

TOSHIBA

Leading Innovation >>>



2017 Industrial Catalog

MOTORS, DRIVES, CONTROLS, & PLCs



POWERING INDUSTRY & INFRASTRUCTURE

Toshiba International Corporation is a global leader in motors and drives, power electronics, transmission & distribution systems, and other social infrastructure solutions. For over 100 years, Toshiba has provided social infrastructure solutions for countless industries and applications.



TOSHIBA
Leading Innovation >>>



About Toshiba International Corporation

Toshiba International Corporation (TIC) is a Toshiba America Inc. (TAI) Group Company, a wholly owned subsidiary of Toshiba Corporation, and comprised of three divisions – Motors & Drives, Power Electronics, and Transmission & Distribution Systems. Headquartered in Houston, Texas, TIC provides application solutions to a wide range of industries including general industrial, oil and gas, utilities, datacenters, HVAC, water/wastewater, and mining. For more information about TIC, please visit www.toshiba.com/tic.



One Call, One Solution

Most products are manufactured at our one million square foot state-of-the-art manufacturing facility, in Houston, Texas. We are proud to be a single-source solution for our customers. Our comprehensive product offering and large installed base demonstrates our customer's confidence in choosing Toshiba. Since most of our products are manufactured under one roof, we can offer customized solutions to meet your application needs. We also have the capability to test our products together, as a complete system, before it goes out into the field—ensuring the highest level of quality, performance, and reliability.

Disclaimer:

Toshiba has made every effort necessary to ensure the accuracy of the contents in this catalog. However, Toshiba cannot be held liable for errors made from changing models/catalog numbers, or typographical and pictorial errors that may have resulted during the compilation of this catalog. All product data and dimensions provided shall be used for reference only. The weights listed in this catalog are estimated and cannot be guaranteed. Prices are subject to change at any given time without notice.

Toshiba cannot assume responsibility for the selection, installation, operation, and maintenance of our products. Only the purchaser, end user, or a qualified underwriter should identify and select the appropriate product that meets the requirements of the intended application.

Toshiba General Product Warranty:

Unless a different warranty is stated herein, affixed to the Goods by the manufacturer or TIC, or is specified in writing in any maintenance or operating instructions pertaining to such Goods, TIC warrants that the Goods sold by TIC to Purchaser will be free from defects in materials and workmanship. This warranty shall expire eighteen (18) months after the date on which the Goods are delivered by TIC to the initial purchaser or twelve (12) months after the Goods are first placed in operation, whichever period shall first expire. If the Goods fail to conform to the foregoing warranty, TIC shall, at its sole discretion, repair, replace or update, free of charge, or refund the purchase price paid for any such nonconforming Goods; provided Purchaser (1) promptly notifies TIC in writing of the nonconformity, (2) furnishes TIC satisfactory proof thereof, and (3) if requested by TIC, returns the nonconforming equipment, part or software to TIC and pays all expenses incurred in connection with such return. The repaired, replacement or equipment, part or software, shall be delivered, free of charge, to Purchaser, FCA TIC designated facility or at TIC's option, FCA a TIC authorized service shop, not loaded on truck or other carrier (INCOTERMS 2010). Purchaser shall pay all costs following such delivery, including, without limitation, all handling, transportation, assembly, installation, insurance, testing, and inspection charges. The warranty excludes (1) normal wear and tear; (2) Goods that have not been properly stored, assembled, installed, serviced, maintained, operated, or used within the limits of rated capacity and normal usage; (3) Goods not used in accordance with current operating and maintenance instructions furnished by TIC, and (4) Goods that have been altered or modified in any manner without the written consent of TIC. THE FOREGOING OBLIGATION TO REPAIR, REPLACE, UPDATE OR REFUND THE PURCHASE PRICE PAID FOR THE GOODS SHALL BE THE SOLE AND EXCLUSIVE REMEDY OF PURCHASER, ITS CUSTOMERS AND USERS OF THE GOODS FOR THE BREACH OF THE FOREGOING WARRANTY. TIC SHALL HAVE NO OBLIGATION TO DISASSEMBLE ANY NONCONFORMING GOODS OR TO INSTALL ANY REPAIRED OR REPLACEMENT PART, EQUIPMENT OR SOFTWARE OR TO PAY ANY COSTS INCURRED IN CONNECTION WITH SUCH DISASSEMBLY OR INSTALLATION. **THERE ARE NO OTHER WARRANTIES AND TIC HEREBY EXPRESSLY DISCLAIMS ALL OTHER EXPRESS, STATUTORY AND IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Additional Product Specific Warranty:

Please contact Toshiba or your Toshiba Sales Representative.

MOTORS

Low Voltage Motors

ODP General Purpose Motors	3
High & NEMA Premium® Efficiency	4
TEFC General Purpose Motors.....	10
EQP Global® SD	11
EQP Global® SD C-Face	21
EQP Global® SD Top Mount	28
EQP Global® 840	32
EQP Global® 840 C-Face	40
EQP Global® 841	46
EQP Global® 841 C-Face	52
Explosion Proof Motors.....	58
EQP Global® XP, TEFC	59
TEFC EQP Global® XP C-Face.....	64
IEC Motors	69
EQP Global® IEC, TEFC.	70
Tosh-ECO™ IEC, TEFC	77
Tosh-ECO™ Permanent Magnet, TEFC	81
Definite Purpose Motors	84
EQP Global® Close-Coupled Pump JM, TEFC	85
EQP Global® Close-Coupled Pump JP, TEFC	87
Tosh-ECO™ Oil Well Pump, TEFC & ODP	89
EQP Global® Cooling Tower, TEFC & TEAO	91
Quarry Duty, TEFC.....	95
EQP Global® Brake Motor, TEFC	101
Vertical P-Base Footless, Normal & Medium Thrust.....	106

Low Voltage Modifications

Stock Modifications	111
Production Price List.....	123
Production Modifications	125

Medium Voltage Motors

Open Enclosure	
General Purpose Motors	143
Open Drip Proof.....	144
Weather-Protected Type I.....	146
Weather-Protected Type II	154
Totally Enclosed	
General Purpose Motors	163
Totally Enclosed Fan Cooled	164
DURA-BULL TX®, TEFC	167
Explosion Proof, TEFC	171
TEFC 840, IP55	173
Totally Enclosed Air-to-Air Cooled	176
Totally Enclosed Water-to-Air Cooled	182
Definite Purpose Motors.....	188
VTX® Vertical Hollow Shaft, WPI & WPIL.....	188
Vertical Solid Shaft	
TEFC, Normal, Medium, & High Thrust.....	191

Medium Voltage Modifications

Production Modifications	197

Motor Appendices

Appendix A.....	210
Model Number Breakdown Type 1	
Model Number Breakdown Type 2	
Appendix B.....	216
Efficiency Tables	
Frame Dimensions	
Appendix C.....	218
UL & CSA Explosion Proof Classifications	
Division 2 Motors	
Appendix D.....	220
IEC Motors Quick Reference Chart	

ADJUSTABLE SPEED DRIVES

Low Voltage ASD

AS3 ASD	224	Mining ASD	285
Power Unit Pricing & Dimensions	225	W7 ASD	286
Options Information & Pricing	226	Part Numbering Convention.....	287
AS1 ASD	230	Assembly Unit Pricing & Dimensions.....	288
Power Unit Pricing & Dimensions	231	Option Information & Pricing	291
Options Information & Pricing	236	WX9 18 Pulse ASD	293
AS1P Numbering Convention	240	Part Numbering Convention.....	294
AS1P Unit Pricing & Dimensions	241	Assembly Unit Pricing & Dimensions.....	295
G9® ASD	243	Plus Pack ASD	297
Power Unit Pricing & Dimensions	244	Part Numbering Convention.....	298
Assembly Unit Part Numbering Convention.....	246	Unit Pricing & Dimensions.....	299
Assembly Unit Pricing & Dimensions.....	247	Option Information & Pricing	302
Assembly Unit Option Information & Pricing	249		
P9 ASD	251		
Power Unit Pricing & Dimensions	252		
Assembly Unit Part Numbering Convention.....	254		
Assembly Unit Pricing & Dimensions.....	255		
S15 ASD	258		
Power Unit Pricing & Dimensions	259		
Option Information & Pricing	260		
S11 ASD	264		
Power Unit Pricing & Dimensions	265		
Options Information & Pricing	267		
NC3 ASD	269		
Power Unit Pricing & Dimensions	270		
GX9 ASD	271		
Power Unit Pricing & Dimensions	272		
Assembly Unit Part Numbering Convention.....	273		
Assembly Unit Pricing & Dimensions.....	274		
Assembly Unit Option Information & Pricing	275		
GX7R Regen ASD	277		
Part Numbering Convention.....	278		
Unit Pricing & Dimensions.....	279		
GX7M Modular ASD	281		
Part Numbering Convention.....	282		
Assembly Unit Pricing & Dimensions.....	283		

Low Voltage ASD Options

G9, P9, AS1 ASD Options	305
GX7, GX9, W7, Plus Pack ASD	308
External Gateway Options	310
G9, P9, AS1 ASD Installed Options	312
GX7, GX9, W7, Plus Pack ASD Installed Options	314
NetPac®	316
Installed Gateway Options	317
Common Installed ASD Options	318
Dynamic Braking Resistors	322
Reactors & Filters	329

POWER APPARATUS & COMPONENTS

Medium Voltage ASD

T300MV2® ASD	343
Part Numbering Convention.....	344
Pricing & Dimensions.....	345
Option Information & Pricing	351
Spare Parts Kits	366
Heat Loss Data	370
MTX2™ ASD.....	374
Part Numbering Convention.....	375
Pricing & Dimensions.....	376
Option Information & Pricing	377
Spare Parts Kits	378
MTX® ASD.....	380
Part Numbering Convention.....	381
Pricing & Dimensions.....	382
Option Information & Pricing	383
Spare Parts Kits	388
BMV2 ASD.....	391
Part Numbering Convention.....	392
Pricing & Dimensions.....	393
Option Information & Pricing	394
Regen ASD.....	397
Part Numbering Convention.....	398
Pricing & Dimensions.....	399

ASD Appendices

Appendix A.....	402
Pricing & Delivery	
Appendix B.....	403
Warranty Information	
Appendix C.....	404
Drawing Requests	
Appendix D.....	405
Medium Voltage ASD Related Services	

Medium Voltage Controllers

JK Series Starters.....	413
JK400 Series Starters	414
JK700 Series Starters	415
JK400 & JK700 Series Pricing.....	416
JK Solid State Starters Series	419
JKSSS4 Solid State Starters	420
JKSSS7 Solid State Starters	421
JK Solid State Starter Series Pricing	422
JK Series	
Part Numbering Convention.....	423
JK Series	
Factory-Installed Modifications.....	424
JK Series Accessories	427

Vacuum Contactors

Medium Voltage	
JK OEM Power Cells	429
JK OEM Power Cell Pricing	430
Low & Medium Voltage	
Vacuum Contactors	431
Low Voltage Vacuum Contactor Specifications ...	432
Medium Voltage	
Vacuum Contactor Specifications.....	435
Low & Medium Voltage Pricing	438
Low & Medium Voltage Accessories.....	439

INDUSTRIAL AUTOMATION

Low Voltage Solid State Starters

TE Series	441
TE-H Series	443
TE & TE-H Series	
Dimensions, Weights, Mods	445
TE Series Accessories.....	446
TD Series.....	447
TX Series.....	451
TD & TX Series Dimensions	454
TD & TX Series	
Part Numbering Convention	456
Factory-Installed Modifications.....	457
TD Series Accessories	464
TD & TX Series Spare Parts.....	465

Vacuum Circuit Breakers

VK/HVK Series.....	467
Specifications	468
Part Numbering Convention.....	469
Pricing & Factory Modifications	470
HV6 Series	471
Part Numbering Convention.....	472
Specifications & Pricing.....	473
OEM Cell Pricing.....	474
Accessories.....	475

Operator Interface Stations

OIS PLUS Series	477

Programmable Logic Controllers

V200 Series.....	481
V2000 Series.....	483

Toshiba Motors

ONE STOP FOR ALL YOUR MOTOR NEEDS

Toshiba is a leading manufacturer of low voltage motors from ½ to 1000 HP and 230 to 575 V and medium voltage motors from 100 to 50,000 HP and 2,300 to 13,800 V. Our extensive motor product offering and large installed base in the numerous industries demonstrates our customers' confidence in choosing Toshiba motors. Since many of our products are manufactured under one roof, we can offer customized solutions to meet your application needs. We also have the capability to test our products together, as a complete system, before it goes out into the field—ensuring the highest level of quality, performance, and reliability.



General Purpose Motors

Open Drip Proof Motors

Toshiba's general purpose, open drip proof motors are designed to meet the industry's ever-increasing need for improved energy conservation and product reliability. These motors offer some of the highest efficiency and torque ratings while producing some of the lowest vibration ratings in the industry—leading to a longer life and greater reliability. Recommended for indoor use, our general purpose, open drip proof motors are available in High, and NEMA Premium® Efficiency.

Standard Features:

- Open Drip Proof
- High & NEMA Premium® Efficiency
- 230/460, 460, or 575 V
- Three-Phase
- 60 Hz
- 1.15 Service Factor
- Design B Torques (*Where Applicable*)
- Class F Insulation; Exceeds Insulation Requirements of NEMA MG1 Part 31 (Inverter Duty)
- Stamped Steel Conduit Box
- Cast Iron Frame
- Cast Iron Brackets
- Ball Bearing 143T through 405T Frames
- Roller Bearing on 444T Frame & Above, 4- & 6-Pole (*Where Noted*)
- Polyurea Base Grease
- 304 Stainless Steel Nameplate
- IP22 Max Protection

Applications:

- Pumps
- Fans
- Compressors
- Conveyors
- Material Handling
- General Applications



ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Open Drip Proof

> High & NEMA Premium® Efficiency



Toshiba’s general purpose, open drip proof motor series is designed to meet the industry’s ever-increasing need for improved energy conservation and product reliability. This product line offers a high torque and low vibration design, leading to a longer life and greater reliability.

Product Scope:

Horsepower:	1 to 800 HP
Speed:	3600, 1800, or 1200 RPM
Voltage:	230/460, 460, or 575 V
Enclosure:	Open Drip Proof
Frame Size:	143T through 5810UZ
Construction:	Cast Iron (Frame & Brackets)
Insulation:	Class F, Exceeds NEMA MG1 Part 31 (Inverter Duty)

HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
1	1800	230/460	143T	45	0014DPSA31A-P	3/1.5	85.5	* 1	MCTDPP	\$450
1	1800	575	143T	45	0014DPSC31A-P	1.2	85.5	* 1	MCTDPP	\$450
1	1200	230/460	145T	51	0016DPSA31A-P	3.8/1.9	82.5	* 1	MCTDPP	\$559
1	1200	575	145T	51	0016DPSC31A-P	1.5	82.5	* 1	MCTDPP	\$559
1.5	3600	230/460	143T	44	Y152DPSA31A-P	4.2/2.1	84.0	* 1	MCTDPP	\$490
1.5	3600	575	143T	44	Y152DPSC31A-P	1.7	84.0	* 1	MCTDPP	\$490
1.5	1800	230/460	145T	41	Y154DPSA31A-P	4.4/2.2	86.5	* 1	MCTDPP	\$495
1.5	1800	575	145T	41	Y154DPSC31A-P	1.8	86.5	1	MCTDPP	\$495
1.5	1200	230/460	182T	93	Y156DPSA31A-P	5.2/2.6	86.5	* 1	MCTDPP	\$597
1.5	1200	575	182T	93	Y156DPSC31A-P	2.1	86.5	* 1	MCTDPP	\$597
2	3600	230/460	145T	49	0022DPSA31A-P	5.4/2.7	85.5	* 1	MCTDPP	\$594
2	3600	575	145T	49	0022DPSC31A-P	2.2	85.5	* 1	MCTDPP	\$594
2	1800	230/460	145T	53	0024DPSA31A-P	5.4/2.7	86.5	* 1	MCTDPP	\$537
2	1800	575	145T	53	0024DPSC31A-P	2.2	86.5	* 1	MCTDPP	\$537
2	1200	230/460	184T	106	0026DPSA31A-P	6.8/3.4	87.5	* 1	MCTDPP	\$692
2	1200	575	184T	106	0026DPSC31A-P	2.7	87.5	* 1	MCTDPP	\$692
3	3600	230/460	145T	54	0032DPSA31A-P	7.8/3.9	85.5	* 1	MCTDPP	\$628
3	3600	575	145T	54	0032DPSC31A-P	3.1	85.5	* 1	MCTDPP	\$628
3	1800	230/460	182T	90	0034DPSA31A-P	8.0/4.0	89.5	* 1	MCTDPP	\$617
3	1800	575	182T	90	0034DPSC31A-P	3.2	89.5	* 1	MCTDPP	\$617
3	1200	230/460	213T	139	0036DPSA31A-P	9.0/4.5	88.5	* 1	MCTDPP	\$879
3	1200	575	213T	139	0036DPSC31A-P	3.9	88.5	1	MCTDPP	\$879
5	3600	230/460	182T	89	0052DPSA31A-P	11.6/5.8	86.5	* 1	MCTDPP	\$778
5	3600	575	182T	89	0052DPSC31A-P	4.6	86.5	* 1	MCTDPP	\$778
5	1800	230/460	184T	101	0054DPSA31A-P	13.2/6.6	89.5	* 1	MCTDPP	\$704
5	1800	575	184T	101	0054DPSC31A-P	5.3	89.5	* 1	MCTDPP	\$704
5	1200	230/460	215T	168	0056DPSA31A-P	14.4/7.2	89.5	* 1	MCTDPP	\$1,292
5	1200	575	215T	168	0056DPSC31A-P	5.8	89.5	1	MCTDPP	\$1,292
7.5	3600	230/460	184T	104	Y752DPSA31A-P	18/9	88.5	* 1	MCTDPP	\$1,008

Open Drip Proof

> High & NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
7.5	3600	575	184T	104	Y752DPSC31A-P	7.2	88.5	* 1	MCTDPP	\$1,008
7.5	1800	230/460	213T	146	Y754DPSA31A-P	18.8/9.4	91.0	* 1	MCTDPP	\$1,008
7.5	1800	575	213T	146	Y754DPSC31A-P	7.5	91.0	* 1	MCTDPP	\$1,008
7.5	1200	230/460	254T	234	Y756DPSA31A-P	20.4/10.2	90.2	* 1	MCTDPP	\$1,680
7.5	1200	575	254T	234	Y756DPSC31A-P	8.2	90.2	* 1	MCTDPP	\$1,680
10	3600	230/460	213T	150	0102DPSA31A-P	24.8/12.4	89.5	* 1	MCTDPP	\$1,209
10	3600	575	213T	150	0102DPSC31A-P	9.9	89.5	* 1	MCTDPP	\$1,209
10	1800	230/460	215T	165	0104DPSA31A-P	24.4/12.2	91.7	* 1	MCTDPP	\$1,226
10	1800	575	215T	165	0104DPSC31A-P	9.8	91.7	* 1	MCTDPP	\$1,226
10	1200	230/460	256T	265	0106DPSA31A-P	26.6/13.3	91.7	* 1	MCTDPP	\$2,052
10	1200	575	256T	265	0106DPSC31A-P	10.6	91.7	* 1	MCTDPP	\$2,052
15	3600	230/460	215T	183	0152DPSA31A-P	36.8/18.4	90.2	* 1	MCTDPP	\$1,663
15	3600	575	215T	183	0152DPSC31A-P	14.7	90.2	* 1	MCTDPP	\$1,663
15	1800	230/460	254T	254	0154DPSA31A-P	38.2/19.1	93.0	* 1	MCTDPP	\$1,621
15	1800	575	254T	254	0154DPSC31A-P	15.2	93.0	* 1	MCTDPP	\$1,621
15	1200	230/460	284T	348	0156DPSA31A-P	40/20	91.7	* 1	MCTDPP	\$2,878
15	1200	575	284T	348	0156DPSC31A-P	16	91.7	* 1	MCTDPP	\$2,878
20	3600	230/460	254T	267	0202DPSA31A-P	47.2/23.6	91.0	* 1	MCTDPP	\$2,109
20	3600	575	254T	267	0202DPSC31A-P	18.9	91.0	* 1	MCTDPP	\$2,109
20	1800	230/460	256T	300	0204DPSA31A-P	50/25	93.0	* 1	MCTDPP	\$2,002
20	1800	575	256T	300	0204DPSC31A-P	20	93.0	1	MCTDPP	\$2,002
20	1200	230/460	286T	373	0206DPSA31A-P	51.6/25.8	92.4	* 1	MCTDPP	\$3,371
20	1200	575	286T	373	0206DPSC31A-P	20.6	92.4	* 1	MCTDPP	\$3,371
25	3600	230/460	256T	300	0252DPSA31A-P	58/29	91.7	* 1	MCTDPP	\$2,589
25	3600	575	256T	300	0252DPSC31A-P	23.2	91.7	* 1	MCTDPP	\$2,589
25	1800	230/460	284T	370	0254DPSA31A-P	64/32	93.6	* 1	MCTDPP	\$2,428
25	1800	575	284T	370	0254DPSC31A-P	25.6	93.6	* 1	MCTDPP	\$2,428
25	1200	230/460	324T	511	0256DPSA31A-P	67/33.5	93.0	* 1	MCTDPP	\$3,445
25	1200	575	324T	511	0256DPSC31A-P	26.8	93.0	* 1	MCTDPP	\$3,445
30	3600	230/460	284TS	377	0302DPSA31B-P	70.8/35.4	91.7	* 1	MCTDPP	\$2,974
30	3600	575	284TS	377	0302DPSC31B-P	28.3	91.7	* 1	MCTDPP	\$2,974
30	1800	230/460	286T	434	0304DPSA31A-P	72.4/36.2	94.1	* 1	MCTDPP	\$2,919
30	1800	575	286T	434	0304DPSC31A-P	29	94.1	* 1	MCTDPP	\$2,919
30	1200	230/460	326T	586	0306DPSA31A-P	80/40	93.6	* 1	MCTDPP	\$4,206
30	1200	575	326T	586	0306DPSC31A-P	32	93.6	* 1	MCTDPP	\$4,206
40	3600	230/460	286TS	406	0402DPSA31B-P	93/46.5	92.4	* 1	MCTDPP	\$3,746
40	3600	575	286TS	406	0402DPSC31B-P	37.2	92.4	* 1	MCTDPP	\$3,746
40	1800	230/460	324T	549	0404DPSA31A-P	97/48.5	94.1	* 1	MCTDPP	\$3,178
40	1800	575	324T	549	0404DPSC31A-P	43.7	94.1	* 1	MCTDPP	\$3,178
40	1200	230/460	364T	679	0406DPSA31A-P	98.4/49.2	94.1	* 1	MCTDPP	\$5,502
40	1200	575	364T	679	0406DPSC31A-P	39.4	94.1	1	MCTDPP	\$5,502
50	3600	230/460	324TS	570	0502DPSA31B-P	118/59	93.0	* 1	MCTDPP	\$4,374
50	3600	575	324TS	570	0502DPSC31B-P	47.2	93.0	1	MCTDPP	\$4,374
50	1800	230/460	326T	606	0504DPSA31A-P	118/59	94.5	* 1	MCTDPP	\$3,876
50	1800	575	326T	606	0504DPSC31A-P	47.2	94.5	* 1	MCTDPP	\$3,876
50	1200	230/460	365T	743	0506DPSA31A-P	123/61.5	94.1	* 1	MCTDPP	\$6,423
50	1200	575	365T	743	0506DPSC31A-P	49.2	94.1	* 1	MCTDPP	\$6,423
60	3600	230/460	326TS	650	0602DPSA31B-P	136/68	93.6	* 1	MCTDPP	\$5,390
60	3600	575	326TS	650	0602DPSC31B-P	54.4	93.6	* 1	MCTDPP	\$5,390

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Open Drip Proof

> High & NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
60	1800	230/460	364T	723	0604DPSA31A-P	144/72	95.0	* 1	MCTDPP	\$5,462
60	1800	575	364T	723	0604DPSC31A-P	57.6	95.0	* 1	MCTDPP	\$5,462
60	1200	230/460	404T	944	0606DPSA31A-P	148/74	94.5	* 1	MCTDPP	\$7,304
60	1200	575	404T	944	0606DPSC31A-P	59.2	94.5	1	MCTDPP	\$7,304
60	1200	230/460	404T	1117	B0606VLF3USH	146/73	94.9		MXTDPP	\$12,418
60	1200	575	404T	1032	B0606VLF3OSH	59.1	94.9		MXTDPP	\$12,418
75	3600	230/460	364TS	699	0752DPSA31B-P	179/89.5	93.6	* 1	MCTDPP	\$6,787
75	3600	575	364TS	699	0752DPSC31B-P	71.6	93.6	1	MCTDPP	\$6,787
75	1800	230/460	365T	794	0754DPSA31A-P	176/88	95.0	* 1	MCTDPP	\$7,037
75	1800	575	365T	794	0754DPSC31A-P	70.4	95.0	* 1	MCTDPP	\$7,037
75	1200	230/460	405T	1144	0756DPSA31A-P	184/92	94.5	* 1	MCTDPP	\$9,130
75	1200	575	405T	1221	0756DPSC31A-P	73.6	94.5	1	MCTDPP	\$9,130
75	1200	230/460	405T	1221	B0756VLF3USH	180/90	95.7		MXTDPP	\$14,470
75	1200	575	405T	1139	B0756VLF3OSH	72.4	95.7		MXTDPP	\$14,470
100	3600	230/460	365TS	770	1002DPSA31B-P	226/113	93.6	* 1	MCTDPP	\$7,078
100	3600	575	365TS	770	1002DPSC31B-P	91	93.6	1	MCTDPP	\$7,078
100	3600	230/460	365TS	747	B1002VLG3USH	230/115	94.9		MXTDPP	\$12,632
100	3600	575	365TS	747	B1002VLG3OSH	91.8	94.9		MXTDPP	\$12,632
100	1800	230/460	404T	1025	1004DPSA31A-P	230/115	95.4	* 1	MCTDPP	\$8,740
100	1800	575	404T	1010	1004DPSC31A-P	92	95.4	1	MCTDPP	\$8,740
100	1800	230/460	404T	1135	B1004VLF3USH	224/112	95.4		MXTDPP	\$11,699
100	1800	575	404T	1100	B1004VLF3OSH	90.2	95.4		MXTDPP	\$11,699
100	1200	230/460	444T	1364	1006DPSA31A-P	240/120	95.0	1	MCTDPP	\$11,988
100	1200	575	444T	1364	1006DPSC31A-P	96	95.0	1	MCTDPP	\$11,988
100	1200	230/460	444T	1480	B1006VLF4USH	242/121	95.5	2	MXTDPP	\$19,243
100	1200	575	444T	1406	B1006VLF4OSH	96.7	95.5	2	MXTDPP	\$19,243
125	3600	230/460	404TS	1010	1252DPSA31B-P	284/142	94.1	* 1	MCTDPP	\$9,915
125	3600	575	404TS	1010	1252DPSC31B-P	114	94.1	1	MCTDPP	\$9,915
125	3600	230/460	404TS	1114	B1252VLG3USH	284/142	95.4		MXTDPP	\$15,262
125	3600	575	404TS	1114	B1252VLG3OSH	112	95.4		MXTDPP	\$15,262
125	1800	230/460	405T	1203	1254DPSA31A-P	287/143.5	95.4	* 1	MCTDPP	\$9,622
125	1800	575	405T	1203	1254DPSC31A-P	115	95.4	1	MCTDPP	\$9,622
125	1800	230/460	405T	1209	B1254VLF3USH	278/139	95.5		MXTDPP	\$13,195
125	1800	575	405T	1209	B1254VLF3OSH	112	95.5		MXTDPP	\$13,195
125	1200	230/460	445T	1647	1256DPSA31A-P	304/152	95.0	* 1	MCTDPP	\$14,582
125	1200	575	445T	1647	1256DPSC31A-P	122	95.0	1	MCTDPP	\$14,582
125	1200	230/460	445T	1507	B1256VLF4USH	306/153	95.3	2	MXTDPP	\$21,855
125	1200	575	445T	1580	B1256VLF4OSH	122	95.3	2	MXTDPP	\$21,855
150	3600	230/460	405TS	1126	1502DPSA31B-P	338/169	94.1	* 1	MCTDPP	\$10,767
150	3600	575	405TS	1126	1502DPSC31B-P	136	94.1	* 1	MCTDPP	\$10,767
150	3600	230/460	405TS	1213	B1502VLG3USH	328/164	95.9		MXTDPP	\$18,565
150	3600	575	405TS	1213	B1502VLG3OSH	132	95.9		MXTDPP	\$18,565
150	1800	230/460	444T	1452	1504DPSA31A-P	346/173	95.8	* 1	MCTDPP	\$12,854
150	1800	575	444T	1452	1504DPSC31A-P	139	95.8	1	MCTDPP	\$12,854
150	1800	230/460	444T	1471	B1504VLF4USH	334/167	95.8	* 2	MXTDPP	\$19,054
150	1800	575	444T	1355	B1504VLF4OSH	133	95.8	* 2	MXTDPP	\$19,054
150	1200	230/460	447T	1938	1506DPSA31A-P	358/179	95.4	* 1	MCTDPP	\$17,222
150	1200	575	447T	1938	1506DPSC31A-P	143	95.4	1	MCTDPP	\$17,222
150	1200	460	445TZ	1617	B1506VLF4BSH	180	95.7	2	MXTDPP	\$24,228

Open Drip Proof

> High & NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
150	1200	575	445TZ	1617	B1506VLF4OSH	143	95.7	2	MXTDPP	\$24,228
200	3600	230/460	444TS	1524	B2002VLG3USH	450/225	95.7	*	MXTDPP	\$28,879
200	3600	575	444TS	1520	B2002VLG3OSH	178	95.7		MXTDPP	\$28,879
200	1800	460	445T	1606	2004DPSB31A-P	228	95.8	* 1	MCTDPP	\$15,712
200	1800	575	445T	1606	2004DPSC31A-P	183	95.8	1	MCTDPP	\$15,712
200	1800	230/460	445T	1586	B2004VLF4USH	442/221	96.2	* 2	MXTDPP	\$22,976
200	1800	575	445T	1597	B2004VLF4OSH	176	96.2	2	MXTDPP	\$22,976
200	1200	460	449T	1936	2006DPSB31A-P	240	95.4	* 1	MCTDPP	\$20,257
200	1200	575	449T	1936	2006DPSC31A-P	192	95.4	1	MCTDPP	\$20,257
200	1200	460	505UZ	2342	B2006VLF4BMH	233	96.0	* 2	MXTDPP	\$37,362
200	1200	575	505UZ	2010	B2006VLF4OMH	186	96.0	2	MXTDPP	\$37,362
200	1200	460	505US	2010	B2006VLG3BMH	233	96.0		MXTDPP	\$33,894
200	1200	575	505US	2010	B2006VLG3OMH	186	96.0		MXTDPP	\$33,894
250	3600	230/460	445TS	1676	B2502VLG3UMH	560/280	95.8	* 1	MXTDPP	\$29,802
250	3600	575	445TS	1720	B2502VLG3OMH	224	95.8		MXTDPP	\$29,802
250	1800	460	447T	1938	2504DPSB31A-P	278	95.8	* 1	MCTDPP	\$18,306
250	1800	575	447T	1938	2504DPSC31A-P	222	95.8	1	MCTDPP	\$18,306
250	1800	460	447T	1721	B2504VLF4BMH	271	96.4	* 2	MXTDPP	\$30,715
250	1800	460	447TS	1721	B2504VLG3BMH	271	96.4		MXTDPP	\$30,715
250	1800	575	447T	1721	B2504VLF4OMH	217	96.4	2	MXTDPP	\$30,715
250	1800	575	447TS	1721	B2504VLG3OMH	217	96.4		MXTDPP	\$30,715
250	1200	460	505UZ	2450	B2506VLF4BMH	287	95.9	* 2	MXTDPP	\$39,068
250	1200	460	505US	2072	B2506VLG3BMH	287	95.9	1	MXTDPP	\$35,600
250	1200	575	505UZ	2072	B2506VLF4OMH	230	95.9	2	MXTDPP	\$39,068
250	1200	575	505US	2072	B2506VLG3OMH	230	95.9		MXTDPP	\$35,600
300	3600	460	447TS	1861	B3002VLG3BMH	325	96.1	*	MXTDPP	\$38,793
300	3600	575	447TS	1857	B3002VLG3OMH	260	96.1		MXTDPP	\$38,793
300	1800	460	449T	2300	3004DPSB31A-P	330	95.8	* 8	MCTDPP	\$23,783
300	1800	575	449T	2300	3004DPSC31A-P	264	95.8	8	MCTDPP	\$23,783
300	1800	460	447T	1898	B3004VLF4BMH	328	96.2	2	MXTDPP	\$32,234
300	1800	460	447TS	1927	B3004VLG3BMH	328	96.2		MXTDPP	\$32,234
300	1800	575	447T	1721	B3004VLF4OMH	262	96.2	2	MXTDPP	\$32,234
300	1800	575	447TS	1868	B3004VLG3OMH	262	96.2		MXTDPP	\$32,234
300	1200	460	507UZ	2702	B3006VLF4BMH	344	95.9	2	MXTDPP	\$46,961
300	1200	460	507US	2474	B3006VLG3BMH	344	95.9		MXTDPP	\$43,493
300	1200	575	507UZ	2474	B3006VLF4OMH	278	95.8	2	MXTDPP	\$46,961
300	1200	575	507US	2474	B3006VLG3OMH	278	95.8		MXTDPP	\$43,493
350	3600	460	447TS	1966	B3502VLG3BMH	378	96.2	*	MXTDPP	\$42,117
350	3600	575	447TS	2012	B3502VLG3OMH	302	96.2		MXTDPP	\$42,117
350	1800	460	505UZ	2054	B3504VLF4BMH	383	96.5	* 2	MXTDPP	\$41,012
350	1800	460	505US	2485	B3504VLG3BMH	383	96.5	*	MXTDPP	\$37,544
350	1800	575	505UZ	2054	B3504VLF4OMH	306	96.5	2	MXTDPP	\$41,012
350	1800	575	505US	2054	B3504VLG3OMH	306	96.5		MXTDPP	\$37,544
400	3600	460	505USS	2341	B4002VLG3BMH	428	95.9	*	MXTDPP	\$48,900
400	3600	575	505USS	2312	B4002VLG3OMH	342	96.0		MXTDPP	\$48,900
400	1800	460	507UZ	2823	B4004VLF4BMH	435	96.5	* 2	MXTDPP	\$50,808
400	1800	460	507US	2806	B4004VLG3BMH	435	96.5	*	MXTDPP	\$47,340
400	1800	575	507UZ	2620	B4004VLF4OMH	348	96.5	2	MXTDPP	\$50,808
400	1800	575	507US	2620	B4004VLG3OMH	348	96.5		MXTDPP	\$47,340

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods.
(Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Open Drip Proof
➤ High & NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
400	1200	460	509UZ	2950	F4006VLF4BM	460	95.4	2	MXTDPP	\$50,793
400	1200	460	509US	2800	F4006VLG3BM	460	95.4		MXTDPP	\$47,250
400	1200	575	509UZ	2950	F4006VLF4OM	368	95.4	2	MXTDPP	\$50,793
400	1200	575	509US	2800	F4006VLG3OM	368	95.4		MXTDPP	\$47,250
450	3600	460	507USS	2631	B4502VLG3BMH	476	96.2	*	MXTDPP	\$52,842
450	3600	575	507USS	2777	B4502VLG3OMH	380	96.2		MXTDPP	\$52,842
450	1800	460	507UZ	2777	B4504VLF4BMH	495	96.2	2	MXTDPP	\$56,724
450	1800	575	507UZ	2777	B4504VLF4OMH	396	96.2	2	MXTDPP	\$56,724
450	1800	460	507US	2777	B4504VLG3BMH	495	96.2	*	MXTDPP	\$53,256
450	1800	575	507US	2777	B4504VLG3OMH	392	96.2		MXTDPP	\$53,256
450	1800	575	509UZ	3200	B5004VLF4OMH	392	96.2	2	MXTDPP	\$64,057
450	1200	460	509UZ	2850	F4506VLF4BM	523	95.4	2	MXTDPP	\$56,700
450	1200	460	509US	2850	F4506VLG3BM	523	95.4		MXTDPP	\$53,155
450	1200	460	509UZ	2850	F4506VLF4OM	521	95.4	2	MXTDPP	\$56,700
450	1200	460	509US	2850	F4506VLG3OM	521	95.4		MXTDPP	\$53,155
500	3600	460	507USS	2811	B5002VLG3BMH	526	96.5	*	MXTDPP	\$58,700
500	3600	575	507USS	2777	B5002VLG3OMH	421	96.5		MXTDPP	\$58,700
500	1800	460	509UZ	3200	B5004VLF4BMH	563	96.4	2	MXTDPP	\$64,057
500	1800	575	509US	3200	B5004VLG3OMH	442	96.5		MXTDPP	\$64,057
500	1800	460	509US	3150	B5004VLG3BMH	563	96.4		MXTDPP	\$64,057
500	1200	460	5810UZ	4750	F5006VLF4BM	655	95.8	2	MXTDPP	\$62,605
500	1200	460	5810US	4650	F5006VLG3BM	655	95.8		MXTDPP	\$59,062
500	1200	575	5810UZ	4750	F5006VLF4OM	524	95.8	2	MXTDPP	\$62,605
500	1200	575	5810US	4650	F5006VLG3OM	524	95.8		MXTDPP	\$59,062
600	3600	460	507USS	2722	F6002VLG3BM	665	94.1		MXTDPP	\$64,467
600	3600	575	507USS	2722	F6002VLG3OM	518	95		MXTDPP	\$64,467
600	3600	460	507USS	2804	F6002VLG3BMH	630	96.2	*	MXTDPP	\$67,752
600	3600	575	507USS	2777	F6002VLG3OMH	510	96.2		MXTDPP	\$67,752
600	1800	460	509UZ	3250	F6004VLF4BM	648	95.4	2	MXTDPP	\$58,669
600	1800	460	509US	3150	F6004VLG3BM	648	95.4		MXTDPP	\$55,124
600	1800	575	509UZ	3250	F6004VLF4OM	518	95.4	2	MXTDPP	\$58,669
600	1800	575	509US	3150	F6004VLG3OM	518	95.4		MXTDPP	\$55,124
600	1200	460	5810UZ	4700	F6006VLF4BM	866	95.4	2	MXTDPP	\$74,418
600	1200	575	5810UZ	4700	F6006VLF4OM	693	95.4	2	MXTDPP	\$74,418
600	1200	460	5810UZ	4700	F6006VLF4BM	860	95.4	2	MXTDPP	\$74,418
600	1200	460	5810US	4700	F6006VLG3BM	860	95.4		MXTDPP	\$70,875
600	1200	575	5810UZ	4700	F6006VLF4OM	577	95.4	2	MXTDPP	\$74,418
600	1200	575	5810US	4700	F6006VLG3OM	577	95.4		MXTDPP	\$70,875
700	3600	460	509USS	3230	F7001VLG3BM	765	94.1	5	MXTDPP	\$68,906
700	3600	460	509USS	3279	F7003VLG3BM	756	95.8	4	MXTDPP	\$68,906
700	3600	575	509USS	3279	F7001VLG3OM	611	95.8	5	MXTDPP	\$68,906
700	3600	575	509USS	3279	F7003VLG3OM	643	95.4	4	MXTDPP	\$68,906
700	3600	460	507USS	2777	B7002VKG3BMH	757	95.8	3, 14	MXTDPP	\$75,091
700	3600	575	507USS	2777	B7002VKG3OMH	592	95.8	3, 14	MXTDPP	\$75,091
700	3600	460	507USS	2820	F7002VKG3BM	765	94.1	3, 14	MXTDPP	\$68,906
700	3600	575	507USS	2890	F7002VKG3OM	643	95.4	3, 14	MXTDPP	\$68,906
700	1800	460	5810UZ	4700	F7004VLF4BM	852	95.4	2	MXTDPP	\$67,855
700	1800	575	5810US	4600	F7004VLG3OM	682	95.4		MXTDPP	\$64,312
700	1800	460	5810US	4600	F7004VLG3BM	852	95.4		MXTDPP	\$64,312

Open Drip Proof
> High & NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
700	1800	575	5810UZ	4700	F7004VLF4OM	682	95.4	2	MXTDPP	\$67,855
700	1200	460	5810US	4750	F7006VKG3BM	991	95.8	3, 14	MXTDPP	\$82,687
700	1200	460	5810UZ	4850	F7006VKF4BM	991	95.8	2, 3, 14	MXTDPP	\$86,230
700	1200	575	5810US	4750	F7006VKG3OM	793	95.8	3, 14	MXTDPP	\$82,687
700	1200	575	5810UZ	4850	F7006VKF4OM	793	95.8	2, 3, 14	MXTDPP	\$86,230
800	3600	460	509USS	3385	F8001VLG3BM	880	96.2	5	MXTDPP	\$78,749
800	3600	460	509USS	3373	F8003VLG3BM	880	96.2	4	MXTDPP	\$78,749
800	3600	575	509USS	3385	F8001VLG3OM	706	95.8	5	MXTDPP	\$78,749
800	3600	575	509USS	3385	F8003VLG3OM	706	95.8	4	MXTDPP	\$78,749
800	1800	460	5810UZ	4750	F8004VLF4BM	968	95.4	2	MXTDPP	\$77,043
800	1800	460	5810US	4650	F8004VLG3BM	969	95.4	4	MXTDPP	\$73,499
800	1800	575	5810US	4650	F8004VLG3OM	775	95.4	4	MXTDPP	\$73,499
800	1800	575	5810UZ	4750	F8004VLF4OM	830	95.8	2	MXTDPP	\$77,043

FL Amps and FL EFF are average expected design values and not guaranteed.
The weights listed above are estimated.
Please contact Toshiba for information on product availability.
“CF”= Consult Factory

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

General Purpose TEFC

EQP Global® SD Motor Series

Toshiba's general purpose, totally enclosed fan cooled, NEMA Premium® efficiency, EQP Global® SD motor series is Toshiba's next-generation motor product line. This cutting-edge motor product line is designed to meet or exceed the competitive demands of the global market, as well as the amended integral horsepower (HP) rule IHMR 2016, while maintaining the high reliability and quality expected from Toshiba. Building on over 20 years of success with our EQP III motor series, the EQP Global® SD features design enhancements on the rotor, frame, brackets, fan, and bearings.



Our EQP (efficiency, quality, and performance) philosophy extends beyond great products. We provide solutions and Global Supply Chain Management Systems (GSCMS) to meet the evolving needs of our global customers.

Standard Features:

- Totally Enclosed Fan Cooled
- Severe Duty
- NEMA Premium® Efficiency
- Three-Phase
- Dual Frequency 50/60 Hz Design
- 1.15 Service Factor
- Available in Footed, C-Face Footed, C-Face Footless, & Top Mount Design
- Exceeds Insulation Requirements of NEMA MG1 Part 31 (Inverter Duty)
- IP55
- Gasketed Cast Iron Conduit Box
- Cast Iron Frame & Brackets
- Multi-Mount on Most Frames
- Oversized 300 Series Bearings on All Frames
- No-Load Commercial Testing on All Motors
- 4142 High Strength Shaft Steel on all 440 Frames and Larger Rolled Bearing Motors
- 20:1 Constant Torque (Non-Hazardous Areas, Refer to Appendix C for Division 2 & ASD Capabilities), 60:1 Variable Torque (1 to 200 HP, 4- & 6-Pole Motors)

Applications:

- Pumps
- Fans
- Compressors
- Conveyors
- Mixers
- Material Handling



Totally Enclosed Fan Cooled

EQP Global® SD

> NEMA Premium® Efficiency



3 THREE YEAR WARRANTY **NEMA Premium**

2 TWO YEAR WARRANTY High Efficiency



Toshiba's general purpose, totally enclosed fan cooled, NEMA Premium® efficiency, EQP Global®

SD motor series is Toshiba's next-generation motor product line. This cutting-edge motor product line is designed to meet or exceed the competitive demands of the global market, as well as the amended integral horsepower (HP) rule IHMR 2016, while maintaining the high reliability and quality expected from Toshiba.

Designed for severe duty applications and built on over 20 years of success with our EQP III motor series, the EQP Global® SD features multiple new design enhancements that make it one of the lowest cost-of-ownership products in the industry.

Product Scope:

Horsepower: ½ to 1000 HP

Speed (60 Hz): 3600, 1800, 1200, or 900 RPM
(50 Hz): 3000, 1500, or 1000 RPM

Volt (60 Hz): 230/460, 460 or 575 V
(50 Hz): 190/380 or 380 V

Enclosure: Totally Enclosed Fan Cooled

Frame Size*: 56 through 6811

Construction: All Cast Iron (Frame Bracket)

Insulation: Class F, Exceeds NEMA MG1 Part 31 (Inverter Duty Voltage Withstand Capability of 2000 V in 0.1 µs)

* Production modifications not applicable to EQP Global® Motors 140 through 360 Frames (use EQP III Series base price for these frame sizes).

HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
0.5	1800	230/460	56/56H	49	B1/24EMF2AOZ	1.7/0.9	78.5	* 1, 7	MXTFCS	\$435
0.5	1800	575	56/56H	49	B1/24EMF2OOZ	0.7	78.5	* 1, 7	MXTFCS	\$435
0.5	1200	230/460	56/56H	53	B1/26FMF2AOZ	2.0/1.0	77	* 1	MXTFCS	\$520
0.5	1200	575	56/56H	53	B1/26FMF2OOZ	0.8	77	* 1	MXTFCS	\$520
0.75	3600	230/460	56/56H	47	B3/42FMF2AOZ	2.2/1.1	77	* 1	MXTFCS	\$430
0.75	3600	575	56/56H	47	B3/42FMF2OOZ	0.9	77	* 1	MXTFCS	\$430
0.75	1200	230/460	56/56H	53	B3/46FLF2AOZ	2.8/1.4	78.5	* 1	MXTFCS	\$525
0.75	1200	575	56/56H	53	B3/46FLF2OOZ	1.1	78.5	* 1	MXTFCS	\$525
0.75	1200	230/460	143T	60	3/46SDSR41A-P	2.8/1.4	80	* 1, 9	MTPFCP	\$547
0.75	1200	575	143T	60	3/46SDSC41A-P	1.1	81.5	* 1	MTPFCP	\$548
1	3600	230/460	56/56H	52	B0012FMF2AOZH	2.8/1.4	81.4	* 1	MXTFCS	\$590
1	3600	575	56/56H	52	B0012FMF2OOZH	1.2	81.2	* 1	MXTFCS	\$590
1	1800	230/460	56/56H	52	B0014FLF2AOZH	2.9/1.45	85.7	* 1	MXTFCS	\$631
1	1800	575	56/56H	52	B0014FLF2OOZH	1.2	85.7	* 1	MXTFCS	\$631
1	1800	230/460	143T	58	0014SDSR41A-P	3.4/1.7	85.5	* 1, 9	MTPFCP	\$464
1	1800	575	143T	57	0014SDSC41A-P	1.2	85.6	* 1	MTPFCP	\$464
1	1200	230/460	56/56H	55	B0016FLF2AOZH	3.8/1.9	84.0	* 1	MXTFCS	\$696

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed Fan Cooled

EQP Global® SD

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
1	1200	575	56/56H	55	B0016FLF2OOZH	1.5	84.4	* 1	MXTFCS	\$696
1	1200	230/460	145T	62	0016SDSR41A-P	3.6/1.8	82.9	* 1, 9	MTPFCP	\$576
1	1200	575	145T	62	0016SDSC41A-P	1.5	82.9	* 1	MTPFCP	\$576
1.5	3600	230/460	56/56H	53	BY152FLF2AOZH	38/1.9	86.4	* 1	MXTFCS	\$656
1.5	3600	575	56/56H	53	BY152FLF2OOZH	1.5	86.3	* 1	MXTFCS	\$656
1.5	3600	230/460	143T	57	Y152SDSR41A-P	4/2	84.3	* 1, 9	MTPFCP	\$505
1.5	3600	575	143T	57	Y152SDSC41A-P	1.6	84.3	* 1	MTPFCP	\$505
1.5	1800	230/460	56/56H	53	BY154FLF2AOZH	4.3/2.2	87.7	* 1	MXTFCS	\$661
1.5	1800	575	56/56H	53	BY154FLF2OOZH	1.7	87.2	* 1	MXTFCS	\$661
1.5	1800	230/460	145T	60	Y154SDSR41A-P	4.8/2.4	86.5	* 1, 9	MTPFCP	\$510
1.5	1800	575	145T	59	Y154SDSC41A-P	1.9	86.5	* 1	MTPFCP	\$510
1.5	1200	230/460	56/56H	59	BY156FLF2AOZH	5.1/2.55	87.6	* 1	MXTFCS	\$958
1.5	1200	575	56/56H	59	BY156FLF2OOZH	2	87.6	* 1	MXTFCS	\$958
1.5	1200	230/460	182T	99	Y156SDSR41A-P	5/2.5	87.7	* 1, 9	MTPFCP	\$615
1.5	1200	575	182T	99	Y156SDSC41A-P	2	87.5	* 1	MTPFCP	\$615
2	3600	230/460	56/56H	57	B0022FLF2AOZH	5.2/2.6	86.8	* 1	MXTFCS	\$681
2	3600	575	56/56H	57	B0022FLF2OOZH	2.1	86.9	* 1	MXTFCS	\$681
2	3600	230/460	145T	60	0022SDSR41A-P	5.2/2.6	85.6	* 1, 9	MTPFCP	\$612
2	3600	575	145T	60	0022SDSC41A-P	2.1	85.5	* 1	MTPFCP	\$612
2	1800	230/460	56/56H	57	B0024FLF2AOZH	6.0/3.0	87.8	* 1	MXTFCS	\$671
2	1800	575	56/56H	57	B0024FLF2OOZH	2.4	87.4	* 1	MXTFCS	\$671
2	1800	230/460	145T	62	0024SDSR41A-P	6/3	86.5	* 1, 9	MTPFCP	\$554
2	1800	575	145T	62	0024SDSC41A-P	2.4	86.5	* 1	MTPFCP	\$554
2	1200	230/460	184T	110	0026SDSR41A-P	6.8/3.4	88.5	* 1, 9	MTPFCP	\$713
2	1200	575	184T	110	0026SDSC41A-P	2.7	88.5	* 1	MTPFCP	\$713
3	3600	230/460	182T	88	0032SDSR41A-P	7.4/3.7	86.7	* 1, 9	MTPFCP	\$647
3	3600	575	182T	84	0032SDSC41A-P	3	86.7	* 1	MTPFCP	\$647
3	1800	230/460	182T	99	0034SDSR41A-P	8/4	89.5	* 1, 9	MTPFCP	\$636
3	1800	575	182T	99	0034SDSC41A-P	3.2	89.5	* 1	MTPFCP	\$636
3	1200	230/460	213T	163	0036SDSR41A-P	8.8/4.4	89.6	* 1, 9	MTPFCP	\$906
3	1200	575	213T	168	0036SDSC41A-P	3.5	89.8	* 1	MTPFCP	\$906
5	3600	230/460	184T	99	0052SDSR41A-P	11.6/5.8	88.7	* 1, 9	MTPFCP	\$802
5	3600	575	184T	101	0052SDSC41A-P	4.6	88.7	* 1	MTPFCP	\$802
5	1800	230/460	184T	110	0054SDSR41A-P	13.8/6.9	89.5	* 1, 9	MTPFCP	\$726
5	1800	575	184T	110	0054SDSC41A-P	5.2	89.5	* 1	MTPFCP	\$726
5	1200	230/460	215T	176	0056SDSR41A-P	13.8/6.9	89.6	* 1, 9	MTPFCP	\$1,332
5	1200	575	215T	179	0056SDSC41A-P	5.5	89.6	* 1	MTPFCP	\$1,332
7.5	3600	230/460	213T	168	Y752SDSR41A-P	18/9	89.7	* 1, 9	MTPFCP	\$1,039
7.5	3600	575	213T	172	Y752SDSC41A-P	7.2	89.7	* 1	MTPFCP	\$1,039
7.5	1800	230/460	213T	186	Y754SDSR41A-P	19.6/9.8	91.8	* 1, 9	MTPFCP	\$1,039
7.5	1800	575	213T	179	Y754SDSC41A-P	7.8	91.8	* 1	MTPFCP	\$1,039
7.5	1200	230/460	254T	281	Y756SDSR41A-P	20.4/10.2	91.2	* 1, 9	MTPFCP	\$1,768
7.5	1200	575	254T	274	Y756SDSC41A-P	8.2	91.1	* 1	MTPFCP	\$1,768
10	3600	230/460	215T	183	0102SDSR41A-P	23.6/11.8	90.2	* 1, 9	MTPFCP	\$1,246
10	3600	575	215T	183	0102SDSC41A-P	9.4	91.7	* 1	MTPFCP	\$1,246
10	1800	230/460	215T	203	0104SDSR41A-P	26/13	91.8	* 1, 9	MTPFCP	\$1,264
10	1800	575	215T	203	0104SDSC41A-P	10.4	91.8	* 1	MTPFCP	\$1,264
10	1200	230/460	256T	292	0106SDSR41A-P	26.8/13.4	91.3	* 1, 9	MTPFCP	\$2,160
10	1200	575	256T	293	0106SDSC41A-P	10.8	91.2	* 1	MTPFCP	\$2,160

Totally Enclosed Fan Cooled

EQP Global® SD

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
15	3600	230/460	254T	295	0152SDSR41A-P	36/18	91.2	* 1, 9	MTPFCP	\$1,714
15	3600	575	254T	302	0152SDSC41A-P	14.4	91.4	* 1	MTPFCP	\$1,714
15	1800	230/460	254T	315	0154SDSR41A-P	38/19	92.6	* 1, 9	MTPFCP	\$1,706
15	1800	575	254T	317	0154SDSC41A-P	15.2	92.6	* 1	MTPFCP	\$1,706
15	1200	230/460	284T	443	0156SDSR41A-P	40/20	91.9	* 1, 9	MTPFCP	\$3,029
15	1200	575	284T	441	0156SDSC41A-P	15.8	91.8	* 1	MTPFCP	\$3,029
20	3600	230/460	256T	311	0202SDSR41A-P	48/24	91.3	* 1, 9	MTPFCP	\$2,220
20	3600	575	256T	311	0202SDSC41A-P	19.2	91.3	* 1	MTPFCP	\$2,220
20	1800	230/460	256T	355	0204SDSR41A-P	50/25	93.3	* 1, 9	MTPFCP	\$2,107
20	1800	575	256T	353	0204SDSC41A-P	20	93.2	* 1	MTPFCP	\$2,107
20	1200	230/460	286T	478	0206SDSR41A-P	50/25	91.8	* 1, 9	MTPFCP	\$3,548
20	1200	575	286T	478	0206SDSC41A-P	20	91.9	* 1	MTPFCP	\$3,548
25	3600	230/460	284TS	485	0252SDSR41B-P	58/29	91.8	* 1, 9	MTPFCP	\$2,725
25	3600	575	284TS	485	0252SDSC41B-P	23	91.8	* 1	MTPFCP	\$2,725
25	1800	230/460	284T	492	0254SDSR41A-P	62/31	93.8	* 1, 9	MTPFCP	\$2,556
25	1800	230/460	284TS	492	0254SDSR41B-P	62/31	93.8	* 1, 9	MTPFCP	\$2,556
25	1800	575	284T	496	0254SDSC41A-P	24	93.6	* 1	MTPFCP	\$2,556
25	1200	230/460	324T	627	0256SDSR41A-P	62/31	93.3	* 1, 9	MTPFCP	\$4,306
25	1200	575	324T	615	0256SDSC41A-P	25	93.3	* 1	MTPFCP	\$4,306
30	3600	230/460	286TS	497	0302SDSR41B-P	70/35	91.9	* 1, 9	MTPFCP	\$3,131
30	3600	575	286TS	496	0302SDSC41B-P	28	91.9	* 1	MTPFCP	\$3,131
30	1800	230/460	286T	531	0304SDSR41A-P	72/36	93.8	* 1, 9	MTPFCP	\$3,073
30	1800	230/460	286TS	505	0304SDSR41B-P	72/36	93.8	* 1, 9	MTPFCP	\$3,073
30	1800	575	286T	518	0304SDSC41A-P	29	93.8	* 1	MTPFCP	\$3,073
30	1200	230/460	326T	638	0306SDSR41A-P	74/37	93.3	* 1, 9	MTPFCP	\$5,257
30	1200	575	326T	631	0306SDSC41A-P	30	93.3	* 1	MTPFCP	\$5,257
40	3600	230/460	324TS	640	0402SDSR41B-P	94/47	92.5	* 1, 9	MTPFCP	\$3,943
40	3600	575	324TS	639	0402SDSC41B-P	38	92.5	* 1	MTPFCP	\$3,943
40	1800	230/460	324T	669	0404SDSR41A-P	96/48	94.1	* 1, 9	MTPFCP	\$3,973
40	1800	230/460	324TS	668	0404SDSR41B-P	96/48	94.1	* 1, 9	MTPFCP	\$3,973
40	1800	575	324T	666	0404SDSC41A-P	38	94.1	* 1	MTPFCP	\$3,973
40	1800	575	324TS	666	0404SDSC41B-P	38	94.1	* 1	MTPFCP	\$3,973
40	1200	230/460	364T	811	0406SDSR41A-P	96/48	94.1	* 1, 9	MTPFCP	\$6,878
40	1200	575	364T	802	0406SDSC41A-P	38	94.1	* 1	MTPFCP	\$6,878
50	3600	230/460	326TS	683	0502SDSR41B-P	116/58	93.0	* 1, 9	MTPFCP	\$5,467
50	3600	575	326TS	683	0502SDSC41B-P	46	93.0	* 1	MTPFCP	\$5,467
50	1800	230/460	326T	715	0504SDSR41A-P	120/60	94.5	* 1, 9	MTPFCP	\$4,845
50	1800	230/460	326TS	714	0504SDSR41B-P	120/60	94.5	* 1, 9	MTPFCP	\$4,845
50	1800	575	326T	716	0504SDSC41A-P	48	94.5	* 1	MTPFCP	\$4,845
50	1800	575	326TS	716	0504SDSC41B-P	48	94.5	* 1	MTPFCP	\$4,845
50	1200	230/460	365T	834	0506SDSR41A-P	120/60	94.1	* 1, 9	MTPFCP	\$8,029
50	1200	575	365T	833	0506SDSC41A-P	48	94.1	* 1	MTPFCP	\$8,029
60	3600	230/460	364TS	849	0602SDSR41B-P	138/69	93.6	* 1, 9	MTPFCP	\$6,737
60	3600	575	364TS	853	0602SDSC41B-P	55	93.7	* 1	MTPFCP	\$6,737
60	1800	230/460	364T	880	0604SDSR41A-P	138/69	95.1	* 1, 9	MTPFCP	\$6,828
60	1800	230/460	364TS	875	0604SDSR41B-P	138/69	95.1	* 1, 9	MTPFCP	\$6,828
60	1800	575	364T	895	0604SDSC41A-P	55	95.1	* 1	MTPFCP	\$6,828
60	1800	575	364TS	895	0604SDSC41B-P	55	95.1	* 1	MTPFCP	\$6,828
60	1200	230/460	404T	1259	0606SDSR41A	152/76	94.5	* 9	MXTFCN	\$10,489

ODP General Purpose

Totally Enclosed Fan Cooled

EQP Global® SD

> NEMA Premium® Efficiency



EQP Global® SD

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
60	1200	575	404T	1241	0606SDSC41A	61	94.5	*	MXTFCN	\$10,489
60	1200	230/460	404T	1259	B0606FLF3USH02	148.0 / 74.0	95.0	* 17	MXTFCG	\$10,489
60	1200	575	404T	1241	B0606FLF3OSH02	59	95.0	* 17	MXTFCG	\$10,489
75	3600	230/460	365TS	895	0752SDSR41B-P	172/86	93.6	* 1, 9	MTPFCP	\$8,484
75	3600	575	365TS	895	0752SDSC41B-P	69	93.8	* 1	MTPFCP	\$8,484
75	1800	230/460	365T	961	0754SDSR41A-P	170/85	95.4	* 1, 9	MTPFCP	\$8,796
75	1800	230/460	365TS	961	0754SDSR41B-P	170/85	95.4	* 1, 9	MTPFCP	\$8,796
75	1800	575	365T	979	0754SDSC41A-P	69	95.4	* 1	MTPFCP	\$8,796
75	1800	575	365TS	979	0754SDSC41B-P	69	95.4	* 1	MTPFCP	\$8,796
75	1200	230/460	405T	1374	0756SDSR41A	188/94	94.5	* 9	MXTFCN	\$11,746
75	1200	575	405T	1319	0756SDSC41A	75	94.5	*	MXTFCN	\$11,746
75	1200	230/460	405T	1374	B0756FLF3USH02	182.0 / 91.0	95.0	* 17	MXTFCG	\$11,746
75	1200	575	405T	1319	B0756FLF3OSH02	73	95.0	* 17	MXTFCG	\$11,746
100	3600	230/460	405TS	1305	1002SDSR41B	228/114	94.1	* 9	MXTFCN	\$12,698
100	3600	575	405TS	1305	1002SDSC41B	91	94.1	*	MXTFCN	\$12,698
100	3600	230/460	405TS	1305	B1002FLG3USH02	228/114	95.0	* 17	MXTFCG	\$12,698
100	3600	575	405TS	1305	B1002FLG3OSH02	91	95.0	* 17	MXTFCG	\$12,698
100	1800	230/460	405T	1367	1004SDSR41A	232/116	95.4	* 8, 9	MXTFCN	\$11,825
100	1800	575	405T	1367	1004SDSC41A	93	95.4	* 8	MXTFCN	\$11,825
100	1800	230/460	405T	1336	B1004FLF3USH03	238/119	95.4	* 17	MXTFCG	\$11,825
100	1800	575	405T	1353	B1004FLF3OSH03	95	95.4	* 17	MXTFCG	\$11,825
100	1200	230/460	444T	2013	B1006FLF4USH01	246/123	95.5	* 2, 17	MXTFCG	\$19,098
100	1200	575	444T	1990	B1006FLF4OSH01	98.5	95.5	* 2, 17	MXTFCG	\$19,098
100	1200	230/460	S444/5T	2500	1006SDSA41A	236/118	95.0	* 8	MXTFCL	\$19,098
100	1200	230/460	S444/5T	2500	1006SDSA41A-R	190/95	95.0	* 2	MXTFCL	\$19,098
125	3600	230/460	444TS	1963	B1253FLG3USH01	278/139	95.3	* 4, 9, 17	MXTFCG	\$20,407
125	3600	230/460	444TS	1988	B1251FLG3USH	278/139	95.3	* 5, 9, 17	MXTFCG	\$20,407
125	3600	230/460	S444/5TS	1988	1252SDSA41B	272/136	95.0	*	MXTFCL	\$20,407
125	3600	575	444TS	1940	B1251FLG3OSH	111	95.3	* 5, 17	MXTFCG	\$20,407
125	3600	575	444TS	1940	B1253FLG3OSH01	111	95.3	* 4, 17	MXTFCG	\$20,407
125	3600	575	S444/5TS	1940	1252SDSC41A	109	95.0	*	MXTFCL	\$20,407
125	1800	230/460	444T	1945	B1254FLF3USH	288/144	95.7	* 8, 9, 17	MXTFCG	\$16,734
125	1800	230/460	444T	1950	B1254FLF4USH01	288/144	95.7	* 2, 9, 17	MXTFCG	\$16,734
125	1800	230/460	S444/5T	2500	1254SDSA41A	284/142	95.4	* 8	MXTFCL	\$16,734
125	1800	230/460	S444/5T	2500	1254SDSA41A-R	284/142	95.4	* 2	MXTFCL	\$16,734
125	1800	575	444T	1943	B1254FLF3OSH	116	95.7	* 8, 17	MXTFCG	\$16,734
125	1800	575	444T	1951	B1254FLF4OSH01	116	95.7	* 2, 17	MXTFCG	\$16,734
125	1800	575	S444/5T	2500	1254SDSC41A	115	95.4	* 8	MXTFCL	\$16,734
125	1800	575	S444/5T	2500	1254SDSC41A-R	115	95.4	* 2	MXTFCL	\$16,734
125	1200	230/460	445T	2097	B1256FLF3USH	290/145	95.4	* 8, 9	MXTFCG	\$18,753
125	1200	230/460	445T	2099	B1256FLF4USH01	312/156	95.5	* 2, 9	MXTFCG	\$20,159
125	1200	575	445T	2080	B1256FLF4OSH01	124	95.5	* 2	MXTFCG	\$20,159
150	3600	230/460	445TS	2074	A1501FLG3USH01	336/168	95.7	* 5, 6, 9, 17	MXTFCG	\$21,648
150	3600	230/460	445TS	2072	A1503FLG3USH01	336/168	95.7	* 4, 6, 9, 17	MXTFCG	\$21,648
150	3600	230/460	S444/5TS	2500	1502SDSA41B	326/163	95.0	*	MXTFCL	\$21,648
150	3600	575	445TS	2016	A1503FLG3OSH01	133	95.7	* 4, 6, 17	MXTFCG	\$21,648
150	3600	575	445TS	2171	A1501FLG3OSH01	133	95.7	* 5, 6, 17	MXTFCG	\$21,648
150	3600	575	S444/5T	2500	1502SDSC41A	131	95.0	*	MXTFCL	\$21,648
150	1800	230/460	445T	2087	B1504FLF4USH01	352/176	95.8	* 2, 9, 17	MXTFCG	\$18,867

Totally Enclosed Fan Cooled

EQP Global® SD

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
150	1800	230/460	445T	2086	B1504FLF3USH	352/176	95.8	* 8, 9, 17	MXTFCG	\$18,867
150	1800	230/460	S444/5T	2500	1504SDSA41A	336/168	95.8	* 8	MXTFCL	\$18,867
150	1800	230/460	S444/5T	2500	1504SDSA41A-R	336/168	95.8	* 2	MXTFCL	\$18,867
150	1800	575	445T	2111	B1504FLF4OSH01	140	95.8	* 2, 17	MXTFCG	\$18,867
150	1800	575	445T	2094	B1504FLF3OSH	140	95.8	* 8, 17	MXTFCG	\$18,867
150	1800	575	S444/5T	2500	1504SDSC41A	135	95.8	* 8	MXTFCL	\$18,867
150	1800	575	S444/5T	2500	1504SDSC41A-R	135	95.8	* 2	MXTFCL	\$18,867
150	1200	460	447T	2354	B1506FLF4BSH01	181	95.8	* 2, 17	MXTFCG	\$22,991
150	1200	460	S445/7T	2500	1506SDSB41A	176	95.8	* 8	MXTFCL	\$22,991
150	1200	460	S445/7T	2500	1506SDSB41A-R	176	95.8	* 2	MXTFCL	\$22,991
150	1200	575	447T	2345	B1506FLF4OSH01	145	95.8	* 2, 17	MXTFCG	\$22,991
150	1200	575	S445/7T	2500	1506SDSC41A	141	95.8	* 8	MXTFCL	\$22,991
150	1200	575	S445/7T	2500	1506SDSC41A-R	141	95.8	* 2	MXTFCL	\$22,991
150	1200	460	447TZ	2354	B1506FLF4BSH	181	95.8	* 2, 17	MXTFCG	\$22,991
200	3600	460	447TS	2322	B2001FLG3BSH	224	95.9	* 5, 17	MXTFCG	\$26,798
200	3600	460	447TS	2311	B2003FLG3BSH01	224	95.9	* 4, 17	MXTFCG	\$26,798
200	3600	460	S445/7TS	2500	2002SDSB41B	216	95.4	*	MXTFCL	\$26,798
200	3600	575	447TS	2325	B2001FLG3OSH	180	96.0	* 5, 17	MXTFCG	\$26,798
200	3600	575	447TS	2348	B2003FLG3OSH01	180	96.0	* 4, 17	MXTFCG	\$26,798
200	3600	575	S445/7TS	2500	2002SDSC41B	173	95.4	*	MXTFCL	\$26,798
200	1800	460	447T	2356	B2004FLF4BSH01	232	96.2	* 2, 17	MXTFCG	\$22,677
200	1800	460	447T	2363	B2004FLF3BSH	232	96.2	* 8, 17	MXTFCG	\$22,677
200	1800	460	S445/7T	2500	2004SDSB41A	229	96.2	* 8	MXTFCL	\$22,677
200	1800	460	S445/7T	2500	2004SDSB41A-R	229	96.2	* 2	MXTFCL	\$22,677
200	1800	575	447T	2357	B2004FLF4OSH01	185	96.2	* 2, 17	MXTFCG	\$22,677
200	1800	575	447T	2345	B2004FLF3OSH	185	96.2	* 8, 17	MXTFCG	\$22,677
200	1800	575	S445/7T	2500	2004SDSC41A	184	96.2	* 8	MXTFCL	\$22,677
200	1800	575	S445/7T	2500	2004SDSC41A-R	184	96.2	* 2	MXTFCL	\$22,677
200	1800	460	447TZ	2356	B2004FLF4BSH	232	96.2	* 2, 17	MXTFCG	\$22,677
200	1200	460	505US	2629	B2006FLG3BSH	233	96.0	*	MXTFCG	\$31,315
200	1200	575	505US	2629	B2006FLG3OSH	186	96.0	*	MXTFCG	\$31,315
200	1200	460	505UZ	2869	B2006FLF4BSH	233	96.0	* 2	MXTFCG	\$32,565
200	1200	575	505UZ	2629	B2006FLF4OSH	186	96.0	* 2	MXTFCG	\$32,565
200	1200	460	N449T	3315	B2006FLF4BMHL	245	96.2	* 2	MXTFCG	\$29,966
200	1200	575	N449T	2629	B2006FLF4OMHL	189	96.2	* 2	MXTFCG	\$29,966
250	3600	460	5010USS	3952	B2501FLG8BMH	271	95.9	* 5	MXTFCG	\$39,281
250	3600	460	5010USS	3952	B2503FLG8BMH	271	95.9	* 4	MXTFCG	\$39,281
250	3600	575	5010USS	3952	B2501FLG8OMH	220	95.9	* 5	MXTFCG	\$39,281
250	3600	575	5010USS	3952	B2503FLG8OMH	220	95.9	* 4	MXTFCG	\$39,281
250	3600	460	N449TS	3386	B2503FLG3BMHL	270	95.9	* 4	MXTFCG	\$37,706
250	3600	460	N449TS	3411	B2501FLG3BMHL	270	95.9	* 5	MXTFCG	\$37,706
250	3600	575	N449TS	3800	B2501FLG3OMHL	216	95.8	* 5	MXTFCG	\$37,706
250	3600	575	N449TS	3800	B2503FLG3OMHL	216	95.8	* 4	MXTFCG	\$37,706
250	1800	460	505US	2850	B2504FLG3BMH	288	96.2	*	MXTFCG	\$31,486
250	1800	575	505US	2907	B2504FLG3OMH	230	96.2	*	MXTFCG	\$31,486
250	1800	460	505UZ	2930	B2504FLF4BMH	288	96.2	* 2	MXTFCG	\$32,736
250	1800	575	505UZ	2915	B2504FLF4OMH	230	96.2	* 2	MXTFCG	\$32,736
250	1800	460	N449T	3509	B2504FLF3BMHL	276	96.2	* 8	MXTFCG	\$32,553
250	1800	460	N449T	3537	B2504FLF4BMHL	276	96.2	* 2	MXTFCG	\$32,553

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed Fan Cooled

EQP Global® SD

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
250	1800	575	N449T	3544	B2504FLF4OMHL	220	96.3	* 2	MXTFCG	\$32,553
250	1200	460	5010US	4440	B2506FLG3BMH01	300	95.9	*	MXTFCG	\$39,657
250	1200	575	5010US	4193	B2506FLG3OMH01	240	95.9	*	MXTFCG	\$39,657
250	1200	460	5010UZ	4512	B2506FLF4BMH01	300	95.9	* 2	MXTFCG	\$40,907
250	1200	575	5010UZ	4193	B2506FLF4OMH01	240	95.9	* 2	MXTFCG	\$40,907
250	1200	460	N449T	3502	B2506FLF4BMHL	295	96.5	* 2	MXTFCG	\$36,084
250	1200	575	N449T	3930	B2506FLF4OMHL	232	96.5	* 2	MXTFCG	\$36,084
300	3600	460	5010USS	3954	B3001FLG8BMH	322	95.9	* 5	MXTFCG	\$45,672
300	3600	460	5010USS	3954	B3003FLG8BMH	322	95.9	* 4	MXTFCG	\$45,672
300	3600	575	5010USS	3954	B3001FLG8OMH	258	95.9	* 5	MXTFCG	\$45,672
300	3600	575	5010USS	4543	B3003FLG8OMH	258	95.9	* 4	MXTFCG	\$45,672
300	3600	460	N449TS	3604	B3001FLG3BMHL	328	95.8	* 5	MXTFCG	\$44,452
300	3600	460	N449TS	3601	B3003FLG3BMHL	328	95.8	* 4	MXTFCG	\$44,452
300	3600	575	N449TS	4000	B3001FLG3OMHL	261	95.8	* 2, 5	MXTFCG	\$44,452
300	3600	575	N449TS	4000	B3003FLG3OMHL	261	95.8	* 2, 4	MXTFCG	\$44,452
300	1800	460	5010US	4476	B3004FLG3BMH01	330	96.5	*	MXTFCG	\$38,887
300	1800	575	5010US	4378	B3004FLG3OMH01	264	96.5	*	MXTFCG	\$38,887
300	1800	460	5010UZ	4508	B3004FLF4BMH01	330	96.5	* 2	MXTFCG	\$40,137
300	1800	575	5010UZ	4540	B3004FLF4OMH01	264	96.5	* 2	MXTFCG	\$40,137
300	1800	460	N449T	3607	B3004FLF3BMHL	330	96.4	* 8	MXTFCG	\$34,822
300	1800	460	N449T	3613	B3004FLF4BMHL	328	96.2	* 2	MXTFCG	\$34,822
300	1800	575	N449T	3628	B3004FLF4OMHL	264	96.4	* 2	MXTFCG	\$34,822
300	1200	460	5010US	4232	B3006FLG3BMH01	362	96.1	*	MXTFCG	\$50,806
300	1200	575	5010US	4232	B3006FLG3OMH	290	96.1		MXTFCG	\$50,806
300	1200	460	5010UZ	4573	B3006FLF4BMH01	362	96.1	* 2	MXTFCG	\$52,056
300	1200	575	5010UZ	4489	B3006FLF4OMH01	290	96.1	* 2	MXTFCG	\$52,056
300	1200	460	N449T	3667	B3006FLF4BMHL	354	96.5	* 2	MXTFCG	\$46,898
300	1200	575	N449T	2629	B3006FLF4OMHL	283	96.4	2	MXTFCG	\$46,898
350	3600	460	5010USS	3975	B3503FLG8BMH	380	95.8	4	MXTFCG	\$49,150
350	3600	575	5010USS	3975	B3503FLG8OMH	304	95.9	4	MXTFCG	\$49,150
350	3600	460	N449TS	3616	B3501FLG3BMHL	382	95.8	* 5	MXTFCG	\$46,820
350	3600	460	N449TS	3594	B3503FLG3BMHL	382	95.8	* 4	MXTFCG	\$46,820
350	3600	575	N449TS	3400	B3501FLG3OMHL	307	95.8	5	MXTFCG	\$46,820
350	3600	575	N449TS	3400	B3503FLG3OMHL	307	95.8	4	MXTFCG	\$46,820
350	1800	460	5010US	4459	B3504FLG3BMH01	388	96.3	*	MXTFCG	\$41,254
350	1800	575	5010US	4121	B3504FLG3OMH01	308	96.3		MXTFCG	\$41,254
350	1800	460	5010UZ	4561	B3504FLF4BMH01	388	96.3	* 2	MXTFCG	\$42,504
350	1800	575	5010UZ	4544	B3504FLF4OMH	308	96.3	2	MXTFCG	\$42,504
350	1800	460	N449T	3644	B3504FLF4BMHL	380	96.2	2	MXTFCG	\$37,891
350	1800	460	N449T	3604	B3504FLF3BMHL	380	96.2	* 8	MXTFCG	\$37,891
350	1800	575	N449T	3669	B3504FLF4OMHL	304	96.2	* 2	MXTFCG	\$37,891
350	1200	460	5010US	4735	B3506FLG3BMH	414	95.8		MXTFCG	\$53,481
350	1200	575	5010US	4735	B3506FLG3OMH	333	95.8		MXTFCG	\$53,481
350	1200	460	5010UZ	4727	B3506FLF4BMH	414	95.8	2	MXTFCG	\$54,731
350	1200	575	5010UZ	4735	B3506FLF4OMH	333	95.8	2	MXTFCG	\$54,731
350	1200	575	L449T	2629	B3506FLF4OMHL01	340	95.8	2	MXTFCG	\$49,445
350	1200	460	5011US	5000	3506FTAB41E-A	415	95.8		MXTFCG	\$61,691
350	1200	460	5011UZ	5000	3506FTAB41E-AR	415	95.8	2	MXTFCG	\$62,941
350	1200	575	5011US	5000	3506FTAC41E-A	332	95.8		MXTFCG	\$61,691

Totally Enclosed Fan Cooled

EQP Global® SD

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
350	1200	575	5011UZ	5000	3506FTAC41G-AR	332	95.8	2	MXTFCG	\$62,941
400	3600	460	5010USS	4692	B4001FLG8BMH	438	96.0	5	MXTFCG	\$58,324
400	3600	460	5010USS	4675	B4003FLG8BMH	438	96.0	4	MXTFCG	\$58,324
400	3600	575	5010USS	4675	B4001FLG8OMH	350	96.0	5	MXTFCG	\$58,324
400	3600	575	5010USS	4050	B4003FLG8OMH	350	96.0	4	MXTFCG	\$58,324
400	3600	460	5011USS	5000	4003FTAB41F-A	441	95.9	4	MXTFCG	\$67,073
400	3600	575	5011USS	5000	4003FTAC41F-A	352	95.8	4	MXTFCG	\$67,073
400	1800	460	5010US	4538	B4004FLG3BMH01	450	96.8	*	MXTFCG	\$54,565
400	1800	575	5010US	4017	B4004FLG3OMH01	357	96.2		MXTFCG	\$54,565
400	1800	460	5010UZ	4575	B4004FLF4BMH01	450	96.8	* 2	MXTFCG	\$55,815
400	1800	575	5010UZ	4603	B4004FLF4OMH01	357	96.2	2	MXTFCG	\$55,815
400	1800	460	5011US	4700	4004FTAB41E-A	446	96.2		MXTFCG	\$62,938
400	1800	460	5011UZ	5000	4004FTAB41E-AR	446	96.2	2	MXTFCG	\$64,188
400	1800	575	5011US	5000	4004FTAC41E-A	358	96.2		MXTFCG	\$62,938
400	1800	575	5011UZ	5000	4004FTAC41G-AR	358	96.2	2	MXTFCG	\$64,188
400	1200	460	5010US	3937	F4006FLG3BMH	482	95.4		MXTFCG	\$60,902
400	1200	575	5010US	4931	F4006FLG3OMH	386	95.4		MXTFCG	\$60,902
400	1200	460	5010UZ	5035	F4006FLF4BMH	482	95.4	* 2	MXTFCG	\$62,152
400	1200	575	5010UZ	4715	F4006FLF4OMH	386	95.4	2	MXTFCG	\$62,152
450	3600	460	5010USS	4803	B4501FLG8BMH	493	96.1	5	MXTFCG	\$65,623
450	3600	460	5010USS	4800	B4503FLG8BMH	493	96.1	4	MXTFCG	\$65,623
450	3600	575	5010USS	4637	B4501FLG8OMH	394	96.1	5	MXTFCG	\$65,623
450	3600	575	5010USS	4637	B4503FLG8OMH	394	96.1	4	MXTFCG	\$65,623
450	3600	460	5011USS	5000	4503FTAB41F-A	494	95.8	4	MXTFCG	\$75,466
450	3600	575	5011USS	5000	4503FTAC41F-A	394	95.9	4	MXTFCG	\$75,466
450	1800	460	5010US	4678	B4504FLG3BMH	512	96.2		MXTFCG	\$55,434
450	1800	575	5010US	4017	B4504FLG3OMH	411	96.2		MXTFCG	\$55,434
450	1800	460	5010UZ	4744	B4504FLF4BMH	512	96.2	2	MXTFCG	\$56,684
450	1800	575	5010UZ	4650	B4504FLF4OMH	411	96.2	2	MXTFCG	\$56,684
450	1800	460	5011US	5000	4504FTAB41E-A	504	96.2	*	MXTFCG	\$67,142
450	1800	460	5011UZ	4717	4504FTAB41E-AR	504	96.2	2	MXTFCG	\$74,964
450	1800	575	5011US	5000	4504FTAC41E-A	405	96.2		MXTFCG	\$67,142
450	1800	575	5011UZ	4717	4504FTAC41G-AR	405	96.2	2	MXTFCG	\$74,964
450	1200	460	5810US	6120	F4506FLG3BMH	533	95.4		MXTFCG	\$65,992
450	1200	575	5810US	6120	F4506FLG3OMH	426	95.4		MXTFCG	\$65,992
450	1200	460	5810UZ	5856	F4506FLF4BMH	533	95.4	2	MXTFCG	\$67,242
450	1200	575	5810UZ	5856	F4506FLF4OMH	426	95.4	2	MXTFCG	\$67,242
500	3600	460	5010USS	4801	B5003FKG8BMH	547	96.1	3, 4, 14	MXTFCG	\$72,911
500	3600	460	5010USS	4793	B5001FKG8BMH	547	96.1	3, 5, 14	MXTFCG	\$72,911
500	3600	575	5010USS	4637	B5001FKG8OMH	438	96.1	3, 5, 14	MXTFCG	\$72,911
500	3600	575	5010USS	4650	B5003FKG8OMH	438	96.1	3, 4, 14	MXTFCG	\$72,911
500	3600	460	5011USS	5000	5003FTAB41F-A	549	96.1	4	MXTFCG	\$83,847
500	3600	575	5011USS	5000	5003FTAC41F-A	439	96.0	4	MXTFCG	\$83,847
500	1800	460	5011US	4709	5004FTAB41E-A	565	96.3	*	MXTFCG	\$74,235
500	1800	460	5011UZ	4837	5004FTAB41G-AR	565	96.2	2	MXTFCG	\$74,235
500	1800	575	5011US	5000	5004FTAC41E-A	452	96.3		MXTFCG	\$74,235
500	1800	575	5011UZ	4837	5004FTAC41G-AR	452	96.3	2	MXTFCG	\$82,884
500	1200	460	5810US	5859	F5006FLG3BMH	591	95.4	*	MXTFCG	\$73,107
500	1200	575	5810US	6120	F5006FLG3OMH	476	95.8		MXTFCG	\$73,107

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed Fan Cooled

EQP Global® SD

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
500	1200	460	5810UZ	6032	F5006FLF4BMH	591	95.4	2	MXTFCG	\$74,357
500	1200	575	5810UZ	6032	F5006FLF4OMH	476	95.8	2	MXTFCG	\$74,357
600	3600	460	5810USS	5898	F6003FLG8BM	655	94.1	4	MXTFCG	\$89,775
600	3600	575	5810USS	6000	F6003FLG8OM	521	95	4	MXTFCG	\$89,775
600	1800	460	5810UZ	7800	F6004FLF4BM	675	95.4	2	MXTFCG	\$82,294
600	1800	460	5810US	7700	F6004FLG3BM	675	95.4		MXTFCG	\$78,749
600	1800	575	5810UZ	7800	F6004FLF4OM	541	95.4	2	MXTFCG	\$82,294
600	1800	575	5810US	7700	F6004FLG3OM	541	95.4		MXTFCG	\$78,749
600	1800	460	5810US	5961	F6004FLG3BMH	673	95.8	*	MXTFCG	\$79,869
600	1800	575	5810US	6040	F6004FLG3OMH	540	95.8		MXTFCG	\$79,869
600	1800	460	5810UZ	6040	F6004FLF4BMH	673	95.8	2	MXTFCG	\$84,550
600	1800	575	5810UZ	6040	F6004FLF4OMH	540	95.8	2	MXTFCG	\$84,550
600	1200	460	5810UZ	7800	F6006FLF4BM	737	95.4	2	MXTFCG	\$93,318
600	1200	460	5810US	7800	F6006FLG3BM	737	95.4		MXTFCG	\$89,775
600	1200	575	5810UZ	7800	F6006FLF4OM	575	95.4	2	MXTFCG	\$93,318
600	1200	575	5810US	7800	F6006FLG3OM	575	95.4		MXTFCG	\$89,775
600	900	460	6809L	11000	CUSTOM PRODUCTION	C.F.	C.F.		MXTFCG	CF
600	900	575	6809L	11000	CUSTOM PRODUCTION	C.F.	C.F.		MXTFCG	CF
700	3600	460	5811USS	6669	7003FTAB11F-A	800	95.4	* 4	MXTFCG	\$96,354
700	3600	575	5811USS	7000	7003FTAC11F-A	638	95.8	* 4	MXTFCG	\$96,354
700	1800	460	5811US	7000	7004FTAB11E-A	779	95.4	*	MXTFCG	\$99,357
700	1800	460	5810UZ	7800	F7004FLF4BM	774	95.8	* 2	MXTFCG	\$95,418
700	1800	460	5810US	7800	F7004FLG3BM	774	95.8	*	MXTFCG	\$91,875
700	1800	575	5811US	7000	7004FTAC11E-A	622	95	*	MXTFCG	\$99,357
700	1800	575	5810UZ	7800	F7004FLF4OM	622	95.4	* 2	MXTFCG	\$95,418
700	1800	575	5810US	7800	F7004FLG3OM	622	95.4	*	MXTFCG	\$91,875
700	1800	460	5810US	6126	F7004FLG3BMH	799	95.8	*	MXTFCG	\$84,966
700	1800	575	5810US	6126	F7004FLG3OMH	640	95.8		MXTFCG	\$84,966
700	1800	460	5810UZ	6032	F7004FLF4BMH	799	95.8	2	MXTFCG	\$86,216
700	1800	575	5810UZ	6032	F7004FLF4OMH	640	95.8	2	MXTFCG	\$86,216
700	1200	460	5811US	7000	7006FTAB11E-A	864	95.4	*	MXTFCG	\$103,169
700	1200	575	5811US	7000	7006FTAC11E-A	761	95.8	*	MXTFCG	\$103,169
700	900	460	6810L	11500	CUSTOM PRODUCTION	C.F.	C.F.		MXTFCG	CF
700	900	575	6810L	11500	CUSTOM PRODUCTION	C.F.	C.F.		MXTFCG	CF
800	3600	460	5811USS	6668	8003FTAB11F-A	910	95.8	*	MXTFCG	\$110,086
800	3600	575	6811H	9500	CUSTOM PRODUCTION	C.F.	C.F.		MXTFCG	CF
800	1800	460	5811US	7000	8004FTAB11E-A	888	95.4	*	MXTFCG	\$101,643
800	1800	575	5811US	7000	8004FTAC11E-A	709	95.4	*	MXTFCG	\$101,643
800	1200	460	6810	11500	CUSTOM PRODUCTION	C.F.	C.F.		MXTFCG	CF
800	1200	575	6810	11500	CUSTOM PRODUCTION	C.F.	C.F.		MXTFCG	CF
800	900	460	6811L	11500	CUSTOM PRODUCTION	C.F.	C.F.		MXTFCG	CF
800	900	575	6811L	11500	CUSTOM PRODUCTION	C.F.	C.F.		MXTFCG	CF
900	1800	460	6811	12500	CUSTOM PRODUCTION	C.F.	C.F.		MXTFCG	CF
900	1800	575	6811	12500	CUSTOM PRODUCTION	C.F.	C.F.		MXTFCG	CF
900	1200	460	6811	12500	CUSTOM PRODUCTION	C.F.	C.F.		MXTFCG	CF
900	1200	575	6811	12500	CUSTOM PRODUCTION	C.F.	C.F.		MXTFCG	CF
900	900	460	6811	12500	CUSTOM PRODUCTION	C.F.	C.F.		MXTFCG	CF
900	900	575	6811	12500	CUSTOM PRODUCTION	C.F.	C.F.		MXTFCG	CF
1000	1800	460	6811	12500	CUSTOM PRODUCTION	C.F.	C.F.		MXTFCG	CF

Totally Enclosed Fan Cooled

EQP Global® SD

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
1000	1800	575	6811	12500	CUSTOM PRODUCTION	C.F.	C.F.		MXTF CG	CF
1000	1200	460	6811	12500	CUSTOM PRODUCTION	C.F.	C.F.		MXTF CG	CF
1000	1200	575	6811	12500	CUSTOM PRODUCTION	C.F.	C.F.		MXTF CG	CF

FL Amps and FL EFF are average expected design values and not guaranteed.
 The weights listed above are estimated.
 Please contact Toshiba for information on product availability.
 "CF"= Consult Factory

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

MV Modifications	MV Definite Purpose	MV Gen. Purp. Enclosed	MV General Purpose Open	LV Mods. (Stock & Prod)	Definite Purpose	IEC	Explosion Proof	TEFC General Purpose	ODP General Purpose

Totally Enclosed Fan Cooled
EQP Global® SD C-Face
 > NEMA Premium® Efficiency



Toshiba's general purpose, totally enclosed fan cooled, C-Face motor series is Toshiba's next-generation motor product line.

The TEFC C-Face motor is available in footed and footless designs and is designed to meet or exceed the competitive demands of the global market, as well as the amended integral horsepower (HP) rule IHMR 2016, while maintaining the high reliability and quality expected from Toshiba.

Product Scope:

Horsepower:	0.5 to 75 HP
Speed (60 Hz):	3600, 1800, or 1200 RPM
(50 Hz):	3000, 1500, or 1000 RPM
Volt (60 Hz):	230/460 or 575 V
(50 Hz):	190/380 V
Enclosure:	Totally Enclosed Fan Cooled
Frame Size*:	56C through 365TC
Construction:	Cast Iron
Insulation:	Class F, Exceeds NEMA MG1 Part 31 (Inverter Duty)

* Production modifications not applicable to EQP Global Motors® 140 through 360 Frames (use EQP III Series base price for these frame sizes).



3 THREE YEAR WARRANTY

HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
C-Face Footed										
0.5	1800	230/460	56C	49	B1/24EMT2AOZ	2.0/1.0	77	*	MXTFCS	\$479
0.5	1800	575	56C	49	B1/24EMT2OOZ	0.8	77	*	MXTFCS	\$479
0.5	1200	230/460	56C	53	B1/26FMT2AOZ	2.0/1.0	77	*	MXTFCS	\$572
0.5	1200	575	56C	53	B1/26FMT2OOZ	0.8	77	*	MXTFCS	\$572
0.75	3600	230/460	56C	47	B3/42FMT2AOZ	2.2/1.1	77	*	MXTFCS	\$473
0.75	3600	575	56C	47	B3/42FMT2OOZ	0.9	77	*	MXTFCS	\$473
0.75	1200	230/460	56C	53	B3/46FLT2AOZ	2.8/1.4	78.5	*	MXTFCS	\$578
0.75	1200	575	56C	53	B3/46FLT2OOZ	1.1	78.5	*	MXTFCS	\$578
0.75	1200	230/460	143TC	66	3/46SDSR42A-P	2.8/1.4	80	* 1, 9, 16	MTPFCP	\$685
0.75	1200	230/460	143TC	66	3/46SDSR47A-P	2.8/1.4	80	* 1, 9	MTPFCP	\$685
0.75	1200	575	143TC	66	3/46SDSC42A-P	1.1	81.5	* 1, 16	MTPFCP	\$686
0.75	1200	575	143TC	66	3/46SDSC47A-P	1.1	81.5	* 1	MTPFCP	\$686
1	3600	230/460	56C	174	B0012FMT2AOZH	2.8/1.4	81.4	*	MXTFCS	\$649
1	3600	575	56C	174	B0012FMT2OOZH	1.2	81.2	*	MXTFCS	\$649
1	1800	230/460	56C	174	B0014FLT2AOZH	2.9/1.45	85.7	*	MXTFCS	\$694
1	1800	575	56C	174	B0014FLT2OOZH	1.2	85.7	*	MXTFCS	\$694

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed Fan Cooled

EQP Global® SD C-Face

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
1	1800	230/460	143TC	63	0014SDSR42A-P	3.4/1.7	85.5	* 1, 9, 16	MTPFCP	\$598
1	1800	230/460	143TC	64	0014SDSR47A-P	3.4/1.7	85.5	* 1, 9	MTPFCP	\$598
1	1800	575	143TC	62	0014SDSC42A-P	1.2	85.6	* 1, 16	MTPFCP	\$598
1	1800	575	143TC	63	0014SDSC47A-P	1.2	85.6	* 1	MTPFCP	\$598
1	1200	230/460	56C	174	B0016FLT2AOZH	3.8/1.9	84.0	*	MXTFCS	\$766
1	1200	575	56C	174	B0016FLT2OOZH	1.5	84.4	*	MXTFCS	\$766
1	1200	230/460	145TC	66	0016SDSR42A-P	3.6/1.8	82.9	* 1, 9, 16	MTPFCP	\$716
1	1200	230/460	145TC	66	0016SDSR47A-P	3.6/1.8	82.9	* 1, 9	MTPFCP	\$716
1	1200	575	145TC	64	0016SDSC42A-P	1.5	82.9	* 1, 16	MTPFCP	\$716
1	1200	575	145TC	64	0016SDSC47A-P	1.5	82.9	* 1	MTPFCP	\$716
1.5	3600	230/460	56C	174	BY152FLT2AOZH	38/1.9	86.4	*	MXTFCS	\$722
1.5	3600	575	56C	174	BY152FLT2OOZH	1.5	86.3	*	MXTFCS	\$722
1.5	3600	230/460	143TC	62	Y152SDSR42A-P	4/2	84.3	* 1, 9, 16	MTPFCP	\$641
1.5	3600	230/460	143TC	62	Y152SDSR47A-P	4/2	84.3	* 1, 9	MTPFCP	\$641
1.5	3600	575	143TC	60	Y152SDSC42A-P	1.6	84.3	* 1, 16	MTPFCP	\$641
1.5	3600	575	143TC	60	Y152SDSC47A-P	1.6	84.3	* 1	MTPFCP	\$641
1.5	1800	230/460	56C	174	BY154FLT2AOZH	4.3/2.2	87.7	*	MXTFCS	\$727
1.5	1800	575	56C	174	BY154FLT2OOZH	1.7	87.2	*	MXTFCS	\$727
1.5	1800	230/460	145TC	64	Y154SDSR42A-P	4.8/2.4	86.5	* 1, 9, 16	MTPFCP	\$646
1.5	1800	230/460	145TC	66	Y154SDSR47A-P	4.8/2.4	86.5	* 1, 9	MTPFCP	\$646
1.5	1800	575	145TC	73	Y154SDSC42A-P	1.9	86.5	* 1, 16	MTPFCP	\$646
1.5	1800	575	145TC	73	Y154SDSC47A-P	1.9	86.5	* 1	MTPFCP	\$646
1.5	1200	230/460	56C	174	BY156FLT2AOZH	5.1/2.55	87.6	*	MXTFCS	\$1,054
1.5	1200	575	56C	174	BY156FLT2OOZH	2	87.6	*	MXTFCS	\$1,054
1.5	1200	230/460	182TC	106	Y156SDSR42A-P	5.0/2.5	87.7	* 1, 9, 16	MTPFCP	\$779
1.5	1200	230/460	182TC	105	Y156SDSR47A-P	5.0/2.5	87.7	* 1, 9	MTPFCP	\$779
1.5	1200	575	182TC	106	Y156SDSC42A-P	2	87.5	* 1, 16	MTPFCP	\$779
1.5	1200	575	182TC	106	Y156SDSC47A-P	2	87.5	* 1	MTPFCP	\$779
2	3600	230/460	56C	174	B0022FLT2AOZH	5.2/2.6	86.8	*	MXTFCS	\$749
2	3600	575	56C	174	B0022FLT2OOZH	2.1	86.9	*	MXTFCS	\$749
2	3600	230/460	145TC	66	0022SDSR42A-P	5.2/2.6	85.6	* 1, 9, 16	MTPFCP	\$754
2	3600	230/460	145TC	66	0022SDSR47A-P	5.2/2.6	85.6	* 1, 9	MTPFCP	\$754
2	3600	575	145TC	65	0022SDSC42A-P	2.1	85.5	* 1, 16	MTPFCP	\$754
2	3600	575	145TC	55	0022SDSC47A-P	2.1	85.5	* 1	MTPFCP	\$754
2	1800	230/460	56C	174	B0024FLT2AOZH	6.0/3.0	87.8	*	MXTFCS	\$738
2	1800	575	56C	174	B0024FLT2OOZH	2.4	87.4	*	MXTFCS	\$738
2	1800	230/460	145TC	66	0024SDSR42A-P	6/3	86.5	* 1, 9, 16	MTPFCP	\$693
2	1800	230/460	145TC	66	0024SDSR47A-P	6/3	86.5	* 1, 9	MTPFCP	\$693
2	1800	575	145TC	66	0024SDSC42A-P	2.4	86.5	* 1, 16	MTPFCP	\$693
2	1800	575	145TC	66	0024SDSC47A-P	2.4	86.5	* 1	MTPFCP	\$693
2	1200	230/460	184TC	119	0026SDSR42A-P	6.8/3.4	88.5	* 1, 9, 16	MTPFCP	\$882
2	1200	230/460	184TC	121	0026SDSR47A-P	6.8/3.4	88.5	* 1, 9	MTPFCP	\$882
2	1200	575	184TC	118	0026SDSC42A-P	2.7	88.5	* 1, 16	MTPFCP	\$882
2	1200	575	184TC	119	0026SDSC47A-P	2.7	88.5	* 1	MTPFCP	\$882
3	3600	230/460	182TC	97	0032SDSR42A-P	7.4/3.7	86.7	* 1, 9, 16	MTPFCP	\$813
3	3600	230/460	182TC	95	0032SDSR47A-P	7.4/3.7	86.7	* 1, 9	MTPFCP	\$813
3	3600	575	182TC	97	0032SDSC42A-P	3	86.7	* 1, 16	MTPFCP	\$813
3	3600	575	182TC	97	0032SDSC47A-P	3	86.7	* 1	MTPFCP	\$813
3	1800	230/460	182TC	104	0034SDSR42A-P	8/4	89.5	* 1, 9, 16	MTPFCP	\$801

Totally Enclosed Fan Cooled

EQP Global® SD C-Face

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
3	1800	230/460	182TC	108	0034SDSR47A-P	8/4	89.5	* 1, 9	MTPFCP	\$801
3	1800	575	182TC	108	0034SDSC42A-P	3.2	89.5	* 1, 16	MTPFCP	\$801
3	1800	575	182TC	108	0034SDSC47A-P	3.2	89.5	* 1	MTPFCP	\$801
3	1200	230/460	213TC	172	0036SDSR42A-P	8.8/4.4	89.6	* 1, 9, 16	MTPFCP	\$1,129
3	1200	230/460	213TC	171	0036SDSR47A-P	8.8/4.4	89.6	* 1, 9	MTPFCP	\$1,129
3	1200	575	213TC	172	0036SDSC42A-P	3.5	89.8	* 1, 16	MTPFCP	\$1,129
3	1200	575	213TC	172	0036SDSC47A-P	3.5	89.8	* 1	MTPFCP	\$1,129
5	3600	230/460	184TC	110	0052SDSR42A-P	11.6/5.8	88.7	* 1, 9, 16	MTPFCP	\$976
5	3600	230/460	184TC	108	0052SDSR47A-P	11.6/5.8	88.7	* 1, 9	MTPFCP	\$976
5	3600	575	184TC	110	0052SDSC42A-P	4.6	88.7	* 1, 16	MTPFCP	\$976
5	3600	575	184TC	110	0052SDSC47A-P	4.6	88.7	* 1	MTPFCP	\$976
5	1800	230/460	184TC	116	0054SDSR42A-P	13.8/6.9	89.5	* 1, 9, 16	MTPFCP	\$896
5	1800	230/460	184TC	119	0054SDSR47A-P	13.8/6.9	89.5	* 1, 9	MTPFCP	\$896
5	1800	575	184TC	117	0054SDSC42A-P	5.2	89.5	* 1, 16	MTPFCP	\$896
5	1800	575	184TC	117	0054SDSC47A-P	5.2	89.5	* 1	MTPFCP	\$896
5	1200	230/460	215TC	187	0056SDSR42A-P	13.8/6.9	89.6	* 1, 9, 16	MTPFCP	\$1,578
5	1200	230/460	215TC	143	0056SDSR47A-P	13.8/6.9	89.6	* 1, 9	MTPFCP	\$1,578
5	1200	575	215TC	206	0056SDSC42A-P	5.5	89.6	* 1, 16	MTPFCP	\$1,578
5	1200	575	215TC	206	0056SDSC47A-P	5.5	89.6	* 1	MTPFCP	\$1,578
7.5	3600	230/460	213TC	185	Y752SDSR42A-P	18/9	89.7	* 1, 9, 16	MTPFCP	\$1,214
7.5	3600	230/460	213TC	179	Y752SDSR47A-P	18/9	89.7	* 1, 9	MTPFCP	\$1,214
7.5	3600	575	213TC	185	Y752SDSC42A-P	7.2	89.7	* 1, 16	MTPFCP	\$1,214
7.5	3600	575	213TC	185	Y752SDSC47A-P	7.2	89.7	* 1	MTPFCP	\$1,214
7.5	1800	230/460	213TC	192	Y754SDSR42A-P	19.6/9.8	91.8	* 1, 9, 16	MTPFCP	\$1,214
7.5	1800	230/460	213TC	196	Y754SDSR47A-P	19.6/9.8	91.8	* 1, 9	MTPFCP	\$1,214
7.5	1800	575	213TC	196	Y754SDSC42A-P	7.8	91.8	* 1, 16	MTPFCP	\$1,214
7.5	1800	575	213TC	196	Y754SDSC47A-P	7.8	91.8	* 1	MTPFCP	\$1,214
7.5	1200	230/460	254TC	298	Y756SDSR42A-P	20.4/10.2	91.2	* 1, 9, 16	MTPFCP	\$2,031
7.5	1200	230/460	254TC	288	Y756SDSR47A-P	20.4/10.2	91.2	* 1, 9	MTPFCP	\$2,031
7.5	1200	575	254TC	325	Y756SDSC42A-P	8.2	91.1	* 1, 16	MTPFCP	\$2,031
7.5	1200	575	254TC	325	Y756SDSC47A-P	8.2	91.1	* 1	MTPFCP	\$2,031
10	3600	230/460	215TC	201	0102SDSR42A-P	23.6/11.8	90.2	* 1, 9, 16	MTPFCP	\$1,421
10	3600	230/460	215TC	196	0102SDSR47A-P	23.6/11.8	90.2	* 1, 9	MTPFCP	\$1,421
10	3600	575	215TC	198	0102SDSC42A-P	9.4	91.7	* 1, 16	MTPFCP	\$1,421
10	3600	575	215TC	198	0102SDSC47A-P	9.4	91.7	* 1	MTPFCP	\$1,421
10	1800	230/460	215TC	205	0104SDSR42A-P	26/13	91.8	* 1, 9, 16	MTPFCP	\$1,439
10	1800	230/460	215TC	207	0104SDSR47A-P	26/13	91.8	* 1, 9	MTPFCP	\$1,439
10	1800	575	215TC	207	0104SDSC42A-P	10.4	91.8	* 1, 16	MTPFCP	\$1,439
10	1800	575	215TC	207	0104SDSC47A-P	10.4	91.8	* 1	MTPFCP	\$1,439
10	1200	230/460	256TC	306	0106SDSR42A-P	26.8/13.4	91.3	* 1, 9, 16	MTPFCP	\$2,423
10	1200	230/460	256TC	306	0106SDSR47A-P	26.8/13.4	91.3	* 1, 9	MTPFCP	\$2,423
10	1200	575	256TC	306	0106SDSC42A-P	10.8	91.2	* 1, 16	MTPFCP	\$2,423
10	1200	575	256TC	306	0106SDSC47A-P	10.8	91.2	* 1	MTPFCP	\$2,423
15	3600	230/460	254TC	313	0152SDSR42A-P	36/18	91.2	* 1, 9, 16	MTPFCP	\$1,977
15	3600	230/460	254TC	309	0152SDSR47A-P	36/18	91.2	* 1, 9	MTPFCP	\$1,977
15	3600	575	254TC	313	0152SDSC42A-P	14.4	91.4	* 1, 16	MTPFCP	\$1,977
15	3600	575	254TC	313	0152SDSC47A-P	14.4	91.4	* 1	MTPFCP	\$1,977
15	1800	230/460	254TC	316	0154SDSR42A-P	38/19	92.6	* 1, 9, 16	MTPFCP	\$1,969

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed Fan Cooled

EQP Global® SD C-Face

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
15	1800	230/460	254TC	326	0154SDSR47A-P	38/19	92.6	* 1, 9	MTPFCP	\$1,969
15	1800	575	254TC	317	0154SDSC42A-P	15.2	92.6	* 1, 16	MTPFCP	\$1,969
15	1800	575	254TC	317	0154SDSC47A-P	15.2	92.6	* 1	MTPFCP	\$1,969
15	1200	230/460	284TC	441	0156SDSR42A-P	40/20	91.9	* 1, 9, 16	MTPFCP	\$3,467
15	1200	575	284TC	440	0156SDSC42A-P	15.8	91.8	* 1, 16	MTPFCP	\$3,467
20	3600	230/460	256TC	331	0202SDSR42A-P	48/24	91.3	* 1, 9, 16	MTPFCP	\$2,483
20	3600	230/460	256TC	318	0202SDSR47A-P	48/24	91.3	* 1, 9	MTPFCP	\$2,483
20	3600	575	256TC	331	0202SDSC42A-P	19.2	91.3	* 1, 16	MTPFCP	\$2,483
20	3600	575	256TC	331	0202SDSC47A-P	19.2	91.3	* 1	MTPFCP	\$2,483
20	1800	230/460	256TC	359	0204SDSR42A-P	50/25	93.3	* 1, 9, 16	MTPFCP	\$2,370
20	1800	230/460	256TC	366	0204SDSR47A-P	50/25	93.3	* 1, 9	MTPFCP	\$2,370
20	1800	575	256TC	362	0204SDSC42A-P	20	93.2	* 1, 16	MTPFCP	\$2,370
20	1800	575	256TC	362	0204SDSC47A-P	20	93.2	* 1	MTPFCP	\$2,370
20	1200	230/460	286TC	492	0206SDSR42A-P	50/25	91.8	* 1, 9	MTPFCP	\$3,986
20	1200	575	286TC	492	0206SDSC42A-P	20	91.9	* 1	MTPFCP	\$3,986
25	3600	230/460	284TSC	489	0252SDSR42B-P	58/29	91.8	* 1, 9	MTPFCP	\$3,163
25	3600	575	284TSC	440	0252SDSC42B-P	23	91.8	* 1	MTPFCP	\$3,163
25	1800	230/460	284TC	511	0254SDSR42A-P	62/31	93.8	* 1, 9	MTPFCP	\$2,994
25	1800	575	284TC	514	0254SDSC42A-P	24	93.6	* 1	MTPFCP	\$2,994
25	1200	230/460	324TC	639	0256SDSR42A-P	62/31	93.3	* 1, 9	MTPFCP	\$4,798
25	1200	575	324TC	639	0256SDSC42A-P	25	93.3	* 1	MTPFCP	\$4,798
30	3600	230/460	286TSC	509	0302SDSR42B-P	70/35	91.9	* 1, 9	MTPFCP	\$3,569
30	3600	575	286TSC	485	0302SDSC42B-P	28	91.9	* 1	MTPFCP	\$3,569
30	1800	230/460	286TC	536	0304SDSR42A-P	72/36	93.8	* 1, 9	MTPFCP	\$3,511
30	1800	575	286TC	525	0304SDSC42A-P	29	93.8	* 1	MTPFCP	\$3,511
30	1200	230/460	326TC	659	0306SDSR42A-P	74/37	93.3	* 1, 9	MTPFCP	\$5,749
30	1200	575	326TC	659	0306SDSC42A-P	29.6	93.6	* 1	MTPFCP	\$5,749
40	3600	230/460	324TSC	666	0402SDSR42B-P	94/47	92.5	* 1, 9	MTPFCP	\$4,435
40	3600	575	324TSC	550	0402SDSC42B-P	38	92.5	* 1	MTPFCP	\$4,435
40	1800	230/460	324TC	683	0404SDSR42A-P	96/48	94.1	* 1, 9	MTPFCP	\$4,465
40	1800	575	324TC	690	0404SDSC42A-P	38	94.1	* 1	MTPFCP	\$4,465
40	1200	230/460	364TC	820	0406SDSR42A-P	96/48	94.1	* 1, 9	MTPFCP	\$7,698
40	1200	575	364TC	820	0406SDSC42A-P	38	94.1	* 1	MTPFCP	\$7,698
50	3600	230/460	326TSC	690	0502SDSR42B-P	116/58	93.0	* 1, 9	MTPFCP	\$5,959
50	3600	575	326TSC	690	0502SDSC42B-P	46	93.0	* 1	MTPFCP	\$5,959
50	1800	230/460	326TC	737	0504SDSR42A-P	120/60	94.5	* 1, 9	MTPFCP	\$5,337
50	1800	575	326TC	752	0504SDSC42A-P	48	94.5	* 1	MTPFCP	\$5,337
50	1200	230/460	365TC	849	0506SDSR42A-P	120/60	94.1	* 1, 9	MTPFCP	\$8,849
50	1200	575	365TC	849	0506SDSC42A-P	48	94.1	* 1	MTPFCP	\$8,849
60	3600	230/460	364TSC	869	0602SDSR42B-P	138/69	93.6	* 1, 9	MTPFCP	\$7,557
60	3600	575	364TSC	869	0602SDSC42B-P	55	93.7	* 1	MTPFCP	\$7,557
60	1800	230/460	364TC	924	0604SDSR42A-P	138/69	95.1	* 1, 9	MTPFCP	\$7,648
60	1800	575	364TC	904	0604SDSC42A-P	55	95.1	* 1	MTPFCP	\$7,648
75	3600	230/460	365TSC	924	0752SDSR42B-P	172/86	93.6	* 1, 9	MTPFCP	\$9,304
75	3600	575	365TSC	924	0752SDSC42B-P	69	93.8	* 1	MTPFCP	\$9,304
75	1800	230/460	365TC	981	0754SDSR42A-P	170/85	95.4	* 1, 9	MTPFCP	\$9,616
75	1800	575	365TC	981	0754SDSC42A-P	69	95.4	* 1	MTPFCP	\$9,616

Totally Enclosed Fan Cooled

EQP Global® SD C-Face

> NEMA Premium® Efficiency



ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
C-Face Footless										
0.5	1800	230/460	56C	47	B1/24EMC2AOZ	2.0/1.0	77	* 1, 7	MXTFCS	\$468
0.5	1800	575	56C	47	B1/24EMC2OOZ	0.8	77	* 1, 7	MXTFCS	\$468
0.5	1200	230/460	56C	51	B1/26FMC2AOZ	2.0/1.0	77	* 1	MXTFCS	\$572
0.5	1200	575	56C	51	B1/26FMC2OOZ	0.8	77	*	MXTFCS	\$572
0.75	1800	230/460	56C	54	B3/44FMC2AOZ	2.2/1.1	81.5	* 1	MXTFCS	\$500
0.75	1800	575	56C	54	B3/44FMC2OOZ	0.9	81.5	* 1	MXTFCS	\$500
0.75	1200	230/460	56C	51	B3/46FLC2AOZ	2.8/1.4	78.5	* 1	MXTFCS	\$578
0.75	1200	575	56C	51	B3/46FLC2OOZ	1.1	78.5	* 1	MXTFCS	\$578
0.75	1200	230/460	143TC	62	3/46SDSR44A-P	2.8/1.4	80	* 1, 9	MTPFCP	\$754
0.75	1200	575	143TC	62	3/46SDSC44A-P	1.1	81.5	* 1	MTPFCP	\$754
1	3600	230/460	56C	174	B0012FMC2AOZH	2.8/1.4	81.4	*	MXTFCS	\$649
1	3600	575	56C	174	B0012FMC2OOZH	1.2	81.2	*	MXTFCS	\$649
1	1800	230/460	56C	174	B0014FLC2AOZH	2.9/1.45	85.7	*	MXTFCS	\$694
1	1800	575	56C	174	B0014FLC2OOZH	1.2	85.7	*	MXTFCS	\$694
1	1800	230/460	143TC	61	0014SDSR44A-P	3.4/1.7	85.5	* 1, 9	MTPFCP	\$658
1	1800	575	143TC	62	0014SDSC44A-P	1.2	85.6	* 1	MTPFCP	\$658
1	1200	230/460	56C	174	B0016FLC2AOZH	3.8/1.9	84.0	*	MXTFCS	\$766
1	1200	575	56C	174	B0016FLC2OOZH	1.5	84.4	*	MXTFCS	\$766
1	1200	230/460	145TC	66	0016SDSR44A-P	3.6/1.8	82.9	* 1, 9	MTPFCP	\$788
1	1200	575	145TC	66	0016SDSC44A-P	1.5	82.9	* 1	MTPFCP	\$788
1.5	3600	230/460	56C	174	BY152FLC2AOZH	38/1.9	86.4	*	MXTFCS	\$722
1.5	3600	575	56C	174	BY152FLC2OOZH	1.5	86.3	*	MXTFCS	\$722
1.5	3600	230/460	143TC	60	Y152SDSR44A-P	4/2	84.3	* 1, 9	MTPFCP	\$705
1.5	3600	575	143TC	60	Y152SDSC44A-P	1.6	84.3	* 1	MTPFCP	\$705
1.5	1800	230/460	56C	174	BY154FLC2AOZH	4.3/2.2	87.7	*	MXTFCS	\$727
1.5	1800	575	56C	174	BY154FLC2OOZH	1.7	87.2	*	MXTFCS	\$727
1.5	1800	230/460	145TC	64	Y154SDSR44A-P	4.8/2.4	86.5	* 1, 9	MTPFCP	\$711
1.5	1800	575	145TC	64	Y154SDSC44A-P	1.9	86.5	* 1	MTPFCP	\$711
1.5	1200	230/460	56C	174	BY156FLC2AOZH	5.1/2.55	87.6	*	MXTFCS	\$1,054
1.5	1200	575	56C	174	BY156FLC2OOZH	2	87.6	*	MXTFCS	\$1,054
1.5	1200	575	182TC	101	Y156SDSC44A-P	2	87.5	* 1	MTPFCP	\$857
1.5	1200	230/460	182TC	101	Y156SDSR44A-P	5/2.5	87.7	* 1, 9	MTPFCP	\$857
2	3600	230/460	56C	174	B0022FLC2AOZH	5.2/2.6	86.8	*	MXTFCS	\$749
2	3600	575	56C	174	B0022FLC2OOZH	2.1	86.9	*	MXTFCS	\$749
2	3600	230/460	145TC	62	0022SDSR44A-P	5.2/2.6	85.6	* 1, 9	MTPFCP	\$829
2	3600	575	145TC	55	0022SDSC44A-P	2.1	85.5	* 1	MTPFCP	\$829
2	1800	230/460	56C	174	B0024FLC2AOZH	6.0/3.0	87.8	*	MXTFCS	\$738
2	1800	575	56C	174	B0024FLC2OOZH	2.4	87.4	*	MXTFCS	\$738
2	1800	230/460	145TC	65	0024SDSR44A-P	6/3	86.5	* 1, 9	MTPFCP	\$762
2	1800	575	145TC	68	0024SDSC44A-P	2.4	86.5	* 1	MTPFCP	\$762
2	1200	230/460	184TC	115	0026SDSR44A-P	6.8/3.4	88.5	* 1, 9	MTPFCP	\$970
2	1200	575	184TC	115	0026SDSC44A-P	2.7	88.5	* 1	MTPFCP	\$970
3	3600	230/460	182TC	95	0032SDSR44A-P	7.4/3.7	86.7	* 1, 9	MTPFCP	\$894
3	3600	575	182TC	95	0032SDSC44A-P	3	86.7	* 1	MTPFCP	\$894
3	1800	230/460	182TC	102	0034SDSR44A-P	8/4	89.5	* 1, 9	MTPFCP	\$881
3	1800	575	182TC	104	0034SDSC44A-P	3.2	89.5	* 1	MTPFCP	\$881

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed Fan Cooled

EQP Global® SD C-Face

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
3	1200	230/460	213TC	165	0036SDSR44A-P	8.8/4.4	89.6	* 1, 9	MTPFCP	\$1,242
3	1200	575	213TC	165	0036SDSC44A-P	3.5	89.8	* 1	MTPFCP	\$1,242
5	3600	230/460	184TC	106	0052SDSR44A-P	11.6/5.8	88.7	* 1, 9	MTPFCP	\$1,074
5	3600	575	184TC	106	0052SDSC44A-P	4.6	88.7	* 1	MTPFCP	\$1,074
5	1800	230/460	184TC	108	0054SDSR44A-P	13.8/6.9	89.5	* 1, 9	MTPFCP	\$986
5	1800	575	184TC	115	0054SDSC44A-P	5.2	89.5	* 1	MTPFCP	\$986
5	1200	230/460	215TC	181	0056SDSR44A-P	13.8/6.9	89.6	* 1, 9	MTPFCP	\$1,736
5	1200	575	215TC	181	0056SDSC44A-P	5.5	89.6	* 1	MTPFCP	\$1,736
7.5	3600	230/460	213TC	176	Y752SDSR44A-P	18/9	89.7	* 1, 9	MTPFCP	\$1,335
7.5	3600	575	213TC	155	Y752SDSC44A-P	7.2	89.7	* 1	MTPFCP	\$1,335
7.5	1800	230/460	213TC	190	Y754SDSR44A-P	19.6/9.8	91.8	* 1, 9	MTPFCP	\$1,335
7.5	1800	575	213TC	190	Y754SDSC44A-P	7.8	91.8	* 1	MTPFCP	\$1,335
7.5	1200	230/460	254TC	276	Y756SDSR44A-P	20.4/10.2	91.2	* 1, 9	MTPFCP	\$2,234
7.5	1200	575	254TC	276	Y756SDSC44A-P	8.2	91.1	* 1	MTPFCP	\$2,234
10	3600	230/460	215TC	185	0102SDSR44A-P	23.6/11.8	90.2	* 1, 9	MTPFCP	\$1,563
10	3600	575	215TC	185	0102SDSC44A-P	9.4	91.7	* 1	MTPFCP	\$1,563
10	1800	230/460	215TC	205	0104SDSR44A-P	26/13	91.8	* 1, 9	MTPFCP	\$1,583
10	1800	575	215TC	201	0104SDSC44A-P	10.4	91.8	* 1	MTPFCP	\$1,583
10	1200	230/460	256TC	295	0106SDSR44A-P	26.8/13.4	91.3	* 1, 9	MTPFCP	\$2,665
10	1200	575	256TC	295	0106SDSC44A-P	10.8	91.2	* 1	MTPFCP	\$2,665
15	3600	230/460	254TC	300	0152SDSR44A-P	36/18	91.2	* 1, 9	MTPFCP	\$2,175
15	3600	575	254TC	300	0152SDSC44A-P	14.4	91.4	* 1	MTPFCP	\$2,175
15	1800	230/460	254TC	322	0154SDSR44A-P	38/19	92.6	* 1, 9	MTPFCP	\$2,166
15	1800	575	254TC	304	0154SDSC44A-P	15.2	92.6	* 1	MTPFCP	\$2,166
15	1200	230/460	284TC	434	0156SDSR44A-P	40/20	91.9	* 1, 9	MTPFCP	\$3,640
15	1200	575	284TC	434	0156SDSC44A-P	15.8	91.8	* 1	MTPFCP	\$3,640
20	3600	230/460	256TC	313	0202SDSR44A-P	48/24	91.3	* 1, 9	MTPFCP	\$2,731
20	3600	575	256TC	313	0202SDSC44A-P	19.2	91.3	* 1	MTPFCP	\$2,731
20	1800	230/460	256TC	353	0204SDSR44A-P	50/25	93.3	* 1, 9	MTPFCP	\$2,607
20	1800	575	256TC	353	0204SDSC44A-P	20	93.2	* 1	MTPFCP	\$2,607
20	1200	230/460	286TC	478	0206SDSR44A-P	50/25	91.8	* 1, 9	MTPFCP	\$4,185
20	1200	575	286TC	478	0206SDSC44A-P	20	91.9	* 1	MTPFCP	\$4,185
25	3600	230/460	284TSC	474	0252SDSR44B-P	58/29	91.8	* 1, 9	MTPFCP	\$3,321
25	3600	575	284TSC	474	0252SDSC44B-P	23	91.8	* 1	MTPFCP	\$3,321
25	1800	230/460	284TC	489	0254SDSR44A-P	62/31	93.8	* 1, 9	MTPFCP	\$3,144
25	1800	575	284TC	489	0254SDSC44A-P	24	93.6	* 1	MTPFCP	\$3,144
25	1200	230/460	324TC	613	0256SDSR44A-P	62/31	93.3	* 1, 9	MTPFCP	\$5,038
25	1200	575	324TC	613	0256SDSC44A-P	25	93.3	* 1	MTPFCP	\$5,038
30	3600	230/460	286TSC	496	0302SDSR44B-P	70/35	91.9	* 1, 9	MTPFCP	\$3,747
30	3600	575	286TSC	496	0302SDSC44B-P	28	91.9	* 1	MTPFCP	\$3,747
30	1800	230/460	286TC	509	0304SDSR44A-P	72/36	93.8	* 1, 9	MTPFCP	\$3,687
30	1800	575	286TC	509	0304SDSC44A-P	29	93.8	* 1	MTPFCP	\$3,687
30	1200	230/460	326TC	633	0306SDSR44A-P	74/37	93.3	* 1, 9	MTPFCP	\$6,036
30	1200	575	326TC	633	0306SDSC44A-P	30	93.3	* 1	MTPFCP	\$6,036
40	3600	230/460	324TSC	642	0402SDSR44B-P	94/47	92.5	* 1, 9	MTPFCP	\$4,657
40	3600	575	324TSC	642	0402SDSC44B-P	38	92.5	* 1	MTPFCP	\$4,657
40	1800	230/460	324TC	668	0404SDSR44A-P	96/48	94.1	* 1, 9	MTPFCP	\$4,688
40	1800	575	324TC	668	0404SDSC44A-P	38	94.1	* 1	MTPFCP	\$4,688

Totally Enclosed Fan Cooled

EQP Global® SD C-Face

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
40	1200	230/460	364TC	708	0406SDSR44A-P	96/48	94.1	* 1, 9	MTPFCP	\$8,083
40	1200	575	364TC	708	0406SDSC44A-P	38	94.1	* 1	MTPFCP	\$8,083
50	3600	230/460	326TSC	624	0502SDSR44B-P	116/58	93.0	* 1, 9	MTPFCP	\$6,257
50	3600	575	326TSC	624	0502SDSC44B-P	46	93.0	* 1	MTPFCP	\$6,257
50	1800	230/460	326TC	714	0504SDSR44A-P	120/60	94.5	* 1, 9	MTPFCP	\$5,604
50	1800	575	326TC	714	0504SDSC44A-P	48	94.5	* 1	MTPFCP	\$5,604
50	1200	230/460	365TC	757	0506SDSR44A-P	120/60	94.1	* 1, 9	MTPFCP	\$9,291
50	1200	575	365TC	757	0506SDSC44A-P	48	94.1	* 1	MTPFCP	\$9,291
60	3600	230/460	364TSC	833	0602SDSR44B-P	138/69	93.6	* 1, 9	MTPFCP	\$7,935
60	3600	575	364TSC	833	0602SDSC44B-P	55	93.7	* 1	MTPFCP	\$7,935
60	1800	230/460	364TC	880	0604SDSR44A-P	138/69	95.1	* 1, 9	MTPFCP	\$8,030
60	1800	575	364TC	880	0604SDSC44A-P	55	95.1	* 1	MTPFCP	\$8,030
75	3600	230/460	365TSC	814	0752SDSR44B-P	172/86	93.6	* 1, 9	MTPFCP	\$9,769
75	3600	575	365TSC	814	0752SDSC44B-P	69	93.8	* 1	MTPFCP	\$9,769
75	1800	230/460	365TC	959	0754SDSR44A-P	170/85	95.4	* 1, 9	MTPFCP	\$10,097
75	1800	575	365TC	950	0754SDSC44A-P	69	95.4	* 1	MTPFCP	\$10,097

FL Amps and FL EFF are average expected design values and not guaranteed.

The weights listed above are estimated.

Please contact Toshiba for information on product availability.

"CF" = Consult Factory

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed Fan Cooled

EQP Global® SD Top Mount

> NEMA Premium® Efficiency



3

THREE YEAR WARRANTY



The EQP Global® Top Mount motor series is designed for severe duty applications. The EQP Global® Top Mount features multiple new design enhancements, including a top-mounted conduit box for a reduced installation profile, that make it one of the lowest cost-of ownership products in the industry.

Product Scope:

Horsepower:	1 to 75 HP
Speed (60 Hz):	3600, 1800, or 1200 RPM
(50 Hz):	3000, 1500, or 1000 RPM
Volt (60 Hz):	230/460 or 575 V
(50 Hz):	190/380 V
Enclosure:	Totally Enclosed Fan Cooled
Frame Size*:	143T through 365T
Construction:	Cast Iron (Frame, Brackets, & Conduit Box)
Insulation:	Class F, Exceeds NEMA MG1 Part 31 (Inverter Duty)
* Production modifications not applicable to EQP Global Motors® 140 through 360 Frames.	

HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
1	1800	230/460	143T	57	0014SDSR41A-P3	3.4/1.7	85.5	* 1, 9	MTPFCP	\$480
1	1800	575	143T	57	0014SDSC41A-P3	1.2	85.6	* 1	MTPFCP	\$480
1	1200	230/460	145T	56	0016SDSR41A-P3	3.6/1.8	82.9	* 1, 9	MTPFCP	\$576
1	1200	575	145T	56	0016SDSC41A-P3	1.5	82.9	* 1	MTPFCP	\$576
1.5	3600	230/460	143T	57	Y152SDSR41A-P3	4/2	84.3	* 1, 9	MTPFCP	\$523
1.5	3600	575	143T	57	Y152SDSC41A-P3	1.6	84.3	* 1	MTPFCP	\$523
1.5	1800	230/460	145T	59	Y154SDSR41A-P3	4.8/2.4	86.5	* 1, 9	MTPFCP	\$528
1.5	1800	575	145T	59	Y154SDSC41A-P3	1.9	86.5	* 1	MTPFCP	\$528
1.5	1200	230/460	182T	79	Y156SDSR41A-P3	5/2.5	87.7	* 1, 9	MTPFCP	\$637
1.5	1200	575	182T	79	Y156SDSC41A-P3	2	87.5	* 1	MTPFCP	\$637
2	3600	230/460	145T	59	0022SDSR41A-P3	5.2/2.6	85.6	* 1, 9	MTPFCP	\$633
2	3600	575	145T	59	0022SDSC41A-P3	2.1	85.5	* 1	MTPFCP	\$633
2	1800	230/460	145T	62	0024SDSR41A-P3	6/3	86.5	* 1, 9	MTPFCP	\$573
2	1800	575	145T	62	0024SDSC41A-P3	2.4	86.5	* 1	MTPFCP	\$573
2	1200	230/460	184T	93	0026SDSR41A-P3	6.8/3.4	88.5	* 1, 9	MTPFCP	\$738
2	1200	575	184T	93	0026SDSC41A-P3	2.7	88.5	* 1	MTPFCP	\$738
3	3600	230/460	182T	95	0032SDSR41A-P3	7.4/3.7	86.7	* 1, 9	MTPFCP	\$670
3	3600	575	182T	95	0032SDSC41A-P3	3	86.7	* 1	MTPFCP	\$670

Totally Enclosed Fan Cooled

EQP Global® SD Top Mount

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
3	1800	230/460	182T	108	0034SDSR41A-P3	8/4	89.5	* 1, 9	MTPFCP	\$658
3	1800	575	182T	108	0034SDSC41A-P3	3.2	89.5	* 1	MTPFCP	\$658
3	1200	230/460	213T	147	0036SDSR41A-P3	8.8/4.4	89.6	* 1, 9	MTPFCP	\$938
3	1200	575	213T	147	0036SDSC41A-P3	3.5	89.8	* 1	MTPFCP	\$938
5	3600	230/460	184T	108	0052SDSR41A-P3	11.6/5.8	88.7	* 1, 9	MTPFCP	\$830
5	3600	575	184T	108	0052SDSC41A-P3	4.6	88.7	* 1	MTPFCP	\$830
5	1800	230/460	184T	110	0054SDSR41A-P3	13.8/6.9	89.5	* 1, 9	MTPFCP	\$751
5	1800	575	184T	110	0054SDSC41A-P3	5.2	89.5	* 1	MTPFCP	\$751
5	1200	230/460	215T	165	0056SDSR41A-P3	13.8/6.9	89.6	* 1, 9	MTPFCP	\$1,379
5	1200	575	215T	165	0056SDSC41A-P3	5.5	89.6	* 1	MTPFCP	\$1,379
7.5	3600	230/460	213T	178	Y752SDSR41A-P3	18/9	89.7	* 1, 9	MTPFCP	\$1,075
7.5	3600	575	213T	178	Y752SDSC41A-P3	7.2	89.7	* 1	MTPFCP	\$1,075
7.5	1800	230/460	213T	198	Y754SDSR41A-P3	19.6/9.8	91.8	* 1, 9	MTPFCP	\$1,075
7.5	1800	575	213T	198	Y754SDSC41A-P3	7.8	91.8	* 1	MTPFCP	\$1,075
7.5	1200	230/460	254T	252	Y756SDSR41A-P3	20.4/10.2	91.2	* 1, 9	MTPFCP	\$1,830
7.5	1200	575	254T	252	Y756SDSC41A-P3	8.2	91.1	* 1	MTPFCP	\$1,830
10	3600	230/460	215T	198	0102SDSR41A-P3	23.6/11.8	90.2	* 1, 9	MTPFCP	\$1,290
10	3600	575	215T	198	0102SDSC41A-P3	9.4	91.7	* 1	MTPFCP	\$1,290
10	1800	230/460	215T	209	0104SDSR41A-P3	26/13	91.8	* 1, 9	MTPFCP	\$1,308
10	1800	575	215T	209	0104SDSC41A-P3	10.4	91.8	* 1	MTPFCP	\$1,308
10	1200	230/460	256T	274	0106SDSR41A-P3	26.8/13.4	91.3	* 1, 9	MTPFCP	\$2,236
10	1200	575	256T	274	0106SDSC41A-P3	10.8	91.2	* 1	MTPFCP	\$2,236
15	3600	230/460	254T	325	0152SDSR41A-P3	36/18	91.2	* 1, 9	MTPFCP	\$1,774
15	3600	575	254T	326	0152SDSC41A-P3	14.4	91.4	* 1	MTPFCP	\$1,774
15	1800	230/460	254T	343	0154SDSR41A-P3	38/19	92.6	* 1, 9	MTPFCP	\$1,766
15	1800	575	254T	316	0154SDSC41A-P3	15.2	92.6	* 1	MTPFCP	\$1,766
15	1200	230/460	284T	364	0156SDSR41A-P3	40/20	91.9	* 1, 9	MTPFCP	\$3,135
15	1200	575	284T	364	0156SDSC41A-P3	15.8	91.8	* 1	MTPFCP	\$3,135
20	3600	230/460	256T	310	0202SDSR41A-P3	48/24	91.3	* 1, 9	MTPFCP	\$2,298
20	3600	575	256T	310	0202SDSC41A-P3	19.2	91.3	* 1	MTPFCP	\$2,298
20	1800	230/460	256T	380	0204SDSR41A-P3	50/25	93.3	* 1, 9	MTPFCP	\$2,181
20	1800	575	256T	381	0204SDSC41A-P3	20	93.2	* 1	MTPFCP	\$2,181
20	1200	230/460	286T	411	0206SDSR41A-P3	50/25	91.8	* 1, 9	MTPFCP	\$3,672
20	1200	575	286T	411	0206SDSC41A-P3	20	91.9	* 1	MTPFCP	\$3,672
25	3600	230/460	284TS	466	0252SDSR41B-P3	58/29	91.8	* 1, 9	MTPFCP	\$2,820
25	3600	575	284TS	466	0252SDSC41B-P3	23	91.8	* 1	MTPFCP	\$2,820
25	1800	230/460	284T	499	0254SDSR41A-P3	62/31	93.8	* 1, 9	MTPFCP	\$2,645
25	1800	575	284T	499	0254SDSC41A-P3	24	93.6	* 1	MTPFCP	\$2,645
25	1200	230/460	324T	545	0256SDSR41A-P3	62/31	93.3	* 1, 9	MTPFCP	\$4,457
25	1200	575	324T	545	0256SDSC41A-P3	25	93.3	* 1	MTPFCP	\$4,457
30	3600	230/460	286TS	495	0302SDSR41B-P3	70/35	91.9	* 1, 9	MTPFCP	\$3,241
30	3600	575	286TS	495	0302SDSC41B-P3	28	91.9	* 1	MTPFCP	\$3,241
30	1800	230/460	286T	504	0304SDSR41A-P3	72/36	93.8	* 1, 9	MTPFCP	\$3,181
30	1800	575	286T	517	0304SDSC41A-P3	29	93.8	* 1	MTPFCP	\$3,181
30	1200	230/460	326T	571	0306SDSR41A-P3	74/37	93.3	* 1, 9	MTPFCP	\$5,441
30	1200	575	326T	571	0306SDSC41A-P3	30	93.3	* 1	MTPFCP	\$5,441
40	3600	230/460	324TS	623	0402SDSR41B-P3	94/47	92.5	* 1, 9	MTPFCP	\$4,081
40	3600	575	324TS	623	0402SDSC41B-P3	38	92.5	* 1	MTPFCP	\$4,081
40	1800	230/460	324T	656	0404SDSR41A-P3	96/48	94.1	* 1, 9	MTPFCP	\$4,112

Totally Enclosed Fan Cooled

EQP Global® SD Top Mount

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
40	1800	575	324T	656	0404SDSC41A-P3	38	94.1	* 1	MTPFCP	\$4,112
40	1200	230/460	364T	708	0406SDSR41A-P3	96/48	94.1	* 1, 9	MTPFCP	\$7,119
40	1200	575	364T	708	0406SDSC41A-P3	38	94.1	* 1	MTPFCP	\$7,119
50	3600	230/460	326TS	653	0502SDSR41B-P3	116/58	93.0	* 1, 9	MTPFCP	\$5,658
50	3600	575	326TS	653	0502SDSC41B-P3	46	93.0	* 1	MTPFCP	\$5,658
50	1800	230/460	326T	711	0504SDSR41A-P3	120/60	94.5	* 1, 9	MTPFCP	\$5,015
50	1800	575	326T	711	0504SDSC41A-P3	48	94.5	* 1	MTPFCP	\$5,015
50	1200	230/460	365T	757	0506SDSR41A-P3	120/60	94.1	* 1, 9	MTPFCP	\$8,310
50	1200	575	365T	757	0506SDSC41A-P3	48	94.1	* 1	MTPFCP	\$8,310
60	3600	230/460	364TS	854	0602SDSR41B-P3	138/69	93.6	* 1, 9	MTPFCP	\$6,973
60	3600	575	364TS	854	0602SDSC41B-P3	55	93.7	* 1	MTPFCP	\$6,973
60	1800	230/460	364T	875	0604SDSR41A-P3	138/69	95.1	* 1, 9	MTPFCP	\$7,067
60	1800	575	364T	876	0604SDSC41A-P3	55	95.1	* 1	MTPFCP	\$7,067
75	3600	230/460	365TS	887	0752SDSR41B-P3	172/86	93.6	* 1, 9	MTPFCP	\$8,781
75	3600	575	365TS	887	0752SDSC41B-P3	69	93.8	* 1	MTPFCP	\$8,781
75	1800	230/460	365T	964	0754SDSR41A-P3	170/85	95.4	* 1, 9	MTPFCP	\$9,104
75	1800	575	365T	964	0754SDSC41A-P3	69	95.4	* 1	MTPFCP	\$9,104

FL Amps and FL EFF are average expected design values and not guaranteed.
The weights listed above are estimated.
Please contact Toshiba for information on product availability.
"CF"= Consult Factory

MV
Modifications

MV Definite
Purpose

MV Gen. Purp.
Enclosed

MV General
Purpose Open

LV Mods.
(Stock & Prod)

Definite
Purpose

IEC

Explosion
Proof

TEFC General
Purpose

ODP General
Purpose

General Purpose TEFC

EQP Global® 840 Motor Series

Toshiba's general purpose, totally enclosed fan cooled, NEMA Premium® efficiency, EQP Global® 840 motor series is Toshiba's next-generation motor product line. This cutting-edge motor product line is designed to meet or exceed the competitive demands of the global market, as well as the amended integral horsepower (HP) rule IHMR 2016, while maintaining the high reliability and quality expected from Toshiba. The EQP Global®840 specifically addresses the needs of the mill and chemical industries, incorporating many key features of an IEEE-841 motor. Building on over 20 years of success with our EQPlll motor series, the EQP Global® 840 features design enhancements on the rotor, frame, brackets, fan, and bearings.



Our EQP (efficiency, quality, and performance) philosophy extends beyond great products. We provide solutions and Global Supply Chain Management Systems (GSCMS) to meet the evolving needs of our global customers.

Standard Features:

- Totally Enclosed Fan Cooled
- Severe Duty, Mill & Chemical
- NEMA Premium® Efficiency
- Three-Phase
- 1.15 Service Factor
- Design B Torques
- Available in Footed, C-Face Footed, & C-Face Footless Design
- Exceeds Insulation Requirements of NEMA MG1 Part 31 (Inverter Duty)
- IP55 (Up to 280 Frame) and IP56 (320 Frame and above)
- Gasketed Cast Iron Conduit Box
- Cast Iron Frame & Brackets
- Breather Drains, Plugs, or T-Drains
- Double Shaft Seal Arrangement 324T-365T Frame on Both Ends
- Labyrinth Shaft Seals (404T & Larger) on Both Ends
- Multi-Mount on Most Frames
- Oversized 300 Series Bearings on All Frames
- 20:1 Constant Torque (Non-Hazardous Areas, Refer to Appendix C for Division 2 & ASD Capabilities), 60:1 Variable Torque (1 to 200 HP, 4- & 6-Pole Motors)
- No-Load Commercial Testing on All Motors
- 4142 High Strength Steel Shaft on all 440 Frames and Larger Roller Bearing Motors

Applications:

- Pumps
- Fans
- Compressors
- Conveyors
- Mixers
- Material Handling



Totally Enclosed Fan Cooled

EQP Global® 840

> NEMA Premium® Efficiency



3 THREE YEAR WARRANTY

EQP Global®
840

Toshiba's general purpose, totally enclosed fan cooled, NEMA Premium® efficiency, EQP Global®

840 motor series is Toshiba's next-generation motor product line. This cutting-edge motor product line is designed to meet or exceed the competitive demands of the global market, as well as the amended integral horsepower (HP) rule IHMR 2016, while maintaining the high reliability and quality expected from Toshiba.

The EQP Global® 840 specifically addresses the needs of the mill and chemical industries, incorporating many key features of an IEEE-841 motor. Building on over 20 years of success with our EQP III motor series, the EQP Global® 840 features design enhancements on the rotor, frame, brackets, fan, and bearings.

Product Scope:

Horsepower: ¾ to 500 HP

Speed (60 Hz): 3600, 1800, or 1200 RPM

Volt (60 Hz): 460 or 575 V

Enclosure: Totally Enclosed Fan Cooled

Frame Size*: 143T through 5810UZ

Construction: All Cast Iron (Frame, End Bracket, Fan Cover, & Conduit Box)

Insulation: Class F, Exceeds NEMA MG1 Part 31 (Inverter Duty Voltage Withstand Capability of 2000 V in 0.1 µs)

* Production modifications not applicable to EQP Global® Motors 140 through 360 Frames (use EQP III Series base price for these frame sizes).

HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
0.75	1200	460	143T	64	3/46XSSB41A-P	1.4	80	* 1	MTP840	\$610
0.75	1200	575	143T	64	3/46XSSC41A-P	1.1	81.5	* 1	MTP840	\$610
1	1800	460	143T	66	0014XSSB41A-P	1.7	85.5	* 1	MTP840	\$552
1	1800	575	143T	64	0014XSSC41A-P	1.2	85.6	* 1	MTP840	\$552
1	1200	460	145T	66	0016XSSB41A-P	1.8	82.9	* 1	MTP840	\$690
1	1200	575	145T	66	0016XSSC41A-P	1.5	82.9	* 1	MTP840	\$690
1.5	3600	460	143T	60	Y152XSSB41A-P	2	84.3	* 1	MTP840	\$616
1.5	3600	575	143T	62	Y152XSSC41A-P	1.6	84.3	* 1	MTP840	\$616
1.5	1800	460	145T	66	Y154XSSB41A-P	2.4	86.5	* 1	MTP840	\$615
1.5	1800	575	145T	66	Y154XSSC41A-P	1.9	86.5	* 1	MTP840	\$615
1.5	1200	460	182T	104	Y156XSSB41A-P	2.5	87.7	* 1	MTP840	\$735
1.5	1200	575	182T	106	Y156XSSC41A-P	2	87.5	* 1	MTP840	\$735
2	3600	460	145T	64	0022XSSB41A-P	2.6	85.6	* 1	MTP840	\$695
2	3600	575	145T	64	0022XSSC41A-P	2.1	85.5	* 1	MTP840	\$695
2	1800	460	145T	73	0024XSSB41A-P	3	86.5	* 1	MTP840	\$675
2	1800	575	145T	66	0024XSSC41A-P	2.4	86.5	* 1	MTP840	\$675
2	1200	460	184T	126	0026XSSB41A-P	3.4	88.5	* 1	MTP840	\$820

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed Fan Cooled

EQP Global® 840

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
2	1200	575	184T	119	0026XSSC41A-P	2.7	88.5	* 1	MTP840	\$820
3	3600	460	182T	95	0032XSSB41A-P	3.7	86.7	* 1	MTP840	\$757
3	3600	575	182T	97	0032XSSC41A-P	3	86.7	* 1	MTP840	\$757
3	1800	460	182T	106	0034XSSB41A-P	4	89.5	* 1	MTP840	\$711
3	1800	575	182T	103	0034XSSC41A-P	3.2	89.5	* 1	MTP840	\$711
3	1200	460	213T	174	0036XSSB41A-P	4.4	89.6	* 1	MTP840	\$1,002
3	1200	575	213T	172	0036XSSC41A-P	3.5	89.8	* 1	MTP840	\$1,002
5	3600	460	184T	104	0052XSSB41A-P	5.8	88.7	* 1	MTP840	\$937
5	3600	575	184T	110	0052XSSC41A-P	4.6	88.7	* 1	MTP840	\$937
5	1800	460	184T	115	0054XSSB41A-P	6.5	89.7	* 1	MTP840	\$830
5	1800	575	184T	117	0054XSSC41A-P	5.2	89.5	* 1	MTP840	\$830
5	1200	460	215T	190	0056XSSB41A-P	6.9	89.6	* 1	MTP840	\$1,411
5	1200	575	215T	187	0056XSSC41A-P	5.5	89.6	* 1	MTP840	\$1,411
7.5	3600	460	213T	174	Y752XSSB41A-P	9	89.7	* 1	MTP840	\$1,212
7.5	3600	575	213T	179	Y752XSSC41A-P	7.2	89.7	* 1	MTP840	\$1,212
7.5	1800	460	213T	194	Y754XSSB41A-P	9.8	91.8	* 1	MTP840	\$1,206
7.5	1800	575	213T	190	Y754XSSC41A-P	7.8	91.8	* 1	MTP840	\$1,206
7.5	1200	460	254T	289	Y756XSSB41A-P	10.2	91.2	* 1	MTP840	\$2,018
7.5	1200	575	254T	280	Y756XSSC41A-P	8.2	91.1	* 1	MTP840	\$2,018
10	3600	460	215T	194	0102XSSB41A-P	11.8	90.2	* 1	MTP840	\$1,423
10	3600	575	215T	196	0102XSSC41A-P	9.4	91.7	* 1	MTP840	\$1,423
10	1800	460	215T	205	0104XSSB41A-P	13	91.8	* 1	MTP840	\$1,418
10	1800	575	215T	203	0104XSSC41A-P	10.4	91.8	* 1	MTP840	\$1,418
10	1200	460	256T	309	0106XSSB41A-P	13.4	91.3	* 1	MTP840	\$2,478
10	1200	575	256T	304	0106XSSC41A-P	10.8	91.2	* 1	MTP840	\$2,478
15	3600	460	254T	304	0152XSSB41A-P	18	91.2	* 1	MTP840	\$1,950
15	3600	575	254T	309	0152XSSC41A-P	14.4	91.4	* 1	MTP840	\$1,950
15	1800	460	254T	326	0154XSSB41A-P	19	92.6	* 1	MTP840	\$1,870
15	1800	575	254T	320	0154XSSC41A-P	15.2	92.6	* 1	MTP840	\$1,870
15	1200	460	284T	452	0156XSSB41A-P	20	91.9	* 1	MTP840	\$3,293
15	1200	575	284T	452	0156XSSC41A-P	15.8	91.8	* 1	MTP840	\$3,293
20	3600	460	256T	326	0202XSSB41A-P	24	91.3	* 1	MTP840	\$2,357
20	3600	575	256T	325	0202XSSC41A-P	19.2	91.3	* 1	MTP840	\$2,357
20	1800	460	256T	371	0204XSSB41A-P	25.4	93.3	* 1	MTP840	\$2,329
20	1800	575	256T	355	0204XSSC41A-P	20	93.2	* 1	MTP840	\$2,329
20	1200	460	286T	492	0206XSSB41A-P	25	91.8	* 1	MTP840	\$3,876
20	1200	575	286T	487	0206XSSC41A-P	20	91.9	* 1	MTP840	\$3,876
25	3600	460	284TS	502	0252XSSB41B-P	29	91.8	* 1	MTP840	\$2,904
25	3600	575	284TS	492	0252XSSC41B-P	23	91.8	* 1	MTP840	\$2,904
25	1800	460	284T	530	0254XSSB41A-P	31	93.8	* 1	MTP840	\$2,818
25	1800	460	284TS	743	0254XSSB41B-P	31	93.8	* 1	MTP840	\$2,818
25	1800	575	284T	527	0254XSSC41A-P	24	93.6	* 1	MTP840	\$2,818
25	1800	575	284TS	527	0254XSSC41B-P	24	93.6	* 1	MTP840	\$2,818
25	1200	460	324T	655	0256XSSB41A-P	31	93.3	* 1	MTP840	\$4,700
25	1200	575	324T	655	0256XSSC41A-P	25	93.3	* 1	MTP840	\$4,700
30	3600	460	286TS	538	0302XSSB41B-P	35	91.9	* 1	MTP840	\$3,539
30	3600	575	286TS	522	0302XSSC41B-P	28	91.9	* 1	MTP840	\$3,539
30	1800	460	286T	544	0304XSSB41A-P	36	93.8	* 1	MTP840	\$3,292

Totally Enclosed Fan Cooled

EQP Global® 840

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
30	1800	460	286TS	536	0304XSSB41B-P	36	93.8	* 1	MTP840	\$3,292
30	1800	575	286T	547	0304XSSC41A-P	29	93.8	* 1	MTP840	\$3,292
30	1800	575	286TS	547	0304XSSC41B-P	29	93.8	* 1	MTP840	\$3,292
30	1200	460	326T	682	0306XSSB41A-P	37	93.3	* 1	MTP840	\$5,412
30	1200	575	326T	677	0306XSSC41A-P	30	93.3	* 1	MTP840	\$5,412
40	3600	460	324TS	692	0402XSSB41B-P	47	92.5	* 1	MTP840	\$4,459
40	3600	575	324TS	681	0402XSSC41B-P	38	92.5	* 1	MTP840	\$4,459
40	1800	460	324T	695	0404XSSB41A-P	48	94.1	* 1	MTP840	\$4,284
40	1800	460	324TS	702	0404XSSB41B-P	48	94.1	* 1	MTP840	\$4,284
40	1800	575	324T	699	0404XSSC41A-P	38	94.1	* 1	MTP840	\$4,284
40	1800	575	324TS	699	0404XSSC41B-P	38	94.1	* 1	MTP840	\$4,284
40	1200	460	364T	836	0406XSSB41A-P	48	94.1	* 1	MTP840	\$7,335
40	1200	575	364T	842	0406XSSC41A-P	38	94.1	* 1	MTP840	\$7,335
50	3600	460	326TS	705	0502XSSB41B-P	58	93.0	* 1	MTP840	\$5,789
50	3600	575	326TS	708	0502XSSC41B-P	46	93.0	* 1	MTP840	\$5,789
50	1800	460	326T	743	0504XSSB41A-P	60	94.5	* 1	MTP840	\$4,978
50	1800	460	326TS	745	0504XSSB41B-P	60	94.5	* 1	MTP840	\$4,978
50	1800	575	326T	752	0504XSSC41A-P	48	94.5	* 1	MTP840	\$4,978
50	1800	575	326TS	752	0504XSSC41B-P	48	94.5	* 1	MTP840	\$4,978
50	1200	460	365T	873	0506XSSB41A-P	60	94.1	* 1	MTP840	\$8,421
50	1200	575	365T	877	0506XSSC41A-P	48	94.1	* 1	MTP840	\$8,421
60	3600	460	364TS	899	0602XSSB41B-P	69	93.6	* 1	MTP840	\$7,615
60	3600	575	364TS	899	0602XSSC41B-P	55	93.7	* 1	MTP840	\$7,615
60	1800	460	364T	919	0604XSSB41A-P	69	95.1	* 1	MTP840	\$7,550
60	1800	460	364TS	917	0604XSSB41B-P	69	95.1	* 1	MTP840	\$7,550
60	1800	575	364T	930	0604XSSC41A-P	55	95.1	* 1	MTP840	\$7,550
60	1800	575	364TS	930	0604XSSC41B-P	55	95.1	* 1	MTP840	\$7,550
60	1200	460	404T	1300	0606XSSB41A	76	94.5	1	MXT40N	\$11,182
60	1200	575	404T	1327	0606XSSC41A	60	94.5	1	MXT40N	\$11,182
60	1200	460	404T	1300	B0606FLF3BSHD01	74	95.0	* 17	MXT40G	\$11,182
60	1200	575	404T	1327	B0606FLF3OSH01	59	95.0	* 17	MXT40G	\$11,182
75	3600	460	365TS	929	0752XSSB41B-P	86	93.6	* 1	MTP840	\$9,562
75	3600	575	365TS	933	0752XSSC41B-P	69	93.8	* 1	MTP840	\$9,562
75	1800	460	365T	1005	0754XSSB41A-P	85	95.4	* 1	MTP840	\$9,060
75	1800	460	365TS	996	0754XSSB41B-P	85	95.4	* 1	MTP840	\$9,060
75	1800	575	365T	994	0754XSSC41A-P	69	95.4	* 1	MTP840	\$9,060
75	1800	575	365TS	994	0754XSSC41B-P	55.2	95.4	* 1	MTP840	\$9,060
75	1200	460	405T	1495	0756XSSB41A	94	94.5		MXT40N	\$12,522
75	1200	575	405T	1419	0756XSSC41A	75	94.5		MXT40N	\$12,522
75	1200	460	405T	1495	0756XSSB41A-R	94	94.5	2	MXT40N	\$16,148
75	1200	575	405T	1419	0756XSSC41A-R	75	94.5	2	MXT40N	\$16,148
75	1200	460	405T	1495	B0756FLF3BSHD01	91	95.0	* 17	MXT40G	\$12,522
75	1200	575	405T	1419	B0756FLF3OSH01	73	95.0	* 17	MXT40G	\$12,522
100	3600	460	405TS	1345	B1002FLG3BSHD01	112	95.0	* 17	MXT40G	\$13,940
100	3600	575	405TS	1388	B1002FLG3OSH01	89.8	95.0	*	MXT40G	\$13,940
100	3600	460	405TS	1345	1002XSSB41B	114	94.1		MXT40N	\$15,527
100	3600	575	405TS	1388	1002XSSC41B	91	94.1		MXT40N	\$15,527
100	1800	460	405T	1375	B1004FLF3BSHD01	116	95.4	* 17	MXT40G	\$12,557

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed Fan Cooled

EQP Global® 840

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
100	1800	575	405T	1426	B1004FLF3OSHD01	93.3	95.4	* 17	MXT40G	\$12,557
100	1800	460	405T	1367	1004XSSB41A	116	95.4		MXT40N	\$12,557
100	1800	575	405T	1367	1004XSSC41A	93	95.4		MXT40N	\$12,557
100	1200	460	444T	2102	B1006FLF4BSHD01	123	95.5	* 2, 17	MXT40G	\$20,279
100	1200	575	444T	2096	B1006FLF4OSHD01	98.5	95.5	* 2, 17	MXT40G	\$20,279
100	1200	460	S444/5T	2102	1006XSSB41A	118	95.0		MXT40M	\$20,279
100	1200	575	S444/5T	2096	1006XSSC41A	95	95.0		MXT40M	\$20,279
100	1200	460	S444/5T	2102	1006XSSB41A-R	118	95.0		MXT40M	\$20,279
125	3600	460	444TS	2074	B1251FLG3BSHD	140	95.4	* 5, 17	MXT40G	\$21,738
125	3600	460	444TS	2025	B1253FLG3BSHD01	139	95.3	* 4, 17	MXT40G	\$21,738
125	3600	460	S444/5TS	2025	1252XSSB41B	136	95.0		MXT40M	\$21,738
125	3600	575	444TS	1972	B1251FLG3OSHD01	111	95.3	* 5, 17	MXT40G	\$21,738
125	3600	575	444TS	2033	B1253FLG3OSHD01	111	95.3	* 4, 17	MXT40G	\$21,738
125	3600	575	S444/5TS	2033	1252XSSC41B	109	95.0		MXT40M	\$21,738
125	1800	460	444T	2060	B1254FLF3BSHD	144	95.7	* 8, 17	MXT40G	\$18,182
125	1800	460	444T	2042	B1254FLF4BSHD01	144	95.7	* 2, 17	MXT40G	\$18,182
125	1800	460	S444/5T	2500	1254XSSB41A	142	95.4	8	MXT40M	\$18,182
125	1800	460	S444/5T	2500	1254XSSB41A-R	142	95.4	2	MXT40M	\$18,182
125	1800	575	444T	2052	B1254FLF3OSHD	116	95.7	* 8, 17	MXT40G	\$18,094
125	1800	575	444T	2048	B1254FLF4OSHD01	116	95.7	* 2, 17	MXT40G	\$18,094
125	1800	575	S444/5T	2500	1254XSSC41A	115	95.4	8	MXT40M	\$18,094
125	1800	575	S444/5T	2500	1254XSSC41A-R	115	95.4	2	MXT40M	\$18,094
125	1200	460	445T	2150	B1256FLF3BSHD	156	95.4	* 8, 17	MXT40G	\$22,013
125	1200	460	445T	2169	B1256FLF4BSHD01	156	95.5	* 2, 17	MXT40G	\$22,013
125	1200	460	S444/5T	2500	1256XSSB41A	148	95.0	8	MXT40M	\$22,013
125	1200	460	S444/5T	2500	1256XSSB41A-R	148	95.0	2	MXT40M	\$22,013
125	1200	575	445T	2169	B1256FLF3OSHD01	125	95.0	8, 17	MXT40G	\$22,013
125	1200	575	445T	2169	B1256FLF4OSHD01	124	95.5	* 2, 17	MXT40G	\$22,013
125	1200	575	S444/5T	2500	1256XSSC41A	119	95.0	8	MXT40M	\$22,013
125	1200	575	S444/5T	2500	1256XSSC41A-R	119	95.0	2	MXT40M	\$22,013
150	3600	460	445TS	2150	A1501FLG3BSHD01	168	95.7	5, 6, 17	MXT40G	\$23,844
150	3600	460	445TS	2150	A1503FLG3BSHD01	168	95.7	* 4, 6	MXT40G	\$23,844
150	3600	460	S444/5TS	2500	1502XSSB41B	163	95.0		MXT40M	\$23,844
150	3600	575	445TS	2150	A1501FLG3OSHD01	133	95.7	* 5, 6, 17	MXT40G	\$23,844
150	3600	575	445TS	2150	A1503FLG3OSHD01	133	95.7	* 4, 6, 17	MXT40G	\$23,844
150	3600	575	S444/5TS	2500	1502XSSC41B	131	95.0		MXT40M	\$23,844
150	1800	460	445T	2193	B1504FLF3BSHD	176	95.8	* 8, 17	MXT40G	\$20,422
150	1800	460	445T	2168	B1504FLF4BSHD01	176	95.8	* 2, 17	MXT40G	\$20,422
150	1800	460	S444/5T	2500	1504XSSB41A	168	95.8	8	MXT40M	\$20,422
150	1800	460	S444/5T	2500	1504XSSB41A-R	168	95.8	2	MXT40M	\$20,422
150	1800	575	445T	2269	B1504FLF3OSHD	140	95.8	* 8, 17	MXT40G	\$20,422
150	1800	575	445T	2166	B1504FLF4OSHD01	140	95.8	* 2, 17	MXT40G	\$20,422
150	1800	575	S444/5T	2500	1504XSSC41A	135	95.8	8	MXT40M	\$20,422
150	1800	575	S444/5T	2500	1504XSSC41A-R	135	95.8	2	MXT40M	\$20,422
150	1200	460	447T	2408	B1506FLF4BSHD01	181	95.8	* 2, 17	MXT40G	\$25,367
150	1200	460	S445/7T	2500	1506XSSB41A	176	95.8	8	MXT40M	\$25,367
150	1200	460	S445/7T	2500	1506XSSB41A-R	176	95.8	2	MXT40M	\$25,367
150	1200	575	447T	2413	B1506FLF4OSHD01	145	95.8	* 2, 17	MXT40G	\$25,367

Totally Enclosed Fan Cooled

EQP Global® 840

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
150	1200	575	S445/7T	2500	1506XSSC41A	141	95.8	8	MXT40M	\$25,367
150	1200	575	S445/7T	2500	1506XSSC41A-R	141	95.8	2	MXT40M	\$25,367
150	1200	460	447TZ	2408	B1506FLF4BSHD	181	95.8	* 2, 17	MXT40G	\$25,367
200	3600	460	447TS	2408	B2001FLG3BSHD	180	96.0	* 5, 17	MXT40G	\$28,727
200	3600	460	447TS	2387	B2003FLG3BSHD	224	95.9	* 4, 17	MXT40G	\$28,727
200	3600	460	S445/7TS	2500	2002XSSB41B	216	95.4		MXT40M	\$28,727
200	3600	575	447TS	2445	B2001FLG3OSHD	180	96.0	* 5, 17	MXT40G	\$28,727
200	3600	575	447TS	2393	B2003FLG3OSHD	180	96.0	* 4, 17	MXT40G	\$28,727
200	3600	575	S445/7TS	2500	2002XSSC41B	173	95.4		MXT40M	\$28,727
200	1800	460	447T	2454	B2004FLF3BSHD	232	96.2	* 8, 17	MXT40G	\$24,840
200	1800	460	447T	2453	B2004FLF4BSHD01	232	96.2	* 2, 17	MXT40G	\$24,840
200	1800	460	S445/7T	2500	2004XSSB41A	229	96.2	8	MXT40M	\$24,840
200	1800	460	S445/7T	2500	2004XSSB41A-R	229	96.2	2	MXT40M	\$24,840
200	1800	575	447T	2448	B2004FLF3OSHD	185	96.2	* 8, 17	MXT40G	\$24,840
200	1800	575	447T	2487	B2004FLF4OSHD01	185	96.2	* 2, 17	MXT40G	\$24,840
200	1800	575	S445/7T	2500	2004XSSC41A	184	96.2	8	MXT40M	\$24,840
200	1800	575	S445/7T	2500	2004XSSC41A-R	184	96.2	2	MXT40M	\$24,840
200	1800	460	447TZ	2453	B2004FLF4BSHD	232	96.2	* 2, 17	MXT40G	\$24,840
200	1200	460	N449T	3334	B2006FLF4BSHDL	245	96.2	* 2	MXT40G	\$33,177
200	1200	460	505US	2862	B2006FLG3BSHD	233	96.0	*	MXT40G	\$34,116
200	1200	460	505UZ	2894	B2006FLF4BSHD	245	96.2	* 2	MXT40G	\$35,230
200	1200	575	N449T	3334	B2006FLF4OSHDL	189	96.2	* 2	MXT40G	\$33,177
200	1200	575	505US	3000	B2006FLG3OSHD	186	96.0		MXT40G	\$34,116
200	1200	575	505UZ	2898	B2006FLF4OSHD	186	96.0	* 2	MXT40G	\$35,230
250	3600	460	N449TS	3470	B2501FLG3BMHDL	270	95.9	* 5	MXT40G	\$41,289
250	3600	460	N449TS	3800	B2503FLG3BMHDL	271	95.9	4	MXT40G	\$41,289
250	3600	460	5010USS	4152	B2501FLG3BMHD	271	95.9	5	MXT40G	\$43,012
250	3600	460	5010USS	4152	B2503FLG3BMHD	270	95.9	4	MXT40G	\$43,012
250	3600	575	N449TS	3800	B2501FLG3OMHDL	220	95.9	* 5	MXT40G	\$41,289
250	3600	575	N449TS	3800	B2503FLG3OMHDL	220	95.9	* 4	MXT40G	\$41,289
250	3600	575	5010USS	4152	B2501FLG3OMHD	220	95.9	5	MXT40G	\$43,012
250	3600	575	5010USS	4152	B2503FLG3OMHD	216	95.8	4	MXT40G	\$43,012
250	1800	460	N449T	3631	B2504FLF3BSHDL	276	96.2	* 8	MXT40G	\$34,026
250	1800	460	N449T	3608	B2504FLF4BSHDL	276	96.2	2	MXT40G	\$34,026
250	1800	460	505US	2941	B2504FLG3BMHD	288	96.2	*	MXT40G	\$34,477
250	1800	460	505UZ	3004	B2504FLF4BMHD	288	96.2	* 2	MXT40G	\$35,846
250	1800	575	N449T	3620	B2504FLF4OMHDL	220	96.3	* 2	MXT40G	\$34,026
250	1800	575	505US	2907	B2504FLG3OMHD	230	96.2	*	MXT40G	\$34,477
250	1800	575	505UZ	2629	B2504FLF4OMHD	220	96.3	2	MXT40G	\$35,846
250	1200	460	N449T	3618	B2506FLF4BSHDL	295	96.2	* 2	MXT40G	\$39,512
250	1200	460	5010US	4193	B2506FLG3BMHD	300	95.9	*	MXT40G	\$43,424
250	1200	460	5010UZ	4549	B2506FLF4BMHD	295	96.5	2	MXT40G	\$44,793
250	1200	575	N449T	3568	B2506FLF4OMHDL	232	96.5	* 2	MXT40G	\$39,512
250	1200	575	5010US	4193	B2506FLG3OMHD	240	95.9		MXT40G	\$43,424
250	1200	575	5010UZ	4193	B2506FLF4OSHD	244	95.8	2	MXT40G	\$44,793
300	3600	460	N449TS	4015	B3001FLG3BMHDL	322	95.9	5	MXT40G	\$48,781
300	3600	460	N449TS	4015	B3003FLG3BMHDL	322	95.9	4	MXT40G	\$48,781
300	3600	460	5010USS	3954	B3001FLG8BMHD	322	95.9	5	MXT40G	\$49,959

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods.
(Stock & Prod)

MV General Purpose Open

MV Gen. Purp.
Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed Fan Cooled

EQP Global® 840

> NEMA Premium® Efficiency

EQP Global®
840

HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
300	3600	460	5010USS	3954	B3003FLG8BMHD	322	95.9	* 4	MXT40G	\$49,959
300	3600	575	N449TS	4015	B3001FLG3OMHDL	258	95.9	5	MXT40G	\$48,781
300	3600	575	N449TS	4000	B3003FLG3OMHDL	258	95.9	* 4	MXT40G	\$48,781
300	3600	575	5010USS	4154	B3001FLG8OMHD	258	95.9	5	MXT40G	\$49,959
300	3600	575	5010USS	4154	B3003FLG8OMHD	258	95.9	4	MXT40G	\$49,959
300	1800	460	N449T	3648	B3004FLF3BMHDL	330	96.4	* 8	MXT40G	\$38,131
300	1800	460	N449T	3688	B3004FLF4BMHDL	330	96.4	* 2	MXT40G	\$38,130
300	1800	460	5010US	4501	B3004FLG3BMHD	330	96.5	*	MXT40G	\$40,554
300	1800	460	5010UZ	4564	B3004FLF4BMHD	330	96.5	* 2	MXT40G	\$43,951
300	1800	575	N449T	3683	B3004FLF4OMHDL	264	96.5	* 2	MXT40G	\$38,130
300	1800	575	5010US	4501	B3004FLG3OMHD	264	96.4		MXT40G	\$40,554
300	1800	575	5010UZ	4400	B3004FLF4OMHD	264	96.4	2	MXT40G	\$43,951
300	1200	460	N449T	3800	B3006FLF4BMHDL	362	96.1	2	MXT40G	\$50,981
300	1200	460	5010US	4232	B3006FLG3BMHD	362	96.1	*	MXT40G	\$55,016
300	1200	460	5010UZ	3967	B3006FLF4BMHD	362	96.1	* 2	MXT40G	\$56,139
300	1200	575	N449T	3755	B3006FLF4OMHDL	283	96.4	* 2	MXT40G	\$50,981
300	1200	575	5010US	4232	B3006FLG3OMHD	290	96.1		MXT40G	\$55,016
300	1200	575	5010UZ	4543	B3006FLF4OMHD	283	96.4	* 2	MXT40G	\$56,139
350	3600	460	N449TS	3400	B3501FLG3BMHDL	380	95.8	5	MXT40G	\$50,904
350	3600	460	N449TS	3677	B3503FLG3BMHDL	380	95.8	* 4	MXT40G	\$50,904
350	3600	460	5010USS	4175	B3503FLG8BMHD	380	95.8	4	MXT40G	\$53,233
350	3600	575	N449TS	3596	B3501FLG3OMHDL	304	95.9	5	MXT40G	\$50,904
350	3600	575	N449TS	3850	B3503FLG3OMHDL	304	95.9	* 4	MXT40G	\$50,904
350	3600	575	5010USS	4175	B3503FLG8OMHD	304	95.9	4	MXT40G	\$53,233
350	1800	460	N449T	3698	B3504FLF3BSHDL	380	96.2	* 8	MXT40G	\$41,491
350	1800	460	N449T	3756	B3504FLF4BSHDL	380	96.2	2	MXT40G	\$41,491
350	1800	460	5010US	4492	B3504FLG3BMHD	388	96.3	*	MXT40G	\$45,173
350	1800	460	5010UZ	3909	B3504FLF4BMHD	380	96.2	2	MXT40G	\$46,542
350	1800	575	N449T	3686	B3504FLF3OSHDL	380	96.2	* 8	MXT40G	\$39,515
350	1800	575	N449T	3800	B3504FLF4OMHDL	304	96.2	2	MXT40G	\$41,491
350	1800	575	5010US	4321	B3504FLG3OMHD	308	96.3		MXT40G	\$45,173
350	1800	575	5010UZ	3909	B3504FLF4OMHD	308	96.3	2	MXT40G	\$46,542
350	1200	460	N449T	4000	B3506FLF4BMHDL	414	95.8	2	MXT40G	\$53,528
350	1200	460	5010US	4400	B3506FLG3BMHD	414	95.8	*	MXT40G	\$57,685
350	1200	460	5010UZ	4935	B3506FLF4BMHD	414	95.8	2	MXT40G	\$58,815
350	1200	575	N449T	4000	B3506FLF4OMHDL	340	95.8	2	MXT40G	\$53,528
350	1200	575	5010US	4400	B3506FLG3OMHD	340	95.8		MXT40G	\$57,685
350	1200	575	5010UZ	4935	B3506FLF4OMHD	340	95.8	2	MXT40G	\$58,815
400	3600	460	5010USS	4050	B4001FLG8BMHD	441	95.9	5	MXT40G	\$62,409
400	3600	460	5010TS	4050	B4003FLG8BMHD	441	95.9	4	MXT40G	\$62,409
400	3600	575	5010TS	4050	B4001FLG8OMHD	352	95.8	5	MXT40G	\$62,409
400	3600	575	5010TS	4050	B4003FLG8OMHD	350	96.0	4	MXT40G	\$62,409
400	1800	460	5010US	4563	B4004FLG3BMHD	450	96.8	*	MXT40G	\$58,768
400	1800	460	5010UZ	4625	B4004FLF4BMHD	446	96.2	2	MXT40G	\$59,899
400	1800	575	5010US	4017	B4004FLG3OMHD	358	96.2	*	MXT40G	\$58,768
400	1800	575	5010UZ	4633	B4004FLF4OMHD	358	96.2	2	MXT40G	\$59,899
400	1200	460	5010US	4998	F4006FLG3BMHD	482	95.4	*	MXT40G	\$65,092
400	1200	460	5010UZ	5123	F4006FLF4BMHD	482	95.4	2	MXT40G	\$66,236

Totally Enclosed Fan Cooled

EQP Global® 840

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
400	1200	575	5010US	4500	F4006FLG3OMHD	386	95.4	*	MXT40G	\$65,092
400	1200	575	5010UZ	4500	F4006FLF4OMHD	386	95.4	2	MXT40G	\$66,236
450	3600	460	5010USS	4837	B4501FLG8BMHD	494	95.8	5	MXT40G	\$69,708
450	3600	460	5010USS	6200	B4503FLG8BMHD	494	95.8	4	MXT40G	\$69,708
450	3600	575	5010USS	4837	B4501FLG8OMHD	394	95.9	5	MXT40G	\$69,708
450	3600	575	5010USS	4837	B4503FLG8OMHD	394	95.9	4	MXT40G	\$69,708
450	1800	460	5010US	4817	B4504FLG3BMHD	504	96.2		MXT40G	\$59,633
450	1800	460	5010UZ	4817	B4504FLF4BMHD	504	96.2	2	MXT40G	\$60,767
450	1800	575	5010US	4817	B4504FLG3OMHD	405	96.2		MXT40G	\$59,633
450	1800	575	5010UZ	4817	B4504FLF4OMHD	405	96.2	2	MXT40G	\$60,767
450	1200	460	5810US	6240	F4506FLG3BMHD	533	95.4		MXT40G	\$70,200
450	1200	460	5810UZ	6240	F4506FLF4BMHD	533	95.4	2	MXT40G	\$71,325
450	1200	575	5810US	6240	F4506FLG3OMHD	426	95.4		MXT40G	\$70,200
450	1200	575	5810UZ	6240	F4506FLF4OMHD	426	95.4	2	MXT40G	\$71,325
500	3600	460	5010USS	4837	B5001FKG8BMHD	549	96.1	3, 5, 14	MXT40G	\$76,995
500	3600	460	5010USS	4837	B5003FKG8BMHD	549	96.1	3, 4, 14	MXT40G	\$76,995
500	3600	575	5010USS	4837	B5001FKG8OMHD	439	96.0	3, 5, 14	MXT40G	\$76,995
500	3600	575	5010USS	4837	B5003FKG8OMHD	439	96.0	3, 4, 14	MXT40G	\$76,995
500	1800	460	5011US	5037	5004XSSB41E	565	96.3		MXT40G	\$77,982
500	1800	460	5011UZ	5037	5004XSSB41G-AR	565	96.3	2	MXT40G	\$88,286
500	1800	575	5011US	5037	5004XSSC41E	452	96.2		MXT40G	\$77,982
500	1800	575	5011UZ	5037	5004XSSC41G-AR	452	96.2	2	MXT40G	\$88,286
500	1200	460	5810US	6120	F5006FLG3BMHD	591	95.4		MXT40G	\$77,303
500	1200	460	5810UZ	6340	F5006FLF4BMHD	591	95.4	2	MXT40G	\$78,440
500	1200	575	5810US	6120	F5006FLG3OMHD	476	95.8		MXT40G	\$77,303
500	1200	575	5810UZ	6340	F5006FLF4OMHD	476	95.8	2	MXT40G	\$78,440

FL Amps and FL EFF are average expected design values and not guaranteed.

The weights listed above are estimated.

Please contact Toshiba for information on product availability.

"CF"= Consult Factory

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed Fan Cooled

EQP Global® 840 C-Face

> NEMA Premium® Efficiency



3

THREE YEAR WARRANTY



Toshiba's general purpose, totally enclosed fan cooled, NEMA Premium® efficiency, EQP Global®

840 C-Face motor series is Toshiba's next-generation motor product line. The EQP Global® 840 C-Face is designed to meet or exceed the competitive demands of the global market, as well as the amended integral horsepower (HP) rule IHMR 2016, while maintaining the high reliability and quality expected from Toshiba.

Available in C-Face Footed and C-Face Footless designs, the EQP Global® 840 C-Face motor specifically addresses the needs of the petrochemical industry, where premium performance and reliability are imperative. Building on over 20 years of success with our EQPIII motor series, this new motor line features design enhancements on the rotor, frame, brackets, fan, and bearings.

Product Scope:

Horsepower:	¾ to 75 HP
Speed (60 Hz):	3600, 1800, or 1200 RPM
Volt (60 Hz):	460 or 575 V
Enclosure:	Totally Enclosed Fan Cooled
Frame Size*:	143TC through 365TC
Construction:	Cast Iron
Insulation:	Class F, Exceeds NEMA MG1 Part 31 (Inverter Duty)

** Production modifications not applicable to EQP Global Motors® 140 through 360 Frames (use EQPIII Series base price for these frame sizes).*

HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
C-Face Footed										
0.75	1200	460	143TC	68	3/46XSSB42A-P	1.4	80	* 1, 16	MTP840	\$719
0.75	1200	460	143TC	68	3/46XSSB47A-P	1.4	80	1	MTP840	\$719
0.75	1200	575	143TC	68	3/46XSSC42A-P	1.1	81.5	* 1, 16	MTP840	\$719
0.75	1200	575	143TC	68	3/46XSSC47A-P	1.1	81.5	1	MTP840	\$719
1	1800	460	143TC	68	0014XSSB42A-P	1.7	85.5	* 1, 16	MTP840	\$661
1	1800	460	143TC	71	0014XSSB47A-P	1.7	85.5	* 1	MTP840	\$661
1	1800	575	143TC	71	0014XSSC42A-P	1.2	85.6	* 1, 16	MTP840	\$661
1	1800	575	143TC	71	0014XSSC47A-P	1.2	85.6	1	MTP840	\$661
1	1200	460	145TC	71	0016XSSB42A-P	1.8	82.9	* 1, 16	MTP840	\$799
1	1200	460	145TC	73	0016XSSB47A-P	1.8	82.9	* 1	MTP840	\$799
1	1200	575	145TC	71	0016XSSC42A-P	1.5	82.9	1, 16	MTP840	\$799
1	1200	575	145TC	71	0016XSSC47A-P	1.5	82.9	1	MTP840	\$799
1.5	3600	460	143TC	66	Y152XSSB42A-P	2	84.3	* 1, 16	MTP840	\$725
1.5	3600	460	143TC	66	Y152XSSB47A-P	2	84.3	1	MTP840	\$725
1.5	3600	575	143TC	60	Y152XSSC42A-P	1.6	84.3	* 1, 16	MTP840	\$725

Totally Enclosed Fan Cooled

EQP Global® 840 C-Face

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
1.5	3600	575	143TC	60	Y152XSSC47A-P	1.6	84.3	1	MTP840	\$725
1.5	1800	460	145TC	64	Y154XSSB42A-P	2.4	86.5	* 1, 16	MTP840	\$724
1.5	1800	460	145TC	71	Y154XSSB47A-P	2.4	86.5	* 1	MTP840	\$724
1.5	1800	575	145TC	71	Y154XSSC42A-P	1.9	86.5	* 1, 16	MTP840	\$724
1.5	1800	575	145TC	71	Y154XSSC47A-P	1.9	86.5	* 1	MTP840	\$724
1.5	1200	460	182TC	103	Y156XSSB42A-P	2.5	87.7	* 1, 16	MTP840	\$866
1.5	1200	460	182TC	79	Y156XSSB47A-P	2.5	87.7	1	MTP840	\$866
1.5	1200	575	182TC	79	Y156XSSC42A-P	2	87.5	1, 16	MTP840	\$866
1.5	1200	575	182TC	79	Y156XSSC47A-P	2	87.5	1	MTP840	\$866
2	3600	460	145TC	64	0022XSSB42A-P	2.6	85.6	* 1, 16	MTP840	\$804
2	3600	460	145TC	64	0022XSSB47A-P	2.6	85.6	1	MTP840	\$804
2	3600	575	145TC	68	0022XSSC42A-P	2.1	85.5	1, 16	MTP840	\$804
2	3600	575	145TC	68	0022XSSC47A-P	2.1	85.5	* 1	MTP840	\$804
2	1800	460	145TC	66	0024XSSB42A-P	3	86.5	* 1, 16	MTP840	\$784
2	1800	460	145TC	75	0024XSSB47A-P	3	86.5	* 1	MTP840	\$784
2	1800	575	145TC	73	0024XSSC42A-P	2.4	86.5	* 1, 16	MTP840	\$784
2	1800	575	145TC	68	0024XSSC47A-P	2.4	86.5	* 1	MTP840	\$784
2	1200	460	184TC	126	0026XSSB42A-P	3.4	88.5	* 1, 16	MTP840	\$951
2	1200	460	184TC	126	0026XSSB47A-P	3.4	88.5	1	MTP840	\$951
2	1200	575	184TC	126	0026XSSC42A-P	2.7	88.5	* 1, 16	MTP840	\$951
2	1200	575	184TC	126	0026XSSC47A-P	2.7	88.5	1	MTP840	\$951
3	3600	460	182TC	104	0032XSSB42A-P	3.7	86.7	* 1, 16	MTP840	\$888
3	3600	460	182TC	99	0032XSSB47A-P	3.7	86.7	* 1	MTP840	\$888
3	3600	575	182TC	112	0032XSSC42A-P	3	86.7	* 1, 16	MTP840	\$888
3	3600	575	182TC	99	0032XSSC47A-P	3	86.7	1	MTP840	\$888
3	1800	460	182TC	112	0034XSSB42A-P	4	89.5	* 1, 16	MTP840	\$842
3	1800	460	182TC	115	0034XSSB47A-P	4	89.5	* 1	MTP840	\$842
3	1800	575	182TC	111	0034XSSC42A-P	3.2	89.5	* 1, 16	MTP840	\$842
3	1800	575	182TC	111	0034XSSC47A-P	3.2	89.5	1	MTP840	\$842
3	1200	460	213TC	183	0036XSSB42A-P	4.4	89.6	* 1, 16	MTP840	\$1,177
3	1200	460	213TC	183	0036XSSB47A-P	4.4	89.6	* 1	MTP840	\$1,177
3	1200	575	213TC	168	0036XSSC42A-P	3.5	89.8	1, 16	MTP840	\$1,177
3	1200	575	213TC	168	0036XSSC47A-P	3.5	89.8	1	MTP840	\$1,177
5	3600	460	184TC	113	0052XSSB42A-P	5.8	88.7	* 1, 16	MTP840	\$1,068
5	3600	460	184TC	117	0052XSSB47A-P	5.8	88.7	* 1	MTP840	\$1,068
5	3600	575	184TC	125	0052XSSC42A-P	4.6	88.7	* 1, 16	MTP840	\$1,068
5	3600	575	184TC	125	0052XSSC47A-P	4.6	88.7	1	MTP840	\$1,068
5	1800	460	184TC	121	0054XSSB42A-P	6.5	89.7	* 1, 16	MTP840	\$961
5	1800	460	184TC	127	0054XSSB47A-P	6.5	89.7	* 1	MTP840	\$961
5	1800	575	184TC	124	0054XSSC42A-P	5.2	89.5	* 1, 16	MTP840	\$961
5	1800	575	184TC	115	0054XSSC47A-P	5.2	89.5	* 1	MTP840	\$961
5	1200	460	215TC	194	0056XSSB42A-P	6.9	89.6	* 1, 16	MTP840	\$1,586
5	1200	460	215TC	194	0056XSSB47A-P	6.9	89.6	* 1	MTP840	\$1,586
5	1200	575	215TC	194	0056XSSC42A-P	5.5	89.6	* 1, 16	MTP840	\$1,586
5	1200	575	215TC	194	0056XSSC47A-P	5.5	89.6	1	MTP840	\$1,586
7.5	3600	460	213TC	183	Y752XSSB42A-P	9	89.7	* 1, 16	MTP840	\$1,387
7.5	3600	460	213TC	183	Y752XSSB47A-P	9	89.7	1	MTP840	\$1,387
7.5	3600	575	213TC	209	Y752XSSC42A-P	7.2	89.7	1, 16	MTP840	\$1,387

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed Fan Cooled

EQP Global® 840 C-Face

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
7.5	3600	575	213TC	209	Y752XSSC47A-P	7.2	89.7	1	MTP840	\$1,387
7.5	1800	460	213TC	209	Y754XSSB42A-P	9.8	91.8	* 1, 16	MTP840	\$1,381
7.5	1800	460	213TC	203	Y754XSSB47A-P	9.8	91.8	* 1	MTP840	\$1,381
7.5	1800	575	213TC	203	Y754XSSC42A-P	7.8	91.8	* 1, 16	MTP840	\$1,381
7.5	1800	575	213TC	203	Y754XSSC47A-P	7.8	91.8	1	MTP840	\$1,381
7.5	1200	460	254TC	295	Y756XSSB42A-P	10.2	91.2	* 1, 16	MTP840	\$2,281
7.5	1200	460	254TC	295	Y756XSSB47A-P	10.2	91.2	* 1	MTP840	\$2,281
7.5	1200	575	254TC	298	Y756XSSC42A-P	8.2	91.1	* 1, 16	MTP840	\$2,281
7.5	1200	575	254TC	298	Y756XSSC47A-P	8.2	91.1	* 1	MTP840	\$2,281
10	3600	460	215TC	201	0102XSSB42A-P	11.8	90.2	* 1, 16	MTP840	\$1,598
10	3600	460	215TC	198	0102XSSB47A-P	11.8	90.2	* 1	MTP840	\$1,598
10	3600	575	215TC	210	0102XSSC42A-P	9.4	91.7	1, 16	MTP840	\$1,598
10	3600	575	215TC	210	0102XSSC47A-P	9.4	91.7	1	MTP840	\$1,598
10	1800	460	215TC	214	0104XSSB42A-P	13	91.8	* 1, 16	MTP840	\$1,593
10	1800	460	215TC	216	0104XSSB47A-P	13	91.8	* 1	MTP840	\$1,593
10	1800	575	215TC	214	0104XSSC42A-P	10.4	91.8	* 1, 16	MTP840	\$1,593
10	1800	575	215TC	213	0104XSSC47A-P	10.4	91.8	* 1	MTP840	\$1,593
10	1200	460	256TC	317	0106XSSB42A-P	13.4	91.3	* 1, 16	MTP840	\$2,741
10	1200	460	256TC	317	0106XSSB47A-P	13.4	91.3	1	MTP840	\$2,741
10	1200	575	256TC	347	0106XSSC42A-P	10.4	91.8	1, 16	MTP840	\$2,741
10	1200	575	256TC	347	0106XSSC47A-P	10.8	91.2	1	MTP840	\$2,741
15	3600	460	254TC	320	0152XSSB42A-P	18	91.2	* 1, 16	MTP840	\$2,213
15	3600	460	254TC	320	0152XSSB47A-P	18	91.2	1	MTP840	\$2,213
15	3600	575	254TC	315	0152XSSC42A-P	14.4	91.4	* 1, 16	MTP840	\$2,213
15	3600	575	254TC	315	0152XSSC47A-P	14.4	91.4	1	MTP840	\$2,213
15	1800	460	254TC	337	0154XSSB42A-P	19	92.6	* 1, 16	MTP840	\$2,133
15	1800	460	254TC	335	0154XSSB47A-P	19	92.6	* 1	MTP840	\$2,133
15	1800	575	254TC	331	0154XSSC42A-P	15.2	92.6	* 1, 16	MTP840	\$2,133
15	1800	575	254TC	322	0154XSSC47A-P	15.2	92.6	* 1	MTP840	\$2,133
15	1200	460	284TC	478	0156XSSB42A-P	20	91.9	* 1	MTP840	\$3,731
15	1200	575	284TC	474	0156XSSC42A-P	15.8	91.8	* 1	MTP840	\$3,731
20	3600	460	256TC	333	0202XSSB42A-P	24	91.3	* 1, 16	MTP840	\$2,620
20	3600	460	256TC	333	0202XSSB47A-P	24	91.3	1	MTP840	\$2,620
20	3600	575	256TC	393	0202XSSC42A-P	19.2	91.3	* 1, 16	MTP840	\$2,620
20	3600	575	256TC	393	0202XSSC47A-P	19.2	91.3	1	MTP840	\$2,620
20	1800	460	256TC	384	0204XSSB42A-P	25.4	93.3	* 1, 16	MTP840	\$2,592
20	1800	460	256TC	375	0204XSSB47A-P	25.4	93.3	* 1	MTP840	\$2,592
20	1800	575	256TC	364	0204XSSC42A-P	20	93.2	* 1, 16	MTP840	\$2,592
20	1800	575	256TC	372	0204XSSC47A-P	20	93.2	* 1	MTP840	\$2,592
20	1200	460	286TC	514	0206XSSB42A-P	25.4	91.7	* 1	MTP840	\$4,314
20	1200	575	286TC	512	0206XSSC42A-P	20	91.9	* 1	MTP840	\$4,314
25	3600	460	284TSC	516	0252XSSB42B-P	29	91.8	* 1	MTP840	\$3,342
25	3600	575	284TSC	455	0252XSSC42B-P	23	91.8	* 1	MTP840	\$3,342
25	1800	460	284TC	538	0254XSSB42A-P	31	93.8	* 1	MTP840	\$3,256
25	1800	575	284TC	553	0254XSSC42A-P	24	93.6	* 1	MTP840	\$3,256
25	1200	460	324TC	668	0256XSSB42A-P	31	93.3	* 1	MTP840	\$5,192
25	1200	575	324TC	668	0256XSSC42A-P	25	93.3	* 1	MTP840	\$5,192
30	3600	460	286TSC	540	0302XSSB42B-P	35	91.9	* 1	MTP840	\$3,977

Totally Enclosed Fan Cooled

EQP Global® 840 C-Face

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
30	3600	575	286TSC	498	0302XSSC42B-P	28	91.9	* 1	MTP840	\$3,977
30	1800	460	286TC	569	0304XSSB42A-P	36	93.8	* 1	MTP840	\$3,730
30	1800	575	286TC	549	0304XSSC42A-P	29	93.8	* 1	MTP840	\$3,730
30	1200	460	326TC	697	0306XSSB42A-P	37	93.3	* 1	MTP840	\$5,904
30	1200	575	326TC	694	0306XSSC42A-P	30	93.3	* 1	MTP840	\$5,904
40	3600	460	324TSC	692	0402XSSB42B-P	47	92.5	* 1	MTP840	\$4,951
40	3600	575	324TSC	692	0402XSSC42B-P	38	92.5	1	MTP840	\$4,951
40	1800	460	324TC	723	0404XSSB42A-P	48	94.1	* 1	MTP840	\$4,776
40	1800	575	324TC	723	0404XSSC42A-P	38	94.1	* 1	MTP840	\$4,776
40	1200	460	364TC	860	0406XSSB42A-P	48	94.1	* 1	MTP840	\$8,155
40	1200	575	364TC	860	0406XSSC42A-P	38	94.1	* 1	MTP840	\$8,155
50	3600	460	326TSC	728	0502XSSB42B-P	58	93.0	* 1	MTP840	\$6,281
50	3600	575	326TSC	728	0502XSSC42B-P	46	93.0	1	MTP840	\$6,281
50	1800	460	326TC	758	0504XSSB42A-P	60	94.5	* 1	MTP840	\$5,420
50	1800	575	326TC	758	0504XSSC42A-P	48	94.5	* 1	MTP840	\$5,420
50	1200	460	365TC	897	0506XSSB42A-P	60	94.1	* 1	MTP840	\$9,241
50	1200	575	365TC	888	0506XSSC42A-P	48	94.1	* 1	MTP840	\$9,241
60	3600	460	364TSC	763	0602XSSB42B-P	69	93.6	* 1	MTP840	\$8,435
60	3600	575	364TSC	763	0602XSSC42B-P	55	93.7	1	MTP840	\$8,435
60	1800	460	364TC	941	0604XSSB42A-P	69	95.1	* 1	MTP840	\$8,370
60	1800	575	364TC	928	0604XSSC42A-P	55	95.1	* 1	MTP840	\$8,370
75	3600	460	365TSC	944	0752XSSB42B-P	86	93.6	* 1	MTP840	\$10,382
75	3600	575	365TSC	944	0752XSSC42B-P	69	93.8	1	MTP840	\$10,382
75	1800	460	365TC	1027	0754XSSB42A-P	85	95.4	* 1	MTP840	\$9,880
75	1800	575	365TC	966	0754XSSC42A-P	69	95.4	1	MTP840	\$9,880
C-Face Footless										
0.75	1200	460	143TC	68	3/46XSSB44A-P	1.4	80	1	MTP840	\$791
0.75	1200	575	143TC	68	3/46XSSC44A-P	1.1	81.5	1	MTP840	\$791
1	1800	460	143TC	68	0014XSSB44A-P	1.7	85.5	* 1	MTP840	\$727
1	1800	575	143TC	68	0014XSSC44A-P	1.2	85.6	* 1	MTP840	\$727
1	1200	460	145TC	68	0016XSSB44A-P	1.8	82.9	1	MTP840	\$879
1	1200	575	145TC	68	0016XSSC44A-P	1.5	82.9	1	MTP840	\$879
1.5	3600	460	143TC	50	Y152XSSB44A-P	2	84.3	1	MTP840	\$798
1.5	3600	575	143TC	50	Y152XSSC44A-P	1.6	84.3	1	MTP840	\$798
1.5	1800	460	145TC	68	Y154XSSB44A-P	2.4	86.5	* 1	MTP840	\$796
1.5	1800	575	145TC	68	Y154XSSC44A-P	1.9	86.5	* 1	MTP840	\$796
1.5	1200	460	182TC	104	Y156XSSB44A-P	2.5	87.7	* 1	MTP840	\$953
1.5	1200	575	182TC	79	Y156XSSC44A-P	2	87.5	1	MTP840	\$953
2	3600	460	145TC	64	0022XSSB44A-P	2.6	85.6	1	MTP840	\$884
2	3600	575	145TC	53	0022XSSC44A-P	2.1	85.5	1	MTP840	\$884
2	1800	460	145TC	71	0024XSSB44A-P	3	86.5	* 1	MTP840	\$862
2	1800	575	145TC	71	0024XSSC44A-P	2.4	86.5	* 1	MTP840	\$862
2	1200	460	184TC	118	0026XSSB44A-P	3.4	88.5	* 1	MTP840	\$1,046
2	1200	575	184TC	93	0026XSSC44A-P	2.7	88.5	* 1	MTP840	\$1,046
3	3600	460	182TC	90	0032XSSB44A-P	3.7	86.7	* 1	MTP840	\$977
3	3600	575	182TC	90	0032XSSC44A-P	3	86.7	1	MTP840	\$977
3	1800	460	182TC	112	0034XSSB44A-P	4	89.5	* 1	MTP840	\$926

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed Fan Cooled

EQP Global® 840 C-Face

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
3	1800	575	182TC	112	0034XSSC44A-P	3.2	89.5	* 1	MTP840	\$926
3	1200	460	213TC	142	0036XSSB44A-P	4.4	89.6	1	MTP840	\$1,295
3	1200	575	213TC	142	0036XSSC44A-P	3.5	89.8	1	MTP840	\$1,295
5	3600	460	184TC	110	0052XSSB44A-P	5.8	88.7	* 1	MTP840	\$1,175
5	3600	575	184TC	110	0052XSSC44A-P	4.6	88.7	1	MTP840	\$1,175
5	1800	460	184TC	123	0054XSSB44A-P	6.5	89.7	* 1	MTP840	\$1,057
5	1800	575	184TC	123	0054XSSC44A-P	5.2	89.5	* 1	MTP840	\$1,057
5	1200	460	215TC	192	0056XSSB44A-P	6.9	89.6	* 1	MTP840	\$1,745
5	1200	575	215TC	165	0056XSSC44A-P	5.5	89.6	1	MTP840	\$1,745
7.5	3600	460	213TC	179	Y752XSSB44A-P	9	89.7	* 1	MTP840	\$1,526
7.5	3600	575	213TC	179	Y752XSSC44A-P	7.2	89.7	1	MTP840	\$1,526
7.5	1800	460	213TC	209	Y754XSSB44A-P	9.8	91.8	* 1	MTP840	\$1,519
7.5	1800	575	213TC	209	Y754XSSC44A-P	7.8	91.8	* 1	MTP840	\$1,519
7.5	1200	460	254TC	282	Y756XSSB44A-P	10.2	91.2	* 1	MTP840	\$2,509
7.5	1200	575	254TC	282	Y756XSSC44A-P	8.2	91.1	1	MTP840	\$2,509
10	3600	460	215TC	196	0102XSSB44A-P	11.8	90.2	* 1	MTP840	\$1,758
10	3600	575	215TC	196	0102XSSC44A-P	9.4	91.7	1	MTP840	\$1,758
10	1800	460	215TC	218	0104XSSB44A-P	13	91.8	* 1	MTP840	\$1,752
10	1800	575	215TC	213	0104XSSC44A-P	10.4	91.8	* 1	MTP840	\$1,752
10	1200	460	256TC	304	0106XSSB44A-P	13.4	91.3	1	MTP840	\$3,015
10	1200	575	256TC	304	0106XSSC44A-P	10.8	91.2	1	MTP840	\$3,015
15	3600	460	254TC	304	0152XSSB44A-P	18	91.2	* 1	MTP840	\$2,434
15	3600	575	254TC	304	0152XSSC44A-P	14.4	91.4	1	MTP840	\$2,434
15	1800	460	254TC	324	0154XSSB44A-P	19	92.6	* 1	MTP840	\$2,346
15	1800	575	254TC	322	0154XSSC44A-P	15.2	92.6	* 1	MTP840	\$2,346
15	1200	460	284TC	454	0156XSSB44A-P	20	91.9	* 1	MTP840	\$4,104
15	1200	575	284TC	454	0156XSSC44A-P	15.8	91.8	1	MTP840	\$4,104
20	3600	460	256TC	324	0202XSSB44A-P	24	91.3	* 1	MTP840	\$2,882
20	3600	575	256TC	324	0202XSSC44A-P	19.2	91.3	1	MTP840	\$2,882
20	1800	460	256TC	359	0204XSSB44A-P	25.4	93.3	* 1	MTP840	\$2,851
20	1800	575	256TC	359	0204XSSC44A-P	20	93.2	1	MTP840	\$2,851
20	1200	460	286TC	489	0206XSSB44A-P	25.4	91.7	* 1	MTP840	\$4,745
20	1200	575	286TC	489	0206XSSC44A-P	20	91.9	1	MTP840	\$4,745
25	3600	460	284TSC	496	0252XSSB44B-P	29	91.8	* 1	MTP840	\$3,676
25	3600	575	284TSC	496	0252XSSC44B-P	23	91.8	1	MTP840	\$3,676
25	1800	460	284TC	514	0254XSSB44A-P	31	93.8	* 1	MTP840	\$3,419
25	1800	575	284TC	514	0254XSSC44A-P	24	93.6	1	MTP840	\$3,419
25	1200	460	324TC	545	0256XSSB44A-P	31	93.3	* 1	MTP840	\$5,711
25	1200	575	324TC	545	0256XSSC44A-P	25	93.3	* 1	MTP840	\$5,711
30	3600	460	286TSC	516	0302XSSB44B-P	35	91.9	* 1	MTP840	\$4,375
30	3600	575	286TSC	516	0302XSSC44B-P	28	91.9	1	MTP840	\$4,375
30	1800	460	286TC	534	0304XSSB44A-P	36	93.8	* 1	MTP840	\$3,917
30	1800	575	286TC	534	0304XSSC44A-P	29	93.8	* 1	MTP840	\$3,917
30	1200	460	326TC	571	0306XSSB44A-P	37	93.3	1	MTP840	\$6,494
30	1200	575	326TC	571	0306XSSC44A-P	30	93.3	1	MTP840	\$6,494
40	3600	460	324TSC	589	0402XSSB44B-P	47	92.5	1	MTP840	\$5,446
40	3600	575	324TSC	589	0402XSSC44B-P	38	92.5	1	MTP840	\$5,446
40	1800	460	324TC	723	0404XSSB44A-P	48	94.1	* 1	MTP840	\$5,015

Totally Enclosed Fan Cooled

EQP Global® 840 C-Face

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
40	1800	575	324TC	723	0404XSSC44A-P	38	94.1	1	MTP840	\$5,015
40	1200	460	364TC	708	0406XSSB44A-P	48	94.1	1	MTP840	\$8,971
40	1200	575	364TC	708	0406XSSC44A-P	38	94.1	1	MTP840	\$8,971
50	3600	460	326TSC	624	0502XSSB44B-P	58	93.0	1	MTP840	\$6,909
50	3600	575	326TSC	624	0502XSSC44B-P	46	93.0	1	MTP840	\$6,909
50	1800	460	326TC	741	0504XSSB44A-P	60	94.5	* 1	MTP840	\$5,744
50	1800	575	326TC	741	0504XSSC44A-P	48	94.5	1	MTP840	\$5,744
50	1200	460	365TC	757	0506XSSB44A-P	60	94.1	1	MTP840	\$10,165
50	1200	575	365TC	757	0506XSSC44A-P	48	94.1	1	MTP840	\$10,165
60	3600	460	364TSC	763	0602XSSB44B-P	69	93.6	1	MTP840	\$9,279
60	3600	575	364TSC	763	0602XSSC44B-P	55	93.7	1	MTP840	\$9,279
60	1800	460	364TC	911	0604XSSB44A-P	69	95.1	1	MTP840	\$8,789
60	1800	575	364TC	796	0604XSSC44A-P	55	95.1	1	MTP840	\$8,789
75	3600	460	365TSC	814	0752XSSB44B-P	86	93.6	1	MTP840	\$11,420
75	3600	575	365TSC	814	0752XSSC44B-P	69	93.8	1	MTP840	\$11,420
75	1800	460	365TC	893	0754XSSB44A-P	85	95.4	1	MTP840	\$10,374
75	1800	575	365TC	893	0754XSSC44A-P	69	95.4	1	MTP840	\$10,374

FL Amps and FL EFF are average expected design values and not guaranteed.

The weights listed above are estimated.

Please contact Toshiba for information on product availability.

"CF" = Consult Factory

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

General Purpose TEFC

EQP Global® 841 Motor Series

Toshiba’s general purpose, totally enclosed fan cooled, NEMA Premium® efficiency, EQP Global® 841 motor series is Toshiba’s next-generation motor product line. The EQP Global® 841 is designed to meet or exceed the competitive demands of the global market, as well as the amended integral horsepower (HP) rule IHMR 2016, while maintaining the high reliability and quality expected from Toshiba.



The EQP Global® 841 specifically addresses the needs of the petrochemical industry, where premium performance and reliability are imperative. Building on over 20 years of success with our EQPIII motor series, the EQP Global® 841 features design enhancements on the rotor, frame, brackets, fan, and bearings.

Our EQP (efficiency, quality, and performance) philosophy extends beyond great products. We provide solutions and Global Supply Chain Management Systems (GSCMS) to meet the evolving needs of our global customers.

Standard Features:

- Totally Enclosed Fan Cooled
- Severe Duty, Petrochemical
- NEMA Premium® Efficiency
- Three-Phase
- 1.15 Service Factor
- Design B Torques
- Available in Footed, C-Face Footed, & C-Face Footless Design
- Exceeds Insulation Requirements of NEMA MG1 Part 31 (Inverter Duty)
- IP56 Protection
- Gasketed Cast Iron Conduit Box
- Cast Iron Frame & Brackets
- Breather Drains, Plugs, or T-Drains
- Labyrinth Shaft Seals
- Multi-Mount on Most Frames
- 20:1 Constant Torque (Non-Hazardous Areas, Refer to Appendix C for Division 2 & ASD Capabilities), 60:1 Variable Torque (1 to 200 HP, 4- & 6-Pole Motors)
- No-Load Commercial Testing on All Motors
- 4142 High Strength Shaft Steel on all 440 Frames and Larger Roller Bearing Motors

Applications:

- Pumps
- Fans
- Compressors
- Conveyors
- Mixers
- Material Handling



Totally Enclosed Fan Cooled EQP Global® 841

> NEMA Premium® Efficiency



**5 FIVE YEAR
WARRANTY**



Toshiba's general purpose, totally enclosed fan cooled, NEMA Premium® efficiency, EQP Global®

841 motor series is Toshiba's next-generation motor product line. The EQP Global® 841 is designed to meet or exceed the competitive demands of the global market, as well as the amended integral horsepower (HP) rule IHMR 2016, while maintaining the high reliability and quality expected from Toshiba.

The EQP Global® 841 specifically addresses the needs of the petrochemical industry, where premium performance and reliability are imperative. Building on over 20 years of success with our EQP III motor series, the EQP Global® 841 features design enhancements on the rotor, frame, brackets, fan, and bearings.

Product Scope:

Horsepower:	¾ to 300 HP
Speed (60 Hz):	3600, 1800, 1200 RPM
Volt (60 Hz):	460 or 575 V
Enclosure:	Totally Enclosed Fan Cooled
Frame Size*:	143T through N449T
Construction:	All Cast Iron (Frame, End Brackets, Fan Cover, & Conduit Box)
Insulation:	Class F, Exceeds NEMA MG1 Part 31 (Inverter Duty Voltage Withstand Capability of 2000 V in 0.1 µs)

* Production modifications not applicable to EQP Global® Motors 140 through 360 Frames (use EQP III Series base price for these frame sizes).

HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
0.75	1200	460	143T	64	3/46XDSB41A-P	1.4	80	*	MTP841	\$829
0.75	1200	575	143T	66	3/46XDSC41A-P	1.1	81.5	*	MTP841	\$829
1	1800	460	145T	66	0014XDSB41A-P	1.7	85.5	* 1	MTP841	\$714
1	1800	575	145T	66	0014XDSC41A-P	1.2	85.6	* 1	MTP841	\$714
1	1200	460	145T	66	0016XDSB41A-P	1.8	82.9	* 1	MTP841	\$885
1	1200	575	145T	66	0016XDSC41A-P	1.5	82.9	* 1	MTP841	\$885
1.5	3600	460	143T	62	Y152XDSB41A-P	2	84.3	* 1	MTP841	\$764
1.5	3600	575	143T	64	Y152XDSC41A-P	1.6	84.3	* 1	MTP841	\$764
1.5	1800	460	145T	66	Y154XDSB41A-P	2.4	86.5	* 1	MTP841	\$793
1.5	1800	575	145T	64	Y154XDSC41A-P	1.9	86.5	* 1	MTP841	\$793
1.5	1200	460	182T	106	Y156XDSB41A-P	2.5	87.7	* 1	MTP841	\$1,092
1.5	1200	575	182T	108	Y156XDSC41A-P	2	87.5	* 1	MTP841	\$1,092
2	3600	460	145T	64	0022XDSB41A-P	2.6	85.6	* 1	MTP841	\$915
2	3600	575	145T	66	0022XDSC41A-P	2.1	85.5	* 1	MTP841	\$915
2	1800	460	145T	68	0024XDSB41A-P	3	86.5	* 1	MTP841	\$871
2	1800	575	145T	62	0024XDSC41A-P	2.4	86.5	* 1	MTP841	\$871
2	1200	460	184T	117	0026XDSB41A-P	3.4	88.5	* 1	MTP841	\$1,117
2	1200	575	184T	119	0026XDSC41A-P	2.7	88.5	* 1	MTP841	\$1,117

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed Fan Cooled

EQP Global® 841

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
3	3600	460	182T	97	0032XDSB41A-P	3.7	86.7	* 1	MTP841	\$1,123
3	3600	575	182T	93	0032XDSC41A-P	3	86.7	* 1	MTP841	\$1,123
3	1800	460	182T	108	0034XDSB41A-P	4	89.5	* 1	MTP841	\$1,054
3	1800	575	182T	106	0034XDSC41A-P	3.2	89.5	* 1	MTP841	\$1,054
3	1200	460	213T	170	0036XDSB41A-P	4.4	89.6	* 1	MTP841	\$1,364
3	1200	575	213T	172	0036XDSC41A-P	3.5	89.8	* 1	MTP841	\$1,364
5	3600	460	184T	112	0052XDSB41A-P	5.8	88.7	* 1	MTP841	\$1,273
5	3600	575	184T	108	0052XDSC41A-P	4.6	88.7	* 1	MTP841	\$1,273
5	1800	460	184T	117	0054XDSB41A-P	6.5	89.7	* 1	MTP841	\$1,129
5	1800	575	184T	119	0054XDSC41A-P	5.2	89.5	* 1	MTP841	\$1,129
5	1200	460	215T	192	0056XDSB41A-P	6.9	89.6	* 1	MTP841	\$1,964
5	1200	575	215T	187	0056XDSC41A-P	5.5	89.6	* 1	MTP841	\$1,964
7.5	3600	460	213T	181	Y752XDSB41A-P	9	89.7	* 1	MTP841	\$1,543
7.5	3600	575	213T	181	Y752XDSC41A-P	7.2	89.7	* 1	MTP841	\$1,543
7.5	1800	460	213T	199	Y754XDSB41A-P	9.8	91.8	* 1	MTP841	\$1,532
7.5	1800	575	213T	190	Y754XDSC41A-P	7.8	91.8	* 1	MTP841	\$1,532
7.5	1200	460	254T	289	Y756XDSB41A-P	10.2	91.2	* 1	MTP841	\$2,553
7.5	1200	575	254T	282	Y756XDSC41A-P	8.2	91.1	* 1	MTP841	\$2,553
10	3600	460	215T	194	0102XDSB41A-P	11.8	90.2	* 1	MTP841	\$1,801
10	3600	575	215T	196	0102XDSC41A-P	9.4	91.7	* 1	MTP841	\$1,801
10	1800	460	215T	207	0104XDSB41A-P	13	91.8	* 1	MTP841	\$1,845
10	1800	575	215T	203	0104XDSC41A-P	10.4	91.8	* 1	MTP841	\$1,845
10	1200	460	256T	310	0106XDSB41A-P	13.4	91.3	* 1	MTP841	\$3,118
10	1200	575	256T	313	0106XDSC41A-P	10.8	91.2	* 1	MTP841	\$3,118
15	3600	460	254T	315	0152XDSB41A-P	18	91.2	* 1	MTP841	\$2,478
15	3600	575	254T	311	0152XDSC41A-P	14.4	91.4	* 1	MTP841	\$2,478
15	1800	460	254T	325	0154XDSB41A-P	19	92.6	* 1	MTP841	\$2,434
15	1800	575	254T	326	0154XDSC41A-P	15.2	92.6	* 1	MTP841	\$2,434
15	1200	460	284T	452	0156XDSB41A-P	20	91.9	* 1	MTP841	\$4,139
15	1200	575	284T	454	0156XDSC41A-P	15.8	91.8	* 1	MTP841	\$4,139
20	3600	460	256T	327	0202XDSB41A-P	24	91.3	* 1	MTP841	\$3,065
20	3600	575	256T	328	0202XDSC41A-P	19.2	91.3	* 1	MTP841	\$3,065
20	1800	460	256T	369	0204XDSB41A-P	25.4	93.3	* 1	MTP841	\$3,029
20	1800	575	256T	370	0204XDSC41A-P	20	93.2	* 1	MTP841	\$3,029
20	1200	460	286T	496	0206XDSB41A-P	25	91.8	* 1	MTP841	\$5,043
20	1200	575	286T	500	0206XDSC41A-P	20	91.9	* 1	MTP841	\$5,043
25	3600	460	284TS	510	0252XDSB41B-P	29	91.8	* 1	MTP841	\$3,779
25	3600	575	284TS	496	0252XDSC41B-P	23	91.8	* 1	MTP841	\$3,779
25	1800	460	284T	529	0254XDSB41A-P	31	93.8	* 1	MTP841	\$3,607
25	1800	575	284T	531	0254XDSC41A-P	24	93.6	* 1	MTP841	\$3,607
25	1800	460	284TS	529	0254XDSB41B-P	31	93.8	* 1	MTP841	\$3,607
25	1800	575	284TS	531	0254XDSC41B-P	24	93.6	* 1	MTP841	\$3,607
25	1200	460	324T	655	0256XDSB41A-P	31	93.3	* 1	MTP841	\$6,112
25	1200	575	324T	650	0256XDSC41A-P	25	93.3	* 1	MTP841	\$6,112
30	3600	460	286TS	529	0302XDSB41B-P	35	91.9	* 1	MTP841	\$4,410
30	3600	575	286TS	534	0302XDSC41B-P	28	91.9	* 1	MTP841	\$4,410
30	1800	460	286T	542	0304XDSB41A-P	36	93.8	* 1	MTP841	\$4,195
30	1800	575	286T	536	0304XDSC41A-P	29	93.8	* 1	MTP841	\$4,195
30	1800	460	286TS	529	0304XDSB41B-P	36	93.8	* 1	MTP841	\$4,195

Totally Enclosed Fan Cooled

EQP Global® 841

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
30	1800	575	286TS	536	0304XDSC41B-P	29	93.8	* 1	MTP841	\$4,195
30	1200	460	326T	677	0306XDSB41A-P	37	93.3	* 1	MTP841	\$7,039
30	1200	575	326T	672	0306XDSC41A-P	30	93.3	* 1	MTP841	\$7,039
40	3600	460	324TS	679	0402XDSB41B-P	47	92.5	* 1	MTP841	\$5,800
40	3600	575	324TS	686	0402XDSC41B-P	38	92.5	* 1	MTP841	\$5,800
40	1800	460	324T	701	0404XDSB41A-P	48	94.1	* 1	MTP841	\$5,575
40	1800	575	324T	703	0404XDSC41A-P	38	94.1	* 1	MTP841	\$5,575
40	1800	460	324TS	701	0404XDSB41B-P	48	94.1	* 1	MTP841	\$5,575
40	1800	575	324TS	703	0404XDSC41B-P	38	94.1	* 1	MTP841	\$5,575
40	1200	460	364T	836	0406XDSB41A-P	48	94.1	* 1	MTP841	\$9,542
40	1200	575	364T	842	0406XDSC41A-P	38	94.1	* 1	MTP841	\$9,542
50	3600	460	326TS	705	0502XDSB41B-P	58	93.0	* 1	MTP841	\$7,531
50	3600	575	326TS	710	0502XDSC41B-P	46	93.0	* 1	MTP841	\$7,531
50	1800	460	326T	748	0504XDSB41A-P	60	94.5	* 1	MTP841	\$6,845
50	1800	575	326T	765	0504XDSC41A-P	48	94.5	* 1	MTP841	\$6,845
50	1800	460	326TS	743	0504XDSB41B-P	60	94.5	* 1	MTP841	\$6,845
50	1800	575	326TS	765	0504XDSC41B-P	48	94.5	* 1	MTP841	\$6,845
50	1200	460	365T	873	0506XDSB41A-P	60	94.1	* 1	MTP841	\$10,956
50	1200	575	365T	888	0506XDSC41A-P	48	94.1	* 1	MTP841	\$10,956
60	3600	460	364TS	908	0602XDSB41B-P	69	93.6	* 1	MTP841	\$8,912
60	3600	575	364TS	899	0602XDSC41B-P	55	93.7	* 1	MTP841	\$8,912
60	1800	460	364T	928	0604XDSB41A-P	69	95.1	* 1	MTP841	\$8,837
60	1800	575	364T	916	0604XDSC41A-P	55	95.1	* 1	MTP841	\$8,837
60	1800	460	364TS	917	0604XDSB41B-P	69	95.1	* 1	MTP841	\$8,837
60	1800	575	364TS	916	0604XDSC41B-P	55	95.1	* 1	MTP841	\$8,837
60	1200	460	404T	1320	0606XDSB41A	76	94.5		MXT41N	\$12,040
60	1200	575	404T	1300	0606XDSC41A	61	94.5		MXT41N	\$12,040
60	1200	460	404T	1320	B0606FLF3BSHJ01	74	95.0	* 17	MXT41G	\$12,040
60	1200	575	404T	1300	B0606FLF3OSHJ01	59	95.0	* 17	MXT41G	\$12,040
75	3600	460	365TS	928	0752XDSB41B-P	86	93.6	* 1	MTP841	\$11,196
75	3600	575	365TS	937	0752XDSC41B-P	69	93.8	* 1	MTP841	\$11,196
75	1800	460	365T	1012	0754XDSB41A-P	85	95.4	* 1	MTP841	\$11,203
75	1800	575	365T	1010	0754XDSC41A-P	69	95.4	* 1	MTP841	\$11,203
75	1800	460	365TS	990	0754XDSB41B-P	85	95.4	* 1	MTP841	\$11,203
75	1800	575	365TS	1010	0754XDSC41B-P	69	95.4	* 1	MTP841	\$11,203
75	1200	460	405T	1456	0756XDSB41A	94	94.5	*	MXT41N	\$13,718
75	1200	575	405T	1456	0756XDSC41A	75	94.5	*	MXT41N	\$13,718
75	1200	460	405T	1456	B0756FLF3BSHJ01	91	95.0	* 17	MXT41G	\$13,718
75	1200	575	405T	1456	B0756FLF3OSHJ01	73	95.0	* 17	MXT41G	\$13,718
100	3600	460	405TS	1388	B1002FLG3BSHJ	112	95.0	* 17	MXT41G	\$15,999
100	3600	575	405TS	1388	B1002FLG3OSHJ	89.8	95.0	* 17	MXT41G	\$15,999
100	3600	460	405TS	1388	1002XDSB41B	114	94.1	*	MXT41N	\$15,999
100	3600	575	405TS	1388	1002XDSC41B	91	94.1	*	MXT41N	\$15,999
100	1800	460	405T	1426	B1004FLF3BSHJ01	116	95.4	* 17	MXT41G	\$15,010
100	1800	575	405T	1426	B1004FLF3OSHJ01	93.3	95.4	* 17	MXT41G	\$15,010
100	1800	460	405T	1345	1004XDSB41A	116	95.4	*	MXT41N	\$15,010
100	1800	575	405T	1345	1004XDSC41A	93	95.4	*	MXT41N	\$15,010
100	1200	460	444T	2075	B1006FLF3BSHJ	123	95.4	8, 17	MXT41G	\$22,087
100	1200	460	444T	2079	B1006FLF4BSHJ01	123	95.5	* 2, 17	MXT41G	\$22,087

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed Fan Cooled

EQP Global® 841

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
100	1200	460	S444/5T	2500	1006XDSB41A	118	95.0	8	MXT41M	\$22,087
100	1200	460	S444/5T	2500	1006XDSB41A-R	118	95.0	2	MXT41M	\$22,087
100	1200	575	444T	2069	B1006FLF3OSHJ	99	95.0	8, 17	MXT41G	\$22,087
100	1200	575	444T	2069	B1006FLF4OSHJ01	98.5	95.5	* 2, 17	MXT41G	\$22,087
100	1200	575	S444/5T	2500	1006XDSC41A	95	95.0	8	MXT41M	\$22,087
100	1200	575	S444/5T	2500	1006XDSC41A-R	95	95.0	2	MXT41M	\$22,087
125	3600	460	444TS	1972	B1251FLG3BSHJ	139	95.3	* 5, 17	MXT41G	\$23,755
125	3600	460	444TS	2055	B1253FLG3BSHJ	139	95.3	* 4, 17	MXT41G	\$23,755
125	3600	460	S444/5TS	2500	1252XDSB41B	136	95.0	*	MXT41M	\$23,755
125	3600	575	444TS	1972	B1251FLG3OSHJ	111	95.3	5, 17	MXT41G	\$23,755
125	3600	575	444TS	1972	B1253FLG3OSHJ	111	95.3	* 4, 17	MXT41G	\$23,755
125	3600	575	S444/5TS	2500	1252XDSC41B	109	95.0	*	MXT41M	\$23,755
125	1800	460	444T	2048	B1254FLF3BSHJ	144	95.7	* 8, 17	MXT41G	\$21,434
125	1800	460	444T	2026	B1254FLF4BSHJ01	144	95.7	* 2, 17	MXT41G	\$21,434
125	1800	460	S444/5T	2500	1254XDSB41A	142	95.4	8	MXT41M	\$21,434
125	1800	460	S444/5T	2500	1254XDSB41A-R	142	95.4	2	MXT41M	\$21,434
125	1800	575	444T	2046	B1254FLF3OSHJ	116	95.7	* 8, 17	MXT41G	\$21,434
125	1800	575	444T	2026	B1254FLF4OSHJ01	116	95.7	* 2, 17	MXT41G	\$21,434
125	1800	575	S444/5T	2500	1254XDSC41A	115	95.4	* 8	MXT41M	\$21,434
125	1800	575	S444/5T	2500	1254XDSC41A-R	115	95.4	* 2	MXT41M	\$21,434
125	1200	460	445T	2181	B1256FLF3BSHJ	156	95.4	* 8, 17	MXT41G	\$26,862
125	1200	460	445T	2163	B1256FLF4BSHJ01	156	95.5	* 2, 17	MXT41G	\$26,862
125	1200	460	S444/5T	2500	1256XDSB41A	148	95.0	* 8	MXT41M	\$26,862
125	1200	460	S444/5T	2500	1256XDSB41A-R	148	95.0	* 2	MXT41M	\$26,862
125	1200	575	445T	2149	B1256FLF3OSHJ01	125	95.0	8, 17	MXT41G	\$26,862
125	1200	575	445T	2149	B1256FLF4OSHJ01	124	95.5	* 2, 17	MXT41G	\$26,862
125	1200	575	S444/5T	2500	1256XDSC41A	119	95.0	* 8	MXT41M	\$26,862
125	1200	575	S444/5T	2500	1256XDSC41A-R	119	95.0	* 2	MXT41M	\$26,862
150	3600	460	445TS	2205	A1501FLG3BSHJ	169	95.8	* 5, 6, 14, 17	MXT41G	\$27,710
150	3600	460	445TS	2160	A1503FLG3BSHJ	169	95.8	* 4, 6, 14, 17	MXT41G	\$27,710
150	3600	460	S444/5TS	2500	1502XDSB41B	163	95.0	*	MXT41M	\$27,710
150	3600	575	445TS	2189	A1501FLG3OSHJ	133	95.7	5, 6, 14, 17	MXT41G	\$27,710
150	3600	575	445TS	2150	A1503FLG3OSHJ	133	95.7	* 4, 6, 14, 17	MXT41G	\$27,710
150	3600	575	S444/5TS	2500	1502XDSC41B	131	95.0	*	MXT41M	\$27,710
150	1800	460	445T	2180	B1504FLF3BSHJ01	176	95.8	* 8, 17	MXT41G	\$24,918
150	1800	460	445T	2238	B1504FLF4BSHJ01	176	95.8	* 2, 17	MXT41G	\$24,918
150	1800	460	S444/5T	2500	1504XDSB41A	168	95.8	* 8	MXT41M	\$24,918
150	1800	460	S444/5T	2500	1504XDSB41A-R	168	95.8	* 2	MXT41M	\$24,918
150	1800	575	445T	2208	B1504FLF3OSHJ	140	95.8	* 8, 17	MXT41G	\$24,918
150	1800	575	445T	2187	B1504FLF4OSHJ01	140	95.8	* 2, 17	MXT41G	\$24,918
150	1800	575	S444/5T	2500	1504XDSC41A	405	95.8	* 8	MXT41M	\$24,918
150	1800	575	S444/5T	2500	1504XDSC41A-R	405	95.8	* 2	MXT41M	\$24,918
150	1200	460	447T	2419	B1506FLF3BSHJ01	405	95.8	8, 17	MXT41G	\$30,054
150	1200	460	447T	2419	B1506FLF4BSHJ01	405	95.8	* 2, 17	MXT41G	\$30,054
150	1200	460	S445/7T	2500	1506XDSB41A	405	95.8	* 8	MXT41M	\$30,054
150	1200	460	S445/7T	2500	1506XDSB41A-R	405	95.8	* 2	MXT41M	\$30,054
150	1200	575	447T	2416	B1506FLF3OSHJ01	405	95.8	8, 17	MXT41G	\$30,054
150	1200	575	447T	2416	B1506FLF4OSHJ01	145	95.8	* 2, 17	MXT41G	\$30,054
150	1200	575	S445/7T	2500	1506XDSC41A	141	95.8	* 8	MXT41M	\$30,054

Totally Enclosed Fan Cooled

EQP Global® 841

➤ NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
150	1200	575	S445/7T	2500	1506XDSC41A-R	141	95.8	* 2	MXT41M	\$30,054
150	1200	460	447T	2419	B1506FLF4BSHJ	405	95.8	* 2, 17	MXT41G	\$30,054
200	3600	460	447TS	2408	B2001FLG3BSHJ	224	95.9	* 5, 17	MXT41G	\$35,052
200	3600	460	447TS	2434	B2003FLG3BSHJ	224	95.9	* 4, 17	MXT41G	\$35,052
200	3600	460	S445/7TS	2500	2002XDSB41B	426	95.4	*	MXT41M	\$35,052
200	3600	575	447TS	2445	B2001FLG3OSHJ	426	96.0	* 5, 17	MXT41G	\$35,052
200	3600	575	447TS	2445	B2003FLG3OSHJ	426	96.0	* 4, 17	MXT41G	\$35,052
200	3600	575	S445/7TS	2500	2002XDSC41B	426	95.4	*	MXT41M	\$35,052
200	1800	460	447T	2446	B2004FLF3BSHJ	426	96.2	* 8, 17	MXT41G	\$30,312
200	1800	460	447T	2467	B2004FLF4BSHJ01	426	96.2	* 2, 17	MXT41G	\$30,312
200	1800	460	S445/7T	2500	2004XDSB41A	426	96.2	* 8	MXT41M	\$30,312
200	1800	460	S445/7T	2500	2004XDSB41A-R	426	96.2	* 2	MXT41M	\$30,312
200	1800	575	447T	2462	B2004FLF3OSHJ	185	96.2	* 8, 17	MXT41G	\$30,312
200	1800	575	447T	2464	B2004FLF4OSHJ01	185	96.2	* 2, 17	MXT41G	\$30,312
200	1800	575	S445/7T	2500	2004XDSC41A	184	96.2	* 8	MXT41M	\$30,312
200	1800	575	S445/7T	2500	2004XDSC41A-R	184	96.2	* 2	MXT41M	\$30,312
200	1200	460	N449T	3339	B2006FLF3BSHJL	264	96.2	* 8	MXT41G	\$36,822
200	1200	460	N449T	3388	B2006FLF4BSHJL	245	96.2	* 2	MXT41G	\$36,822
200	1200	575	N449T	3397	B2006FLF3OSHJL	191	95.8	8	MXT41G	\$36,822
200	1200	575	N449T	3397	B2006FLF4OSHJL	189	96.2	* 2	MXT41G	\$36,822
250	3600	460	N449TS	3800	B2503FLG3BSHJL	270	95.9	4, 13	MXT41G	\$44,185
250	3600	575	N449TS	3800	B2503FLG3OSHJL	216	95.8	4, 13	MXT41G	\$44,185
250	3600	460	N449TS	3800	B2501FLG3BSHJL	270	95.9	* 5, 13	MXT41G	\$44,185
250	3600	575	N449TS	3800	B2501FLG3OSHJL	216	95.8	5, 13	MXT41G	\$44,185
250	1800	460	N449T	3606	B2504FLF3BSHJL	276	96.2	* 8	MXT41G	\$36,423
250	1800	460	N449T	3636	B2504FLF4BSHJL	276	96.2	* 2	MXT41G	\$36,423
250	1800	575	N449T	3800	B2504FLF3OSHJL	221	96.2	8	MXT41G	\$36,423
250	1800	575	N449T	3800	B2504FLF4OSHJL	220	96.3	2	MXT41G	\$36,423
250	1200	460	N449T	3640	B2506FLF3BSHJL	298	95.8	8	MXT41G	\$40,972
250	1200	460	N449T	3640	B2506FLF4BSHJL	295	96.5	2	MXT41G	\$43,021
250	1200	575	N449T	3800	B2506FLF3OSHJL	234	95.8	8	MXT41G	\$43,021
250	1200	575	N449T	3800	B2506FLF4OSHJL	232	96.5	2	MXT41G	\$43,021
300	3600	460	N449TS	3800	B3003FLG3BSHJL	328	95.8	4, 13	MXT41G	\$52,272
300	3600	460	N449TS	3800	B3001FLG3BSHJL	328	95.8	5, 13	MXT41G	\$52,272
300	3600	575	N449TS	3800	B3003FLG3OSHJL	261	95.8	4, 13	MXT41G	\$52,272
300	3600	575	N449TS	3800	B3001FLG3OSHJL	261	95.8	5, 13	MXT41G	\$52,272
300	1800	460	N449T	3685	B3004FLF3BSHJL	330	96.4	8	MXT41G	\$42,197
300	1800	460	N449T	3739	B3004FLF4BSHJL	330	96.4	2	MXT41G	\$42,197
300	1800	575	N449T	3800	B3004FLF3OSHJL	265	96.2	8	MXT41G	\$42,197
300	1800	575	N449T	3800	B3004FLF4OSHJL	264	96.4	2	MXT41G	\$42,197
300	1200	460	N449T	3800	B3006FLF3BSHJL	368	95.8	8	MXT41G	\$54,990
300	1200	460	N449T	3817	B3006FLF4BSHJL	354	96.5	2	MXT41G	\$56,640
300	1200	575	N449T	3800	B3006FLF3OSHJL	292	95.8	8	MXT41G	\$54,990
300	1200	575	N449T	3800	B3006FLF4OSHJL	283	96.4	2	MXT41G	\$56,640

FL Amps and FL EFF are average expected design values and not guaranteed.

The weights listed above are estimated.

Please contact Toshiba for information on product availability.

"CF"= Consult Factory

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed Fan Cooled

EQP Global® 841 C-Face

> NEMA Premium® Efficiency



CC027B

ee

5 FIVE YEAR WARRANTY

EQPGlobal®

841

Toshiba's general purpose, totally enclosed fan cooled, NEMA Premium® efficiency, EQP Global® 840 C-Face motor series is Toshiba's next-generation motor product line. The EQP Global® 840 C-Face is designed to meet or exceed the competitive demands of the global market, as well as the amended integral horsepower (HP) rule IHMR 2016, while maintaining the high reliability and quality expected from Toshiba.

Available in C-Face Footed and C-Face Footless designs, the EQP Global® 840 C-Face motor specifically addresses the needs of the petrochemical industry, where premium performance and reliability are imperative. Building on over 20 years of success with our EQPIII motor series, this new motor line features design enhancements on the rotor, frame, brackets, fan, and bearings.

Product Scope:	
Horsepower:	¾ to 75 HP
Speed (60 Hz):	3600, 1800, or 1200 RPM
Volt (60 Hz):	460 or 575 V
Enclosure:	Totally Enclosed Fan Cooled
Frame Size*:	143TC through 365TC
Construction:	Cast Iron
Insulation:	Class F, Exceeds NEMA MG1 Part 31 (Inverter Duty)
* Production modifications not applicable to EQP Global Motors® 140 through 360 Frames (use EQPIII Series base price for these frame sizes).	

HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
C-Face Footed										
0.75	1200	460	143TC	52	3/46XDSB42A-P	1.4	80	1, 16	MTP841	\$938
0.75	1200	460	143TC	52	3/46XDSB47A-P	1.4	80	1	MTP841	\$938
0.75	1200	575	143TC	52	3/46XDSC42A-P	1.1	81.5	1, 16	MTP841	\$938
0.75	1200	575	143TC	52	3/46XDSC47A-P	1.1	81.5	1	MTP841	\$938
1	1800	460	143TC	68	0014XDSB42A-P	1.7	85.5	* 1, 16	MTP841	\$823
1	1800	460	143TC	71	0014XDSB47A-P	1.7	85.5	* 1	MTP841	\$823
1	1800	575	143TC	62	0014XDSC42A-P	1.2	85.6	* 1, 16	MTP841	\$823
1	1800	575	143TC	62	0014XDSC47A-P	1.2	85.6	1	MTP841	\$823
1	1200	460	145TC	71	0016XDSB42A-P	1.8	82.9	* 1, 16	MTP841	\$994
1	1200	460	145TC	73	0016XDSB47A-P	1.8	82.9	* 1	MTP841	\$994
1	1200	575	145TC	73	0016XDSC42A-P	1.5	82.9	* 1, 16	MTP841	\$994
1	1200	575	145TC	73	0016XDSC47A-P	1.5	82.9	1	MTP841	\$994
1.5	3600	460	143TC	66	Y152XDSB42A-P	2	84.3	* 1, 16	MTP841	\$873
1.5	3600	460	143TC	66	Y152XDSB47A-P	2	84.3	1	MTP841	\$873
1.5	3600	575	143TC	66	Y152XDSC42A-P	1.6	84.3	1, 16	MTP841	\$873
1.5	3600	575	143TC	66	Y152XDSC47A-P	1.6	84.3	1	MTP841	\$873

Totally Enclosed Fan Cooled

EQP Global® 841 C-Face

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
1.5	1800	460	145TC	73	Y154XDSB42A-P	2.4	86.5	* 1, 16	MTP841	\$902
1.5	1800	460	145TC	71	Y154XDSB47A-P	2.4	86.5	* 1	MTP841	\$902
1.5	1800	575	145TC	73	Y154XDSC42A-P	1.9	86.5	* 1, 16	MTP841	\$902
1.5	1800	575	145TC	73	Y154XDSC47A-P	1.9	86.5	1	MTP841	\$902
1.5	1200	460	182TC	112	Y156XDSB42A-P	2.5	87.7	* 1, 16	MTP841	\$1,223
1.5	1200	460	182TC	112	Y156XDSB47A-P	2.5	87.7	1	MTP841	\$1,223
1.5	1200	575	182TC	112	Y156XDSC42A-P	2	87.5	* 1, 16	MTP841	\$1,223
1.5	1200	575	182TC	112	Y156XDSC47A-P	2	87.5	1	MTP841	\$1,223
2	3600	460	145TC	68	0022XDSB42A-P	2.6	85.6	* 1, 16	MTP841	\$1,024
2	3600	460	145TC	71	0022XDSB47A-P	2.6	85.6	* 1	MTP841	\$1,024
2	3600	575	145TC	75	0022XDSC42A-P	2.1	85.5	* 1, 16	MTP841	\$1,024
2	3600	575	145TC	75	0022XDSC47A-P	2.1	85.5	1	MTP841	\$1,024
2	1800	460	145TC	71	0024XDSB42A-P	3	86.5	* 1, 16	MTP841	\$980
2	1800	460	145TC	73	0024XDSB47A-P	3	86.5	* 1	MTP841	\$980
2	1800	575	145TC	73	0024XDSC42A-P	2.4	86.5	* 1, 16	MTP841	\$980
2	1800	575	145TC	73	0024XDSC47A-P	2.4	86.5	1	MTP841	\$980
2	1200	460	184TC	143	0026XDSB42A-P	3.4	88.5	* 1, 16	MTP841	\$1,248
2	1200	460	184TC	126	0026XDSB47A-P	3.4	88.5	* 1	MTP841	\$1,248
2	1200	575	184TC	123	0026XDSC42A-P	2.7	88.5	* 1, 16	MTP841	\$1,248
2	1200	575	184TC	123	0026XDSC47A-P	2.7	88.5	1	MTP841	\$1,248
3	3600	460	182TC	95	0032XDSB42A-P	3.7	86.7	* 1, 16	MTP841	\$1,254
3	3600	460	182TC	104	0032XDSB47A-P	3.7	86.7	* 1	MTP841	\$1,254
3	3600	575	182TC	101	0032XDSC42A-P	3	86.7	* 1, 16	MTP841	\$1,254
3	3600	575	182TC	101	0032XDSC47A-P	3	86.7	1	MTP841	\$1,254
3	1800	460	182TC	112	0034XDSB42A-P	4	89.5	* 1, 16	MTP841	\$1,185
3	1800	460	182TC	115	0034XDSB47A-P	4	89.5	* 1	MTP841	\$1,185
3	1800	575	182TC	112	0034XDSC42A-P	3.2	89.5	* 1, 16	MTP841	\$1,185
3	1800	575	182TC	112	0034XDSC47A-P	3.2	89.5	1	MTP841	\$1,185
3	1200	460	213TC	183	0036XDSB42A-P	4.4	89.6	* 1, 16	MTP841	\$1,539
3	1200	460	213TC	183	0036XDSB47A-P	4.4	89.6	* 1	MTP841	\$1,539
3	1200	575	213TC	168	0036XDSC42A-P	3.5	89.8	* 1, 16	MTP841	\$1,539
3	1200	575	213TC	168	0036XDSC47A-P	3.5	89.8	1	MTP841	\$1,539
5	3600	460	184TC	115	0052XDSB42A-P	5.8	88.7	* 1, 16	MTP841	\$1,404
5	3600	460	184TC	117	0052XDSB47A-P	5.8	88.7	* 1	MTP841	\$1,404
5	3600	575	184TC	115	0052XDSC42A-P	4.6	88.7	* 1, 16	MTP841	\$1,404
5	3600	575	184TC	115	0052XDSC47A-P	4.6	88.7	1	MTP841	\$1,404
5	1800	460	184TC	126	0054XDSB42A-P	6.5	89.7	* 1, 16	MTP841	\$1,260
5	1800	460	184TC	126	0054XDSB47A-P	6.5	89.7	* 1	MTP841	\$1,260
5	1800	575	184TC	121	0054XDSC42A-P	5.2	89.5	* 1, 16	MTP841	\$1,260
5	1800	575	184TC	121	0054XDSC47A-P	5.2	89.5	* 1	MTP841	\$1,260
5	1200	460	215TC	183	0056XDSB42A-P	6.9	89.6	* 1, 16	MTP841	\$2,139
5	1200	460	215TC	201	0056XDSB47A-P	6.9	89.6	* 1	MTP841	\$2,139
5	1200	575	215TC	194	0056XDSC42A-P	5.5	89.6	* 1, 16	MTP841	\$2,139
5	1200	575	215TC	194	0056XDSC47A-P	5.5	89.6	1	MTP841	\$2,139
7.5	3600	460	213TC	187	Y752XDSB42A-P	9	89.7	* 1, 16	MTP841	\$1,718
7.5	3600	460	213TC	187	Y752XDSB47A-P	9	89.7	* 1	MTP841	\$1,718
7.5	3600	575	213TC	209	Y752XDSC42A-P	7.2	89.7	* 1, 16	MTP841	\$1,718
7.5	3600	575	213TC	209	Y752XDSC47A-P	7.2	89.7	1	MTP841	\$1,718
7.5	1800	460	213TC	207	Y754XDSB42A-P	9.8	91.8	* 1, 16	MTP841	\$1,707

ODP General Purpose

Totally Enclosed Fan Cooled

EQP Global® 841 C-Face

> NEMA Premium® Efficiency



TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
7.5	1800	460	213TC	209	Y754XDSB47A-P	9.8	91.8	* 1	MTP841	\$1,707
7.5	1800	575	213TC	190	Y754XDSC42A-P	7.8	91.8	* 1, 16	MTP841	\$1,707
7.5	1800	575	213TC	190	Y754XDSC47A-P	7.8	91.8	1	MTP841	\$1,707
7.5	1200	460	254TC	298	Y756XDSB42A-P	10.2	91.2	* 1, 16	MTP841	\$2,816
7.5	1200	460	254TC	300	Y756XDSB47A-P	10.2	91.2	* 1	MTP841	\$2,816
7.5	1200	575	254TC	330	Y756XDSC42A-P	8.2	91.1	* 1, 16	MTP841	\$2,816
7.5	1200	575	254TC	330	Y756XDSC47A-P	8.2	91.1	1	MTP841	\$2,816
10	3600	460	215TC	205	0102XDSB42A-P	11.8	90.2	* 1, 16	MTP841	\$1,976
10	3600	460	215TC	205	0102XDSB47A-P	11.8	90.2	* 1	MTP841	\$1,976
10	3600	575	215TC	205	0102XDSC42A-P	9.4	91.7	* 1, 16	MTP841	\$1,976
10	3600	575	215TC	205	0102XDSC47A-P	9.4	91.7	1	MTP841	\$1,976
10	1800	460	215TC	218	0104XDSB42A-P	13	91.8	* 1, 16	MTP841	\$2,020
10	1800	460	215TC	216	0104XDSB47A-P	13	91.8	* 1	MTP841	\$2,020
10	1800	575	215TC	218	0104XDSC42A-P	10.4	91.8	* 1, 16	MTP841	\$2,020
10	1800	575	215TC	218	0104XDSC47A-P	10.4	91.8	1	MTP841	\$2,020
10	1200	460	256TC	317	0106XDSB42A-P	13.4	91.3	* 1, 16	MTP841	\$3,381
10	1200	460	256TC	320	0106XDSB47A-P	13.4	91.3	* 1	MTP841	\$3,381
10	1200	575	256TC	317	0106XDSC42A-P	10.8	91.2	* 1, 16	MTP841	\$3,381
10	1200	575	256TC	317	0106XDSC47A-P	10.8	91.2	1	MTP841	\$3,381
15	3600	460	254TC	324	0152XDSB42A-P	18	91.2	* 1, 16	MTP841	\$2,741
15	3600	460	254TC	324	0152XDSB47A-P	18	91.2	* 1	MTP841	\$2,741
15	3600	575	254TC	322	0152XDSC42A-P	14.4	91.4	* 1, 16	MTP841	\$2,741
15	3600	575	254TC	322	0152XDSC47A-P	14.4	91.4	1	MTP841	\$2,741
15	1800	460	254TC	340	0154XDSB42A-P	19	92.6	* 1, 16	MTP841	\$2,697
15	1800	460	254TC	348	0154XDSB47A-P	19	92.6	* 1	MTP841	\$2,697
15	1800	575	254TC	335	0154XDSC42A-P	15.2	92.6	* 1, 16	MTP841	\$2,697
15	1800	575	254TC	335	0154XDSC47A-P	15.2	92.6	1	MTP841	\$2,697
15	1200	460	284TC	487	0156XDSB42A-P	20	91.9	* 1	MTP841	\$4,577
15	1200	575	284TC	474	0156XDSC42A-P	15.8	91.8	* 1	MTP841	\$4,577
20	3600	460	256TC	333	0202XDSB42A-P	24	91.3	* 1, 16	MTP841	\$3,328
20	3600	460	256TC	340	0202XDSB47A-P	24	91.3	* 1	MTP841	\$3,328
20	3600	575	256TC	333	0202XDSC42A-P	19.2	91.3	* 1, 16	MTP841	\$3,328
20	3600	575	256TC	333	0202XDSC47A-P	19.2	91.3	1	MTP841	\$3,328
20	1800	460	256TC	371	0204XDSB42A-P	25.4	93.3	* 1, 16	MTP841	\$3,292
20	1800	460	256TC	377	0204XDSB47A-P	25.4	93.3	* 1	MTP841	\$3,292
20	1800	575	256TC	375	0204XDSC42A-P	20	93.2	* 1, 16	MTP841	\$3,292
20	1800	575	256TC	375	0204XDSC47A-P	20	93.2	1	MTP841	\$3,292
20	1200	460	286TC	518	0206XDSB42A-P	25.4	91.7	* 1	MTP841	\$5,481
20	1200	575	286TC	518	0206XDSC42A-P	20	91.9	* 1	MTP841	\$5,481
25	3600	460	284TSC	514	0252XDSB42B-P	29	91.8	* 1	MTP841	\$4,217
25	3600	575	284TSC	455	0252XDSC42B-P	23	91.8	1	MTP841	\$4,217
25	1800	460	284TC	540	0254XDSB42A-P	31	93.8	* 1	MTP841	\$4,045
25	1800	575	284TC	534	0254XDSC42A-P	24	93.6	* 1	MTP841	\$4,045
25	1200	460	324TC	679	0256XDSB42A-P	31	93.3	* 1	MTP841	\$6,604
25	1200	575	324TC	666	0256XDSC42A-P	25	93.3	* 1	MTP841	\$6,604
30	3600	460	286TSC	534	0302XDSB42B-P	35	91.9	* 1	MTP841	\$4,848
30	3600	575	286TSC	498	0302XDSC42B-P	28	91.9	* 1	MTP841	\$4,848
30	1800	460	286TC	558	0304XDSB42A-P	36	93.8	* 1	MTP841	\$4,633
30	1800	575	286TC	551	0304XDSC42A-P	29	93.8	* 1	MTP841	\$4,633

Totally Enclosed Fan Cooled

EQP Global® 841 C-Face

> NEMA Premium® Efficiency



ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
30	1200	460	326TC	694	0306XDSB42A-P	37	93.3	* 1	MTP841	\$7,531
30	1200	575	326TC	692	0306XDSC42A-P	30	93.3	* 1	MTP841	\$7,531
40	3600	460	324TSC	690	0402XDSB42B-P	47	92.5	* 1	MTP841	\$6,292
40	3600	575	324TSC	692	0402XDSC42B-P	38	92.5	* 1	MTP841	\$6,292
40	1800	460	324TC	716	0404XDSB42A-P	48	94.1	* 1	MTP841	\$6,067
40	1800	575	324TC	719	0404XDSC42A-P	38	94.1	* 1	MTP841	\$6,067
40	1200	460	364TC	862	0406XDSB42A-P	48	94.1	* 1	MTP841	\$10,362
40	1200	575	364TC	862	0406XDSC42A-P	38	94.1	1	MTP841	\$10,362
50	3600	460	326TSC	725	0502XDSB42B-P	58	93.0	* 1	MTP841	\$8,023
50	3600	575	326TSC	717	0502XDSC42B-P	46	93.0	* 1	MTP841	\$8,023
50	1800	460	326TC	767	0504XDSB42A-P	60	94.5	* 1	MTP841	\$7,337
50	1800	575	326TC	769	0504XDSC42A-P	48	94.5	* 1	MTP841	\$7,337
50	1200	460	365TC	895	0506XDSB42A-P	60	94.1	* 1	MTP841	\$11,776
50	1200	575	365TC	895	0506XDSC42A-P	48	94.1	* 1	MTP841	\$11,776
60	3600	460	364TSC	911	0602XDSB42B-P	69	93.6	* 1	MTP841	\$9,732
60	3600	575	364TSC	911	0602XDSC42B-P	55	93.7	1	MTP841	\$9,732
60	1800	460	364TC	928	0604XDSB42A-P	69	95.1	* 1	MTP841	\$9,657
60	1800	575	364TC	941	0604XDSC42A-P	55	95.1	* 1	MTP841	\$9,657
75	3600	460	365TSC	941	0752XDSB42B-P	86	93.6	* 1	MTP841	\$12,016
75	3600	575	365TSC	941	0752XDSC42B-P	69	93.8	* 1	MTP841	\$12,016
75	1800	460	365TC	1025	0754XDSB42A-P	85	95.4	* 1	MTP841	\$12,023
75	1800	575	365TC	1020	0754XDSC42A-P	69	95.4	1	MTP841	\$12,023

C-Face Footless

0.75	1200	460	143TC	71	3/46XDSB44A-P	1.4	80	1	MTP841	\$1,032
0.75	1200	575	143TC	71	3/46XDSC44A-P	1.1	81.5	1	MTP841	\$1,032
1	1800	460	143TC	71	0014XDSB44A-P	1.7	85.5	* 1	MTP841	\$905
1	1800	575	143TC	71	0014XDSC44A-P	1.2	85.6	1	MTP841	\$905
1	1200	460	145TC	68	0016XDSB44A-P	1.8	82.9	* 1	MTP841	\$1,093
1	1200	575	145TC	68	0016XDSC44A-P	1.5	82.9	1	MTP841	\$1,093
1.5	3600	460	143TC	68	Y152XDSB44A-P	2	84.3	1	MTP841	\$960
1.5	3600	575	143TC	68	Y152XDSC44A-P	1.6	84.3	1	MTP841	\$960
1.5	1800	460	145TC	68	Y154XDSB44A-P	2.4	86.5	* 1	MTP841	\$992
1.5	1800	575	145TC	68	Y154XDSC44A-P	1.9	86.5	1	MTP841	\$992
1.5	1200	460	182TC	103	Y156XDSB44A-P	2.5	87.7	* 1	MTP841	\$1,345
1.5	1200	575	182TC	79	Y156XDSC44A-P	2	87.5	1	MTP841	\$1,345
2	3600	460	145TC	64	0022XDSB44A-P	2.6	85.6	* 1	MTP841	\$1,126
2	3600	575	145TC	75	0022XDSC44A-P	2.1	85.5	1	MTP841	\$1,126
2	1800	460	145TC	75	0024XDSB44A-P	3	86.5	* 1	MTP841	\$1,078
2	1800	575	145TC	73	0024XDSC44A-P	2.4	86.5	* 1	MTP841	\$1,078
2	1200	460	184TC	126	0026XDSB44A-P	3.4	88.5	* 1	MTP841	\$1,373
2	1200	575	184TC	116	0026XDSC44A-P	2.7	88.5	1	MTP841	\$1,373
3	3600	460	182TC	97	0032XDSB44A-P	3.7	86.7	* 1	MTP841	\$1,379
3	3600	575	182TC	97	0032XDSC44A-P	3	86.7	1	MTP841	\$1,379
3	1800	460	182TC	112	0034XDSB44A-P	4	89.5	* 1	MTP841	\$1,304
3	1800	575	182TC	112	0034XDSC44A-P	3.2	89.5	1	MTP841	\$1,304
3	1200	460	213TC	142	0036XDSB44A-P	4.4	89.6	1	MTP841	\$1,693
3	1200	575	213TC	142	0036XDSC44A-P	3.5	89.8	1	MTP841	\$1,693

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed Fan Cooled

EQP Global® 841 C-Face

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
5	3600	460	184TC	110	0052XDSB44A-P	5.8	88.7	* 1	MTP841	\$1,544
5	3600	575	184TC	110	0052XDSC44A-P	4.6	88.7	1	MTP841	\$1,544
5	1800	460	184TC	121	0054XDSB44A-P	6.5	89.7	* 1	MTP841	\$1,386
5	1800	575	184TC	121	0054XDSC44A-P	5.2	89.5	1	MTP841	\$1,386
5	1200	460	215TC	190	0056XDSB44A-P	6.9	89.6	* 1	MTP841	\$2,353
5	1200	575	215TC	190	0056XDSC44A-P	5.5	89.6	1	MTP841	\$2,353
7.5	3600	460	213TC	155	Y752XDSB44A-P	9	89.7	* 1	MTP841	\$1,890
7.5	3600	575	213TC	155	Y752XDSC44A-P	7.2	89.7	1	MTP841	\$1,890
7.5	1800	460	213TC	203	Y754XDSB44A-P	9.8	91.8	* 1	MTP841	\$1,878
7.5	1800	575	213TC	198	Y754XDSC44A-P	7.8	91.8	1	MTP841	\$1,878
7.5	1200	460	254TC	252	Y756XDSB44A-P	10.2	91.2	* 1	MTP841	\$3,098
7.5	1200	575	254TC	252	Y756XDSC44A-P	8.2	91.1	1	MTP841	\$3,098
10	3600	460	215TC	205	0102XDSB44A-P	11.8	90.2	* 1	MTP841	\$2,174
10	3600	575	215TC	205	0102XDSC44A-P	9.4	91.7	1	MTP841	\$2,174
10	1800	460	215TC	214	0104XDSB44A-P	13	91.8	* 1	MTP841	\$2,222
10	1800	575	215TC	214	0104XDSC44A-P	10.4	91.8	1	MTP841	\$2,222
10	1200	460	256TC	274	0106XDSB44A-P	13.4	91.3	* 1	MTP841	\$3,719
10	1200	575	256TC	274	0106XDSC44A-P	10.8	91.2	1	MTP841	\$3,719
15	3600	460	254TC	313	0152XDSB44A-P	18	91.2	* 1	MTP841	\$3,015
15	3600	575	254TC	313	0152XDSC44A-P	14.4	91.4	1	MTP841	\$3,015
15	1800	460	254TC	333	0154XDSB44A-P	19	92.6	* 1	MTP841	\$2,967
15	1800	575	254TC	1359	0154XDSC44A-P	15.2	92.6	* 1	MTP841	\$2,967
15	1200	460	284TC	454	0156XDSB44A-P	20	91.9	* 1	MTP841	\$5,035
15	1200	575	284TC	454	0156XDSC44A-P	15.8	91.8	1	MTP841	\$5,035
20	3600	460	256TC	331	0202XDSB44A-P	24	91.3	* 1	MTP841	\$3,661
20	3600	575	256TC	331	0202XDSC44A-P	19.2	91.3	1	MTP841	\$3,661
20	1800	460	256TC	368	0204XDSB44A-P	25.4	93.3	* 1	MTP841	\$3,621
20	1800	575	256TC	364	0204XDSC44A-P	20	93.2	* 1	MTP841	\$3,621
20	1200	460	286TC	489	0206XDSB44A-P	25.4	91.7	* 1	MTP841	\$6,029
20	1200	575	286TC	489	0206XDSC44A-P	20	91.9	1	MTP841	\$6,029
25	3600	460	284TSC	496	0252XDSB44B-P	29	91.8	* 1	MTP841	\$4,639
25	3600	575	284TSC	496	0252XDSC44B-P	23	91.8	1	MTP841	\$4,639
25	1800	460	284TC	516	0254XDSB44A-P	31	93.8	* 1	MTP841	\$4,247
25	1800	575	284TC	550	0254XDSC44A-P	24	93.6	* 1	MTP841	\$4,247
25	1200	460	324TC	653	0256XDSB44A-P	31	93.3	* 1	MTP841	\$7,264
25	1200	575	324TC	653	0256XDSC44A-P	25	93.3	1	MTP841	\$7,264
30	3600	460	286TSC	516	0302XDSB44B-P	35	91.9	* 1	MTP841	\$5,333
30	3600	575	286TSC	516	0302XDSC44B-P	28	91.9	1	MTP841	\$5,333
30	1800	460	286TC	531	0304XDSB44A-P	36	93.8	* 1	MTP841	\$4,865
30	1800	575	286TC	551	0304XDSC44A-P	29	93.8	* 1	MTP841	\$4,865
30	1200	460	326TC	571	0306XDSB44A-P	37	93.3	1	MTP841	\$8,284
30	1200	575	326TC	571	0306XDSC44A-P	30	93.3	1	MTP841	\$8,284
40	3600	460	324TSC	686	0402XDSB44B-P	47	92.5	* 1	MTP841	\$6,921
40	3600	575	324TSC	589	0402XDSC44B-P	38	92.5	1	MTP841	\$6,921
40	1800	460	324TC	723	0404XDSB44A-P	48	94.1	* 1	MTP841	\$6,370
40	1800	575	324TC	723	0404XDSC44A-P	38	94.1	1	MTP841	\$6,370
40	1200	460	364TC	708	0406XDSB44A-P	48	94.1	1	MTP841	\$11,398
40	1200	575	364TC	708	0406XDSC44A-P	38	94.1	1	MTP841	\$11,398
50	3600	460	326TSC	701	0502XDSB44B-P	58	93.0	* 1	MTP841	\$8,825

Totally Enclosed Fan Cooled

EQP Global® 841 C-Face

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
50	3600	575	326TSC	702	0502XDSC44B-P	46	93.0	1	MTP841	\$8,825
50	1800	460	326TC	758	0504XDSB44A-P	60	94.5	* 1	MTP841	\$7,704
50	1800	575	326TC	758	0504XDSC44A-P	48	94.5	1	MTP841	\$7,704
50	1200	460	365TC	757	0506XDSB44A-P	60	94.1	1	MTP841	\$12,954
50	1200	575	365TC	757	0506XDSC44A-P	48	94.1	1	MTP841	\$12,954
60	3600	460	364TSC	763	0602XDSB44B-P	69	93.6	* 1	MTP841	\$10,705
60	3600	575	364TSC	763	0602XDSC44B-P	55	93.7	1	MTP841	\$10,705
60	1800	460	364TC	796	0604XDSB44A-P	69	95.1	1	MTP841	\$10,140
60	1800	575	364TC	796	0604XDSC44A-P	55	95.1	1	MTP841	\$10,140
75	3600	460	365TSC	814	0752XDSB44B-P	86	93.6	1	MTP841	\$13,218
75	3600	575	365TSC	814	0752XDSC44B-P	69	93.8	1	MTP841	\$13,218
75	1800	460	365TC	893	0754XDSB44A-P	85	95.4	* 1	MTP841	\$12,624
75	1800	575	365TC	893	0754XDSC44A-P	69	95.4	1	MTP841	\$12,624

FL Amps and FL EFF are average expected design values and not guaranteed.

The weights listed above are estimated.

Please contact Toshiba for information on product availability.

"CF"= Consult Factory

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Explosion Proof Motors

Totally Enclosed Fan Cooled

Toshiba's EQP Global® XP explosion proof motors are equipped to contain an explosion that may occur inside a motor, as well as prevent explosive gases and vapors from being released into the environment. Its robust construction meets the UL and CSA Listed Hazardous Locations requirements. This product line is designed for use in Class I, Division 1, Group D, and Class II, Division 1, Groups E, F, & G, and carries a temperature code rating of T3C (160°C). It is ideal for indoor and outdoor use and offers the performance and reliability the motor industry has come to expect from Toshiba, which makes the EQP Global® XP motor the clear choice for your toughest environments and applications.



Standard Features:

- Totally Enclosed Fan Cooled
- Premium Efficiency
- 230/460, 460, or 575 V
- Three-Phase
- 60 Hz
- 1.15 Service Factor
- NEMA Design B
- Class I, Group D; Class II, Groups E, F, and G - Inverter Duty, 1.0 Service Factor, 60 Hz ratings, T3C (160°C)
- Frames 143T through 326T 20:1CT, 60:1VT, 1:1.5CHP Frames 360 through N449 10:1CT, 60:1VT, 1:1.5CHP
- T3C Temperature Code 160°C
- Class F Insulation
- All Cast Iron Construction
- Non-Sparking Brass Shaft Slingers
- IP56 Protection
- Normally-Closed Thermostats
- Ball Bearing is available on all Frame sizes
- Roller Bearing is available on frames 440 and above
- Frames 143 through N449
UL Listed File No. E53559

Applications:

- Petrochemical & Gas
- Grain & Feed Mills
- Pharmaceuticals
- Pumps
- Fans
- Compressors
- Conveyors
- Material Handling
- UL & CSA Listed Hazardous Locations



Totally Enclosed Fan Cooled EQP Global® XP

> NEMA Premium® Efficiency



3 THREE YEAR
WARRANTY



Toshiba's EQP Global® XP explosion proof motors are equipped to contain an explosion

that may occur inside a motor, as well as prevent explosive gases and vapors from being released into the environment. Its robust construction meets the UL and CSA Listed Hazardous Locations requirements. It is ideal for indoor and outdoor use and offers the performance and reliability the motor industry has come to expect from Toshiba, which makes the EQP Global® XP motor the clear choice for your toughest environments and applications.

Product Scope:

Horsepower:	1 to 1000 HP
Speed:	3600, 1800, 1200, or 900 RPM
Voltage:	230/460, 460, or 575 V
Enclosure:	Totally Enclosed Fan Cooled
Frame Size:	143T through 6811
Construction:	Cast Iron (Frame & Brackets)
Insulation:	Class F

HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
1	1800	230/460	143T	93	0014XPEA41A-P	3.4/1.7	85.5	* 1	MTPXPP	\$840
1	1800	575	143T	75	0014XPEC41A-P	1.3	85.6	* 1	MTPXPP	\$840
1	1200	230/460	145T	77	0016XPEA41A-P	3.6/1.8	82.9	* 1	MTPXPP	\$903
1	1200	575	145T	77	0016XPEC41A-P	1.5	82.9	* 1	MTPXPP	\$903
1.5	3600	230/460	143T	71	Y152XPEA41A-P	4.0/2.0	84.0	* 1	MTPXPP	\$886
1.5	3600	575	143T	77	Y152XPEC41A-P	1.6	84.0	* 1	MTPXPP	\$886
1.5	1800	230/460	145T	73	Y154XPEA41A-P	4.8/2.4	86.5	* 1	MTPXPP	\$910
1.5	1800	575	145T	77	Y154XPEC41A-P	1.9	86.5	* 1	MTPXPP	\$910
1.5	1200	230/460	182T	119	Y156XPEA41A-P	5/2.5	87.5	* 1	MTPXPP	\$978
1.5	1200	575	182T	119	Y156XPEC41A-P	2	87.5	* 1	MTPXPP	\$978
2	3600	230/460	145T	55	0022XPEA41A-P	5.2/2.6	85.6	* 1	MTPXPP	\$917
2	3600	575	145T	77	0022XPEC41A-P	2.1	85.5	1	MTPXPP	\$917
2	1800	230/460	145T	77	0024XPEA41A-P	6.0/3.0	86.5	* 1	MTPXPP	\$916
2	1800	575	145T	77	0024XPEC41A-P	2.4	86.5	* 1	MTPXPP	\$916
2	1200	230/460	184T	65	0026XPEA41A-P	6.8/3.4	88.5	* 1	MTPXPP	\$1,130
2	1200	575	184T	114	0026XPEC41A-P	2.7	88.5	* 1	MTPXPP	\$1,130
3	3600	230/460	182T	108	0032XPEA41A-P	7.4/3.7	86.7	* 1	MTPXPP	\$1,057
3	3600	575	182T	120	0032XPEC41A-P	3	86.7	* 1	MTPXPP	\$1,057
3	1800	230/460	182T	117	0034XPEA41A-P	8.0/4.0	89.5	* 1	MTPXPP	\$1,152
3	1800	575	182T	117	0034XPEC41A-P	3.2	89.5	* 1	MTPXPP	\$1,152
3	1200	230/460	213T	214	0036XPEA41A-P	8.8/4.4	89.6	* 1	MTPXPP	\$1,429
3	1200	575	213T	198	0036XPEC41A-P	3.5	89.8	* 1	MTPXPP	\$1,429
5	3600	230/460	184T	121	0052XPEA41A-P	11.6/5.8	88.7	* 1	MTPXPP	\$1,305
5	3600	575	184T	120	0052XPEC41A-P	4.6	88.7	* 1	MTPXPP	\$1,305
5	1800	230/460	184T	121	0054XPEA41A-P	13.0/6.5	89.7	* 1	MTPXPP	\$1,275

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed Fan Cooled

EQP Global® XP

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
5	1800	575	184T	120	0054XPEC41A-P	5.2	89.5	* 1	MTPXPP	\$1,275
5	1200	230/460	215T	225	0056XPEA41A-P	13.8/6.9	89.6	* 1	MTPXPP	\$1,840
5	1200	575	215T	213	0056XPEC41A-P	5.5	89.6	* 1	MTPXPP	\$1,840
7.5	3600	230/460	213T	218	Y752XPEA41A-P	18/9	89.5	* 1	MTPXPP	\$1,768
7.5	3600	575	213T	237	Y752XPEC41A-P	7.2	89.5	* 1	MTPXPP	\$1,768
7.5	1800	230/460	213T	238	Y754XPEA41A-P	19.6/9.8	91.7	* 1	MTPXPP	\$1,729
7.5	1800	575	213T	221	Y754XPEC41A-P	7.8	91.7	* 1	MTPXPP	\$1,729
7.5	1200	230/460	254T	340	Y756XPEA41A-P	20.4/10.2	91.0	* 1	MTPXPP	\$2,402
7.5	1200	575	254T	327	Y756XPEC41A-P	8.2	91.0	1	MTPXPP	\$2,402
10	3600	230/460	215T	238	0102XPEA41A-P	23.6/11.8	90.2	* 1	MTPXPP	\$1,861
10	3600	575	215T	237	0102XPEC41A-P	9.4	91.7	* 1	MTPXPP	\$1,861
10	1800	230/460	215T	245	0104XPEA41A-P	26.0/13.0	91.8	* 1	MTPXPP	\$2,015
10	1800	575	215T	221	0104XPEC41A-P	10.4	91.8	* 1	MTPXPP	\$2,015
10	1200	230/460	256T	355	0106XPEA41A-P	26.8/13.4	91.3	* 1	MTPXPP	\$2,942
10	1200	575	256T	314	0106XPEC41A-P	10.8	91.2	* 1	MTPXPP	\$2,942
15	3600	230/460	254T	366	0152XPEA41A-P	36/18	91.2	* 1	MTPXPP	\$2,421
15	3600	575	254T	373	0152XPEC41A-P	14.4	91.4	* 1	MTPXPP	\$2,421
15	1800	230/460	254T	379	0154XPEA41A-P	38/19	92.6	* 1	MTPXPP	\$2,782
15	1800	575	254T	379	0154XPEC41A-P	15.2	92.6	* 1	MTPXPP	\$2,782
15	1200	230/460	284T	542	0156XPEA41A-P	40/20	91.9	* 1	MTPXPP	\$4,017
15	1200	575	284T	473	0156XPEC41A-P	15.8	91.8	* 1	MTPXPP	\$4,017
20	3600	230/460	256T	372	0202XPEA41A-P	48/24	91.3	* 1	MTPXPP	\$3,263
20	3600	575	256T	386	0202XPEC41A-P	19.2	91.3	* 1	MTPXPP	\$3,263
20	1800	230/460	256T	422	0204XPEA41A-P	50/25	93.3	* 1	MTPXPP	\$3,261
20	1800	575	256T	422	0204XPEC41A-P	20	93.2	* 1	MTPXPP	\$3,261
20	1200	230/460	286T	798	0206XPEA41A-P	50/25	91.8	* 1	MTPXPP	\$4,553
20	1200	575	286T	540	0206XPEC41A-P	20	91.9	1	MTPXPP	\$4,553
25	3600	230/460	284TS	573	0252XPEA41B-P	58/29	91.8	* 1	MTPXPP	\$3,835
25	3600	575	284TS	560	0252XPEC41B-P	23	91.8	* 1	MTPXPP	\$3,835
25	1800	230/460	284T	595	0254XPEA41A-P	62/31	93.8	* 1	MTPXPP	\$4,391
25	1800	575	284T	597	0254XPEC41A-P	24	93.6	* 1	MTPXPP	\$4,391
25	1200	230/460	324T	743	0256XPEA41A-P	62/31	93.3	* 1	MTPXPP	\$5,609
25	1200	575	324T	685	0256XPEC41A-P	25	93.3	1	MTPXPP	\$5,609
30	3600	230/460	286TS	580	0302XPEA41B-P	70/35	91.9	* 1	MTPXPP	\$4,528
30	3600	575	286TS	560	0302XPEC41B-P	28	91.9	* 1	MTPXPP	\$4,528
30	1800	230/460	286T	611	0304XPEA41A-P	72/36	93.8	* 1	MTPXPP	\$4,667
30	1800	575	286T	615	0304XPEC41A-P	29	93.8	* 1	MTPXPP	\$4,667
30	1200	230/460	326T	763	0306XPEA41A-P	74/37	93.3	* 1	MTPXPP	\$6,853
30	1200	575	326T	689	0306XPEC41A-P	30	93.3	1	MTPXPP	\$6,853
40	3600	230/460	324TS	743	0402XPEA41B-P	94/47	92.5	* 1	MTPXPP	\$6,385
40	3600	575	324TS	754	0402XPEC41B-P	38	92.5	1	MTPXPP	\$6,385
40	1800	230/460	324T	785	0404XPEA41A-P	96/48	94.1	* 1	MTPXPP	\$6,635
40	1800	575	324T	789	0404XPEC41A-P	38	94.1	* 1	MTPXPP	\$6,635
40	1200	230/460	364T	935	0406XPEA41A-P	96/48	94.1	* 1	MTPXPP	\$9,011
40	1200	575	364T	950	0406XPEC41A-P	38	94.1	* 1	MTPXPP	\$9,011
50	3600	230/460	326TS	805	0502XPEA41B-P	116/58	93.0	* 1	MTPXPP	\$8,009
50	3600	575	326TS	754	0502XPEC41B-P	46	93.0	1	MTPXPP	\$8,009
50	1800	230/460	326T	840	0504XPEA41A-P	120/60	94.5	* 1	MTPXPP	\$7,645
50	1800	575	326T	844	0504XPEC41A-P	48	94.5	* 1	MTPXPP	\$7,645

Totally Enclosed Fan Cooled

EQP Global® XP

➤ NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
50	1200	230/460	365T	981	0506XPEA41A-P	120/60	94.1	* 1	MTPXPP	\$9,097
50	1200	575	365T	932	0506XPEC41A-P	48	94.1	* 1	MTPXPP	\$9,097
60	3600	230/460	364TS	988	0602XPEA41B-P	138/69	93.6	* 1	MTPXPP	\$9,487
60	3600	575	364TS	984	0602XPEC41B-P	55	93.7	1	MTPXPP	\$9,487
60	1800	230/460	364T	1021	0604XPEA41A-P	138/69	95.1	* 1	MTPXPP	\$9,459
60	1800	575	364T	1021	0604XPEC41A-P	55	95.1	* 1	MTPXPP	\$9,459
60	1200	230/460	404T	1350	B0606YLF4USH	148/74	94.5	2	MXTXPP	\$22,001
60	1200	575	404T	1350	B0606YLF4OSH	59	94.5	2	MXTXPP	\$22,001
75	3600	230/460	365TS	1023	0752XPEA41B-P	172/86	93.6	* 1	MTPXPP	\$11,284
75	3600	575	365TS	984	0752XPEC41B-P	69	93.8	* 1	MTPXPP	\$11,284
75	1800	230/460	365T	1098	0754XPEA41A-P	172/86	95.4	* 1	MTPXPP	\$11,086
75	1800	575	365T	1107	0754XPEC41A-P	69	95.4	* 1	MTPXPP	\$11,086
75	1200	230/460	405T	1550	B0756YLF4USH	186/93	94.5	* 2	MXTXPP	\$24,369
75	1200	575	405T	1550	B0756YLF4OSH	74	94.5	2	MXTXPP	\$24,369
100	3600	230/460	405TS	1569	B1002YLG3USH	124/112	95.0	*	MXTXPP	\$27,483
100	3600	575	405TS	1525	B1002YLG3OSH	90	95.0		MXTXPP	\$27,483
100	1800	230/460	405T	1571	B1004YLF3USH	132/116	95.4	*	MXTXPP	\$25,623
100	1800	575	405T	1539	B1004YLF3OSH	93	95.4		MXTXPP	\$25,623
100	1200	230/460	444T	2244	B1006YLF4USH	146/123	95.5	2	MXTXPP	\$33,871
100	1200	575	444T	2100	B1006YLF4OSH	99	95.5	2	MXTXPP	\$33,871
125	3600	230/460	444TS	1831	B1251YLG3USH	286/143	95.1	5	MXTXPP	\$34,442
125	3600	230/460	444TS	1831	B1253YLG3USH	286/143	95.1	* 4	MXTXPP	\$34,442
125	3600	575	444TS	1838	B1251YLG3OSH	116	95.2	5	MXTXPP	\$34,442
125	3600	575	444TS	1838	B1253YLG3OSH	116	95.2	4	MXTXPP	\$34,442
125	1800	230/460	444T	2230	B1254YLF4USH	288/144	95.7	* 2	MXTXPP	\$30,048
125	1800	575	444T	2202	B1254YLF4OSH	116	95.8	2	MXTXPP	\$30,048
125	1200	230/460	445T	1941	B1256YLF4USH	306/153	95	* 2	MXTXPP	\$36,392
125	1200	575	445T	2155	B1256YLF4OSH	122.8	95.0	2	MXTXPP	\$36,392
150	3600	230/460	445TS	2115	B1501YLG3USH	350/175	95.7	5	MXTXPP	\$40,313
150	3600	230/460	445TS	2115	B1503YLG3USH	350/175	95.7	* 4	MXTXPP	\$40,313
150	3600	575	445TS	2115	B1501YLG3OSH	140	95.7	5	MXTXPP	\$40,313
150	3600	575	445TS	2115	B1503YLG3OSH	140	95.7	4	MXTXPP	\$40,313
150	1800	230/460	445T	2356	B1504YLF4USH	354/177	95.8	* 2	MXTXPP	\$35,522
150	1800	575	445T	2164	B1504YLF4OMH	142	95.8	2	MXTXPP	\$35,522
200	3600	460	447TS	2445	B2001YLG3BSH	218	95.9	5	MXTXPP	\$49,194
200	3600	460	447TS	2550	B2003YLG3BSH	218	95.9	* 4	MXTXPP	\$49,194
200	3600	575	447TS	2445	B2001YLG3OSH	176	95.8	5	MXTXPP	\$49,194
200	3600	575	447TS	2445	B2003YLG3OSH	176	95.8	4	MXTXPP	\$49,194
200	1800	460	447T	2623	B2004YLF4BSH	232	96.2	* 2	MXTXPP	\$41,984
200	1800	575	447T	2626	B2004YLF4OSH	185	96.2	2	MXTXPP	\$41,984
200	1200	460	N449T	3728	2006XPEB41A	245	95.8	8	MXTXPP	\$45,372
200	1200	460	N449T	3700	2006XPEB41A-R	245	95.8	2	MXTXPP	\$46,572
200	1200	575	N449T	3700	2006XPEC41A	198	95.8	8	MXTXPP	\$45,372
200	1200	575	N449T	3700	2006XPEC41A-R	198	95.8	2	MXTXPP	\$46,572
250	3600	460	N449TS	3500	2503XPEB41B	275	95.8	4	MXTXPP	\$55,986
250	3600	575	N449TS	3500	2503XPEC41B	219	95.8	4	MXTXPP	\$55,986
250	1800	460	N449T	4022	2504XPEB41A	275	96.2	8	MXTXPP	\$48,625
250	1800	460	N449T	4000	2504XPEB41A-R	275	96.2	2	MXTXPP	\$49,875
250	1800	575	N449T	4000	2504XPEC41A	220	96.2	8	MXTXPP	\$48,625

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed Fan Cooled

EQP Global® XP

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
250	1800	575	N449T	4000	2504XPEC41A-R	220	96.2	2	MXTXPP	\$49,875
250	1200	460	N449T	3937	2506XPB41A	309	96.0	8	MXTXPP	\$51,679
250	1200	460	N449T	4000	2506XPB41A-R	309	95.8	2	MXTXPP	\$52,929
250	1200	460	N449TS	4000	2506XPB41B	309	95.8		MXTXPP	\$51,679
250	1200	575	N449T	4000	2506XPEC41A	243	95.8	8	MXTXPP	\$51,679
250	1200	575	N449T	4000	2506XPEC41A-R	243	95.8	2	MXTXPP	\$52,929
250	1200	575	N449TS	4000	2506XPEC41B	243	95.8		MXTXPP	\$51,679
250	900	460	509	3325	2508XPB41E-CM	339	95	12	MXTXPP	CF
250	900	575	509	3325	2508XPEC41E-CM	271	95	12	MXTXPP	CF
300	3600	460	N449TS	3900	3003XPB41B	327	95.8	4	MXTXPP	\$62,015
300	3600	575	N449TS	3900	3003XPEC41B	261	95.9	4	MXTXPP	\$62,015
300	1800	460	N449T	4058	3004XPB41A	331	96.2	8	MXTXPP	\$51,807
300	1800	460	N449T	4000	3004XPB41A-R	331	96.2	2	MXTXPP	\$53,057
300	1800	575	N449T	4000	3004XPEC41A	265	96.2	8	MXTXPP	\$51,807
300	1800	575	N449T	4000	3004XPEC41A-R	265	96.2	2	MXTXPP	\$53,057
300	1200	460	N449T	4000	3006XPB41A	375	95.8	8	MXTXPP	\$55,518
300	1200	460	N449T	4000	3006XPB41A-R	375	95.8	2	MXTXPP	\$56,768
300	1200	575	N449T	4000	3006XPEC41A	297	95.8	8	MXTXPP	\$55,518
300	1200	575	N449T	4000	3006XPEC41A-R	297	95.8	2	MXTXPP	\$56,768
300	900	460	509	3325	3008XPB41E-CM	393	95.4	12	MXTXPP	CF
300	900	575	509	3325	3008XPEC41E-CM	315	95	12	MXTXPP	CF
350	3600	460	N449T	3900	3503XPB41B	386	95.8	4	MXTXPP	\$64,378
350	3600	575	N449T	3900	3503XPEC41B	311	95.9	4	MXTXPP	\$64,378
350	1800	460	N449T	4119	3504XPB41A	388	96.2	8	MXTXPP	\$54,928
350	1800	460	N449T	4082	3504XPB41A-R	388	96.2	2	MXTXPP	\$56,178
350	1800	575	N449T	4000	3504XPEC41A	310	96.2	8	MXTXPP	\$54,928
350	1800	575	N449T	4000	3504XPEC41A-R	310	96.2	2	MXTXPP	\$56,178
350	1200	460	D509	4000	3506XPB11E-CM	408	95.8	12	MXTXPP	CF
350	1200	575	D509	4000	3506XPEC11E-CM	326	95.8	12	MXTXPP	CF
350	900	460	D509	4000	3508XPB41E-CM	452	95	12	MXTXPP	CF
350	900	575	D509	4000	3508XPEC41E-CM	361	95	12	MXTXPP	CF
400	3600	460	H509US	5000	4003XPB41F-CM	420	95.8	4, 12	MXTXPP	CF
400	3600	575	H509US	5000	4003XPEC41F-CM	336	95.8	4, 12	MXTXPP	CF
400	1800	460	509	3325	4004XPB41E-CM	444	96.2	12	MXTXPP	CF
400	1800	575	509	3325	4004XPEC41E-CM	355	96.2	12	MXTXPP	CF
400	1200	460	D509	4000	4006XPB41E-CM	465	95.8	12	MXTXPP	CF
400	1200	575	D509	4000	4006XPEC41E-CM	372	95.8	12	MXTXPP	CF
400	900	460	H509	5000	4008XPB41E-CM	506	95	12	MXTXPP	CF
400	900	575	H509	5000	4008XPEC41E-CM	405	95	12	MXTXPP	CF
450	3600	460	H509US	5000	4503XPB41F-CM	472	95.8	4, 12	MXTXPP	CF
450	3600	575	H509US	5000	4503XPEC41F-CM	377	95.8	4, 12	MXTXPP	CF
450	1800	460	D509	4000	4504XPB41E-CM	499	96.2	12	MXTXPP	CF
450	1800	575	D509	4000	4504XPEC41E-CM	399	96.2	12	MXTXPP	CF
450	1200	460	H509	5000	4506XPB41E-CM	520	95.8	12	MXTXPP	CF
450	1200	575	H509	5000	4506XPEC41E-CM	416	95.8	12	MXTXPP	CF
450	900	460	5811	6900	4508XPB41E-CM	565	95	12	MXTXPP	CF
450	900	575	5811	6900	4508XPEC41E-CM	452	95	12	MXTXPP	CF
500	3600	460	5810S	6200	5003XPB41F-CM	524	95.8	4, 12	MXTXPP	CF
500	3600	575	5810S	6200	5003XPEC41F-CM	419	95.8	4, 12	MXTXPP	CF

Totally Enclosed Fan Cooled

EQP Global® XP

➤ NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
500	1800	460	H509	5000	5004XPEB41E-CM	553	96.2	12	MXTXPP	CF
500	1800	575	H509	5000	5004XPEC41E-CM	443	96.2	12	MXTXPP	CF
500	1200	460	H509	5000	5006XPEB41E-CM	577	95.8	12	MXTXPP	CF
500	1200	575	H509	5000	5006XPEC41E-CM	461	95.8	12	MXTXPP	CF
500	900	460	688	7000	5008XPEB41E-CM	617	95	12	MXTXPP	CF
500	900	575	688	7000	5008XPEC41E-CM	493	95	12	MXTXPP	CF
600	3600	460	5811USS	6900	6003XPEB11F-CM	628	95.4	4, 12	MXTXPP	CF
600	3600	575	5811USS	6900	6003XPEC11F-CM	502	95.4	4, 12	MXTXPP	CF
600	1800	460	5810	6200	6004XPEB11E-CM	662	95.4	12	MXTXPP	CF
600	1800	575	5810	6200	6004XPEC11E-CM	530	95.4	12	MXTXPP	CF
600	1200	460	688	7000	6006XPEB11E-CM	688	95	12	MXTXPP	CF
600	1200	575	688	7000	6006XPEC11E-CM	550	95	12	MXTXPP	CF
600	900	460	6809	11000	6008XPEB11E-CM	722	94.1	12	MXTXPP	CF
600	900	575	6809	11000	6008XPEC11E-CM	578	94.1	12	MXTXPP	CF
700	3600	460	6810USS	11500	7003XPEB11F-CM	732	95.4	4, 10, 12	MXTXPP	CF
700	3600	575	6810USS	11500	7003XPEC11F-CM	575	95.4	4, 10, 12	MXTXPP	CF
700	1800	460	6809	11000	7004XPEB11E-CM	771	95.8	12	MXTXPP	CF
700	1800	575	6809	11000	7004XPEC11E-CM	617	95.8	12	MXTXPP	CF
700	1200	460	6809	11000	7006XPEB11E-CM	800	95	12	MXTXPP	CF
700	1200	575	6809	11000	7006XPEC11E-CM	640	95	12	MXTXPP	CF
700	900	460	6810	11500	7008XPEB11E-CM	826	94.1	12	MXTXPP	CF
700	900	575	6810	11500	7008XPEC11E-CM	661	94.1	12	MXTXPP	CF
800	3600	460	6811USS	12500	8003XPEB11F-CM	836	95.8	4, 10, 12	MXTXPP	CF
800	3600	575	6811USS	12500	8003XPEC11F-CM	669	95.8	4, 10, 12	MXTXPP	CF
800	1800	460	6810	11500	8004XPEB11E-CM	880	96.2	12	MXTXPP	CF
800	1800	575	6810	11500	8004XPEC11E-CM	704	96.2	12	MXTXPP	CF
800	1200	460	6810	11500	8006XPEB11E-CM	913	95	12	MXTXPP	CF
800	1200	575	6810	11500	8006XPEC11E-CM	730	95	12	MXTXPP	CF
800	900	460	6811	12500	8008XPEB11E-CM	930	95.4	12	MXTXPP	CF
800	900	575	6811	12500	8008XPEC11E-CM	744	95.4	12	MXTXPP	CF
900	1800	460	6811	12500	9004XPEB11E-CM	987	96.2	12	MXTXPP	CF
900	1800	575	6811	12500	9004XPEC11E-CM	790	96.2	12	MXTXPP	CF
900	1200	460	6811	12500	9006XPEB11E-CM	1020	95	12	MXTXPP	CF
900	1200	575	6811	12500	9006XPEC11E-CM	816	95	12	MXTXPP	CF
900	900	460	6811	12500	9008XPEB11E-CM	1034	95.4	12	MXTXPP	CF
900	900	575	6811	12500	9008XPEC11E-CM	827	95.4	12	MXTXPP	CF
1000	1800	460	6811	12500	M204XPEB11E-CM	1096	96.2	12	MXTXPP	CF
1000	1800	575	6811	12500	M204XPEC11E-CM	877	96.2	12	MXTXPP	CF
1000	1200	460	6811	12500	M206XPEB11E-CM	1130	95	12	MXTXPP	CF
1000	1200	575	6811	12500	M206XPEC11E-CM	904	95	12	MXTXPP	CF

FL Amps and FL EFF are average expected design values and not guaranteed.

The weights listed above are estimated.

Please contact Toshiba for information on product availability.

"CF"= Consult Factory

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed Fan Cooled

EQP Global® XP C-Face

> NEMA Premium® Efficiency



3

THREE YEAR WARRANTY



Toshiba's EQP Global® XP C-Face Footed explosion proof motors are equipped to contain an explosion that may occur inside a motor, as well as prevent explosive gases and vapors from being released into the environment. Its robust construction meets the UL and CSA Listed Hazardous Locations requirements. This product line is designed for use in Class I, Division 1, Group D, and Class II, Division 1, Groups E, F, and G and carries a temperature code rating of T3C (160°C). It is ideal for indoor and outdoor use and offers the performance and reliability the motor industry has come to expect from Toshiba, which makes the EQP Global® XP motor the clear choice for your toughest environments and applications.

Product Scope:*

Horsepower:	1 to 75 HP
Speed:	3600, 1800, or 1200 RPM
Voltage:	230/460 or 575 V
Enclosure:	Totally Enclosed Fan Cooled
Frame Size:	143TC through 365TC
Construction:	Cast Iron
Insulation:	Class F
* Contact Toshiba for additional C-Face capabilities.	

HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
C-Face Footed										
1	1800	230/460	143TC	75	0014XPEA42A-P	3.4/1.7	85.5	* 1, 16	MTPXPP	\$1,081
1	1800	575	143TC	75	0014XPEC42A-P	1.3	85.6	* 1, 16	MTPXPP	\$1,081
1	1200	230/460	145TC	79	0016XPEA42A-P	3.6/1.8	82.9	* 1, 16	MTPXPP	\$1,144
1	1200	575	145TC	77	0016XPEC42A-P	1.5	82.9	* 1, 16	MTPXPP	\$1,144
1.5	3600	230/460	143TC	66	Y152XPEA42A-P	4.0/2.0	84.0	1, 16	MTPXPP	\$1,127
1.5	3600	575	143TC	77	Y152XPEC42A-P	1.6	84.0	1, 16	MTPXPP	\$1,127
1.5	1800	230/460	145TC	75	Y154XPEA42A-P	4.8/2.4	86.5	* 1, 16	MTPXPP	\$1,151
1.5	1800	575	145TC	75	Y154XPEC42A-P	1.9	86.5	* 1, 16	MTPXPP	\$1,151
1.5	1200	230/460	182TC	82	Y156XPEA42A-P	5/2.5	87.7	1, 16	MTPXPP	\$1,251
1.5	1200	575	182TC	82	Y156XPEC42A-P	2	87.5	1, 16	MTPXPP	\$1,251
2	3600	230/460	145TC	77	0022XPEA42A-P	5.2/2.6	85.6	* 1, 16	MTPXPP	\$1,158
2	3600	575	145TC	77	0022XPEC42A-P	2.1	85.5	1, 16	MTPXPP	\$1,158
2	1800	230/460	145TC	77	0024XPEA42A-P	6/3	86.5	* 1, 16	MTPXPP	\$1,157
2	1800	575	145TC	77	0024XPEC42A-P	2.4	86.5	* 1, 16	MTPXPP	\$1,157
2	1200	230/460	184TC	136	0026XPEA42A-P	6.8/3.4	88.5	* 1, 16	MTPXPP	\$1,403
2	1200	575	184TC	136	0026XPEC42A-P	2.7	88.5	1, 16	MTPXPP	\$1,403
3	3600	230/460	182TC	112	0032XPEA42A-P	7.4/3.7	86.7	* 1, 16	MTPXPP	\$1,330
3	3600	575	182TC	112	0032XPEC42A-P	3	86.7	1, 16	MTPXPP	\$1,330
3	1800	230/460	182TC	117	0034XPEA42A-P	8/4	89.5	* 1, 16	MTPXPP	\$1,425
3	1800	575	182TC	121	0034XPEC42A-P	3.2	89.5	* 1, 16	MTPXPP	\$1,425
3	1200	230/460	213TC	216	0036XPEA42A-P	8.8/4.4	89.6	* 1, 16	MTPXPP	\$1,757
3	1200	575	213TC	216	0036XPEC42A-P	3.5	89.8	* 1, 16	MTPXPP	\$1,757
5	3600	230/460	184TC	126	0052XPEA42A-P	11.6/5.8	88.7	* 1, 16	MTPXPP	\$1,578

Totally Enclosed Fan Cooled

EQP Global® XP C-Face

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
5	3600	575	184TC	126	0052XPEC42A-P	4.6	88.7	* 1, 16	MTPXPP	\$1,578
5	1800	230/460	184TC	121	0054XPEA42A-P	13/6.5	89.7	* 1, 16	MTPXPP	\$1,548
5	1800	575	184TC	128	0054XPEC42A-P	5.2	89.5	* 1, 16	MTPXPP	\$1,548
5	1200	230/460	215TC	233	0056XPEA42A-P	13.8/6.9	89.6	* 1, 16	MTPXPP	\$2,168
5	1200	575	215TC	233	0056XPEC42A-P	5.5	89.6	1, 16	MTPXPP	\$2,168
7.5	3600	575	213TC	220	Y752XPEC42A-P	7.2	89.5	1, 16	MTPXPP	\$2,096
7.5	3600	230/460	213TC	220	Y752XPEA42A-P	18/9	89.5	* 1, 16	MTPXPP	\$2,096
7.5	1800	230/460	213TC	243	Y754XPEA42A-P	19.6/9.8	91.7	* 1, 16	MTPXPP	\$2,057
7.5	1800	575	213TC	243	Y754XPEC42A-P	7.8	91.7	* 1, 16	MTPXPP	\$2,057
7.5	1200	230/460	254TC	355	Y756XPEA42A-P	20.4/10.2	91.0	* 1, 16	MTPXPP	\$2,840
7.5	1200	575	254TC	327	Y756XPEC42A-P	8.2	91.0	* 1, 16	MTPXPP	\$2,840
10	3600	230/460	215TC	242	0102XPEA42A-P	23.6/11.8	90.2	* 1, 16	MTPXPP	\$2,189
10	3600	575	215TC	242	0102XPEC42A-P	9.4	91.7	1, 16	MTPXPP	\$2,189
10	1800	230/460	215TC	254	0104XPEA42A-P	26/13	91.8	* 1, 16	MTPXPP	\$2,343
10	1800	575	215TC	253	0104XPEC42A-P	10.4	91.8	* 1, 16	MTPXPP	\$2,343
10	1200	230/460	256TC	1544	0106XPEA42A-P	26.8/13.4	91.3	1, 16	MTPXPP	\$3,380
10	1200	575	256TC	314	0106XPEC42A-P	10.8	91.0	* 1, 16	MTPXPP	\$3,380
15	3600	230/460	254TC	366	0152XPEA42A-P	36/18	91.2	* 1, 16	MTPXPP	\$2,859
15	3600	575	254TC	373	0152XPEC42A-P	14.4	91.4	1, 16	MTPXPP	\$2,859
15	1800	230/460	254TC	384	0154XPEA42A-P	38/19	92.6	* 1, 16	MTPXPP	\$3,220
15	1800	575	254TC	384	0154XPEC42A-P	15.2	92.6	* 1, 16	MTPXPP	\$3,220
15	1200	230/460	284TC	549	0156XPEA42A-P	40/20	91.9	* 1	MTPXPP	\$4,783
15	1200	575	284TC	549	0156XPEC42A-P	15.8	91.8	1	MTPXPP	\$4,783
20	3600	230/460	256TC	379	0202XPEA42A-P	48/24	91.3	1, 16	MTPXPP	\$3,701
20	3600	575	256TC	379	0202XPEC42A-P	19.2	91.3	* 1, 16	MTPXPP	\$3,701
20	1800	230/460	256TC	423	0204XPEA42A-P	50/25	93.3	* 1, 16	MTPXPP	\$3,699
20	1800	575	256TC	423	0204XPEC42A-P	20	93.2	* 1, 16	MTPXPP	\$3,699
20	1200	230/460	286TC	589	0206XPEA42A-P	50/25	91.8	* 1	MTPXPP	\$5,319
20	1200	575	286TC	589	0206XPEC42A-P	20	91.9	1	MTPXPP	\$5,319
25	3600	230/460	284TSC	560	0252XPEA42B-P	91.7	91.7	1	MTPXPP	\$4,601
25	3600	575	284TSC	560	0252XPEC42B-P	91.7	91.7	1	MTPXPP	\$4,601
25	1800	230/460	284TC	604	0254XPEA42A-P	62/31	93.8	* 1	MTPXPP	\$5,157
25	1800	575	284TC	792	0254XPEC42A-P	24	93.6	* 1	MTPXPP	\$5,157
25	1200	230/460	324TC	616	0256XPEA42A-P	62/31	93.3	* 1	MTPXPP	\$6,484
25	1200	575	324TC	616	0256XPEC42A-P	25	93.3	1	MTPXPP	\$6,484
30	3600	230/460	286TSC	591	0302XPEA42B-P	70/35	91.9	* 1	MTPXPP	\$5,294
30	3600	575	286TSC	591	0302XPEC42B-P	28	91.7	1	MTPXPP	\$5,294
30	1800	230/460	286TC	628	0304XPEA42A-P	72/36	93.8	* 1	MTPXPP	\$5,433
30	1800	575	286TC	500	0304XPEC42A-P	29	93.8	* 1	MTPXPP	\$5,433
30	1200	230/460	326TC	794	0306XPEA42A-P	74/37	93.3	* 1	MTPXPP	\$7,728
30	1200	575	326TC	794	0306XPEC42A-P	30	93.3	1	MTPXPP	\$7,728
40	3600	230/460	324TSC	754	0402XPEA42B-P	94/47	92.5	1	MTPXPP	\$7,260
40	3600	575	324TSC	754	0402XPEC42B-P	37.6	92.4	1	MTPXPP	\$7,260
40	1800	230/460	324TC	813	0404XPEA42A-P	96/48	94.1	* 1	MTPXPP	\$7,510
40	1800	575	324TC	794	0404XPEC42A-P	38	94.1	* 1	MTPXPP	\$7,510
40	1200	230/460	364TC	968	0406XPEA42A-P	96/48	94.1	* 1	MTPXPP	\$9,995
40	1200	575	364TC	968	0406XPEC42A-P	38	94.1	1	MTPXPP	\$9,995
50	3600	230/460	326TSC	772	0502XPEA42B-P	116/58	93.0	* 1	MTPXPP	\$8,884
50	3600	575	326TSC	772	0502XPEC42B-P	46.4	93.0	1	MTPXPP	\$8,884

Totally Enclosed Fan Cooled

EQP Global® XP C-Face

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
50	1800	230/460	326TC	862	0504XPEA42A-P	120/60	94.5	* 1	MTPXPP	\$8,520
50	1800	575	326TC	855	0504XPEC42A-P	48	94.5	* 1	MTPXPP	\$8,520
50	1200	230/460	365TC	1010	0506XPEA42A-P	120/60	94.1	* 1	MTPXPP	\$10,081
50	1200	575	365TC	1010	0506XPEC42A-P	48	94.1	1	MTPXPP	\$10,081
60	3600	230/460	364TSC	1014	0602XPEA42B-P	138/69	93.6	* 1	MTPXPP	\$10,471
60	3600	575	364TSC	1014	0602XPEC42B-P	55	93.7	1	MTPXPP	\$10,471
60	1800	230/460	364TC	1049	0604XPEA42A-P	138/69	95.1	* 1	MTPXPP	\$10,443
60	1800	575	364TC	1038	0604XPEC42A-P	55	95.1	* 1	MTPXPP	\$10,443
75	3600	230/460	365TSC	984	0752XPEA42B-P	172/86	93.6	1	MTPXPP	\$12,268
75	3600	575	365TSC	984	0752XPEC42B-P	69	93.8	1	MTPXPP	\$12,268
75	1800	230/460	365TC	1127	0754XPEA42A-P	169.2/84.6	95.4	* 1	MTPXPP	\$12,070
75	1800	575	365TC	1107	0754XPEC42A-P	69	95.4	* 1	MTPXPP	\$12,070
C-Face Footless										
1	1800	230/460	143TC	75	0014XPEA44A-P	3.4/1.7	85.5	1	MTPXPP	\$1,081
1	1800	575	143TC	75	0014XPEC44A-P	1.3	85.6	1	MTPXPP	\$1,081
1	1200	230/460	145TC	79	0016XPEA44A-P	3.6/1.8	82.9	1	MTPXPP	\$1,144
1	1200	575	145TC	77	0016XPEC44A-P	1.5	82.9	1	MTPXPP	\$1,144
1.5	3600	230/460	143TC	66	Y152XPEA44A-P	4.0/2.0	84.0	1	MTPXPP	\$1,127
1.5	3600	575	143TC	77	Y152XPEC44A-P	1.6	84.0	1	MTPXPP	\$1,127
1.5	1800	230/460	145TC	75	Y154XPEA44A-P	4.8/2.4	86.5	1	MTPXPP	\$1,151
1.5	1800	575	145TC	75	Y154XPEC44A-P	1.9	86.5	1	MTPXPP	\$1,151
1.5	1200	230/460	182TC	82	Y156XPEA44A-P	5.0/2.5	87.7	1	MTPXPP	\$1,251
1.5	1200	575	182TC	82	Y156XPEC44A-P	2	87.5	1	MTPXPP	\$1,251
2	3600	230/460	145TC	77	0022XPEA44A-P	5.2/2.6	85.6	1	MTPXPP	\$1,158
2	3600	575	145TC	77	0022XPEC44A-P	2.1	85.5	1	MTPXPP	\$1,158
2	1800	230/460	145TC	77	0024XPEA44A-P	6/3	86.5	1	MTPXPP	\$1,157
2	1800	575	145TC	77	0024XPEC44A-P	2.4	86.5	1	MTPXPP	\$1,157
2	1200	230/460	184TC	136	0026XPEA44A-P	6.8/3.4	88.5	1	MTPXPP	\$1,403
2	1200	575	184TC	136	0026XPEC44A-P	2.7	88.5	1	MTPXPP	\$1,403
3	3600	230/460	182TC	112	0032XPEA44A-P	7.4/3.7	86.7	1	MTPXPP	\$1,330
3	3600	575	182TC	112	0032XPEC44A-P	3	86.7	1	MTPXPP	\$1,330
3	1800	230/460	182TC	117	0034XPEA44A-P	8/4	89.5	1	MTPXPP	\$1,425
3	1800	575	182TC	121	0034XPEC44A-P	3.2	89.5	1	MTPXPP	\$1,425
3	1200	230/460	213TC	216	0036XPEA44A-P	8.8/4.4	89.6	1	MTPXPP	\$1,757
3	1200	575	213TC	216	0036XPEC44A-P	3.5	89.8	1	MTPXPP	\$1,757
5	3600	230/460	184TC	126	0052XPEA44A-P	11.6/5.8	88.7	1	MTPXPP	\$1,578
5	3600	575	184TC	126	0052XPEC44A-P	4.6	88.7	1	MTPXPP	\$1,578
5	1800	230/460	184TC	121	0054XPEA44A-P	13/6.5	89.7	1	MTPXPP	\$1,548
5	1800	575	184TC	128	0054XPEC44A-P	5.2	89.5	1	MTPXPP	\$1,548
5	1200	230/460	215TC	233	0056XPEA44A-P	13.8/6.9	89.6	1	MTPXPP	\$2,168
5	1200	575	215TC	233	0056XPEC44A-P	5.5	89.6	1	MTPXPP	\$2,168
7.5	3600	230/460	213TC	220	Y752XPEA44A-P	18/9	89.5	1	MTPXPP	\$2,096
7.5	3600	575	213TC	220	Y752XPEC44A-P	7.2	89.5	1	MTPXPP	\$2,096
7.5	1800	230/460	213TC	243	Y754XPEA44A-P	19.6/9.8	91.7	1	MTPXPP	\$2,057
7.5	1800	575	213TC	243	Y754XPEC44A-P	7.8	91.7	1	MTPXPP	\$2,057
7.5	1200	230/460	254TC	355	Y756XPEA44A-P	20.4/10.2	91.0	1	MTPXPP	\$2,840
7.5	1200	575	254TC	327	Y756XPEC44A-P	8.2	91.0	1	MTPXPP	\$2,840

Totally Enclosed Fan Cooled

EQP Global® XP C-Face

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
10	3600	230/460	215TC	242	0102XPEA44A-P	23.6/11.8	90.2	1	MTPXPP	\$2,189
10	3600	575	215TC	242	0102XPEC44A-P	9.4	91.7	1	MTPXPP	\$2,189
10	1800	230/460	215TC	254	0104XPEA44A-P	26/13	91.8	1	MTPXPP	\$2,343
10	1800	575	215TC	253	0104XPEC44A-P	10.4	91.8	1	MTPXPP	\$2,343
10	1200	230/460	256TC	1544	0106XPEA44A-P	26.8/13.4	91.3	1	MTPXPP	\$3,380
10	1200	575	256TC	314	0106XPEC44A-P	10.8	91.0	1	MTPXPP	\$3,380
15	3600	230/460	254TC	366	0152XPEA44A-P	36/18	91.2	1	MTPXPP	\$2,859
15	3600	575	254TC	373	0152XPEC44A-P	14.4	91.4	1	MTPXPP	\$2,859
15	1800	230/460	254TC	384	0154XPEA44A-P	38/19	92.6	1	MTPXPP	\$3,220
15	1800	575	254TC	384	0154XPEC44A-P	15.2	92.6	1	MTPXPP	\$3,220
20	3600	230/460	256TC	379	0202XPEA44A-P	48/24	91.3	1	MTPXPP	\$3,701
20	3600	575	256TC	379	0202XPEC44A-P	19.2	91.3	1	MTPXPP	\$3,701
20	1800	230/460	256TC	423	0204XPEA44A-P	50/25	93.3	1	MTPXPP	\$3,699
20	1800	575	256TC	423	0204XPEC44A-P	20	93.2	1	MTPXPP	\$3,699

FL Amps and FL EFF are average expected design values and not guaranteed.

The weights listed above are estimated.

Please contact Toshiba for information on product availability.

"CF"= Consult Factory

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

MV Modifications	MV Definite Purpose	MV Gen. Purp. Enclosed	MV General Purpose Open	LV Mods. (Stock & Prod)	Definite Purpose	IEC	Explosion Proof	TEFC General Purpose	ODP General Purpose

IEC Motors

Totally Enclosed Fan Cooled

COMING SOON

Toshiba is proud to introduce the new IEC motors including the EQP Global® and the Tosh-ECO™ Series product lines. This cutting-edge motor product line is designed to meet or exceed the competitive demands of the global market, as well as the requirements of the IEC 60034, while maintaining the high reliability and quality expected from Toshiba.

Available Features:

- IE3 Efficiency Levels per IEC 60034-30
- Meets or Exceeds Global Standard Specifications such as IEC 60034, 60072, 60204-1, 60038, & 60721
- Single Frequency 50 Hz Design Tosh-ECO™
- Dual Frequency 50/60 Hz Design EQP Global®
- Multi-mount 355 Frame
- Aluminum Frame with Removable Base for 80 through 180 Frames, Cast Iron with Removable Base 160-250 Frames for Tosh-ECO
- Available Interchangeable Flange Options (B5/B35 and B14/34)
- EQP® Global IEC:
 - Aluminum - 160 & Smaller Frame
 - Cast Iron - 160 & Larger Frame
- Non-NAFTA Tosh-ECO & Global IEC Ratings
- 1.0 SF Tosh-ECO

Applications:

- Pumps
- Fans
- Conveyors
- Compressors



Totally Enclosed Fan Cooled

EQP Global® IEC Motors

> Premium Efficiency



3

THREE YEAR WARRANTY



This cutting-edge motor product line is designed to meet or exceed the competitive demands of the global market, as well as the requirements of the IEC 60034, while maintaining the high reliability and quality expected from Toshiba.

The EQP Global IEC motor series is designed for severe duty applications. Building on over 20 years of success with the EQPIII motor series, the EQP Global IEC features multiple new design enhancements that make it one of the lowest cost-of-ownership products in the industry.

The EQP philosophy extends beyond great products. Toshiba provides solutions and Global Supply Chain Management Systems (GSCMS) to meet the evolving needs of global customers.

Product Scope:

Power:	.75 to 45 kw
Speed	
(50 Hz)*	3000, 1500, or 1000 RPM
(60 Hz):	3600, 1800, or 1200 RPM
Voltage	
(50 Hz)*	230/400, 208/415, 220/380, or 400 V
(60 Hz):	460 V
Enclosure:	Totally Enclosed Fan Cooled (IC411)
Frame Size:	80M through 225S
Ingress	
Protection:	IP55
Construction:	Aluminum Fin Type (80-160 Frame) Cast Iron (180-225 Frame)
Environment:	Suitable for Indoor or Outdoor Use in Severe Duty Applications
*50/60 Hz Listed on Nameplate on .75 through 45 kw	

KW	Speed (RPM)	Volts	Frame	Weight (kgs)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
Footed										
0.75	1800	230/400	80M		X754SDMV7FS-PL	3.3/1.9	82.5	1, 9	MTPIEC	CF
0.75	1200	230/400	80M		X756SDMV7FS-PL	3.5/2	78.9	1, 9	MTPIEC	CF
1.1	3600	230/400	80M		Y112SDMV7FS-PL	3.8/2.2	82.7	1, 9	MTPIEC	CF
1.1	1800	230/400	90L		Y114SDMV7FS-PL	4.3/2.5	84.1	* 1, 9	MTPIEC	\$536
1.1	1200	230/400	90L		Y116SDMV7FS-PL	5.2/3	81.0	* 1, 9	MTPIEC	\$677
1.5	3600	230/400	90L		Y152SDMV7FS-PL	5.2/3	84.2	* 1, 9	MTPIEC	\$578
1.5	1800	230/400	90L		Y154SDMV7FS-PL	5.9/3.4	85.3	* 1, 9	MTPIEC	\$609
1.5	1200	230/400	100L		Y156SDMV7FS-PL	6.9/4	82.5	* 1, 9	MTPIEC	\$784
2.2	3600	230/400	90L		Y222SDMV7FS-PL	7.5/4.3	85.9	* 1, 9	MTPIEC	\$712
2.2	1800	230/400	100L		Y224SDMV7FS-PL	9.2/5.3	86.7	* 1, 9	MTPIEC	\$700
2.2	1200	230/400	112M		Y226SDMV7FS-PL	9/5.2	84.3	* 1, 9	MTPIEC	\$997
3	3600	230/400	100L		0032SDMV7FS-PL	9.7/5.6	87.1	* 1, 9	MTPIEC	\$797
3	1800	230/400	100L		0034SDMV7FS-PL	12/6.9	87.7	* 1, 9	MTPIEC	\$768
3	1200	230/400	132S		0036SDMV7FS-PL	11.7/6.8	85.6	* 1, 9	MTPIEC	\$1,231
4	3600	230/400	112M		0042SDMV7FS-PL	12.5/7.2	88.1	* 1, 9	MTPIEC	\$882

Totally Enclosed Fan Cooled

EQP Global® IEC Motors

> Premium Efficiency



KW	Speed (RPM)	Volts	Frame	Weight (kgs)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
4	1800	230/400	112M		0044SDMV7FS-PL	14.9/8.6	88.6	* 1, 9	MTPIEC	\$835
4	1200	230/400	132M		0046SDMV7FS-PL	15.3/8.8	86.8	* 1, 9	MTPIEC	\$1,465
5.5	3600	230/400	132S		Y552SDMV7FS-PL	18/10.4	89.2	* 1, 9	MTPIEC	\$1,143
5.5	1800	230/400	132S		Y554SDMV7FS-PL	20.4/11.8	89.6	* 1, 9	MTPIEC	\$1,143
5.5	1200	230/400	132M		Y556SDMV7FS-PL	20.4/11.8	88.0	* 1, 9	MTPIEC	\$1,945
7.5	3600	230/400	132M		Y752SDMV7FS-PL	25.1/14.5	90.1	* 1, 9	MTPIEC	\$1,371
7.5	1800	230/400	132M		Y754SDMV7FS-PL	26.3/15.2	90.4	* 1, 9	MTPIEC	\$1,390
7.5	1200	400	160M		Y756SDMW7FS-PL	27/15.6	89.1	* 1, 9	MTPIEC	\$2,376
11	3600	400	160M		0112SDMW7FS-PL	21	91.2	* 1, 9	MTPIEC	\$1,885
11	1800	400	160M		0114SDMW7FS-PL	23.2	91.4	* 1, 9	MTPIEC	\$1,877
11	1200	400	160L		0116SDMW7FS-PL	22.8	90.3	* 1, 9	MTPIEC	\$3,332
15	3600	400	160M		0152SDMW7FS-PL	29	91.9	* 1, 9	MTPIEC	\$2,442
15	1800	400	160L		0154SDMW7FS-PL	29.8	92.1	* 1, 9	MTPIEC	\$2,318
15	1200	400	180L		0156SDMW7FS-P	31.4	91.2	* 1, 9	MTPIEC	\$3,903
18.5	3600	400	160L		0182SDMW7FS-PL	35	92.4	* 1, 9	MTPIEC	\$2,998
18.5	1800	400	180M		0184SDMW7FS-P	37.1	92.6	* 1, 9	MTPIEC	\$2,812
18.5	1200	400	200L		0186SDMW7FS-P	39.4	91.7	* 1, 9	MTPIEC	\$4,737
22	3600	400	180M		0222SDMW7FS-P	39	92.7	* 1, 9	MTPIEC	\$3,444
22	1800	400	180L		0224SDMW7FS-P	42.1	93.0	* 1, 9	MTPIEC	\$3,380
22	1200	400	200L		0226SDMW7FS-P	45.4	92.2	* 1, 9	MTPIEC	\$5,783
30	3600	400	200L		0302SDMW7FS-P	55	93.3	* 1, 9	MTPIEC	\$4,337
30	1800	400	200L		0304SDMW7FS-P	57.6	93.6	* 1, 9	MTPIEC	\$4,370
30	1200	400	225S		0306SDMW7FS-P	60.8	92.9	* 1, 9	MTPIEC	\$7,566
37	3600	400	200L		0372SDMW7FS-P	72.4	93.9	1, 9	MTPIEC	\$6,014
37	1800	400	225S		0374SDMW7FS-P	72.4	93.9	* 1, 9	MTPIEC	\$5,330
45	3600	400	225S		0452SDMW7FS-P	80	94.0	* 1, 9	MTPIEC	\$7,411
45	1800	400	225S		0454SDMW7FS-P	86	94.2	* 1, 9	MTPIEC	\$7,511
D-Flange Footed Type (B35 & B34)										
0.75	3600	230/400	80M		X752SDMV7GS-PL	2.7/1.6	80.7	1, 9	MTPIEC	CF
0.75	1800	230/400	80M		X754SDMV7GS-PL	3.3/1.9	82.5	1, 9	MTPIEC	CF
0.75	1200	230/400	80M		X756SDMV7GS-PL	3.5/2	78.9	1, 9	MTPIEC	CF
1.1	3600	230/400	80M		Y112SDMV7GS-PL	3.8/2.2	82.7	* 1, 9	MTPIEC	CF
1.1	1800	230/400	90L		Y114SDMV7GS-PL	4.3/2.5	84.1	* 1, 9	MTPIEC	\$563
1.1	1200	230/400	90L		Y116SDMV7GS-PL	5.2/3	81.0	* 1, 9	MTPIEC	\$711
1.5	3600	230/400	90L		Y152SDMV7GS-PL	5.2/3	84.2	* 1, 9	MTPIEC	\$607
1.5	1800	230/400	90L		Y154SDMV7GS-PL	5.9/3.4	85.3	* 1, 9	MTPIEC	\$639
1.5	1200	230/400	100L		Y156SDMV7GS-PL	6.9/4	82.5	* 1, 9	MTPIEC	\$823
2.2	3600	230/400	90L		Y222SDMV7GS-PL	7.5/4.3	85.9	* 1, 9	MTPIEC	\$748
2.2	1800	230/400	100L		Y224SDMV7GS-PL	9.2/5.3	86.7	* 1, 9	MTPIEC	\$735
2.2	1200	230/400	112M		Y226SDMV7GS-PL	9/5.2	84.3	* 1, 9	MTPIEC	\$1,047
3	3600	230/400	100L		0032SDMV7GS-PL	9.7/5.6	87.1	* 1, 9	MTPIEC	\$837
3	1800	230/400	100L		0034SDMV7GS-PL	12/6.9	87.7	* 1, 9	MTPIEC	\$806
3	1200	230/400	132S		0036SDMV7GS-PL	11.7/6.8	85.6	* 1, 9	MTPIEC	\$1,293
4	3600	230/400	112M		0042SDMV7GS-PL	12.5/7.2	88.1	* 1, 9	MTPIEC	\$926
4	1800	230/400	112M		0044SDMV7GS-PL	14.9/8.6	88.6	* 1, 9	MTPIEC	\$877
4	1200	230/400	132M		0046SDMV7GS-PL	15.3/8.8	86.8	* 1, 9	MTPIEC	\$1,538
5.5	3600	230/400	132S		Y552SDMV7GS-PL	18/10.4	89.2	* 1, 9	MTPIEC	\$1,200
5.5	1800	230/400	132S		Y554SDMV7GS-PL	20.4/11.8	89.6	* 1, 9	MTPIEC	\$1,200

Totally Enclosed Fan Cooled

EQP Global® IEC Motors

> Premium Efficiency



KW	Speed (RPM)	Volts	Frame	Weight (kgs)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
5.5	1200	230/400	132M		Y556SDMV7GS-PL	20.4/11.8	88.0	* 1, 9	MTPIEC	\$2,042
7.5	3600	230/400	132M		Y752SDMV7GS-PL	25.1/14.5	90.1	* 1, 9	MTPIEC	\$1,440
7.5	1800	230/400	132M		Y754SDMV7GS-PL	26.3/15.2	90.4	* 1, 9	MTPIEC	\$1,460
7.5	1200	400	160M		Y756SDMV7GS-PL	27/15.6	89.1	* 1, 9	MTPIEC	\$2,495
11	3600	400	160M		0112SDMW7GS-PL	21	91.2	* 1, 9	MTPIEC	\$1,979
11	1800	400	160M		0114SDMW7GS-PL	23.2	91.4	* 1, 9	MTPIEC	\$1,971
11	1200	400	160L		0116SDMW7GS-PL	22.8	90.3	* 1, 9	MTPIEC	\$3,499
15	3600	400	160M		0152SDMW7GS-PL	29	91.9	* 1, 9	MTPIEC	\$2,564
15	1800	400	160L		0154SDMW7GS-PL	29.8	92.1	* 1, 9	MTPIEC	\$2,434
18.5	3600	400	160L		0182SDMW7GS-PL	35	92.4	* 1, 9	MTPIEC	\$3,148
D-Flange Footless Type (B5 & B14)										
0.75	3600	230/400	80M		X752SDMV7JS-PL	2.7/1.6	80.7	1, 9	MTPIEC	CF
0.75	1800	230/400	80M		X754SDMV7JS-PL	3.3/1.9	82.5	1, 9	MTPIEC	CF
0.75	1200	230/400	90S		X756SDMV7JS-PL	3.5/2	78.9	1, 9	MTPIEC	CF
1.1	3600	230/400	80M		Y112SDMV7JS-PL	3.8/2.2	82.7	1, 9	MTPIEC	CF
1.1	1800	230/400	90L		Y114SDMV7JS-PL	4.3/2.5	84.1	1, 9	MTPIEC	\$590
1.1	1200	230/400	90L		Y116SDMV7JS-PL	5.2/3	81.0	1, 9	MTPIEC	\$745
1.5	3600	230/400	90L		Y152SDMV7JS-PL	5.2/3	84.2	1, 9	MTPIEC	\$636
1.5	1800	230/400	90L		Y154SDMV7JS-PL	5.9/3.4	85.3	1, 9	MTPIEC	\$670
1.5	1200	230/400	100L		Y156SDMV7JS-PL	6.9/4	82.5	1, 9	MTPIEC	\$862
2.2	3600	230/400	90L		Y222SDMV7JS-PL	7.5/4.3	85.9	1, 9	MTPIEC	\$783
2.2	1800	230/400	100L		Y224SDMV7JS-PL	9.2/5.3	86.7	1, 9	MTPIEC	\$770
2.2	1200	230/400	112M		Y226SDMV7JS-PL	9/5.2	84.3	1, 9	MTPIEC	\$1,097
3	3600	230/400	100L		0032SDMV7JS-PL	9.7/5.6	87.1	1, 9	MTPIEC	\$877
3	1800	230/400	100L		0034SDMV7JS-PL	12/6.9	87.7	1, 9	MTPIEC	\$845
3	1200	230/400	132S		0036SDMV7JS-PL	11.7/6.8	85.6	1, 9	MTPIEC	\$1,354
4	3600	230/400	112M		0042SDMV7JS-PL	12.5/7.2	88.1	1, 9	MTPIEC	\$970
4	1800	230/400	112M		0044SDMV7JS-PL	14.9/8.6	88.6	1, 9	MTPIEC	\$919
4	1200	230/400	132M		0046SDMV7JS-PL	15.3/8.8	86.8	1, 9	MTPIEC	\$1,612
5.5	3600	230/400	132S		Y552SDMV7JS-PL	18/10.4	89.2	1, 9	MTPIEC	\$1,257
5.5	1800	230/400	132S		Y554SDMV7JS-PL	20.4/11.8	89.6	1, 9	MTPIEC	\$1,257
5.5	1200	230/400	132M		Y556SDMV7JS-PL	20.4/11.8	88.0	1, 9	MTPIEC	\$2,140
7.5	3600	230/400	132M		Y752SDMV7JS-PL	25.1/14.5	90.1	1, 9	MTPIEC	\$1,508
7.5	1800	230/400	132M		Y754SDMV7JS-PL	26.3/15.2	90.4	1, 9	MTPIEC	\$1,529
7.5	1200	400	160M		Y756SDMV7JS-PL	27/15.6	89.1	1, 9	MTPIEC	\$2,614
11	3600	400	160M		0112SDMW7JS-PL	21	91.2	1, 9	MTPIEC	\$2,074
11	1800	400	160M		0114SDMW7JS-PL	23.2	91.4	1, 9	MTPIEC	\$2,065
11	1200	400	160L		0116SDMW7JS-PL	22.8	90.3	1, 9	MTPIEC	\$3,665
15	3600	400	160M		0152SDMW7JS-PL	29	91.9	1, 9	MTPIEC	\$2,686
15	1800	400	160L		0154SDMW7JS-PL	29.8	92.1	1, 9	MTPIEC	\$2,550
15	1200	400	180L		0156SDMW7JS-P	31.4	91.2	* 1, 9	MTPIEC	\$4,293
15	1200	400	180L		0156SDMW7KS-P	31.4	91.2	* 1, 9	MTPIEC	\$4,293
18.5	3600	400	160L		0182SDMW7JS-PL	35	92.4	1, 9	MTPIEC	\$3,298
18.5	1800	400	180M		0184SDMW7JS-P	37.1	92.6	* 1, 9	MTPIEC	\$3,093
18.5	1200	400	200L		0186SDMW7JS-P	39.4	91.7	* 1, 9	MTPIEC	\$5,211
22	3600	400	180M		0222SDMW7JS-P	39	92.7	* 1, 9	MTPIEC	\$3,788
22	1800	400	180L		0224SDMW7JS-P	42.1	93.0	* 1, 9	MTPIEC	\$3,718
22	1200	400	200L		0226SDMW7JS-P	45.4	92.2	* 1, 9	MTPIEC	\$6,361

Totally Enclosed Fan Cooled

EQP Global® IEC Motors

> Premium Efficiency



KW	Speed (RPM)	Volts	Frame	Weight (kgs)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
30	3600	400	200L		0302SDMW7JS-P	55	93.3	* 1, 9	MTPIEC	\$4,771
30	1800	400	200L		0304SDMW7JS-P	57.6	93.6	* 1, 9	MTPIEC	\$4,807
30	1200	400	225S		0306SDMW7JS-P	60.8	92.9	* 1, 9	MTPIEC	\$8,323
37	3600	400	200L		0372SDMW7JS-P	66	93.7	* 1, 9	MTPIEC	\$6,615
37	1800	400	225S		0374SDMW7JS-P	72.4	93.9	* 1, 9	MTPIEC	\$5,863
45	3600	400	225S		0452SDMW7JS-P	80	94.0	* 1, 9	MTPIEC	\$8,152
45	1800	400	225S		0454SDMW7JS-P	86	94.2	* 1, 9	MTPIEC	\$8,262

C-Faced Footed Type (B34)

0.75	3600	230/400	80M		X752SDMV7HS-PL	2.7/1.6	80.7	1, 9	MTPIEC	CF
0.75	1800	230/400	80M		X754SDMV7HS-PL	3.3/1.9	82.5	1, 9	MTPIEC	CF
0.75	1200	230/400	90S		X756SDMV7HS-PL	3.5/2	78.9	1, 9	MTPIEC	CF
1.1	3600	230/400	80M		Y112SDMV7HS-PL	3.8/2.2	82.7	* 1, 9	MTPIEC	CF
1.1	3600	230/400	90L		Y1124DMV7HS-PL	3.8/2.2	82.7	1, 9	MTPIEC	\$590
1.1	1200	230/400	90L		Y116SDMV7HS-PL	5.2/3	81.0	* 1, 9	MTPIEC	\$745
1.5	3600	230/400	90L		Y152SDMV7HS-PL	5.2/3	84.2	* 1, 9	MTPIEC	\$636
1.5	1800	230/400	90L		Y154SDMV7HS-PL	5.9/3.4	85.3	* 1, 9	MTPIEC	\$670
1.5	1200	230/400	100L		Y156SDMV7HS-PL	6.9/4	82.5	* 1, 9	MTPIEC	\$862
2.2	3600	230/400	90L		Y222SDMV7HS-PL	7.5/4.3	85.9	* 1, 9	MTPIEC	\$783
2.2	1800	230/400	100L		Y224SDMV7HS-PL	9.2/5.3	86.7	* 1, 9	MTPIEC	\$770
2.2	1200	230/400	112M		Y226SDMV7HS-PL	9/5.2	84.3	* 1, 9	MTPIEC	\$1,097
3	3600	230/400	100L		0032SDMV7HS-PL	9.7/5.6	87.1	* 1, 9	MTPIEC	\$877
3	1800	230/400	100L		0034SDMV7HS-PL	12/6.9	87.7	* 1, 9	MTPIEC	\$845
3	1200	230/400	132S		0036SDMV7HS-PL	11.7/6.8	85.6	* 1, 9	MTPIEC	\$1,354
4	3600	230/400	112M		0042SDMV7HS-PL	12.5/7.2	88.1	* 1, 9	MTPIEC	\$970
4	1800	230/400	112M		0044SDMV7HS-PL	14.9/8.6	88.6	* 1, 9	MTPIEC	\$919
4	1200	230/400	132M		0046SDMV7HS-PL	15.3/8.8	86.8	* 1, 9	MTPIEC	\$1,612
5.5	3600	230/400	132S		Y552SDMV7HS-PL	18/10.4	89.2	* 1, 9	MTPIEC	\$1,257
5.5	1800	230/400	132S		Y554SDMV7HS-PL	20.4/11.8	89.6	* 1, 9	MTPIEC	\$1,257
5.5	1200	230/400	132M		Y556SDMV7HS-PL	20.4/11.8	88.0	* 1, 9	MTPIEC	\$2,140
7.5	3600	230/400	132M		Y752SDMV7HS-PL	25.1/14.5	90.1	* 1, 9	MTPIEC	\$1,508
7.5	1800	230/400	132M		Y754SDMV7HS-PL	26.3/15.2	90.4	* 1, 9	MTPIEC	\$1,529
7.5	1200	400	160M		Y756SDMW7HS-PL	27/15.6	89.1	* 1, 9	MTPIEC	\$2,614
11	3600	400	160M		0112SDMW7HS-PL	21	91.2	* 1, 9	MTPIEC	\$2,074
11	1800	400	160M		Y114SDMW7HS-PL	4.3/2.5	84.1	1, 9	MTPIEC	CF
11	1800	400	160M	0	0114SDMW7HS-PL	23.2	91.4		MTPIEC	\$2,065
11	1200	400	160L		0116SDMW7HS-PL	22.8	90.3	* 1, 9	MTPIEC	\$3,665
15	3600	400	160M		0152SDMW7HS-PL	29	91.9	* 1, 9	MTPIEC	\$2,686
15	1800	400	160L		0154SDMW7HS-PL	29.8	92.1	* 1, 9	MTPIEC	\$2,550
18.5	3600	400	160L		0182SDMW7HS-PL	35	92.4	* 1, 9	MTPIEC	\$3,298

C-Faced Footless Type (B14)

0.75	3600	230/400	80M		X342SDMV7KS-PL			1, 9	MTPIEC	CF
0.75	1800	230/400	80M		X344SDMV7KS-PL			1, 9	MTPIEC	CF
0.75	1200	230/400	90S		X346SDMV7KS-PL			1, 9	MTPIEC	CF
1.1	3600	230/400	80M		Y112SDMV7KS-PL	3.8/2.2	82.7	1, 9	MTPIEC	CF
1.1	3600	230/400	80M		Y1124DMV7KS-PL	3.8/2.2	82.7	1, 9	MTPIEC	CF
1.1	1800	400	225S	0	Y114SDMV7KS-PL	4.3/2.5	84.1		MTPIEC	\$590
1.1	1200	230/400	90L		Y116SDMV7KS-PL	5.2/3	81.0	1, 9	MTPIEC	\$745

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed Fan Cooled

EQP Global® IEC Motors

> Premium Efficiency



KW	Speed (RPM)	Volts	Frame	Weight (kgs)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
1.5	3600	230/400	90S		Y152SDMV7KS-PL	5.2/3	84.2	1, 9	MTPIEC	\$636
1.5	1800	230/400	90L		Y154SDMV7KS-PL	5.9/3.4	85.3	1, 9	MTPIEC	\$670
1.5	1200	230/400	100L		Y156SDMV7KS-PL	6.9/4	82.5	1, 9	MTPIEC	\$862
2.2	3600	230/400	90L		Y222SDMV7KS-PL	7.5/4.3	85.9	1, 9	MTPIEC	\$783
2.2	1800	230/400	100L		Y224SDMV7KS-PL	9.2/5.3	86.7	1, 9	MTPIEC	\$770
2.2	1200	230/400	112M		Y226SDMV7KS-PL	9/5.2	84.3	1, 9	MTPIEC	\$1,097
3	3600	230/400	100L		0032SDMV7KS-PL	9.7/5.6	87.1	1, 9	MTPIEC	\$877
3	1800	230/400	100L		0034SDMV7KS-PL	12/6.9	87.7	1, 9	MTPIEC	\$845
3	1200	230/400	132S		0036SDMV7KS-PL	11.7/6.8	85.6	1, 9	MTPIEC	\$1,354
4	3600	230/400	112M		0042SDMV7KS-PL	12.5/7.2	88.1	1, 9	MTPIEC	\$970
4	1800	230/400	112M		0044SDMV7KS-PL	14.9/8.6	88.6	1, 9	MTPIEC	\$919
4	1200	230/400	132M		0046SDMV7KS-PL	15.3/8.8	86.8	1, 9	MTPIEC	\$1,612
5.5	3600	230/400	132S		Y552SDMV7KS-PL	18/10.4	89.2	1, 9	MTPIEC	\$1,257
5.5	1800	230/400	132S		Y554SDMV7KS-PL	20.4/11.8	89.6	1, 9	MTPIEC	\$1,257
5.5	1200	230/400	132M		Y556SDMV7KS-PL	20.4/11.8	88.0	1, 9	MTPIEC	\$2,140
7.5	3600	230/400	132S		Y752SDMV7KS-PL	25.1/14.5	90.1	1, 9	MTPIEC	\$1,508
7.5	1800	230/400	132M		Y754SDMV7KS-PL	26.3/15.2	90.4	1, 9	MTPIEC	\$1,529
7.5	1200	400	160M		Y756SDMW7KS-PL	27/15.6	89.1	1, 9	MTPIEC	\$2,614
11	3600	400	160M		0112SDMW7KS-PL	21	91.2	1, 9	MTPIEC	\$2,074
11	1800	400	160M		0114SDMW7KS-PL	23.2	91.4	1, 9	MTPIEC	\$2,065
11	1200	400	160L		0116SDMW7KS-PL	22.8	90.3	1, 9	MTPIEC	\$3,665
15	3600	400	160M		0152SDMW7KS-PL	29	91.9	1, 9	MTPIEC	\$2,686
15	1800	400	160L		0154SDMW7KS-PL	29.8	92.1	1, 9	MTPIEC	\$2,550
18.5	3600	400	160L		0182SDMW7KS-PL	35	92.4	1, 9	MTPIEC	\$3,298

FL Amps and FL EFF are average expected design values and not guaranteed.

The weights listed above are estimated.

Please contact Toshiba for information on product availability.

“CF”= Consult Factory

MV
Modifications

MV Definite
Purpose

MV Gen. Purp.
Enclosed

MV General
Purpose Open

LV Mods.
(Stock & Prod)

Definite
Purpose

IEC

Explosion
Proof

TEFC General
Purpose

ODP General
Purpose

MV Modifications	MV Definite Purpose	MV Gen. Purp. Enclosed	MV General Purpose Open	LV Mods. (Stock & Prod)	Definite Purpose	IEC	Explosion Proof	TEFC General Purpose	ODP General Purpose

Totally Enclosed Fan Cooled

Tosh-ECO™ IEC

> Premium Efficiency - IE3



3

THREE YEAR
WARRANTY

This cutting-edge motor product line is designed to meet or exceed the competitive demands of the global market, as well as the requirements of the IEC 60034, while maintaining the high reliability and quality expected from Toshiba.

The Tosh-ECO IEC motor series is designed for severe duty applications and features multiple new design enhancements that make it one of the lowest cost-of-ownership products in the industry.

Toshiba also provides solutions and Global Supply Chain Management Systems (GSCMS) to meet the evolving needs of global customers.

Product Scope:

Power: 0.37 to 315 kw

Speed (50 Hz*): 3000, 1500, or 1000 RPM

Voltage (50 Hz*): ≤ 4 kw = 230 V / 400 V
> 4 kw = 400 V / 690 V

Enclosure: Totally Enclosed Fan Cooled (IC411)

Frame Size: 80M through 355M

Ingress Protection: IP55

Construction: Aluminum Fin Type (80-180 Frame)
Cast Iron (80-355 Frame)

Insulation: Class F

Environment: Suitable for Indoor or Outdoor Use in Severe Duty Applications

KW	Speed (RPM)	Volts	Frame	Weight (kgs)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
Aluminum Frame										
0.75	3000	230/400	80	11	MM102	2.9/1.7	80.7		MECIEC	\$428
0.75	1500	230/400	80	16	MM103	3.1/1.8	82.5		MECIEC	\$412
0.75	1000	230/400	90S	16	MM104	3.5/2.0	78.9		MECIEC	\$512
1.1	3000	230/400	80	12	MM105	4.2/2.4	82.7		MECIEC	\$448
1.1	1500	230/400	90S	17	MM106	4.2/2.4	84.1		MECIEC	\$433
1.1	1000	230/400	90L	17	MM107	4.9/2.8	81.0		MECIEC	\$546
1.5	3000	230/400	90S	17	MM108	5.1/2.9	84.2		MECIEC	\$466
1.5	1500	230/400	90L	19	MM109	5.6/3.2	85.3		MECIEC	\$492
1.5	1000	230/400	100L	29	MM110	6.5/3.7	82.5		MECIEC	\$634
2.2	3000	230/400	90L	19	MM111	7.2/4.2	85.9		MECIEC	\$575
2.2	1500	230/400	100L	25	MM112	7.9/4.5	86.7		MECIEC	\$565
2.2	1000	230/400	112M	31	MM113	9.0/5.2	84.3		MECIEC	\$805
3	3000	230/400	100L	26	MM114	9.7/5.6	87.1		MECIEC	\$643
3	1500	230/400	100L	31	MM115	10.6/6.1	87.7		MECIEC	\$620
3	1000	230/400	132S	47	MM116	11.9/6.8	85.6		MECIEC	\$994

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed Fan Cooled

Tosh-ECO™ IEC

➤ Premium Efficiency - IE3



KW	Speed (RPM)	Volts	Frame	Weight (kgs)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
4	3000	230/400	112M	29	MM117	13.0/7.4	88.1		MECIEC	\$713
4	1500	230/400	112M	33	MM118	14.0/8.0	88.6		MECIEC	\$675
4	1000	230/400	132M	36	MM119	15.2/8.8	86.8		MECIEC	\$1,183
5.5	3000	400/690	132S	42	MM120	10.0/5.8	89.2		MECIEC	\$922
5.5	1500	400/690	132S	54	MM121	10.9/6.3	89.6		MECIEC	\$922
5.5	1000	400/690	132M	63	MM122	11.9/6.9	88.0		MECIEC	\$1,570
7.5	3000	400/690	132S	48	MM123	13.3/7.7	90.1		MECIEC	\$1,107
7.5	1500	400/690	132M	63	MM124	14.6/8.5	90.4		MECIEC	\$1,123
7.5	1000	400/690	160M	97	MM125	15.4/8.9	89.1		MECIEC	\$1,919
11	3000	400/690	160M	97	MM126	19.6/11.3	91.2		MECIEC	\$1,523
11	1500	400/690	160M	100	MM127	20/11.8	91.4		MECIEC	\$1,515
11	1000	400/690	160L	117	MM128	22/12.9	90.3		MECIEC	\$2,690
15	3000	400/690	160M	107	MM129	26/15.3	91.9		MECIEC	\$1,972
15	1500	400/690	160L	117	MM130	27/15.8	92.1		MECIEC	\$1,872
15	1000	400/690	180L	152	MM131	30/17.4	91.2		MECIEC	\$3,151
18.5	3000	400/690	160L	124	MM132	32/18.8	92.4		MECIEC	\$2,421
18.5	1500	400/690	180M	152	MM133	34/19.4	92.6		MECIEC	\$2,271
22	3000	400/690	180M	145	MM134	38/22	92.7		MECIEC	\$2,781
22	1500	400/690	180L	145	MM135	40/23	93.0		MECIEC	\$2,729
Cast Iron Frame										
0.37	1000	230/400	80M	18	MM1	1.8/1.0	73.5		MECIEC	CF
0.55	1500	230/400	80M	18	MM3	2.3/1.3	80.8		MECIEC	CF
0.55	1000	230/400	80M	20	MM4	2.6/1.5	77.2		MECIEC	CF
0.75	3000	230/400	80M	18	MM6	2.8/1.6	80.7		MECIEC	CF
0.75	1500	230/400	80M	19	MM7	3.0/1.7	82.5		MECIEC	\$434
0.75	1000	230/400	90S	24	MM8	3.3/1.9	78.9		MECIEC	\$539
1.1	3000	230/400	80M	21	MM10	3.9/2.3	82.7		MECIEC	\$472
1.1	1500	230/400	90S	23	MM11	4.2/2.4	84.1		MECIEC	\$456
1.1	1000	230/400	90L	26	MM12	4.7/2.7	81.0		MECIEC	\$575
1.5	3000	230/400	90S	25	MM14	5.1/3.0	84.2		MECIEC	\$491
1.5	1500	230/400	90L	29	MM15	5.6/3.2	85.3		MECIEC	\$518
1.5	1000	230/400	100L	34	MM16	6.2/3.6	82.5		MECIEC	\$667
2.2	3000	230/400	90L	30	MM18	7.3/4.2	85.9		MECIEC	\$605
2.2	1500	230/400	100L	35	MM19	8.0/4.6	86.7		MECIEC	\$595
2.2	1000	230/400	112M	40	MM20	8.6/5.0	84.3		MECIEC	\$847
3	3000	230/400	100L	37	MM22	9.8/5.6	87.1		MECIEC	\$677
3	1500	230/400	100L	39	MM23	10.5/6.0	87.7		MECIEC	\$653
3	1000	230/400	132S	57	MM24	11.4/6.6	85.6		MECIEC	\$1,046
4	3000	230/400	112M	46	MM26	12.8/7.4	88.1		MECIEC	\$750
4	1500	230/400	112M	45	MM27	13.7/7.9	88.6		MECIEC	\$710
4	1000	230/400	132M	73	MM28	15.0/8.7	86.8		MECIEC	\$1,245
5.5	3000	400/690	132S	65	MM30	10.0/5.8	89.2		MECIEC	\$971
5.5	1500	400/690	132S	62	MM31	10.8/6.3	89.6		MECIEC	\$971
5.5	1000	400/690	132M	77	MM32	11.6/6.7	88.0		MECIEC	\$1,653
7.5	3000	400/690	132S	72	MM34	13.2/7.7	90.1		MECIEC	\$1,165
7.5	1500	400/690	132M	74	MM35	14.4/8.4	90.4		MECIEC	\$1,182
7.5	1000	400/690	160M	115	MM36	15.4/8.9	89.1		MECIEC	\$2,020
11	3000	400/690	160M	120	MM38	19.6/11.3	91.2		MECIEC	\$1,603

Totally Enclosed Fan Cooled

Tosh-ECO™ IEC

➤ Premium Efficiency - IE3



KW	Speed (RPM)	Volts	Frame	Weight (kgs)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
11	1500	400/690	160M	124	MM39	20/11.8	91.4		MECIEC	\$1,595
11	1000	400/690	160L	136	MM40	22/12.9	90.3		MECIEC	\$2,832
15	3000	400/690	160M	130	MM42	26/15.3	91.9		MECIEC	\$2,076
15	1500	400/690	160L	145	MM43	27/15.8	92.1		MECIEC	\$1,970
15	1000	400/690	180L	197	MM44	30/17.4	91.2		MECIEC	\$3,317
18.5	3000	400/690	160L	150	MM46	32/18.8	92.4		MECIEC	\$2,548
18.5	1500	400/690	180M	195	MM47	34/19.4	92.6		MECIEC	\$2,390
18.5	1000	400/690	200L	226	MM48	37/21	91.7		MECIEC	\$4,026
22	3000	400/690	180M	185	MM50	38/22	92.7		MECIEC	\$2,927
22	1500	400/690	180L	215	MM51	40/23	93.0		MECIEC	\$2,873
22	1000	400/690	200L	246	MM52	43/25	92.2		MECIEC	\$4,915
30	3000	400/690	200L	245	MM54	52/30	93.3		MECIEC	\$3,687
30	1500	400/690	200L	265	MM55	53/31	93.6		MECIEC	\$3,715
30	1000	400/690	225M	314	MM56	55/32	92.9		MECIEC	\$6,431
37	3000	400/690	200L	275	MM58	63/37	93.7		MECIEC	\$5,112
37	1500	400/690	225S	320	MM59	65/38	93.9		MECIEC	\$4,530
37	1000	400/690	250M	440	MM60	68/40	93.3		MECIEC	\$7,507
45	3000	400/690	225M	345	MM62	76/44	94.0		MECIEC	\$6,299
45	1500	400/690	225M	350	MM63	80/46	94.2		MECIEC	\$6,384
45	1000	400/690	280S	520	MM64	82/47	93.7		MECIEC	\$12,853
55	3000	400/690	250M	450	MM66	95/55	94.3		MECIEC	\$7,933
55	1500	400/690	250M	457	MM67	96/56	94.6		MECIEC	\$8,224
55	1000	400/690	280M	565	MM68	99/58	94.1		MECIEC	\$14,162
75	3000	400/690	280S	540	MM70	127/74	94.7		MECIEC	\$13,225
75	1500	400/690	280S	590	MM71	132/77	95.0		MECIEC	\$12,294
75	1000	400/690	315S	970	MM72	136/79	94.6		MECIEC	\$17,857
90	3000	400/690	280M	575	MM74	152/88	95.0		MECIEC	\$19,081
90	1500	400/690	280M	575	MM75	157/91	95.2		MECIEC	\$15,646
90	1000	400/690	315M	1065	MM76	163/94	94.9		MECIEC	\$17,534
110	3000	400/690	315S	1010	MM78	185/107	95.2		MECIEC	\$20,241
110	1500	400/690	315S	1060	MM79	189/110	95.4		MECIEC	\$17,641
110	1000	400/690	315L	1135	MM80	196/114	95.1		MECIEC	\$21,497
132	3000	400/690	315M	1070	MM82	222/129	95.4		MECIEC	\$25,056
132	1500	400/690	315M	1120	MM83	226/131	95.6		MECIEC	\$21,203
132	1000	400/690	315L	1200	MM84	238/138	95.4		MECIEC	\$28,018
160	3000	400/690	315L	1210	MM86	268/156	95.6		MECIEC	\$35,255
160	1500	400/690	315L	1200	MM87	271/157	95.8		MECIEC	\$30,437
160	1000	400/690	355M	1755	MM88	284/165	95.6		MECIEC	\$33,739
200	3000	400/690	315L	1285	MM90	335/194	95.8		MECIEC	\$41,563
200	1500	400/690	315L	1295	MM91	338/196	96.0		MECIEC	\$32,559
200	1000	400/690	355M	1890	MM92	355/206	95.8		MECIEC	\$43,850
250	3000	400/690	355M	1798	MM94	414/240	95.8		MECIEC	\$43,777
250	1500	400/690	355M	1820	MM95	422/245	96.0		MECIEC	\$35,428
250	1000	400/690	355L	2120	MM96	443/257	95.8		MECIEC	\$51,173
315	3000	400/690	355L	1960	MM98	522/302	95.8		MECIEC	\$54,533
315	1500	400/690	355L	2000	MM99	532/308	96.0		MECIEC	\$52,187

FL Amps and FL EFF are average expected design values and not guaranteed.

The weights listed above are estimated.

Please contact Toshiba for information on product availability.

"CF"= Consult Factory

MV Modifications	MV Definite Purpose	MV Gen. Purp. Enclosed	MV General Purpose Open	LV Mods. (Stock & Prod)	Definite Purpose	IEC	Explosion Proof	TEFC General Purpose	ODP General Purpose

Totally Enclosed Fan Cooled

Tosh-ECO™ Permanent Magnet Motor

Toshiba is proud to introduce new Permanent Magnet low voltage motor products. With ever-increasing regulations on energy efficiency for electric motors, Toshiba offers high efficiency AC Permanent Magnet motors designed to meet IE4 and "Super Premium" efficiency levels. The AC Permanent Magnet Motor utilizes rare-earth neodymium elements in the rotor construction. By using permanent magnets incorporated into the AC Motor design, the motor utilizes the same power output and high torque density with reduced size and weight.

Standard Features:

- Average Efficiency Improvement of 5-8% over Induction Motors
- Powerful Mechanical Strength & Corrosion Resistance of Rare Earth Magnet in Core
- No-Slip, Synchronous Speed
- Precision Speed and Rotational Control
- No I²R Losses in Rotor
- Rotatable 90° Increments F-3 (Top Mount) with 2 Ground Provisions (One Plastic Cable Gland & Plug)
- Suitable for High Speed Operation Up to 50% Above Rated Speed at Constant Power (Typical Beyond NEMA Max Overspeed)
- 1.0 SF
- Non NAFTA Qualified

Applications:

- Pumps
- Fans
- Conveyors
- Compressors



Totally Enclosed Fan Cooled

Tosh-ECO™

Permanent Magnet Motor

> Premium Efficiency - IE4



Toshiba is proud to introduce the IEC IE4 Permanent Magnet motors from the new Tosh-ECO™ Series. With ever-increasing regulations on energy efficiency for electric motors, Toshiba offers a high efficiency AC Permanent Magnet motor to meet the IE4 and “Super Premium” efficiency levels. The AC Permanent Magnet Motor utilizes rare-earth neodymium elements in the rotor construction. By using permanent magnets incorporated into the AC Motor design, the motor utilizes the same power output and high torque density with reduced size and weight.

Product Scope:

Power:	.55 to 315 kw
Speed (50 Hz):	1500, 3000, & 4500 RPM
Efficiency Class:	IE4 Efficiency (As defined by IEC60034-30-1)
Voltage:	400 V
Enclosure:	Totally Enclosed Fan Cooled (TEFC)
Frame Size:	71 - 315 Frame per IEC 60072
Construction:	Aluminum Frame 71 - 132 Cast Iron Frame 160 - 315
Ingress Protection:	IP55
Insulation Class:	Class F-Random Wound
Applicable Standards:	IEC 60034, 60072, 60204
Mounting:	Suitable for Horizontal Mounting; All Mounting Orientations for <160 Frame
Note: Consult factory for other ratings not listed	

KW	Speed (RPM)	Volts	Frame	Weight (kgs)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
0.55	3000	400	71M	5	PM1	1.2	88.0		MECPMM	CF
0.55	1500	400	71M	5	PM2	1.2	87.1		MECPMM	CF
0.75	4500	400	71M	5	PM3	1.6	88.2		MECPMM	CF
0.75	3000	400	71M	5	PM4	1.6	88.6		MECPMM	CF
0.75	1500	400	71M	6	PM5	1.6	88.6		MECPMM	\$820
1.1	4500	400	71M	5	PM6	2.3	89.5		MECPMM	\$892
1.1	3000	400	71M	6	PM7	2.3	90.0		MECPMM	\$892
1.1	1500	400	71M	7	PM8	2.3	89.7		MECPMM	\$901
1.5	4500	400	71M	6	PM9	3.2	90.4		MECPMM	\$1,081
1.5	3000	400	71M	6	PM10	3.2	90.9		MECPMM	\$1,081
1.5	1500	400	71M	7	PM11	3.2	89.9		MECPMM	\$979
1.5	1500	400	90L	11	PM12	3.2	90.9		MECPMM	\$979
2.2	4500	400	71M	7	PM13	4.6	91.5		MECPMM	\$1,143
2.2	4500	400	90L	11	PM14	4.7	90.0		MECPMM	\$1,143
2.2	3000	400	71M	7	PM15	4.5	91.8		MECPMM	\$1,143
2.2	3000	400	90L	11	PM16	4.6	91.3		MECPMM	\$1,143
2.2	1500	400	90L	13	PM17	4.5	91.5		MECPMM	\$1,124
3	4500	400	90L	11	PM18	6.4	91.2		MECPMM	\$1,281
3	3000	400	90L	13	PM19	6.3	91.6		MECPMM	\$1,281
3	1500	400	90L	15	PM20	6.2	91.5		MECPMM	\$1,203
4	4500	400	90L	13	PM21	8.3	92.0		MECPMM	\$1,417
4	3000	400	90L	15	PM22	8.3	91.7		MECPMM	\$1,417

Totally Enclosed Fan Cooled Tosh-ECO™ Permanent Magnet Motor

➤ Premium Efficiency - IE4



KW	Speed (RPM)	Volts	Frame	Weight (kgs)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
4	1500	400	90L	18	PM23	8.1	92.1		MECPMM	\$1,283
4	1500	400	112M	24	PM24	8.1	92.2		MECPMM	\$1,283
5.5	4500	400	90L	15	PM25	11.5	92.6		MECPMM	\$1,836
5.5	3000	400	90L	17	PM26	11.2	93.0		MECPMM	\$1,836
5.5	3000	400	112M	24	PM27	11.3	92.2		MECPMM	\$1,836
5.5	1500	400	112M	27	PM28	11.1	92.8		MECPMM	\$1,836
7.5	3000	400	112M	27	PM29	15	92.8		MECPMM	\$2,201
7.5	1500	400	112M	32	PM30	14.9	93.4		MECPMM	\$2,233
11	3000	400	112M	32	PM31	22	93.6		MECPMM	\$3,028
11	1500	400	113M	35	PM32	22	93.6		MECPMM	\$3,014
11	1500	400	132M	54	PM33	22	94.2		MECPMM	\$3,014
15	3000	400	112M	35	PM34	29	93.9		MECPMM	\$3,922
15	3000	400	132M	54	PM35	31	94.0		MECPMM	\$3,922
15	1500	400	132M	61	PM36	29	94.7		MECPMM	\$3,722
18.5	3000	400	132M	61	PM37	37	94.3		MECPMM	\$4,814
18.5	1500	400	132M	68	PM38	36	94.8		MECPMM	\$4,516
22	3000	400	132M	68	PM39	44	94.4		MECPMM	\$5,531
30	3000	400	132M	75	PM40	58	94.7		MECPMM	\$6,966

FL Amps and FL EFF are average expected design values and not guaranteed.

The weights listed above are estimated.

Please contact Toshiba for information on product availability.

"CF"= Consult Factory

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Definite Purpose Series

Totally Enclosed Fan Cooled Close-Coupled Pump Motors

The EQP Global® Close-Coupled Pump motor series is designed for close-coupled pumping applications and features multiple new design enhancements that make it one of the lowest cost-of-ownership products in the industry. This cutting-edge motor product line is designed to meet or exceed the competitive demands of the global fluid handling industry, as well as the amended integral horsepower (HP) rule IHMR 2016, while maintaining the high reliability and quality expected from Toshiba.



Standard Features:

- Totally Enclosed Fan Cooled
- NEMA Premium® Efficiency
- 230/460, or 575 V (60 Hz)
- 190/380 or 380 V (50 Hz)
- Three-Phase
- Dual Frequency 50/60 Hz on Nameplate (1 to 75 HP)
- Class F Insulation
- 1.15 Service Factor
- IP55 Protection
- Cast Iron Frame, Brackets & Conduit Box
- Oversized 300 Series Bearing on All Frames
- Regreasable 280 Frame & Larger
- Multi-Mount on 140 through 365 Frames
- Non-NAFTA Qualified
- Inverter Duty 10:1 CT or 60:1 VT
- Division 2, Class 1



Totally Enclosed Fan Cooled Close-Coupled Pump

> NEMA Premium® Efficiency



3 THREE YEAR WARRANTY



The EQP Global® Close-Coupled Pump motor series is designed for close-coupled pumping

applications and features multiple new design enhancements that make it one of the lowest cost-of-ownership products in the industry. This cutting-edge motor product line is designed to meet or exceed the competitive demands of the global fluid handling industry, as well as the amended integral horsepower (HP) rule IHMR 2016, while maintaining the high reliability and quality expected from Toshiba.

Product Scope:

Horsepower:	1 to 75 HP
Speed:	3600, 1800, or 1200 RPM (60 Hz) 3000, 1500, or 1000 RPM (50 Hz)
Voltage*:	230/460, or 575 V (60 Hz) 190/380 (50 Hz) <i>(Where Noted)</i>
Enclosure:	Totally Enclosed Fan Cooled
Frame Size:	143JM/JP through 326JM/365JP
Construction:	Cast Iron
Insulation:	Class F

* Contact Toshiba for other voltages.

HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
JM										
1	1800	230/460	143JM	64	0014SDJR41M-P	3.4\1.7	85.5	* 1, 9	MTPCCP	\$773
1	1800	575	143JM	68	0014SDJC41M-P	1.2	85.6	* 1	MTPCCP	\$773
1	1200	230/460	145JM	66	0016SDJR41M-P	3.6\1.8	82.9	* 1, 9	MTPCCP	\$891
1	1200	575	145JM	56	0016SDJC41M-P	1.5	82.9	* 1	MTPCCP	\$891
1.5	3600	230/460	143JM	59	Y152SDJR41M-P	4\2	84.3	* 1, 9	MTPCCP	\$816
1.5	3600	575	143JM	73	Y152SDJC41M-P	1.6	84.3	* 1	MTPCCP	\$816
1.5	1800	230/460	145JM	59	Y154SDJR41M-P	4.8\2.4	86.5	* 1, 9	MTPCCP	\$821
1.5	1800	575	145JM	70	Y154SDJC41M-P	1.9	86.5	* 1	MTPCCP	\$821
1.5	1200	230/460	182JM	110	Y156SDJR41M-P	5\2.5	87.7	* 1, 9	MTPCCP	\$981
1.5	1200	575	182JM	79	Y156SDJC41M-P	2	87.5	* 1	MTPCCP	\$981
2	3600	230/460	145JM	62	0022SDJR41M-P	5.2\2.6	85.6	* 1, 9	MTPCCP	\$929
2	3600	575	145JM	55	0022SDJC41M-P	2.1	85.5	* 1	MTPCCP	\$929
2	1800	230/460	145JM	66	0024SDJR41M-P	6\3	86.5	* 1, 9	MTPCCP	\$868
2	1800	575	145JM	66	0024SDJC41M-P	2.4	86.5	* 1	MTPCCP	\$868
2	1200	230/460	184JM	123	0026SDJR41M-P	6.8\3.4	88.5	* 1, 9	MTPCCP	\$1,087
2	1200	575	184JM	93	0026SDJC41M-P	2.7	88.5	* 1	MTPCCP	\$1,087
3	3600	230/460	182JM	99	0032SDJR41M-P	7.4\3.7	86.7	* 1, 9	MTPCCP	\$988
3	3600	575	182JM	103	0032SDJC41M-P	3	86.7	* 1	MTPCCP	\$988
3	1800	230/460	182JM	110	0034SDJR41M-P	8\4	89.5	* 1, 9	MTPCCP	\$976
3	1800	575	182JM	112	0034SDJC41M-P	3.2	89.5	* 1	MTPCCP	\$976
3	1200	230/460	213JM	183	0036SDJR41M-P	8.8\4.4	89.6	* 1, 9	MTPCCP	\$1,404

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed Fan Cooled

Close-Coupled Pump

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
3	1200	575	213JM	147	0036SDJC41M-P	3.5	89.8	* 1	MTPCCP	\$1,404
5	3600	230/460	184JM	112	0052SDJR41M-P	11.6\5.8	88.7	* 1, 9	MTPCCP	\$1,151
5	3600	575	184JM	119	0052SDJC41M-P	4.6	88.7	* 1	MTPCCP	\$1,151
5	1800	230/460	184JM	114	0054SDJR41M-P	13.8\6.9	89.5	* 1, 9	MTPCCP	\$1,071
5	1800	575	184JM	125	0054SDJC41M-P	5.2	89.5	* 1	MTPCCP	\$1,071
5	1200	230/460	215JM	198	0056SDJR41M-P	13.8\6.9	89.6	* 1, 9	MTPCCP	\$1,962
5	1200	575	215JM	165	0056SDJC41M-P	5.5	89.6	* 1	MTPCCP	\$1,962
7.5	3600	230/460	213JM	183	Y752SDJR41M-P	18\9	89.7	* 1, 9	MTPCCP	\$1,421
7.5	3600	575	213JM	181	Y752SDJC41M-P	7.2	89.7	* 1	MTPCCP	\$1,421
7.5	1800	230/460	213JM	211	Y754SDJR41M-P	19.6\9.8	91.8	* 1, 9	MTPCCP	\$1,421
7.5	1800	575	213JM	171	Y754SDJC41M-P	7.8	91.8	* 1	MTPCCP	\$1,421
7.5	1200	230/460	254JM	330	Y756SDJR41M-P	20.4\10.2	91.2	* 1, 9	MTPCCP	\$2,525
7.5	1200	575	254JM	312	Y756SDJC41M-P	8.2	91.1	* 1	MTPCCP	\$2,525
10	3600	230/460	215JM	200	0102SDJR41M-P	23.6\11.8	90.2	* 1, 9	MTPCCP	\$1,656
10	3600	575	215JM	172	0102SDJC41M-P	9.4	91.7	* 1	MTPCCP	\$1,656
10	1800	230/460	215JM	215	0104SDJR41M-P	26\13	91.8	* 1, 9	MTPCCP	\$1,677
10	1800	575	215JM	186	0104SDJC41M-P	10.4	91.8	* 1	MTPCCP	\$1,677
10	1200	230/460	256JM	348	0106SDJR41M-P	26.8\13.4	91.3	* 1, 9	MTPCCP	\$3,012
10	1200	575	256JM	348	0106SDJC41M-P	10.8	91.2	* 1	MTPCCP	\$3,012
15	3600	230/460	254JM	294	0152SDJR41M-P	36\18	91.2	* 1, 9	MTPCCP	\$2,304
15	3600	575	254JM	295	0152SDJC41M-P	14.4	91.4	* 1	MTPCCP	\$2,304
15	1800	230/460	254JM	354	0154SDJR41M-P	38\19	92.6	* 1, 9	MTPCCP	\$2,295
15	1800	575	254JM	348	0154SDJC41M-P	15.2	92.6	* 1	MTPCCP	\$2,295
15	1200	230/460	284JM	442	0156SDJR41M-P	40\20	91.9	* 1, 9	MTPCCP	\$4,310
15	1200	575	284JM	442	0156SDJC41M-P	15.8	91.8	* 1	MTPCCP	\$4,310
20	3600	230/460	256JM	310	0202SDJR41M-P	48\24	91.3	* 1, 9	MTPCCP	\$2,894
20	3600	575	256JM	310	0202SDJC41M-P	19.2	91.3	* 1	MTPCCP	\$2,894
20	1800	230/460	256JM	394	0204SDJR41M-P	50\25	93.3	* 1, 9	MTPCCP	\$2,762
20	1800	575	256JM	389	0204SDJC41M-P	20	93.2	* 1	MTPCCP	\$2,762
20	1200	230/460	286JM	477	0206SDJR41M-P	50\25	91.8	* 1, 9	MTPCCP	\$4,955
20	1200	575	286JM	477	0206SDJC41M-P	20	91.9	* 1	MTPCCP	\$4,955
25	3600	230/460	284JM	473	0252SDJR41M-P	58\29	91.8	* 1, 9	MTPCCP	\$3,686
25	3600	575	284JM	473	0252SDJC41M-P	23	91.8	* 1	MTPCCP	\$3,686
25	1800	230/460	284JM	532	0254SDJR41M-P	62\31	93.8	* 1, 9	MTPCCP	\$3,722
25	1800	575	284JM	528	0254SDJC41M-P	24	93.6	* 1	MTPCCP	\$3,722
25	1200	230/460	324JM	616	0256SDJR41M-P	62\31	93.3	* 1, 9	MTPCCP	\$5,592
25	1200	575	324JM	592	0256SDJC41M-P	25	93.3	* 1	MTPCCP	\$5,592
30	3600	230/460	286JM	497	0302SDJR41M-P	70\35	91.9	* 1, 9	MTPCCP	\$4,160
30	3600	575	286JM	497	0302SDJC41M-P	28	91.9	* 1	MTPCCP	\$4,160
30	1800	230/460	286JM	671	0304SDJR41M-P	72\36	93.8	* 1, 9	MTPCCP	\$4,365
30	1800	575	286JM	548	0304SDJC41M-P	29	93.8	* 1	MTPCCP	\$4,365
30	1200	230/460	326JM	634	0306SDJR41M-P	74\37	93.3	* 1, 9	MTPCCP	\$6,700
30	1200	575	326JM	618	0306SDJC41M-P	30	93.3	* 1	MTPCCP	\$6,700
40	3600	230/460	324JM	657	0402SDJR41M-P	94\47	92.5	* 1, 9	MTPCCP	\$5,169
40	3600	575	324JM	658	0402SDJC41M-P	38	92.5	* 1	MTPCCP	\$5,169
40	1800	230/460	324JM	671	0404SDJR41M-P	96\48	94.1	* 1, 9	MTPCCP	\$5,551
40	1800	575	324JM	671	0404SDJC41M-P	38	94.1	* 1	MTPCCP	\$5,551
50	3600	230/460	326JM	693	0502SDJR41M-P	116\58	93.0	* 1, 9	MTPCCP	\$6,945
50	3600	575	326JM	693	0502SDJC41M-P	46	93.0	* 1	MTPCCP	\$6,945

Totally Enclosed Fan Cooled Close-Coupled Pump

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
50	1800	230/460	326JM	722	0504SDJR41M-P	120\60	94.5	* 1, 9	MTPCCP	\$6,220
50	1800	575	326JM	722	0504SDJC41M-P	48	94.5	* 1	MTPCCP	\$6,220
JP										
1	1800	230/460	143JP	68	0014SDJR41P-P	3.4\1.7	85.5	* 1, 9	MTPCCP	\$773
1	1800	575	143JP	68	0014SDJC41P-P	1.2	85.6	* 1	MTPCCP	\$773
1	1200	230/460	145JP	422	0016SDJR41P-P	3.6\1.8	82.9	* 1, 9	MTPCCP	\$891
1	1200	575	145JP	56	0016SDJC41P-P	1.5	82.9	* 1	MTPCCP	\$891
1.5	3600	230/460	143JP	73	Y152SDJR41P-P	4\2	84.3	* 1, 9	MTPCCP	\$816
1.5	3600	575	143JP	73	Y152SDJC41P-P	1.6	84.3	* 1	MTPCCP	\$816
1.5	1800	230/460	145JP	70	Y154SDJR41P-P	4.8\2.4	86.5	* 1, 9	MTPCCP	\$821
1.5	1800	575	145JP	70	Y154SDJC41P-P	1.9	86.5	* 1	MTPCCP	\$821
1.5	1200	230/460	182JP	532	Y156SDJR41P-P	5\2.5	87.7	* 1, 9	MTPCCP	\$981
1.5	1200	575	182JP	79	Y156SDJC41P-P	2	87.5	* 1	MTPCCP	\$981
2	3600	230/460	145JP	75	0022SDJR41P-P	5.2\2.6	85.6	* 1, 9	MTPCCP	\$929
2	3600	575	145JP	55	0022SDJC41P-P	2.1	85.5	* 1	MTPCCP	\$929
2	1800	230/460	145JP	66	0024SDJR41P-P	6\3	86.5	* 1, 9	MTPCCP	\$868
2	1800	575	145JP	66	0024SDJC41P-P	2.4	86.5	* 1	MTPCCP	\$868
2	1200	230/460	184JP	391	0026SDJR41P-P	6.8\3.4	88.5	* 1, 9	MTPCCP	\$1,087
2	1200	575	184JP	93	0026SDJC41P-P	2.7	88.5	* 1	MTPCCP	\$1,087
3	3600	230/460	182JP	103	0032SDJR41P-P	7.4\3.7	86.7	* 1, 9	MTPCCP	\$988
3	3600	575	182JP	103	0032SDJC41P-P	3	86.7	* 1	MTPCCP	\$988
3	1800	230/460	182JP	112	0034SDJR41P-P	8\4	89.5	* 1, 9	MTPCCP	\$976
3	1800	575	182JP	112	0034SDJC41P-P	3.2	89.5	* 1	MTPCCP	\$976
3	1200	230/460	213JP	576	0036SDJR41P-P	8.8\4.4	89.6	* 1, 9	MTPCCP	\$1,404
3	1200	575	213JP	147	0036SDJC41P-P	3.5	89.8	* 1	MTPCCP	\$1,404
5	3600	230/460	184JP	119	0052SDJR41P-P	11.6\5.8	88.7	* 1, 9	MTPCCP	\$1,151
5	3600	575	184JP	119	0052SDJC41P-P	4.6	88.7	* 1	MTPCCP	\$1,151
5	1800	230/460	184JP	125	0054SDJR41P-P	13.8\6.9	89.5	* 1, 9	MTPCCP	\$1,071
5	1800	575	184JP	125	0054SDJC41P-P	5.2	89.5	* 1	MTPCCP	\$1,071
5	1200	230/460	215JP	770	0056SDJR41P-P	13.8\6.9	89.6	* 1, 9	MTPCCP	\$1,962
5	1200	575	215JP	165	0056SDJC41P-P	5.5	89.6	* 1	MTPCCP	\$1,962
7.5	3600	230/460	213JP	431	Y752SDJR41P-P	18.0\9	89.7	* 1, 9	MTPCCP	\$1,421
7.5	3600	575	213JP	155	Y752SDJC41P-P	7.2	89.7	* 1	MTPCCP	\$1,421
7.5	1800	230/460	213JP	805	Y754SDJR41P-P	19.6\9.8	91.8	* 1, 9	MTPCCP	\$1,421
7.5	1800	575	213JP	171	Y754SDJC41P-P	7.8	91.8	* 1	MTPCCP	\$1,421
7.5	1200	230/460	254JP	312	Y756SDJR41P-P	20.4\10.2	91.2	* 1, 9	MTPCCP	\$2,525
7.5	1200	575	254JP	312	Y756SDJC41P-P	8.2	91.1	* 1	MTPCCP	\$2,525
10	3600	230/460	215JP	466	0102SDJR41P-P	23.6\11.8	90.2	* 1, 9	MTPCCP	\$1,656
10	3600	575	215JP	172	0102SDJC41P-P	9.4	91.7	* 1	MTPCCP	\$1,656
10	1800	230/460	215JP	215	0104SDJR41P-P	26\13	91.8	* 1, 9	MTPCCP	\$1,677
10	1800	575	215JP	186	0104SDJC41P-P	10.4	91.8	* 1	MTPCCP	\$1,677
10	1200	230/460	256JP	347	0106SDJR41P-P	26.8\13.4	91.3	* 1, 9	MTPCCP	\$3,012
10	1200	575	256JP	348	0106SDJC41P-P	10.8	91.2	* 1	MTPCCP	\$3,012
15	3600	230/460	254JP	294	0152SDJR41P-P	36\18	91.2	* 1, 9	MTPCCP	\$2,304
15	3600	575	254JP	295	0152SDJC41P-P	14.4	91.4	* 1	MTPCCP	\$2,304
15	1800	230/460	254JP	429	0154SDJR41P-P	38\19	92.6	* 1, 9	MTPCCP	\$2,295
15	1800	575	254JP	429	0154SDJC41P-P	15.2	92.6	* 1	MTPCCP	\$2,295

Totally Enclosed Fan Cooled

Close-Coupled Pump

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
15	1200	230/460	284JP	442	0156SDJR41P-P	40/20	91.9	* 1, 9	MTPCCP	\$4,310
15	1200	575	284JP	442	0156SDJC41P-P	15.8	91.8	* 1	MTPCCP	\$4,310
20	3600	230/460	256JP	310	0202SDJR41P-P	48/24	91.3	* 1, 9	MTPCCP	\$2,894
20	3600	575	256JP	310	0202SDJC41P-P	19.2	91.3	* 1	MTPCCP	\$2,894
20	1800	230/460	256JP	389	0204SDJR41P-P	50/25	93.3	* 1, 9	MTPCCP	\$2,762
20	1800	575	256JP	389	0204SDJC41P-P	20	93.2	* 1	MTPCCP	\$2,762
20	1200	230/460	286JP	477	0206SDJR41P-P	50/25	91.8	* 1, 9	MTPCCP	\$4,955
20	1200	575	286JP	477	0206SDJC41P-P	20	91.9	* 1	MTPCCP	\$4,955
25	3600	230/460	284JP	473	0252SDJR41P-P	58/29	91.8	* 1, 9	MTPCCP	\$3,686
25	3600	575	284JP	473	0252SDJC41P-P	23	91.8	* 1	MTPCCP	\$3,686
25	1800	230/460	284JP	528	0254SDJR41P-P	62/31	93.8	* 1, 9	MTPCCP	\$3,722
25	1800	575	284JP	528	0254SDJC41P-P	24	93.6	* 1	MTPCCP	\$3,722
25	1200	230/460	324JP	591	0256SDJR41P-P	62/31	93.3	* 1, 9	MTPCCP	\$5,592
25	1200	575	324JP	592	0256SDJC41P-P	25	93.3	* 1	MTPCCP	\$5,592
30	3600	230/460	286JP	497	0302SDJR41P-P	70/35	91.9	* 1, 9	MTPCCP	\$4,160
30	3600	575	286JP	497	0302SDJC41P-P	28	91.9	* 1	MTPCCP	\$4,160
30	1800	230/460	286JP	548	0304SDJR41P-P	72/36	93.8	* 1, 9	MTPCCP	\$4,365
30	1800	575	286JP	548	0304SDJC41P-P	29	93.8	* 1	MTPCCP	\$4,365
30	1200	230/460	326JP	618	0306SDJR41P-P	74/37	93.3	* 1, 9	MTPCCP	\$6,700
30	1200	575	326JP	618	0306SDJC41P-P	30	93.3	* 1	MTPCCP	\$6,700
40	3600	230/460	324JP	657	0402SDJR41P-P	94/47	92.5	* 1, 9	MTPCCP	\$5,169
40	3600	575	324JP	658	0402SDJC41P-P	38	92.5	* 1	MTPCCP	\$5,169
40	1800	230/460	324JP	671	0404SDJR41P-P	96/48	94.1	* 1, 9	MTPCCP	\$5,551
40	1800	575	324JP	671	0404SDJC41P-P	38	94.1	* 1	MTPCCP	\$5,551
40	1200	230/460	364JP	809	0406SDJR41P-P	96/48	94.1	* 1, 9	MTPCCP	\$8,972
40	1200	575	364JP	810	0406SDJC41P-P	38	94.1	* 1	MTPCCP	\$8,972
50	3600	230/460	326JP	693	0502SDJR41P-P	116/58	93.0	* 1, 9	MTPCCP	\$6,945
50	3600	575	326JP	693	0502SDJC41P-P	46	93.0	* 1	MTPCCP	\$6,945
50	1800	230/460	326JP	721	0504SDJR41P-P	120/60	94.5	* 1, 9	MTPCCP	\$6,220
50	1800	575	326JP	722	0504SDJC41P-P	48	94.5	* 1	MTPCCP	\$6,220
50	1200	230/460	365JP	831	0506SDJR41P-P	120/60	94.1	* 1, 9	MTPCCP	\$10,313
50	1200	575	365JP	832	0506SDJC41P-P	48	94.1	* 1	MTPCCP	\$10,313
60	3600	230/460	364JP	627	0602SDJR41P-P	138/69	93.6	* 1, 9	MTPCCP	\$8,807
60	3600	575	364JP	627	0602SDJC41P-P	55	93.7	* 1	MTPCCP	\$8,807
60	1800	230/460	364JP	904	0604SDJR41P-P	138/69	95.1	* 1, 9	MTPCCP	\$8,913
60	1800	575	364JP	904	0604SDJC41P-P	55	95.1	* 1	MTPCCP	\$8,913
75	3600	230/460	365JP	932	0752SDJR41P-P	172/86	93.6	* 1, 9	MTPCCP	\$10,843
75	3600	575	365JP	932	0752SDJC41P-P	69	93.8	* 1	MTPCCP	\$10,843
75	1800	230/460	365JP	981	0754SDJR41P-P	170/85	95.4	* 1, 9	MTPCCP	\$11,207
75	1800	575	365JP	981	0754SDJC41P-P	69	95.4	* 1	MTPCCP	\$11,207

FL Amps and FL EFF are average expected design values and not guaranteed.

The weights listed above are estimated.

Please contact Toshiba for information on product availability.

"CF"= Consult Factory

Definite Purpose Series

Open Drip Proof & Totally Enclosed Fan Cooled Tosh-ECO™ Oil Well Pump

COMING SOON

The Oil Well Pump motor is equipped to handle the harshest of environments, including installations in remote locations where the motor cannot be easily accessed. Specifically built for use in the oil and gas industry, these motors offer a high-slip, high-torque design with protective screens to safeguard against outdoor elements. Exceptional corrosion-resistance and high structural rigidity are inherent in this type of motor, and reliability and durability are critical factors that differentiate this product from competitors' offerings.

Standard Features:

- High Efficiency Design
- NEMA Design D (Typical 5 to 8% Slip)
- All Cast Iron Construction
- Corrosion-Resistant Screens & Hardware
- F2 Assembly
- Thermal Protection
- External Grounding Provisions

Applications:

- Booster Pumps
- Centrifugal Pumps
- Non-Clog pumps
- In-Line Pumps
- Vertical Turbine Pumps



Open Drip Proof

Tosh-ECO™ ODP & TEFC

Oil Well Pump

> High Efficiency



Toshiba’s Oil Well Pump motor shares the same superb quality as other Toshiba open drip proof & totally enclosed fan cooled designs. The Oil Well Pump motor is equipped to handle the harshest of environments, including installations in remote locations where the motor cannot be easily accessed. Specifically built for use in the oil and gas industry, these motors offer a high-slip, high-torque design with protective screens to safeguard against outdoor elements. Exceptional corrosion-resistance and high structural rigidity are inherent in this type of motor, and reliability and durability are critical factors that differentiate this product from competitors’ offerings.

- Product Scope:
- Horsepower: 5 to 100 HP
- Speed (60 Hz): 1200 RPM
- Voltage (60 Hz): 230, 460, or 796 V
- Enclosure: Open Drip Proof (ODP)
& Totally Enclosed Fan Cooled (TEFC)
- Frame Size: 215T through 444T
- Protection: ODP IP 22/TEFC IP55
- Construction: Cast Iron (Frame, Brackets, & Conduit Box)
- Insulation: Class F

2

TWO YEAR WARRANTY

HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
TEFC										
5	1200	230/460/796	215T	172	OW13	14.4/7.2	84	* 1	MECOWP	\$1,347
7.5	1200	230/460/796	254T	278	OW14	20/10.2	86.5	* 1	MECOWP	\$1,890
10	1200	230/460/796	256T	295	OW15	27/13.4	87.5	* 1	MECOWP	\$2,189
15	1200	230/460/796	284T	386	OW16	42/21	84	* 1	MECOWP	\$2,924
20	1200	230/460/796	286T	420	OW17	56/28	85.5	* 1	MECOWP	\$3,491
25	1200	230/460/796	324T	646	OW18	66/33	85.5	* 1	MECOWP	\$4,180
30	1200	230/460/796	326T	730	OW19	80/40	85.5	* 1	MECOWP	\$4,645
40	1200	230/460/796	364T	838	OW20	100/50	86.5	* 1	MECOWP	\$6,297
50	1200	230/460/796	365T	865	OW21	124/62	87.5	* 1	MECOWP	\$7,281
60	1200	230/460/796	404T	1137	OW22	152/76	87.5	* 1	MECOWP	\$9,057
75	1200	230/460/796	405T	1249	OW23	188/94	87.5	* 1	MECOWP	\$11,004
100	1200	230/460/796	444T	1616	OW24	256/128	87.5	* 1, 2	MECOWP	\$13,989
ODP										
5	1200	230/460/796	215T	176	OW1	14.4/7.2	84	* 1	MECOWP	\$1,171
7.5	1200	230/460/796	254T	287	OW2	20/10.2	86.5	* 1	MECOWP	\$1,550
10	1200	230/460/796	256T	298	OW3	27/13.4	87.5	* 1	MECOWP	\$1,824
15	1200	230/460/796	284T	349	OW4	42/21	84	* 1	MECOWP	\$2,543
20	1200	230/460/796	286T	428	OW5	56/28	85.5	* 1	MECOWP	\$3,036
25	1200	230/460/796	324T	516	OW6	66/33	85.5	* 1	MECOWP	\$3,635
30	1200	230/460/796	326T	571	OW7	80/40	85.5	* 1	MECOWP	\$4,039
40	1200	230/460/796	364T	872	OW8	100/50	86.5	* 1	MECOWP	\$5,476
50	1200	230/460/796	365T	932	OW9	124/62	87.5	* 1	MECOWP	\$6,331
60	1200	230/460/796	404T	1217	OW10	146/73	90.2	* 1	MECOWP	\$7,876
75	1200	230/460/796	405T	1335	OW11	188/94	87.5	* 1	MECOWP	\$9,569
100	1200	230/460/796	444T	1686	OW12	256/128	87.5	* 1, 2	MECOWP	\$12,164

FL Amps and FL EFF are average expected design values and not guaranteed.
The weights listed above are estimated.

Please contact Toshiba for information on product availability.
"CF"= Consult Factory

Definite Purpose Series

Totally Enclosed Fan Cooled

EQP Global® Cooling Tower Motors

NEW
PRODUCT

The Cooling Tower motor features multiple enhancements specifically designed for cooling tower applications in wet and humid environments. Built with an IP56-rated enclosure and coated with corrosion-resistant Severe Duty epoxy paint system, the motor can withstand the most severe operating conditions with 100% humidity. The Cooling Tower motor is available in TEFC and TEAO designs for all operating conditions.



Standard Features:

- API 661 Compliant
- Totally Enclosed Fan Cooled or Totally Enclosed Air Over
- NEMA Premium® Efficiency
- Cast Iron Frame & Conduit Box
- Class F Insulation
- Exceed Insulation Requirements of NEMA MG1 Part 31 (Inverter Duty Rated)
- Dual-Frequency 50/60 Hz Design (50/60 Hz Listed on Nameplate)
- Horizontal or Vertical Mounting
- Epoxy Finished Paint
- Multiple Drain Plugs for all Mounting Positions

Applications:

- Blowers
- Fans

Available Options:

- Space Heater
- Auxiliary Terminal Box
- Drip Cover
- Thermal Protection Devices (Thermostat & Thermistor)
- F2 Mount
- Rotate Main Terminal Box
- Shaft Grounding (Not Applicable for Div 2 Locations)
- Grease Fittings on 284T Frame & Larger
- Non-NAFTA Qualified



Totally Enclosed

EQP Global® Cooling Tower

> NEMA Premium® Efficiency



3

THREE YEAR WARRANTY

The Cooling Tower motor features multiple enhancements specifically designed for cooling tower applications in wet and humid environments. Built with an IP56-rated enclosure and coated with corrosion-resistant Severe Duty epoxy paint system, the motor can withstand the most severe operating conditions with 100% humidity. The Cooling Tower motor is available in TEFC and TEAO designs for all operating conditions.



Product Scope:	
Horsepower:	3/4 to 75 HP
Speed	
(60 Hz)*	1800 or 1200 RPM
(50 Hz)*:	1500 or 1000 RPM
Voltage	
(60 Hz)*	230/460, or 575 V
(50 Hz)*:	190/380 V
Enclosure:	
Totally Enclosed Fan Cooled or Totally Enclosed Air Over	
Frame Size:	143T through 365T
Ingress Protection:	
IP56 (100% Humidity-Protected)	
Construction:	Cast Iron Frame, Brackets & Terminal Box
Insulation:	Class F, Exceeds NEMA MG1 Part 31 (Inverter Duty)
Environment:	Severe Duty, Suitable for Use in Division 2 Hazardous Locations
<i>*50/60 Hz Listed on Nameplate for 230/460 Designs</i>	

HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
TEFC										
0.75	1200	230/460	143T	60	3/46SDGR41A-P	2.8/1.4	81.5	* 9	MTPFCT	\$702
0.75	1200	575	143T	60	3/46SDGC41A-P	1.1	81.5	*	MTPFCT	\$702
1	1800	230/460	143T	58	0014SDGR41A-P	3.4/1.7	85.5	* 9	MTPFCT	\$635
1	1800	575	143T	58	0014SDGC41A-P	1.3	85.5	*	MTPFCT	\$635
1	1200	230/460	145T	62	0016SDGR41A-P	3.6/1.8	82.5	* 9	MTPFCT	\$794
1	1200	575	145T	62	0016SDGC41A-P	1.5	82.5	*	MTPFCT	\$794
1.5	1800	230/460	145T	60	Y154SDGR41A-P	4.8/2.4	86.5	* 9	MTPFCT	\$707
1.5	1800	575	145T	59	Y154SDGC41A-P	1.9	86.5	*	MTPFCT	\$707
1.5	1200	230/460	182T	99	Y156SDGR41A-P	5/2.5	87.5	* 9	MTPFCT	\$845
1.5	1200	575	182T	99	Y156SDGC41A-P	2	87.5	*	MTPFCT	\$845
2	1800	230/460	145T	62	0024SDGR41A-P	6.0/3.0	86.5	* 9	MTPFCT	\$776
2	1800	575	145T	62	0024SDGC41A-P	2.4	86.5	*	MTPFCT	\$776
2	1200	230/460	184T	110	0026SDGR41A-P	6.8/3.4	88.5	* 9	MTPFCT	\$943
2	1200	575	184T	110	0026SDGC41A-P	2.7	88.5	*	MTPFCT	\$943
3	1800	230/460	182T	99	0034SDGR41A-P	8.0/4.0	89.5	* 9	MTPFCT	\$818
3	1800	575	182T	99	0034SDGC41A-P	3.2	89.5	*	MTPFCT	\$818
3	1200	230/460	213T	163	0036SDGR41A-P	8.8/4.4	89.5	* 9	MTPFCT	\$1,152
3	1200	575	213T	168	0036SDGC41A-P	3.5	89.5	*	MTPFCT	\$1,152
5	1800	230/460	184T	110	0054SDGR41A-P	13/6.5	89.5	* 9	MTPFCT	\$955
5	1800	575	184T	110	0054SDGC41A-P	5.2	89.5	*	MTPFCT	\$955

Totally Enclosed
EQP Global® Cooling Tower
 > NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
5	1200	230/460	215T	176	0056SDGR41A-P	13.8/6.9	89.5	* 9	MTPFCT	\$1,623
5	1200	575	215T	179	0056SDGC41A-P	5.5	89.5	*	MTPFCT	\$1,623
7.5	1800	230/460	213T	186	Y754SDGR41A-P	19.6/9.8	91.7	* 9	MTPFCT	\$1,387
7.5	1800	575	213T	179	Y754SDGC41A-P	7.8	91.7	*	MTPFCT	\$1,387
7.5	1200	230/460	254T	281	Y756SDGR41A-P	20.4/10.2	91.0	* 9	MTPFCT	\$2,321
7.5	1200	575	254T	274	Y756SDGC41A-P	8.2	91.0	*	MTPFCT	\$2,321
10	1800	230/460	215T	203	0104SDGR41A-P	26/13	91.7	* 9	MTPFCT	\$1,631
10	1800	575	215T	203	0104SDGC41A-P	10.4	91.7	*	MTPFCT	\$1,631
10	1200	230/460	256T	292	0106SDGR41A-P	26.8/13.4	91.0	* 9	MTPFCT	\$2,850
10	1200	575	256T	293	0106SDGC41A-P	10.8	91.0	*	MTPFCT	\$2,850
15	1800	230/460	254T	315	0154SDGR41A-P	38/19	92.4	* 9	MTPFCT	\$2,151
15	1800	575	254T	317	0154SDGC41A-P	15.2	92.4	*	MTPFCT	\$2,151
15	1200	230/460	284T	443	0156SDGR41A-P	39.2/19.6	91.7	* 9	MTPFCT	\$3,787
15	1200	575	284T	441	0156SDGC41A-P	15.8	91.7	*	MTPFCT	\$3,787
20	1800	230/460	256T	355	0204SDGR41A-P	50/25	93.0	* 9	MTPFCT	\$2,678
20	1800	575	256T	353	0204SDGC41A-P	20	93.0	*	MTPFCT	\$2,678
20	1200	230/460	286T	478	0206SDGR41A-P	50.8/25.4	91.7	* 9	MTPFCT	\$4,457
20	1200	575	286T	478	0206SDGC41A-P	20.4	91.7	*	MTPFCT	\$4,457
25	1800	230/460	284T	492	0254SDGR41A-P	61/30.5	93.6	* 9	MTPFCT	\$3,241
25	1800	575	284T	492	0254SDGC41A-P	24.4	93.6	*	MTPFCT	\$3,241
25	1200	230/460	324T	627	0256SDGR41A-P	62.4/31.2	93.0	* 9	MTPFCT	\$5,405
25	1200	575	324T	615	0256SDGC41A-P	24.6	93.0	*	MTPFCT	\$5,405
30	1800	230/460	286T	531	0304SDGR41A-P	72.0/36	93.8	* 9	MTPFCT	\$3,786
30	1800	575	286T	505	0304SDGC41A-P	29.2	93.6	*	MTPFCT	\$3,786
30	1200	230/460	326T	638	0306SDGR41A-P	74.4/37.2	93.0	* 9	MTPFCT	\$6,224
30	1200	575	326T	631	0306SDGC41A-P	30	93.0	*	MTPFCT	\$6,224
40	1800	230/460	324T	669	0404SDGR41A-P	96/48	94.1	* 9	MTPFCT	\$4,927
40	1800	575	324T	666	0404SDGC41A-P	38.4	94.1	*	MTPFCT	\$4,927
40	1200	230/460	364T	811	0406SDGR41A-P	96/48	94.1	* 9	MTPFCT	\$8,435
40	1200	575	364T	802	0406SDGC41A-P	38.4	94.1	*	MTPFCT	\$8,435
50	1800	230/460	326T	715	0504SDGR41A-P	120/60	94.5	* 9	MTPFCT	\$5,725
50	1800	575	326T	716	0504SDGC41A-P	48	94.5	*	MTPFCT	\$5,725
50	1200	230/460	365T	834	0506SDGR41A-P	120/60	94.1	* 9	MTPFCT	\$9,684
50	1200	575	365T	833	0506SDGC41A-P	48	94.1	*	MTPFCT	\$9,684
60	1800	230/460	364T	880	0604SDGR41A-P	138/69	95.0	* 9	MTPFCT	\$8,683
60	1800	575	364T	895	0604SDGC41A-P	55	95.0	*	MTPFCT	\$8,683
75	1800	230/460	365T	961	0754SDGR41A-P	172/86	95.4	* 9	MTPFCT	\$10,419
75	1800	575	365T	979	0754SDGC41A-P	68.8	95.4	*	MTPFCT	\$10,419
TEAO										
0.75	1200	230/460	143T	60	3/46FAGR41A-P	2.8/1.4	81.5	* 9	MTPFCT	\$702
0.75	1200	575	143T	60	3/46FAGC41A-P	1.1	81.5	*	MTPFCT	\$702
1	1800	230/460	143T	58	0014FAGR41A-P	3.4/1.7	85.5	* 9	MTPFCT	\$635
1	1800	575	143T	58	0014FAGC41A-P	1.3	85.5	*	MTPFCT	\$635
1	1200	230/460	145T	62	0016FAGR41A-P	3.6/1.8	82.5	* 9	MTPFCT	\$794
1	1200	575	145T	62	0016FAGC41A-P	1.5	82.5	*	MTPFCT	\$794
1.5	1800	230/460	145T	60	Y154FAGR41A-P	4.8/2.4	86.5	* 9	MTPFCT	\$707
1.5	1800	575	145T	59	Y154FAGC41A-P	1.9	86.5	*	MTPFCT	\$707
1.5	1200	230/460	182T	99	Y156FAGR41A-P	5/2.5	87.5	* 9	MTPFCT	\$845

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed

EQP Global® Cooling Tower

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
1.5	1200	575	182T	99	Y156FAGC41A-P	2	87.5	*	MTPFCT	\$845
2	1800	230/460	145T	62	0024FAGR41A-P	6.0/3.0	86.5	* 9	MTPFCT	\$776
2	1800	575	145T	62	0024FAGC41A-P	2.4	86.5	*	MTPFCT	\$776
2	1200	230/460	184T	110	0026FAGR41A-P	6.8/3.4	88.5	* 9	MTPFCT	\$943
2	1200	575	184T	110	0026FAGC41A-P	2.7	88.5	*	MTPFCT	\$943
3	1800	230/460	182T	99	0034FAGR41A-P	8.0/4.0	89.5	* 9	MTPFCT	\$818
3	1800	575	182T	99	0034FAGC41A-P	3.2	89.5	*	MTPFCT	\$818
3	1200	230/460	213T	163	0036FAGR41A-P	8.8/4.4	89.5	* 9	MTPFCT	\$1,152
3	1200	575	213T	168	0036FAGC41A-P	3.5	89.5	*	MTPFCT	\$1,152
5	1800	230/460	184T	110	0054FAGR41A-P	13/6.5	89.5	* 9	MTPFCT	\$955
5	1800	575	184T	110	0054FAGC41A-P	5.2	89.5	*	MTPFCT	\$955
5	1200	230/460	215T	176	0056FAGR41A-P	13.8/6.9	89.5	* 9	MTPFCT	\$1,623
5	1200	575	215T	179	0056FAGC41A-P	5.5	89.5	*	MTPFCT	\$1,623
7.5	1800	230/460	213T	186	Y754FAGR41A-P	19.6/9.8	91.7	* 9	MTPFCT	\$1,387
7.5	1800	575	213T	179	Y754FAGC41A-P	7.8	91.7	*	MTPFCT	\$1,387
7.5	1200	230/460	254T	281	Y756FAGR41A-P	20.4/10.2	91.0	* 9	MTPFCT	\$2,321
7.5	1200	575	254T	274	Y756FAGC41A-P	8.2	91.0	*	MTPFCT	\$2,321
10	1800	230/460	215T	203	0104FAGR41A-P	26/13	91.7	* 9	MTPFCT	\$1,631
10	1800	575	215T	203	0104FAGC41A-P	10.4	91.7	*	MTPFCT	\$1,631
10	1200	230/460	256T	292	0106FAGR41A-P	26.8/13.4	91.0	* 9	MTPFCT	\$2,850
10	1200	575	256T	293	0106FAGC41A-P	10.8	91.0	*	MTPFCT	\$2,850
15	1800	230/460	254T	315	0154FAGR41A-P	38/19	92.4	* 9	MTPFCT	\$2,151
15	1800	575	254T	317	0154FAGC41A-P	15.2	92.4	*	MTPFCT	\$2,151
15	1200	230/460	284T	443	0156FAGR41A-P	39.2/19.6	91.7	* 9	MTPFCT	\$3,787
15	1200	575	284T	441	0156FAGC41A-P	15.8	91.7	*	MTPFCT	\$3,787
20	1800	230/460	256T	355	0204FAGR41A-P	50/25	93.0	* 9	MTPFCT	\$2,678
20	1800	575	256T	353	0204FAGC41A-P	20	93.0	*	MTPFCT	\$2,678
20	1200	230/460	286T	478	0206FAGR41A-P	50.8/25.4	91.7	* 9	MTPFCT	\$4,457
20	1200	575	286T	478	0206FAGC41A-P	20.4	91.7	*	MTPFCT	\$4,457
25	1800	230/460	284T	492	0254FAGR41A-P	61/30.5	93.6	* 9	MTPFCT	\$3,241
25	1800	575	284T	492	0254FAGC41A-P	24.4	93.6	*	MTPFCT	\$3,241
25	1200	230/460	324T	627	0256FAGR41A-P	62.4/31.2	93.0	* 9	MTPFCT	\$5,405
25	1200	575	324T	615	0256FAGC41A-P	24.6	93.0	*	MTPFCT	\$5,405
30	1800	230/460	286T	531	0304FAGR41A-P	72.8/36.4	93.6	* 9	MTPFCT	\$3,786
30	1800	575	286T	505	0304FAGC41A-P	29.2	93.6	*	MTPFCT	\$3,786
30	1200	230/460	326T	638	0306FAGR41A-P	74.4/37.2	93.0	* 9	MTPFCT	\$6,224
30	1200	575	326T	631	0306FAGC41A-P	30	93.0	*	MTPFCT	\$6,224
40	1800	230/460	324T	669	0404FAGR41A-P	96/48	94.1	* 9	MTPFCT	\$4,927
40	1800	575	324T	666	0404FAGC41A-P	38.4	94.1	*	MTPFCT	\$4,927
40	1200	230/460	364T	811	0406FAGR41A-P	96/48	94.1	* 9	MTPFCT	\$8,435
40	1200	575	364T	802	0406FAGC41A-P	38.4	94.1	*	MTPFCT	\$8,435
50	1800	230/460	326T	715	0504FAGR41A-P	120/60	94.5	* 9	MTPFCT	\$5,725
50	1800	575	326T	716	0504FAGC41A-P	48	94.5	*	MTPFCT	\$5,725
50	1200	230/460	365T	834	0506FAGR41A-P	120/60	94.1	* 9	MTPFCT	\$9,684
50	1200	575	365T	833	0506FAGC41A-P	48	94.1	*	MTPFCT	\$9,684
60	1800	230/460	364T	880	0604FAGR41A-P	138/69	95.0	* 9	MTPFCT	\$8,683
60	1800	575	364T	895	0604FAGC41A-P	55	95.0	*	MTPFCT	\$8,683
75	1800	230/460	365T	961	0754FAGR41A-P	172/86	95.4	* 9	MTPFCT	\$10,419
75	1800	575	365T	979	0754FAGC41A-P	68.8	95.4	*	MTPFCT	\$10,419

Definite Purpose Series

Totally Enclosed Fan Cooled

Quarry Duty

Toshiba's definite purpose, totally enclosed fan cooled, premium & high efficiency, Quarry Duty motor series have a proven track record of exceeding the extreme demands of the cement and aggregate industries. Our Quarry Duty motors utilize a totally enclosed fan cooled design and provide exceptional high torque. This motor series exceeds NEMA MG1 Part 31 requirements and is designed for horizontal or vertical, indoor and outdoor applications.

Standard Features:

- Totally Enclosed Fan Cooled
- Premium & High Efficiency
- High Torque Design
- 230/460, 460, or 575 V
- Three-Phase
- 60 Hz
- Class F Insulation
- 1.15 Service Factor
- Exceeds Insulation Requirements of NEMA MG1 Part 31 (Inverter Duty)
- Cast Iron Frames
- Stamped Steel Fan Cover
- Cast Iron Brackets
- Polyurea Base Grease
- Cast Iron or Stamped Steel Gasketed Conduit Box
- Open Regreasable Roller Bearings
- Shaft Slinger or V-Ring Shaft on Drive End
- 4142 High Strength Shaft Steel
- Grade-8 Hardware
- Bearing Lock Nuts for Vertical Mounting

Applications:

- Ball & Rolling Mills
- Centrifuges
- Chippers
- Cone Crushers
- Conveyors
- Debarkers
- Grinding Mills
- Hammer Mills
- Jaw Crushers



Totally Enclosed Fan Cooled Quarry Duty

> Premium & High Efficiency



2 TWO YEAR
WARRANTY

Toshiba’s definite purpose, Quarry Duty motor series have a proven track record of exceeding the extreme demands of the cement and aggregate industries. Our Quarry Duty motors utilize a totally enclosed fan cooled design and provide exceptional high torque. This motor series exceeds NEMA MG1 Part 31 requirements and is designed for horizontal or vertical, indoor and outdoor applications.

Product Scope:

Horsepower:	1 to 600 HP
Speed:	1800, 1200, or 900 RPM
Volt:	230/460, 460 or 575 V
Enclosure:	Totally Enclosed Fan Cooled
Frame Size:	143T through 5810UZ
Construction:	Cast Iron T-Box, Frame, and Brackets
Insulation:	Class F, Exceeds NEMA MG1 Part 31 (Inverter Duty)

HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
1	1800	230/460	143T	53	QD1	3.2/1.6	85.5	1	MECQCP	\$479
1	1800	575	143T	51	QD39	1.3	85.5	1	MECQCP	\$479
1	1200	230/460	145T	59	QD2	3.4/1.7	82.5	1	MECQCP	\$595
1	1200	575	145T	60	QD40	1.3	82.5	1	MECQCP	\$595
1.5	1800	230/460	145T	64	QD3	4.6/2.3	86.5	1	MECQCP	\$527
1.5	1800	575	145T	65	QD41	1.9	86.5	1	MECQCP	\$527
1.5	1200	230/460	182T	98	QD4	4.6/2.3	87.5	1	MECQCP	\$635
1.5	1200	575	182T	100	QD42	1.9	87.5	1	MECQCP	\$635
2	1800	575	145T	66	QD43	2.5	86.5	1	MECQCP	\$572
2	1800	230/460	145T	65	QD5	6.2/3.1	86.5	1	MECQCP	\$572
2	1200	575	184T	105	QD44	2.7	88.5	1	MECQCP	\$736
2	1200	230/460	184T	103	QD6	6.6/3.3	88.5	1	MECQCP	\$736
3	1800	575	182T	120	QD45	3	89.5	1	MECQCP	\$657
3	1800	230/460	182T	117	QD7	7.4/3.7	89.5	1	MECQCP	\$657
3	1200	575	213T	175	QD46	4	89.5	1	MECQCP	\$935
3	1200	230/460	213T	174	QD8	10.0/5.0	89.5	1	MECQCP	\$935
5	1800	575	184T	120	QD47	5	89.5	1	MECQCP	\$750
5	1800	230/460	184T	119	QD9	12.4/6.2	89.5	1	MECQCP	\$750
5	1200	230/460	215T	178	QD10	15.4/7.7	89.5	1	MECQCP	\$1,375
5	1200	575	215T	180	QD48	6.1	89.5	1	MECQCP	\$1,375
7.5	1800	230/460	213T	188	QD11	19.2/9.6	91.7	1	MECQCP	\$1,073
7.5	1800	575	213T	191	QD49	7.6	91.7	1	MECQCP	\$1,073
7.5	1200	230/460	254T	282	QD12	22/11	91	1	MECQCP	\$1,825
7.5	1200	575	254T	280	QD50	8.8	91	1	MECQCP	\$1,825
10	1800	230/460	215T	191	QD13	25.4/12.7	91.7	1	MECQCP	\$1,305
10	1800	575	215T	190	QD51	10.2	91.7	1	MECQCP	\$1,305
10	1200	230/460	256T	288	QD14	30/15	91	1	MECQCP	\$2,230

Totally Enclosed Fan Cooled

Quarry Duty

➤ Premium & High Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
10	1200	575	256T	290	QD52	11.9	91	1	MECQCP	\$2,230
15	1800	230/460	254T	351	QD15	38/19.2	92.4	1	MECQCP	\$1,761
15	1800	575	254T	350	QD53	15.5	92.4	1	MECQCP	\$1,761
15	1200	230/460	284T	405	QD16	39/19.5	91.7	1	MECQCP	\$3,127
15	1200	575	284T	400	QD54	15.8	91.7	1	MECQCP	\$3,127
20	1800	230/460	256T	378	QD17	50/25	93	1	MECQCP	\$2,175
20	1800	575	256T	380	QD55	20	93	1	MECQCP	\$2,175
20	1200	230/460	286T	428	QD18	52/26	91.7	1	MECQCP	\$3,663
20	1200	575	286T	430	QD56	21	91.7	1	MECQCP	\$3,663
25	1800	230/460	284T	439	QD19	62/31	93.6	1	MECQCP	\$2,639
25	1800	575	284T	440	QD57	25	93.6	1	MECQCP	\$2,639
25	1200	230/460	324T	542	QD20	66/33	93	1	MECQCP	\$4,446
25	1200	575	324T	546	QD58	27	93	1	MECQCP	\$4,446
30	1800	230/460	286T	450	QD21	74/37	93.6	1	MECQCP	\$3,173
30	1800	575	286T	455	QD59	29	93.6	1	MECQCP	\$3,173
30	1200	230/460	326T	564	QD22	80/40	93	1	MECQCP	\$5,428
30	1200	575	326T	564	QD60	32	93	1	MECQCP	\$5,428
40	1800	230/460	324T	781	QD23	96/48	94.1	1	MECQCP	\$4,102
40	1800	575	324T	787	QD61	38	94.1	1	MECQCP	\$4,102
40	1200	230/460	364T	796	QD24	96/48	94.1	1	MECQCP	\$7,102
40	1200	575	364T	796	QD62	38	94.1	1	MECQCP	\$7,102
50	1800	230/460	326T	626	QD25	120/60	94.5	1	MECQCP	\$5,002
50	1800	575	326T	626	QD63	48	94.5	1	MECQCP	\$5,002
50	1200	230/460	365T	840	QD26	124/62	94.1	1	MECQCP	\$8,290
50	1200	575	365T	846	QD64	49	94.1	1	MECQCP	\$8,290
60	1800	230/460	364T	862	QD27	144/72	95	1	MECQCP	\$7,050
60	1800	575	364T	867	QD65	58	95	1	MECQCP	\$7,050
60	1200	230/460	404T	1164	QD28	162/81	94.5	1	MECQCP	\$10,308
60	1200	575	404T	1172	QD66	65	94.5	1	MECQCP	\$10,308
75	1800	230/460	365T	959	QD29	188/94	95.4	1	MECQCP	\$9,082
75	1800	575	365T	965	QD67	75	95.4	1	MECQCP	\$9,082
75	1200	230/460	405T	1343	QD30	186/93	94.5	1	MECQCP	\$12,253
75	1200	575	405T	1348	QD68	74	94.5	1	MECQCP	\$12,253
100	1800	230/460	405T	1243	QD31	248/124	95.4	1	MECQCP	\$12,196
100	1800	575	405T	1250	QD69	99	95.4	1	MECQCP	\$12,196
100	1200	230/460	444T	1601	QD32	246/123	95	1, 2	MECQCP	\$17,713
100	1200	575	444T	1607	QD70	98	95	1, 2	MECQCP	\$17,713
125	1800	230/460	444T	1715	QD33	284/142	95.4	1, 2	MECQCP	\$15,521
125	1800	575	444T	1685	QD71	122	95.4	1, 2	MECQCP	\$15,521
125	1200	230/460	445T	1678	QD34	304/152	95	1, 2	MECQCP	\$17,393
125	1200	575	445T	1685	QD72	122	95	1, 2	MECQCP	\$17,393
150	1800	230/460	445T	1865	QD35	336/168	95.8	1, 2	MECQCP	\$17,499
150	1800	575	445T	2185	QD73	145	95.8	1, 2	MECQCP	\$17,499
150	1200	460	447T	2180	QD36	181	95.8	1, 2	MECQCP	\$21,324
150	1200	575	447T	2185	QD74	145	95.8	1, 2	MECQCP	\$21,324
200	1800	460	447T	2370	QD37	223	96.2	1, 2	MECQCP	\$21,033
200	1800	575	447T	2497	QD75	196	96.2	1, 2	MECQDP	\$21,033
200	1200	460	505UZ	2874	2006QDAB41-RF	235	95.8	2	MXTQDP	\$24,563
200	1200	575	505UZ	2874	2006QDAC41-R	188	95.8	2	MXTQDP	\$24,563

Totally Enclosed Fan Cooled

Quarry Duty

> Premium & High Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
200	1200	460	505UZ	2485	QD78	246	95.8	1, 2	MECQDP	\$24,563
200	1200	575	505UZ	2497	QD98	196	95.8	1, 2	MECQDP	\$24,563
200	900	460	N587UZQ	3840	2008QDAB41-R	291	94.5	2	MXTQDP	\$42,791
200	900	575	N587UZQ	3840	2008QDAC41-R	233	94.5	2	MXTQDP	\$42,791
200	900	460	586UZ	4092	QD79	261	94.5	1, 2	MECQDP	\$42,791
200	900	575	586UZ	4088	QD99	210	94.5	1, 2	MECQDP	\$42,791
250	1800	460	505UZ	2908	2504QDAB41-R	289	96.2	2	MXTQDP	\$31,341
250	1800	575	505UZ	2908	2504QDAC41-R	231	96.2	2	MXTQDP	\$31,341
250	1800	575	505UZ	2432	QD100	227	96.2	1, 2	MECQDP	\$31,341
250	1800	460	505UZ	2430	QD80	286	96.2	1, 2	MECQDP	\$31,341
250	1200	460	N587UZQ	3837	2506QDAB41-RF	308	95.8	2	MXTQDP	\$40,182
250	1200	575	N587UZQ	3837	2506QDAC41-R	247	95.8	2	MXTQDP	\$40,182
250	1200	575	586UZ	4168	QD101	237	95.8	1, 2	MECQDP	\$40,182
250	1200	460	586UZ	4167	QD81	295	95.8	1, 2	MECQDP	\$40,182
250	900	460	N587UZQ	4339	2508QDAB41-R	362	95	2	MXTQDP	\$47,438
250	900	575	N587UZQ	4339	2508QDAC41-R	290	95	2	MXTQDP	\$47,438
250	900	575	586U	4226	QD102	258	95.0	1, 2	MECQDP	\$47,438
250	900	460	586UZ	4221	QD82	320	95.0	1, 2	MECQDP	\$47,438
300	1800	460	N587UZQ	3815	3004QDAB41-R	346	96.2	2	MXTQDP	\$39,952
300	1800	575	N587UZQ	3815	3004QDAC41-R	277	96.2	2	MXTQDP	\$39,952
300	1800	575	586UZ	4151	QD103	266	96.2	1, 2	MECQDP	\$39,952
300	1800	460	586UZ	4163	QD83	333	96.2	1, 2	MECQDP	\$39,952
300	1200	460	N587UZQ	4037	3006QDAB41-R	381	95.8	2	MXTQDP	\$47,002
300	1200	575	N587UZQ	4037	3006QDAC41-R	305	95.8	2	MXTQDP	\$47,002
300	1200	575	586UZ	4241	QD104	283	95.8	1, 2	MECQDP	\$47,002
300	1200	460	586UZ	4239	QD84	354	95.8	1, 2	MECQDP	\$47,002
300	900	460	5810UZ	6000	F3008FLF4BMQ	443	95	2	MXTQDP	\$53,174
300	900	575	5810UZ	6000	F3008FLF4OMQ	354	95	2	MXTQDP	\$53,174
300	900	575	586UZ	4301	QD105	307	95	1, 2	MECQDP	\$53,174
300	900	460	586UZ	4298	QD85	388	95	1, 2	MECQDP	\$53,174
350	1800	460	N587UZQ	4081	3504QDAB41-R	403	96.2	2	MXTQDP	\$42,747
350	1800	575	N587UZQ	4081	3504QDAC41-R	323	96.2	2	MXTQDP	\$42,747
350	1800	575	586UZ	4383	QD106	311	96.2	1, 2	MECQDP	\$42,747
350	1800	460	586UZ	4366	QD86	388	96.2	1, 2	MECQDP	\$42,747
350	1200	460	5010UZ	4735	3506QDAB41-R1	444	95.8	2	MXTQDP	\$51,504
350	1200	575	5010UZ	4735	3506QDAC41-R1	355	95.8	2	MXTQDP	\$51,504
350	1200	575	586UZ	4522	QD107	337	95.8	1, 2	MECQDP	\$51,504
350	1200	460	586UZ	4600	QD87	420	95.8	1, 2	MECQDP	\$51,504
350	900	460	5810UZ	6083	F3508FLF4BMQ	488	93.6	2	MXTQDP	\$59,889
350	900	575	5810UZ	6083	F3508FLF4OMQ	390	93.6	2	MXTQDP	\$59,889
350	900	575	587UZ	4339	QD108	367	95	1, 2	MECQDP	\$59,889
350	900	460	587UZ	4345	QD88	453	95	1, 2	MECQDP	\$59,889
400	1800	460	N587UZQ	4088	4004QDAB41-R	455	96.2	2	MXTQDP	\$48,004
400	1800	575	N587UZQ	4088	4004QDAC41-R	364	96.2	2	MXTQDP	\$48,004
400	1800	575	587UZ	4480	QD109	354	96.2	1, 2	MECQDP	\$48,004
400	1800	460	587UZ	4450	QD89	442	96.2	1, 2	MECQDP	\$48,004
400	1200	460	5010UZ	4500	F4006FLF4BMQ	485	95.4	2	MXTQDP	\$51,456
400	1200	575	5010UZ	4500	F4006FLF4OMQ	388	95.4	2	MXTQDP	\$51,456

Totally Enclosed Fan Cooled

Quarry Duty

➤ Premium & High Efficiency



HP	Speed (RPM)	Volts	Frame	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
400	1200	575	587UZ	4546	QD110	364	95.8	1, 2	MECQDP	\$51,456
400	1200	460	587UZ	4537	QD90	455	95.8	1, 2	MECQDP	\$51,456
400	900	460	5810UZ	5982	F4008FLF4BMQ	560	95.4	2	MXTQDP	\$68,259
400	900	575	5810UZ	5982	F4008FLF4OMQ	450	95.4	2	MXTQDP	\$68,259
450	1800	460	5010UZ	4905	4504QDAB41-R	575	96.2	2	MXTQDP	\$51,121
450	1800	575	5010UZ	4905	4504QDAC41-R	460	96.2	2	MXTQDP	\$51,121
450	1800	575	587UZ	4621	QD111	398	96.2	1, 2	MECQDP	\$51,121
450	1800	460	587UZ	4612	QD91	498	96.2	1, 2	MECQDP	\$51,121
450	1200	460	5810UZ	5856	F4508FLF4BMQ	589	95.4	2	MXTQDP	\$56,247
450	1200	575	5810UZ	5856	F4508FLF4OMQ	475	95.4	2	MXTQDP	\$56,247
450	1200	575	587UZ	4786	QD112	434	95.8	1, 2	MECQDP	\$56,247
450	1200	460	587UZ	4780	QD92	534	95.8	1, 2	MECQDP	\$56,247
450	900	460	5810UZ	7800	F4508FLF4BMQ	588	95.4	2	MXTQDP	\$73,289
450	900	575	5810UZ	7800	F4508FLF4OMQ	488	95.4	2	MXTQDP	\$73,289
500	1800	460	5010UZ	5000	5004QDAB41-R	635	96.2	2	MXTQDP	\$53,452
500	1800	575	5010UZ	5000	5004QDAC41-R	508	96.2	2	MXTQDP	\$53,452
500	1800	575	587UZ	4847	QD113	442	96.2	1, 2	MECQDP	\$53,452
500	1800	460	587UZ	4847	QD93	442	96.2	1, 2	MECQDP	\$53,452
500	1200	460	5810UZ	5987	F5006FLF4BMQ	645	95.4	2	MXTQDP	\$71,163
500	1200	575	5810UZ	5987	F5006FLF4OMQ	516	95.4	2	MXTQDP	\$71,163
500	1200	575	587UZ	4966	QD114	480	95.8	1, 2	MECQDP	\$71,163
500	1200	460	587UZ	4955	QD94	596	95.8	1, 2	MECQDP	\$71,163
600	1800	460	5810UZ	5870	F6004FLF4BMQ	682	95.8	2	MXTQDP	\$61,200
600	1800	575	5810UZ	5870	F6004FLF4OMQ	547	95.8	2	MXTQDP	\$61,200
600	1800	575	5810UZ	5103	QD115	582	96.2	1, 2	MECQDP	\$61,200
600	1800	460	5810UZ	5112	QD95	717	96.2	1, 2	MECQDP	\$61,200
600	1200	460	5810UZ	6083	F6006FLF4BMQ	776	95.4	2	MXTQDP	\$85,397
600	1200	575	5810UZ	6083	F6006FLF4OMQ	612	95.4	2	MXTQDP	\$85,397
600	1200	575	5810UZ	5186	QD116	569	95.8	1, 2	MECQDP	\$85,397
600	1200	460	5810UZ	5180	QD96	705	95.8	1, 2	MECQDP	\$85,397

FL Amps and FL EFF are average expected design values and not guaranteed.

The weights listed above are estimated.

Please contact Toshiba for information on product availability.

"CF"= Consult Factory

MV Modifications	MV Definite Purpose	MV Gen. Purp. Enclosed	MV General Purpose Open	LV Mods. (Stock & Prod)	Definite Purpose	IEC	Explosion Proof	TEFC General Purpose	ODP General Purpose

Definite Purpose Series

Totally Enclosed Fan Cooled

EQP Global® Brake Motor

Toshiba's definite purpose, totally enclosed fan cooled, NEMA Premium® efficiency, Brake Motor series is designed to meet the needs of general holding applications. This product line is built to withstand the toughest conditions and offers some of the highest efficiency and torque ratings while producing some of the lowest vibration ratings in the industry—leading to a longer life and greater reliability. The Brake Motor series is suitable for indoor and outdoor use.



Standard Features:

- Totally Enclosed Fan Cooled
- NEMA Premium® Efficiency
- C-Face Footed & Footless
- 230/460 V, (190/380 V; 50 Hz) or 575 V 60 Hz
- Multi-Mount Frames
- Three-Phase
- 50/60 Hz
- 1.15 Service Factor @ 60 Hz, 1.0 SF @ 50 Hz
- Class F Insulation
- IP55 Protection
- 304 Stainless Steel Nameplate
- Exceeds Insulation Requirements of NEMA MG1 Part 31 (Inverter Duty)
- Cast Iron Frame, Brackets, and Conduit Box
- Cast Iron Fan Cover
- V-Ring Seal on Drive End
- Brake Ratings 15 lb. ft. and Below Suitable for Vertical Mounting
- Non-NAFTA Qualified

Brake Options:

- Solenoid Actuated Spring-Set Brakes
- Multiple Options for Brake Voltages
- Manual Release Lever on Rear of Brake Housing
- Wear Adjustment
- Static Torque Ratings from 3 to 125 lb. ft.
- Spring-Kits for 210 Frame and Larger Vertical Mountings

Applications:

- Conveyors
- Gear Reducers
- Material Handling
- Baggage Handling
- Carousels & Palletizing
- Holding Applications



ODP General Purpose
TEFC General Purpose
Explosion Proof
IEC
Definite Purpose
LV Mods. (Stock & Prod)
MV General Purpose Open
MV Gen. Purp. Enclosed
MV Definite Purpose
MV Modifications

Totally Enclosed Fan Cooled

EQP Global® Brake Motor

➤ NEMA Premium® Efficiency



3

THREE YEAR WARRANTY

Toshiba's definite purpose, totally enclosed fan cooled, NEMA Premium® efficiency, EQP Global



Brake Motor series is designed to meet the needs of general holding applications. This product line is built to withstand the toughest conditions and offers some of the highest efficiency and torque ratings while producing some of the lowest vibration ratings in the industry—leading to a longer life and greater reliability. The EQP Global Brake Motor series is suitable for indoor and outdoor use.

Product Scope:

Horsepower: ½ to 30 HP

Speed: 1800 or 1200 RPM
1500 or 1000 RPM

Voltage: 230/460 or 575 V
190/380 V

Enclosure: Totally Enclosed Fan Cooled

Frame Size: 143T through 286T

Construction: Cast Iron

Insulation: Class F, Exceeds NEMA MG1 Part 31 (Inverter Duty)

Brake Coil

Voltage: Matches Motor Voltage

HP	Speed (RPM)	Volts	Frame	Brake (ft.-lbs.)	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
0.5	1200	230/460	143T		66	1/26SDBA41A-P		CF	1, 9, 15	MTPBRK	\$1,997
0.5	1200	575	143T		66	1/26SDBC41A-P		CF	1, 15	MTPBRK	\$1,997
0.75	1200	230/460	143T	6	66	3/46SDBA41A-P	2.8/1.4	81.5	1, 9, 15	MTPBRK	\$1,997
0.75	1200	575	143T	6	66	3/46SDBC41A-P	1.1	81.5	1, 15	MTPBRK	\$1,998
1	1800	230/460	143T	6	66	0014SDBA41A-P	3.4/1.7	85.5	* 1, 9, 15	MTPBRK	\$1,914
1	1800	575	143T	6	66	0014SDBC41A-P	1.3	85.5	* 1, 15	MTPBRK	\$1,914
1	1200	230/460	145T	10	75	0016SDBA41A-P	3.6/1.8	82.5	1, 9, 15	MTPBRK	\$2,126
1	1200	575	145T	10	75	0016SDBC41A-P	1.5	82.5	1, 15	MTPBRK	\$2,126
1.5	1800	230/460	145T	10	70	Y154SDBA41A-P	4.8/2.4	86.5	* 1, 9, 15	MTPBRK	\$2,060
1.5	1800	575	145T	10	70	Y154SDBC41A-P	1.9	86.5	* 1, 15	MTPBRK	\$2,060
1.5	1200	230/460	182T	10	94	Y156SDBA41A-P	5/2.5	87.5	1, 9, 15	MTPBRK	\$2,165
1.5	1200	575	182T	10	94	Y156SDBC41A-P	2	87.5	1, 15	MTPBRK	\$2,165
2	1800	230/460	145T	10	74	0024SDBA41A-P	6.0/3.0	86.5	* 1, 9, 15	MTPBRK	\$2,104
2	1800	575	145T	10	74	0024SDBC41A-P	2.4	86.5	* 1, 15	MTPBRK	\$2,104
2	1200	230/460	184T	15	113	0026SDBA41A-P	6.8/3.4	88.5	* 1, 9, 15	MTPBRK	\$2,563
2	1200	575	184T	15	113	0026SDBC41A-P	2.7	88.5	1, 15	MTPBRK	\$2,563
3	1800	230/460	182T	15	110	0034SDBA41A-P	8.0/4.0	89.5	* 1, 9, 15	MTPBRK	\$2,486
3	1800	575	182T	15	110	0034SDBC41A-P	3.2	89.5	* 1, 15	MTPBRK	\$2,486
3	1200	230/460	213T	35	189	0036SDBA41A-P	8.8/4.4	89.5	1, 9	MTPBRK	\$4,406
3	1200	575	213T	35	189	0036SDBC41A-P	3.5	89.5	1	MTPBRK	\$4,406
5	1800	230/460	184T	15	115	0054SDBA41A-P	13/6.5	89.5	* 1, 9, 15	MTPBRK	\$2,576
5	1800	575	184T	15	115	0054SDBC41A-P	5.2	89.5	* 1, 15	MTPBRK	\$2,576
5	1200	230/460	215T	35	206	0056SDBA41A-P	13.8/6.9	89.5	* 1, 9	MTPBRK	\$4,832
5	1200	575	215T	35	206	0056SDBC41A-P	5.5	89.5	1	MTPBRK	\$4,832
7.5	1800	230/460	213T	35	217	Y754SDBA41A-P	19.6/9.8	91.7	1, 9	MTPBRK	\$4,539
7.5	1800	575	213T	35	217	Y754SDBC41A-P	7.8	91.7	* 1	MTPBRK	\$4,539
7.5	1200	230/460	254T	50	254	Y756SDBA41A-P	20.4/10.2	91.0	* 1, 9	MTPBRK	\$5,768
7.5	1200	575	254T	50	254	Y756SDBC41A-P	8.2	91.0	1	MTPBRK	\$5,768
10	1800	230/460	215T	50	232	0104SDBA41A-P	26/13	91.7	1, 9	MTPBRK	\$5,264

Totally Enclosed Fan Cooled

EQP Global® Brake Motor

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Brake (ft.-lbs.)	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
10	1800	575	215T	50	232	0104SDBC41A-P	10.4	91.7	* 1	MTPBRK	\$5,264
10	1200	230/460	256T	75	327	0106SDBA41A-P	26.8/13.4	91.0	* 1, 9	MTPBRK	\$7,060
10	1200	575	256T	75	327	0106SDBC41A-P	10.8	91.0	1	MTPBRK	\$7,060
15	1800	230/460	254T	75	310	0154SDBA41A-P	38/19	92.4	1, 9	MTPBRK	\$6,606
15	1800	575	254T	75	310	0154SDBC41A-P	15.2	92.4	* 1	MTPBRK	\$6,606
15	1200	230/460	284T	105	408	0156SDBA41A-P	39.2/19.6	91.7	* 1, 9	MTPBRK	\$9,479
15	1200	575	284T	105	408	0156SDBC41A-P	15.8	91.7	1	MTPBRK	\$9,479
20	1800	230/460	256T	105	433	0204SDBA41A-P	50/25	93.0	1, 9	MTPBRK	\$8,557
20	1800	575	256T	105	433	0204SDBC41A-P	20	93.0	* 1	MTPBRK	\$8,557
20	1200	230/460	286T	125	650	0206SDBA41A-P	50.8/25.4	91.7	1, 9	MTPBRK	\$13,048
20	1200	575	286T	125	650	0206SDBC41A-P	20.4	91.7	1	MTPBRK	\$13,048
25	1800	230/460	284T	105	471	0254SDBA41A-P	61/30.5	93.6	* 1, 9	MTPBRK	\$10,150
25	1800	575	284T	105	471	0254SDBC41A-P	24.4	93.6	* 1	MTPBRK	\$10,150
30	1800	230/460	286T	125	635	0304SDBA41A-P	72.8/36.4	93.6	* 1, 9	MTPBRK	\$12,573
30	1800	575	286T	125	635	0304SDBC41A-P	29.2	93.6	* 1	MTPBRK	\$12,573

FL Amps and FL EFF are average expected design values and not guaranteed.

The weights listed above are estimated.

Please contact Toshiba for information on product availability.

"CF"= Consult Factory

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed Fan Cooled

EQP Global® Brake Motor

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Brake (ft.-lbs.)	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
C-Face Footed											
0.5	1200	230/460	143TC		64	1/26SDBA42A-P		CF	1, 9, 15, 16	MTPBRK	\$2,057
0.5	1200	575	143TC		64	1/26SDBC42A-P		CF	1, 15, 16	MTPBRK	\$2,057
0.75	1200	230/460	143TC	6	64	3/46SDBA42A-P	2.8/1.4	81.5	1, 9, 15, 16	MTPBRK	\$2,057
0.75	1200	575	143TC	6	64	3/46SDBC42A-P	1.1	81.5	1, 15, 16	MTPBRK	\$2,058
1	1800	230/460	143TC	6	74	0014SDBA42A-P	3.4/1.7	85.5	* 1, 9, 15, 16	MTPBRK	\$1,971
1	1800	575	143TC	6	74	0014SDBC42A-P	1.3	85.5	1, 15, 16	MTPBRK	\$1,971
1	1200	230/460	145TC	10	69	0016SDBA42A-P	3.6/1.8	82.5	1, 9, 15, 16	MTPBRK	\$2,190
1	1200	575	145TC	10	69	0016SDBC42A-P	1.5	82.5	1, 15, 16	MTPBRK	\$2,190
1.5	1800	230/460	145TC	10	69	Y154SDBA42A-P	4.8/2.4	86.5	* 1, 9, 15, 16	MTPBRK	\$2,122
1.5	1800	575	145TC	10	69	Y154SDBC42A-P	1.9	86.5	1, 15, 16	MTPBRK	\$2,122
1.5	1200	230/460	182TC	10	92	Y156SDBA42A-P	5/2.5	87.5	1, 9, 15, 16	MTPBRK	\$2,230
1.5	1200	575	182TC	10	92	Y156SDBC42A-P	2	87.5	1, 15, 16	MTPBRK	\$2,230
2	1800	230/460	145TC	10	74	0024SDBA42A-P	6.0/3.0	86.5	* 1, 9, 15, 16	MTPBRK	\$2,167
2	1800	575	145TC	10	74	0024SDBC42A-P	2.4	86.5	1, 15, 16	MTPBRK	\$2,167
2	1200	230/460	184TC	15	107	0026SDBA42A-P	6.8/3.4	88.5	1, 9, 15, 16	MTPBRK	\$2,640
2	1200	575	184TC	15	107	0026SDBC42A-P	2.7	88.5	1, 15, 16	MTPBRK	\$2,640
3	1800	230/460	182TC	15	136	0034SDBA42A-P	8.0/4.0	89.5	* 1, 9, 15, 16	MTPBRK	\$2,561
3	1800	575	182TC	15	136	0034SDBC42A-P	3.2	89.5	1, 15, 16	MTPBRK	\$2,561
3	1200	230/460	213TC	35	184	0036SDBA42A-P	8.8/4.4	89.5	1, 9, 16	MTPBRK	\$4,538
3	1200	575	213TC	35	184	0036SDBC42A-P	3.5	89.5	1, 16	MTPBRK	\$4,538
5	1800	230/460	184TC	15	115	0054SDBA42A-P	13/6.5	89.5	* 1, 9, 15, 16	MTPBRK	\$2,653
5	1800	575	184TC	15	115	0054SDBC42A-P	5.2	89.5	1, 15, 16	MTPBRK	\$2,653
5	1200	230/460	215TC	35	206	0056SDBA42A-P	13.8/6.9	89.5	1, 9, 16	MTPBRK	\$4,977
5	1200	575	215TC	35	206	0056SDBC42A-P	5.5	89.5	1, 16	MTPBRK	\$4,977
7.5	1800	230/460	213TC	35	272	Y754SDBA42A-P	19.6/9.8	91.7	* 1, 9, 16	MTPBRK	\$4,675
7.5	1800	575	213TC	35	272	Y754SDBC42A-P	7.8	91.7	1, 16	MTPBRK	\$4,675
7.5	1200	230/460	254TC	50	272	Y756SDBA42A-P	20.4/10.2	91.0	1, 9, 16	MTPBRK	\$5,941
7.5	1200	575	254TC	50	272	Y756SDBC42A-P	8.2	91.0	1, 16	MTPBRK	\$5,941
10	1800	230/460	215TC	50	227	0104SDBA42A-P	26/13	91.7	* 1, 9, 16	MTPBRK	\$5,422
10	1800	575	215TC	50	227	0104SDBC42A-P	10.4	91.7	1, 16	MTPBRK	\$5,422
10	1200	230/460	256TC	75	352	0106SDBA42A-P	26.8/13.4	91.0	1, 9, 16	MTPBRK	\$7,272
10	1200	575	256TC	75	352	0106SDBC42A-P	10.8	91.0	1, 16	MTPBRK	\$7,272
15	1800	230/460	254TC	75	402	0154SDBA42A-P	38/19	92.4	* 1, 9, 16	MTPBRK	\$6,804
15	1800	575	254TC	75	402	0154SDBC42A-P	15.2	92.4	1, 16	MTPBRK	\$6,804
15	1200	230/460	284TC	105	408	0156SDBA42A-P	39.2/19.6	91.7	1, 9	MTPBRK	\$9,763
15	1200	575	284TC	105	408	0156SDBC42A-P	15.8	91.7	1	MTPBRK	\$9,763
20	1800	230/460	256TC	105	330	0204SDBA42A-P	50/25	93.0	1, 9, 16	MTPBRK	\$8,814
20	1800	575	256TC	105	330	0204SDBC42A-P	20	93.0	1, 16	MTPBRK	\$8,814
20	1200	230/460	286TC	125	650	0206SDBA42A-P	50.8/25.4	91.7	1, 9	MTPBRK	\$13,439
20	1200	575	286TC	125	650	0206SDBC42A-P	20.4	91.7	1	MTPBRK	\$13,439
25	1800	230/460	284TC	105	489	0254SDBA42A-P	61/30.5	93.6	1, 9	MTPBRK	\$10,455
25	1800	575	284TC	105	489	0254SDBC42A-P	24.4	93.6	1	MTPBRK	\$10,455

Totally Enclosed Fan Cooled

EQP Global® Brake Motor

> NEMA Premium® Efficiency



HP	Speed (RPM)	Volts	Frame	Brake (ft.-lbs.)	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
30	1800	230/460	286TC	125	560	0304SDBA42A-P	72.8/36.4	93.6	1, 9	MTPBRK	\$12,950
30	1800	575	286TC	125	560	0304SDBC42A-P	29.2	93.6	1	MTPBRK	\$12,950
C-Face Footless											
0.5	1200	230/460	143TC		64	1/26SDBA44A-P		CF	1, 9, 15	MTPBRK	\$2,097
0.5	1200	575	143TC		64	1/26SDBC44A-P		CF	1, 15	MTPBRK	\$2,097
0.75	1200	230/460	143TC	6	64	3/46SDBA44A-P	2.8/1.4	81.5	1, 9, 15	MTPBRK	\$2,097
0.75	1200	575	143TC	6	64	3/46SDBC44A-P	1.1	81.5	1, 15	MTPBRK	\$2,098
1	1800	230/460	143TC	6	74	0014SDBA44A-P	3.4/1.7	85.5	* 1, 9, 15	MTPBRK	\$2,010
1	1800	575	143TC	6	74	0014SDBC44A-P	1.3	85.5	* 1, 15	MTPBRK	\$2,010
1	1200	230/460	145TC	10	69	0016SDBA44A-P	3.6/1.8	82.5	1, 9, 15	MTPBRK	\$2,232
1	1200	575	145TC	10	69	0016SDBC44A-P	1.5	82.5	1, 15	MTPBRK	\$2,232
1.5	1800	230/460	145TC	10	69	Y154SDBA44A-P	4.8/2.4	86.5	* 1, 9, 15	MTPBRK	\$2,163
1.5	1800	575	145TC	10	69	Y154SDBC44A-P	1.9	86.5	* 1, 15	MTPBRK	\$2,163
1.5	1200	230/460	182TC	10	92	Y156SDBA44A-P	5/2.5	87.5	1, 9, 15	MTPBRK	\$2,273
1.5	1200	575	182TC	10	92	Y156SDBC44A-P	2	87.5	1, 15	MTPBRK	\$2,273
2	1800	230/460	145TC	10	74	0024SDBA44A-P	6.0/3.0	86.5	* 1, 9, 15	MTPBRK	\$2,209
2	1800	575	145TC	10	74	0024SDBC44A-P	2.4	86.5	* 1, 15	MTPBRK	\$2,209
2	1200	230/460	184TC	15	107	0026SDBA44A-P	6.8/3.4	88.5	1, 9, 15	MTPBRK	\$2,691
2	1200	575	184TC	15	107	0026SDBC44A-P	2.7	88.5	1, 15	MTPBRK	\$2,691
3	1800	230/460	182TC	15	136	0034SDBA44A-P	8.0/4.0	89.5	* 1, 9, 15	MTPBRK	\$2,610
3	1800	575	182TC	15	136	0034SDBC44A-P	3.2	89.5	* 1, 15	MTPBRK	\$2,610
3	1200	230/460	213TC	35	184	0036SDBA44A-P	8.8/4.4	89.5	1, 9	MTPBRK	\$4,626
3	1200	575	213TC	35	184	0036SDBC44A-P	3.5	89.5	1	MTPBRK	\$4,626
5	1800	230/460	184TC	15	115	0054SDBA44A-P	13/6.5	89.5	* 1, 9, 15	MTPBRK	\$2,705
5	1800	575	184TC	15	115	0054SDBC44A-P	5.2	89.5	* 1, 15	MTPBRK	\$2,705
5	1200	230/460	215TC	35	206	0056SDBA44A-P	13.8/6.9	89.5	1, 9	MTPBRK	\$5,074
5	1200	575	215TC	35	206	0056SDBC44A-P	5.5	89.5	1	MTPBRK	\$5,074
7.5	1800	230/460	213TC	35	272	Y754SDBA44A-P	19.6/9.8	91.7	* 1, 9	MTPBRK	\$4,766
7.5	1800	575	213TC	35	272	Y754SDBC44A-P	7.8	91.7	* 1	MTPBRK	\$4,766
7.5	1200	230/460	254TC	50	272	Y756SDBA44A-P	20.4/10.2	91.0	1, 9	MTPBRK	\$6,056
7.5	1200	575	254TC	50	272	Y756SDBC44A-P	8.2	91.0	1	MTPBRK	\$6,056
10	1800	230/460	215TC	50	227	0104SDBA44A-P	26/13	91.7	* 1, 9	MTPBRK	\$5,527
10	1800	575	215TC	50	227	0104SDBC44A-P	10.4	91.7	* 1	MTPBRK	\$5,527
10	1200	230/460	256TC	75	352	0106SDBA44A-P	26.8/13.4	91.0	1, 9	MTPBRK	\$7,413
10	1200	575	256TC	75	352	0106SDBC44A-P	10.8	91.0	1	MTPBRK	\$7,413
15	1800	230/460	254TC	75	402	0154SDBA44A-P	38/19	92.4	* 1, 9	MTPBRK	\$6,936
15	1800	575	254TC	75	402	0154SDBC44A-P	15.2	92.4	1	MTPBRK	\$6,936
15	1200	230/460	284TC	105	408	0156SDBA44A-P	39.2/19.6	91.7	1, 9	MTPBRK	\$9,953
15	1200	575	284TC	105	408	0156SDBC44A-P	15.8	91.7	1	MTPBRK	\$9,953
20	1800	230/460	256TC	105	330	0204SDBA44A-P	50/25	93.0	* 1, 9	MTPBRK	\$8,985
20	1800	575	256TC	105	330	0204SDBC44A-P	20	93.0	1	MTPBRK	\$8,985
20	1200	230/460	286TC	125	650	0206SDBA44A-P	50.8/25.4	91.7	1, 9	MTPBRK	\$13,700
20	1200	575	286TC	125	650	0206SDBC44A-P	20.4	91.7	1	MTPBRK	\$13,700
25	1800	230/460	284TC	105	489	0254SDBA44A-P	61/30.5	93.6	1, 9	MTPBRK	\$10,658
25	1800	575	284TC	105	489	0254SDBC44A-P	24.4	93.6	1	MTPBRK	\$10,658
30	1800	230/460	286TC	125	560	0304SDBA44A-P	72.8/36.4	93.6	1, 9	MTPBRK	\$13,202
30	1800	575	286TC	125	560	0304SDBC44A-P	29.2	93.6	1	MTPBRK	\$13,202

Definite Purpose Series

Totally Enclosed Fan Cooled Vertical P-Base Motors

Toshiba's definite purpose, totally enclosed fan cooled, Vertical P-Base Footless motors are designed with the petrochemical and material processing industries in mind. These motors are built to withstand the toughest conditions and offer some of the highest efficiency and torque ratings—leading to a longer life and greater reliability. In addition, our LP design meets API 610 specifications for chemical processing applications and all motors include a patent-pending lubrication system that provides improved flow and circulation of grease and oil for longer bearing life. The Vertical P-Base motor can be used in indoor and outdoor applications, exceeds NEMA MG1 Part 31 requirements, and is available in normal, medium, and high thrust.

Standard Features:

- Totally Enclosed Fan Cooled
- IP55 Mill & Chemical Duty
- NEMA Premium® Efficiency
- 460 V
- 1.15 Service Factor
- Three-Phase
- 60 Hz
- Class F Insulation
- Exceeds Insulation Requirements of NEMA MG1 Part 31 (Inverter Duty)
- NEMA Design B
- All Cast Iron Construction
- HP (Normal Thrust), LP (Medium Thrust), or VP (High Thrust)
- Positive Displacement Grease Lubrication System
- Labyrinth Seal on Top Bracket
- Base Brackets in Various Diameters
- Labyrinth-Seal Option for Drive End
- 260 to 3780 lbs. Down Thrust (Minimum L-10 at 17,500 Hours)
- Standard Grease Lubrication (Field-Modifiable for Oil-Mist Lubrication)
- IEEE 841 Option to Build Using the LP Frame

Applications:

- Booster Pumps
- Centrifugal Pumps
- Non-Clog pumps
- In-Line Pumps
- Vertical Turbine Pumps



Totally Enclosed Fan Cooled Vertical P-Base Footless Normal & Medium Thrust

> Premium Efficiency



CC027B



3 THREE YEAR WARRANTY

Toshiba's definite purpose, totally enclosed fan cooled, premium efficiency, Vertical P-Base Footless normal, medium, and high thrust motors are designed with the petrochemical and material processing industries in mind. These motors are built to withstand the toughest conditions and offer some of the highest efficiency and torque ratings—leading to a longer life and greater reliability. In addition, our medium thrust design meets API 610 specifications for chemical processing applications and all motors include a patent-pending lubrication system that provides improved flow and circulation of grease and oil for longer bearing life.

Product Scope:

Horsepower:	3 to 350 HP
Speed:	3600, 1800, or 1200 RPM
Voltage:	460 V
Enclosure:	Totally Enclosed Fan Cooled
Frame Size:	180HP10 through N449LP20
Construction:	All Cast Iron
Thrust Ratings:	260 to 3780 Pounds
Insulation:	Class F, Exceeds NEMA MG1 Part 31 (Inverter Duty)

HP	Speed (RPM)	Volts	Frame	BD Dimension	Max Downtrust Cap	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
Normal Thrust											
3	3600	460	180HP10	10"	260	0032FTVB3PW-A	3.4	89.9		MXTFCV	\$5,797
3	1800	460	180HP10	10"	390	0034FTVB3PW-A	3.7	89.5		MXTFCV	\$5,978
5	3600	460	180HP10	10"	310	0052FTVB3PW-A	5.7	89.8		MXTFCV	\$6,306
5	1800	460	180HP10	10"	490	0054FTVB3PW-A	6.1	89.5		MXTFCV	\$6,179
7.5	3600	460	210HP10	10"	310	Y752FTVB3PW-A	8.7	90.5		MXTFCV	\$7,870
7.5	1800	460	210HP10	10"	560	Y754FTVB3PW-A	9.1	91.7		MXTFCV	\$6,672
10	3600	460	210HP10	10"	380	0102FTVB3PW-A	11.4	90.2		MXTFCV	\$8,586
10	1800	460	210HP	10"	640	0104FTVB3PW-A	12	91.8		MXTFCV	\$7,282
15	3600	460	250HP10	10"	760	0152FTVB3PW-A	16.6	91.6		MXTFCV	\$10,071
15	1800	460	250HP10	10"	1050	0154FTVB3PW-A	18.2	92.4		MXTFCV	\$9,544
15	1200	460	280HP10	10"	1200	0156FTVB3PW-A	18.6	92.3		MXTFCV	\$9,975
20	3600	460	250HP10	10"	750	0202FTVB3PW-A	21	92.5		MXTFCV	\$11,335
20	1800	460	250HP10	10"	1040	0204FTVB3PW-A	24	93.1		MXTFCV	\$10,202
20	1200	460	280HP10	10"	1200	0206FTVB3PW-A	25	91.7		MXTFCV	\$11,192
25	3600	460	280HP10	10"	740	0252FTVB3PW-A	28	92.4		MXTFCV	\$11,518
25	1800	460	280HP10	10"	1050	0254FTVB3PW-A	29	93.8		MXTFCV	\$10,934
25	1200	460	320HP16	10"	1335	0256FTVB3RW-A	62	93		MXTFCV	\$13,072
30	3600	460	280HP10	10"	730	0302FTVB3PW-A	33	92.4		MXTFCV	\$12,002
30	1800	460	280HP10	10"	1050	0304FTVB3PW-A	34.9	93.6		MXTFCV	\$11,483
30	1200	460	320HP16	16"	1335	0306FTVB3RW-A	37	93.6		MXTFCV	\$14,328
40	3600	460	320HP16	16"	850	0402FTVB3RW-A	45	93.1		MXTFCV	\$13,514
40	1800	460	320HP16	16"	1170	0404FTVB3RW-A	47	94.1		MXTFCV	\$13,190
40	1200	460	360HP16	16"	1335	0406FTVB3RW-A	48	94.1		MXTFCV	\$15,663

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed Fan Cooled
Vertical P-Base Footless
Normal & Medium Thrust
> Premium Efficiency



HP	Speed (RPM)	Volts	Frame	BD Dimension	Max Downthrust Cap	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
50	3600	460	320HP16	16"	830	0502FTVB3RW-A	56	93.0		MXTFCV	\$14,504
50	1800	460	320HP16	16"	1150	0504FTVB3RW-A	60	94.5		MXTFCV	\$14,480
50	1200	460	360HP16	16"	1335	0506FTVB3RW-A	61	94.1		MXTFCV	\$18,467
60	3600	460	360HP16	16"	940	0602FTVB3RW-A	69	93.8		MXTFCV	\$16,484
60	1800	460	360HP16	16"	1290	0604FTVB3RW-A	70	95.1		MXTFCV	\$17,201
60	1200	460	400HP16	16"	1690	0606FTVB3RW-A	72	95.0		MXTFCV	\$21,426
75	3600	460	360HP16	16"	930	0752FTVB3RW-A	85	93.6		MXTFCV	\$16,750
75	1800	460	360HP16	16"	1270	0754FTVB3RW-A	88	95.4		MXTFCV	\$17,750
75	1200	460	400HP16	16"	1640	0756FTVB3RW-A	91	95.0		MXTFCV	\$25,197
100	3600	460	400HP16	16"	990	1002FTVB3RW-A	112	95.0		MXTFCV	\$22,591
100	1800	460	400HP16	16"	1370	1004FTVB3RW-A	116	95.4		MXTFCV	\$21,511
100	1200	460	440HP16	16"	1780	1006FTVB3RW-A	123	95.5		MXTFCV	\$32,189
125	3600	460	440HP16	16"	1030	1251FTVB3RW-A	139	95.3	5	MXTFCV	\$32,781
125	1800	460	440HP16	16"	1480	1254FTVB3RW-A	144	95.7		MXTFCV	\$26,758
125	1200	460	440HP16	16"	1740	1256FTVB3RW-A	156	95.5		MXTFCV	\$38,913
150	3600	460	440HP16	16"	1000	1501FTVB3RW-A	168	95.7	5	MXTFCV	\$39,873
150	1800	460	440HP16	16"	1430	1504FTVB3RW-A	176	95.8		MXTFCV	\$32,681
150	1200	460	440HP16	16"	1670	1506FTVB3RW-A	181	95.8		MXTFCV	\$48,352
200	3600	460	440HP16	16"	940	2001FTVB3RW-A	221	96.0	5	MXTFCV	\$48,667
200	1800	460	440HP16	16"	1350	2004FTVB3RW-A	232	96.2		MXTFCV	\$45,673
200	1200	460	N449HP20	20"	1710	2006FTVB3SW-A	234	96.2		MXTFCV	\$65,625
250	3600	460	N449HP20	20"	860	2501FTVB3SW-A	270	95.9	5	MXTFCV	\$62,889
250	1800	460	N449HP20	20"	1360	2504FTVB3SW-A	276	96.2		MXTFCV	\$54,687
250	1200	460	N449HP20	20"	1610	2506FTVB3SW-A	295	96.5		MXTFCV	\$82,030
300	3600	460	N449HP20	20"	820	3001FTVB3SW-A	325	95.8	5	MXTFCV	\$75,467
300	1800	460	N449HP20	20"	1340	3004FTVB3SW-A	328	96.2		MXTFCV	\$65,625
300	1200	460	N449HP20	20"	1570	3006FTVB3SW-A	354	96.5		MXTFCV	\$98,438
350	3600	460	N449HP20	20"	820	3501FTVB3SW-A	382	95.8	5	MXTFCV	\$88,048
350	1800	460	N449HP20	20"	1340	3504FTVB3SW-A	380	96.2		MXTFCV	\$76,561
Medium Thrust											
3	3600	460	180LP10	10"	500	0032FTVB3PX-A	3.4	89.9		MXTFCV	\$6,145
3	1800	460	180LP10	10"	500	0034FTVB3PX-A	3.7	89.5		MXTFCV	\$6,337
5	3600	460	180LP10	10"	500	0052FTVB3PX-A	5.7	89.8		MXTFCV	\$6,684
5	1800	460	180LP10	10"	750	0054FTVB3PX-A	6.1	89.5		MXTFCV	\$6,550
7.5	3600	460	210LP10	10"	580	Y752FTVB3PX-A	8.7	90.5		MXTFCV	\$8,342
7.5	1800	460	210LP10	10"	850	Y754FTVB3PX-A	9.1	91.7		MXTFCV	\$7,072
10	3600	460	210LP10	10"	640	0102FTVB3PX-A	11.4	90.2		MXTFCV	\$9,101
10	1800	460	210LP	10"	900	0104FTVB3PX-A	12	91.8		MXTFCV	\$7,718
15	3600	460	250LP10	10"	1250	0152FTVB3PX-A	16.6	91.6		MXTFCV	\$10,676
15	1800	460	250LP10	10"	1580	0154FTVB3PX-A	18.2	92.4		MXTFCV	\$10,117
15	1200	460	280LP10	10"	2000	0156FTVB3PX-A	18.6	92.3		MXTFCV	\$10,573
20	3600	460	250LP10	10"	1240	0202FTVB3PX-A	21	92.5		MXTFCV	\$12,015
20	1800	460	250LP10	10"	1560	0204FTVB3PX-A	24	93.1		MXTFCV	\$10,814
20	1200	460	280LP10	10"	2200	0206FTVB3PX-A	25	91.7		MXTFCV	\$11,864
25	3600	460	280LP10	10"	1230	0252FTVB3PX-A	28	92.4		MXTFCV	\$12,209
25	1800	460	280LP10	10"	1570	0254FTVB3PX-A	29	93.8		MXTFCV	\$11,590

Totally Enclosed Fan Cooled Vertical P-Base Footless Normal & Medium Thrust

> Premium Efficiency



HP	Speed (RPM)	Volts	Frame	BD Dimension	Max Downthrust Cap	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
25	1200	460	320LP16	16"	2290	0256FTVB3RX-A	62	93		MXTFCV	\$13,856
30	3600	460	280LP10	10"	1220	0302FTVB3PX-A	33	92.4		MXTFCV	\$12,722
30	1800	460	280LP10	10"	1580	0304FTVB3PX-A	34.9	93.6		MXTFCV	\$12,172
30	1200	460	320LP16	16"	2380	0306FTVB3RX-A	37	93.6		MXTFCV	\$15,188
40	3600	460	320LP16	16"	1840	0402FTVB3RX-A	45	93.1		MXTFCV	\$14,325
40	1800	460	320LP16	16"	2320	0404FTVB3RX-A	47	94.1		MXTFCV	\$13,981
40	1200	460	360LP16	16"	2540	0406FTVB3RX-A	48	94.1		MXTFCV	\$16,290
50	3600	460	320LP16	16"	1830	0502FTVB3RX-A	56	93.0		MXTFCV	\$15,375
50	1800	460	320LP16	16"	2300	0504FTVB3RX-A	60	94.5		MXTFCV	\$15,349
50	1200	460	360LP16	16"	2670	0506FTVB3RX-A	61	94.1		MXTFCV	\$19,206
60	3600	460	360LP16	16"	2080	0602FTVB3RX-A	69	93.8		MXTFCV	\$17,473
60	1800	460	360LP16	16"	2610	0604FTVB3RX-A	70	95.1		MXTFCV	\$18,233
60	1200	460	400LP16	16"	3330	0606FTVB3RX-A	72	95.0		MXTFCV	\$22,284
75	3600	460	360LP16	16"	2070	0752FTVB3RX-A	85	93.6		MXTFCV	\$17,755
75	1800	460	360LP16	16"	2600	0754FTVB3RX-A	88	95.4		MXTFCV	\$18,815
75	1200	460	400LP16	16"	3280	0756FTVB3RX-A	92.1	95.0		MXTFCV	\$26,205
100	3600	460	400LP16	16"	2290	1002FTVB3RX-A	112	95.0		MXTFCV	\$23,495
100	1800	460	400LP16	16"	2880	1004FTVB3RX-A	116	95.4		MXTFCV	\$22,372
100	1200	460	440LP16	16"	3620	1006FTVB3RX-A	123	95.5		MXTFCV	\$32,833
125	3600	460	440LP16	16"	2480	1251FTVB3RX-A	139	95.3	5	MXTFCV	\$33,437
125	1800	460	440LP16	16"	3180	1254FTVB3RX-A	144	95.7		MXTFCV	\$27,293
125	1200	460	440LP16	16"	3580	1256FTVB3RX-A	156	95.5		MXTFCV	\$39,692
150	3600	460	440LP16	16"	2450	1501FTVB3RX-A	168	95.7	5	MXTFCV	\$40,670
150	1800	460	440LP16	16"	3130	1504FTVB3RX-A	176	95.8		MXTFCV	\$33,334
150	1200	460	440LP16	16"	3510	1506FTVB3RX-A	181	95.8		MXTFCV	\$49,319
200	3600	460	440LP16	16"	2390	2001FTVB3RX-A	221	96.0	5	MXTFCV	\$49,640
200	1800	460	440LP16	16"	3050	2004FTVB3RX-A	232	96.2		MXTFCV	\$46,587
200	1200	460	N449LP20	20"	3780	2006FTVB3SX-A	234	96.2		MXTFCV	\$67,593
250	3600	460	N449LP20	20"	2490	2501FTVB3SX-A	270	95.9	5	MXTFCV	\$64,777
250	1800	460	N449LP20	20"	3270	2504FTVB3SX-A	276	96.2		MXTFCV	\$56,328
250	1200	460	N449LP20	20"	3680	2506FTVB3SX-A	295	96.5		MXTFCV	\$84,492
300	3600	460	N449LP20	20"	2440	3001FTVB3SX-A	325	95.8	5	MXTFCV	\$77,733
300	1800	460	N449LP20	20"	3250	3004FTVB3SX-A	328	96.2		MXTFCV	\$67,593
300	1200	460	N449LP20	20"	3630	3006FTVB3SX-A	354	96.5		MXTFCV	\$101,391
350	3600	460	N449LP20	20"	2440	3501FTVB3SX-A	382	95.8	5	MXTFCV	\$90,689
350	1800	460	N449LP20	20"	3250	3504FTVB3SX-A	380	96.2		MXTFCV	\$78,859
350	1200	460	N449LP20	20"	3560	3506FTVB3SX-A	414	96.5		MXTFCV	\$118,288

FL Amps and FL EFF are average expected design values and not guaranteed.

The weights listed above are estimated.

Please contact Toshiba for information on product availability.

"CF"= Consult Factory

MV Modifications	MV Definite Purpose	MV Gen. Purp. Enclosed	MV General Purpose Open	LV Mods. (Stock & Prod)	Definite Purpose	IEC	Explosion Proof	TEFC General Purpose	ODP General Purpose

Low Voltage Modifications

Stock Modifications

Bearings	113	Insulation Modifications	118
Sealed/Shielded Bearings.....	113	Tropicalized Coating on Motor Windings	
Insulated Bearings.....	113	and Internal Surface.....	118
Change Bearings.....	113	Fungus-Proof Coating on Motor Windings.....	118
Blowers	113	Epoxy Coating on Motor Windings	118
Conduit Box Modifications	114	Labels	118
Auxiliary Terminal Box.....	114	Lead Terminals	118
Cast Iron Main Box.....	114	Crimp Lead Terminals.....	118
Location.....	114	Burdny Lugs/Two-Hole Terminals	118
Remote-Mount Conduit Box.....	114	Lubrication	119
Couplings & Sheaves Mounted	115	High Temperature Grease	119
Documentation	115	Low Temperature Grease	119
Drains & Breathers	115	Special-Based Grease	119
Breathers.....	115	Nameplate(s)	119
Additional Drain Holes.....	115	Duplicate or Special Nameplate	119
Drip Covers	116	Screens	120
Enclosures	116	Screens to an Open Drip Proof Motor	120
Marine Duty	116	Service Factor	120
Export Crating	116	Shaft Grounding Provisions	120
Fan Covers	116	Software: Engineering Data	121
Flange-Mounting	116	Space Heaters	121
Open Drip Proof Motors	116	Terminal Blocks/Strips	121
Totally Enclosed Fan Cooled Motors.....	117	Thermal Protection	121
Totally Enclosed Explosion Proof	117	Resistance Temperature Detectors (RTDs).....	121
Grounding Provisions	117	Thermostats (Klixons).....	122
External Grounding Provisions		Winding PTC Thermistors.....	122
on Motor Frame (Base).....	117	Vertical Jacking Provisions	122
External Grounding Pad on Motor Frame.....	117	Vertical Lifting Provisions	122

Handling Charge

This section requires that the handling charge listed below be added to each motor that is to be modified in addition to the requested modifications.

Option		Handling Charge
Frame	56/143/145	\$241
	182/184	\$241
	213/215	\$284
	254/256	\$284
	284/286	\$383
	324/326	\$383
	364/365	\$438
	404/405	\$728
	444/445	\$837
	447	\$837
	449/500	\$837
	5000/5800	\$1,065

Modifications from this section should be added to the appropriate motor list price and the above handling charge to generate a total list price for the motor. Apply the applicable discount/multiplier to arrive at a net each price. This will be the production/modified multiplier associated with the account pricing.

Consult factory for modification availability on EQP Global IEC, EQP Global Brake, and EQP Global Cooling Tower products. Modifications are not available on Tosh-ECO motor series.

Bearings

Special bearings and designs are available on a production basis. Standard bearings can be changed for specific application requirements. The following list additions apply.

Sealed/Shielded Bearings

Open and totally enclosed general purpose motors on 250T frame and smaller contain shielded or sealed-type, non-regreasable bearings as standard. Contact Toshiba to determine actual stock design bearing information.

Option		Sealed Bearings
Frame	143/145	\$219
	182/184	\$219
	213/215	\$273
	254/256	\$273
	284/286	\$328
	324/326	\$328
	364/365	\$514
	404/405	\$820
	444/445	\$875
	447	—
	449/500	—
	5000/5800	—

Special Notes:

- Bearings are lubed for life and cannot be regreased.
- Sealed bearings come standard on all 140 through 250 frame motors, except for all 841 products.

Insulated Bearings

Insulated bearings are typically applied in applications where shaft current concerns exist (i.e. applications involving the use of adjustable speed drives). Insulating the bearings helps to prevent electrical arcing (bearing fluting) and potential premature bearing failure.

Pricing below is for insulating the bearings on both end bells.

Option		Insulating Ball Bearings	Insulating Roller
Frame	143/145	\$1,641	—
	182/184	\$1,750	—
	213/215	\$2,188	—
	254/256	\$2,734	—
	284/286	\$2,953	—
	324/326	\$3,172	—
	364/365	\$3,281	—
	404/405	\$3,609	—
	444/445	\$3,938	\$6925 (1)
	447	\$3,938	\$6925 (1)
	449/500	\$4,375	\$7562 (1)
	5000	\$6,016	\$9,600
	5800	\$6,525	Contact Toshiba

(1) Contact Toshiba for delivery. Availability of bearings may vary.

Special Notes:

- Insulating the bearings is recommended when shaft voltage exceeds 300 mV.
- It is up to the user to determine when insulated bearings are required, especially with the use of inverter-fed control. NEMA MG1 Part 31 suggests insulating the bearing(s) on all motors in 500 series frames and larger when inverter-fed.
- Toshiba suggests insulating both bearings on all frame sizes 440 and larger when used with adjustable speed drives.
- When insulated bearings are used on direct-coupled applications, the use of an insulated coupling and/or a shaft grounding brush is required in order to reduce the risk of driven equipment bearing damage. Grounding brushes are not suitable for Division 2 environments.
- Insulated bearings are not available on angular contact bearing construction.

If bearing thermal devices are required with insulated bearings, a special version of the thermal device will be required. Contact Toshiba for availability and price of this thermal device.

Change Bearings

Cylindrical roller bearings are used in horizontal motors where high radial loads are present for an improved L-10 life, i.e. belted applications. Ball bearings are to be used in coupled applications.

Option		Roller Bearings	Ball Bearings
Frame	143/145	—	
	182/184	—	
	213/215	—	
	254/256	\$708	
	284/286	\$926	
	324/326	\$1,025	
	364/365	\$1,090	
	404/405	\$1,199	
	444/445	\$1,550	\$1,225
	447	\$1,550	\$1,225
	449/500	\$1,775	\$1,435
	5000/5800	—	\$1,615

Special Notes:

- This is applicable only for 1800 RPM motors and slower.
- Roller bearing requests require that full belting/application details be provided prior to order acceptance.
- Adders above not available on explosion-proof product.
- Cast iron inner bearing cap required for roller bearings. Contact Toshiba for availability.

Blowers

Toshiba motors are suitable for use with inverter-fed controllers. Turndown capability is a function of the product selected. See individual product page for specific information. When turndown requirements exceed product capability, the use of an auxiliary blower is required. Contact Toshiba for help with determining whether a blower is required for an application.

The National Electrical Code 430.126 (a)(4) requires that motors with external forced ventilation must have a form of thermal protection. See "Thermal Protection" section for the addition of thermal protection. This addition is not included in the blower adder.

Option		Blower
Frame	143/145	\$2,074
	182/184	\$2,129
	213/215	\$2,414
	254/256	\$2,567
	284/286	\$2,949
	324/326	\$3,441
	364/365	\$4,553
	404/405	\$5,541
	444/445	\$7,883
	447	\$7,883
	449/500	\$8,493
	5010/5011	
	5810	Contact Toshiba
	5811	

Special Notes:

- Adders above are not available on explosion proof product.
- Blower standard voltages are as follows:
 - » 140 through 280T frames—single-phase 230 to 330 V and three-phase 230 to 330/400 to 575 V
 - » 320 through N449T frames—three-phase 230 to 330/400 to 575 V
 - » 500 frame and larger – three-phase 460 or 575 V (specify at time of order)
- Blowers cannot operate on line voltages over 575 V.
- Contact Toshiba for applications requiring line voltages over 575 V.
- Blowers are not suitable for Division 2 applications. Contact Toshiba for availability in Division 2 applications.

Conduit Box Modifications

Toshiba’s standard main conduit box on all motors is located in the F1 position, with the exception of oil well pump motors that have the main box located in the F2 position.

Auxiliary Terminal Box

Termination of protective or monitoring devices can be provided in a separate auxiliary box (280 frame and larger) or a conduit mounted off the main terminal box (250T frame and below). All auxiliary boxes are mounted on the same side as the main terminal box unless otherwise specified.

Option		Condulet	Auxiliary Cast Iron Box
Frame	56/143/145	\$383	—
	182/184	\$383	—
	213/215	\$383	—
	254/256	\$383	—
	284/286	\$450	\$766
	324/326	\$450	\$766
	364/365	\$450	\$766
	404/405	—	\$766
	444/445	—	\$766
	447	—	\$766
	449/500	—	\$766
	5000/5800	—	\$766

- Special Notes:**
- Adders above are not available on explosion proof product.
 - Auxiliary conduit box is provided as standard with stator RTD adder on all motors.

Cast Iron Main Box

Cast iron conduit boxes come standard on all explosion proof, EQP Global, and Quarry Duty products..

Option		Cast Iron Main Box
Frame	56/143/145	\$123
	182/184	\$123
	213/215	\$149
	254/256	\$149
	284/286	\$219
	324/326	\$219
	364/365	\$328
	404/405	\$328
	444/445	\$602
	447	\$602
	449/500	\$656
	5000/5800	\$1,094

Location

All motors are provided with the main terminal box in the F1 position, with the exception of oil well pump motors that have the main box located in the F2 position. For conduit box location in the F2 position, see adder below.

Option		F2 (Stock Modifications)	
		ODP	TEFC
Frame	56/143/145	\$65	\$65
	182/184	\$65	\$65
	213/215	\$95	\$95
	254/256	\$95	\$95
	284/286	\$110	\$110
	324/326	\$110	\$110
	364/365	\$165	\$165
	404/405	\$220	\$220 (1)
	444/445	\$330	\$220 (1)
	447	\$330	\$330 (1)
	449/500	\$400	\$400
	5000/5800	\$400	\$400

(1) New frame designs may be field modifiable to F2 - Contact Toshiba.

- Special Notes:**
- Not all motors are field-modifiable to F2 assembly.
 - See applications section for F2 field modifiability.
 - Contact Toshiba for availability.
 - See TEFC section in catalog for F3 (Top-Mount)

Remote-Mount Conduit Box

For applications requiring that the conduit box be located away from the motor, Toshiba is able to supply a remote-mount conduit box. The conduit box will be supplied with the main motor, but it will arrive unfastened. It includes a main terminal box and a threaded mounting plate on the motor and the conduit box.

Option		Cast Iron Conduit Box
Frame	56/143/145	\$219
	182/184	\$219
	213/215	\$273
	254/256	\$273
	284/286	\$438
	324/326	\$438
	364/365	\$656
	404/405	\$656
	444/445	\$1,094
	447	\$1,094
	449/500	\$1,313
	5000/5800	\$1,750

- Special Note:**
- Adders above are not available on explosion proof product.

Couplings & Sheaves Mounted

Couplings and V-belt sheaves must be supplied (finished bored, balanced, and key-seated) to Toshiba's shaft dimensions before they can be mounted to the motor. An incoming identification number must be obtained from Toshiba, and coupling must be shipped at least three weeks in advance before scheduled motor shipment and must include the manufacturer's mounting instructions.

Option		Customer-Supplied Sheave/Coupling
Frame	143/145	\$656
	182/184	\$656
	213/215	\$766
	254/256	\$875
	284/286	\$875
	324/326	\$875
	364/365	\$984
	404/405	\$984
	444/445	\$1,500
	447	\$2,100
	449/500	\$2,600
	5000/5800	\$2,750

Special Note:

- Incoming parts without a proper Toshiba identification number will not be accepted and will be instead returned to sender.

Documentation

See "Software" modifications section.

Drains & Breathers

Standard horizontally-mounted totally enclosed fan cooled and open motors are provided with drain holes. Drain holes are located at the lowest point on the motor.

Breathers

Option		Standard Breather (1)	UL Stainless Breather (2)	Standard Breather Conduit Box (3)
Frame	56/143/145	\$219	\$273	\$273
	182/184	\$219	\$273	\$273
	213/215	\$219	\$273	\$273
	254/256	\$328	\$383	\$383
	284/286	\$328	\$383	\$383
	324/326	\$328	\$383	\$383
	364/365	\$328	\$438	\$438
	404/405	\$328	\$438	\$438
	444/445	\$328	\$438	\$438
	447	\$328	\$438	\$438
	449/500	\$328	\$438	\$438
	5000/5800	\$328	\$438	\$438

- (1) EQP III 840 and EQP III 841 motors have dual tapped holes fitted with automatic bronze drain and breathers as standard.
- (2) Explosion proof motors have UL-listed stainless steel drain and breathers as standard (for horizontal-mounting only).
- (3) Standard and stainless breathers are available for cast conduit boxes only (not available on explosion proof motors).

Special Notes:

- EQP Global® 840 and 841 motors have tapped holes fitted with stainless steel T-drains located at the lowest point in the face of each bearing bracket (140 through 210 frames) or on the lowest point of the frame (250 through 360 frames).
- Additional breathers are not available on explosion proof product.

Additional Drain Holes

Option		Drain Hole	Drain Hole Conduit Box (1)	Stainless T-Drain	Stainless T-Drain Conduit Box
Frame	56/143/145	\$131	\$131	\$219	\$219
	182/184	\$131	\$131	\$219	\$219
	213/215	\$131	\$131	\$219	\$219
	254/256	\$131	\$131	\$328	\$328
	284/286	\$131	\$131	\$328	\$328
	324/326	\$131	\$131	\$328	\$328
	364/365	\$131	\$131	\$328	\$328
	404/405	\$131	\$131	\$328	\$328
	444/445	\$131	\$131	\$328	\$328
	447	\$131	\$131	\$328	\$328
	449/500	\$131	\$131	\$328	\$328
	5000/5800	\$131	\$131	\$328	\$328

- (1) Conduit box drain holes are available on cast conduit boxes only.

Special Notes:

- Above adders not available on explosion proof product.
- All EQP Global® products are provided with additional plugged drain provisions in each bearing bracket for vertical mounting configurations. Plugs must be removed for proper drainage of moisture.

Drip Covers

Drip covers can be furnished on standard motors for extra protection from dripping liquids and falling objects when the motor is mounted in the vertical shaft-down position. Standard drip covers are of fabricated steel 3⁄8" with lip.

Option		Drip Cover
Frame	56/143/145	\$177
	182/184	\$237
	213/215	\$237
	254/256	\$237
	284/286	\$330
	324/326	\$414
	364/365	\$450
	404/405	\$475
	444/445	\$510
	447	\$510
	449/500	\$510
	5000/5800	\$510

Special Notes:

- The drip cover adder does not include vertical lifting provisions.
- Vertical Lifting provisions available on all EQP Global® round body motors. See Vertical Lifting Provisions in "Stock" Modification Section.

Enclosures

This section refers to additional specifications used to define the motor's enclosure. These adders may be required in order to provide a necessary additional degree of protection for normal operation in certain environments.

Marine Duty

Marine Duty IEEE 45 must be incorporated into an EQP Series 840 or 841 base motor. Please see adders below.

Option		IEEE 45 (1)	IEEE 45 (2)
Frame	143/145	\$383	\$131
	182/184	\$383	\$131
	213/215	\$405	\$131
	254/256	\$438	\$131
	284/286	\$645	\$131
	324/326	\$700	\$131
	364/365	\$853	\$131
	404/405	\$1,083	\$131
	444/445	\$1,291	\$131
	447	\$1,542	\$131
	449/500	\$1,542	\$131
	5000/5800	\$1,914	\$131

(1) In above-deck applications, the adder includes space heaters with leads terminating in main terminal box and tropicalization in accordance with IEEE 45 requirements.

- » IP56 Degree of protection is required
 - » Not available on EQP 840 280 frame and below
- (2) In below-deck applications only, the nameplate changes.

Special Note:

- EQP 840 and EQP 841 products through N449T frame are nameplated IEEE 45 Marine Duty as standard.

Export Crating

Toshiba provides packaging options for different shipping requirements. Options include standard commercial packaging (for common, below-deck transport on ships) and containerized shipping. Both options are available at a net price of 8% of the motor's total sell price or a minimum of \$350, whichever is greater.

Fan Covers

Cast Iron fan covers are available for totally enclosed fan cooled enclosures.

Option		Cast Iron Fan Cover (1)
Frame	56/143/145	\$90
	182/184	\$110
	213/215	\$140
	254/256	\$180
	284/286	\$260
	324/326	\$300
	364/365	\$485
	404/405	\$640
	444/445	\$1000
	447	\$1,500
	449	\$2,200
	500	Contact Toshiba
	5000/5800	Contact Toshiba

(1) This feature is standard on EQP Global 840, EQP Global 841, Explosion Proof, and Vertical P-base Motors.

Flange-Mounting

Flanges can be ordered through production and are also available as kits. Contact Field Service for Spare Part Kits.

Open Drip Proof Motors

Option		C-Face Footed (1)
Frame	143/145	\$208 (2)
	182/184	\$236 (2)
	213/215	\$295
	254/256	\$295
	284/286	\$438
	324/326	\$481
	364/365	\$875
	404/405	\$1,094
	444/445	\$1,586
	447	\$1,695
	449/500	\$2,078
	5000/5800	—

(1) Motors do not meet NEMA BA dimensions.

(2) Adders above are not available on EQPIII Open Drip Proof product.

Totally Enclosed Fan Cooled Motors

Option		C-Face Footed	D-Flange Footed
Frame	56/143/145	\$109 (1, 2)	—
	182/184	\$131 (1, 2)	—
	213/215	\$175 (1, 2)	\$547 (3)
	254/256	\$263 (1, 2)	\$875 (3)
	284/286	\$438	\$930 (3)
	324/326	\$492	\$1,422 (3)
	364/365	\$820	\$1,695 (3)
	404/405	\$1,148	\$2,078 (3)
	444/445	\$1,477	\$2,297 (3)
	447	\$1,477	\$2,297 (3)
	449/500	\$1,641	\$2,734 (3)
	5000/5800	—	—

(1) Motors do not meet NEMA BA dimensions

(2) NEMA BA dimensions are available in Stock Catalog part numbers.

(3) Available on Global SD, 840, and 841 products only.

Totally Enclosed Explosion Proof

Option		C-Face Footed
Frame	143/145	\$241 (1)
	182/184	\$273 (1)
	213/215	\$328 (1)
	254/256	\$438 (1)
	284/286	\$766
	324/326	\$875
	364/365	\$984
	404/405	—
	444/445	—
	447	—
	449/500	—
	5000/5800	—

(1) Motors do not meet NEMA BA dimensions.

Grounding Provisions

All motor frames 140T through 5800 have a CSA clamp-type grounding lug in the conduit box. All EQPIII/Global 840 and 841 motors are provided with a UL-approved clamp-type grounding lug in the conduit box.

External Grounding Provisions on Motor Frame (Base)

All EQPIII 841 motors have an additional grounding provision on the motor base as standard. The grounding provisions on the motor base are ¼" - 20" UNC tap for frames 140T through 250T, ⅜" - 16" UNC tap on frames 280T through 447T, and ½" - 13" UNC for frames larger than 447T.

Option		Base Grounding
	56/ 143/145	\$219
	182/184	\$219
	213/215	\$219
	254/256	\$219
	284/286	\$219
	324/326	\$219
	360	\$219
	364/365	\$219
	404/405	\$219
	444/445	\$219
	447	\$219
	449/500	\$219
	5000/5800	\$219

Special Note:

- External grounding provisions are available for explosion proof product but must be used as supplementary ground connection in conjunction to the main equipment ground provision provided in the main terminal box.

External Grounding Pad on Motor Frame

Apply the adder below for a special ground pad with two holes mounted on the motor frame. When placing the order, the hole and tap size must be provided.

Option		Frame Grounding
	56/ 143/145	—
	182/184	—
	213/215	—
	254/256	—
	284/286	—
	324/326	\$1,641
	364/365	\$1,641
	404/405	\$1,641
	444/445	\$1,641
	447	\$1,641
	449/500	\$1,641
	5000/5800	\$1,641

Special Note:

- Adders above are not available on explosion proof product.

Insulation Modifications

Insulation systems are divided into classes according to the thermal endurance by temperature rating. Standard motor insulation comes non-hygroscopic Class F (utilizing Class H components) and is dipped and baked in a Class H varnish. Unusual or severe applications may require special insulation systems or winding protection.

Tropicalized Coating on Motor Windings and Internal Surface

This adder provides additional insulation coating as well as corrosion protection for all internal machined surfaces.

Option		Tropicalized Coating
	56/143/145	\$164
	182/184	\$164
	213/215	\$219
	254/256	\$328
	284/286	\$547
	324/326	\$766
	364/365	\$875
	404/405	\$1,203
	444/445	\$1,641
	447	\$2,406
	449/500	\$2,406
	5000/5800	\$2,734

Special Note:

- This comes standard on all 840 and all 841 motors.

Fungus-Proof Coating on Motor Windings

Unwanted fungi may break down a motor’s insulation system over time. The addition of the fungus-proof adder will protect motor windings from this type of problem.

Option		Fungus-Proof Coating
	56/143/145	\$109
	182/184	\$109
	213/215	\$164
	254/256	\$219
	284/286	\$328
	324/326	\$438
	364/365	\$547
	404/405	\$711
	444/445	\$930
	447	\$1,203
	449/500	\$1,203
	5000/5800	\$1,531

Epoxy Coating on Motor Windings

This adder provides additional protection against corrosive and abrasive environments.

Option		Epoxy Coating
	56/143/145	\$164
	182/184	\$164
	213/215	\$219
	254/256	\$328
	284/286	\$547
	324/326	\$766
	364/365	\$875
	404/405	\$1,203
	444/445	\$1,641
	447	\$2,406
	449/500	\$2,406
	5000/5800	\$2,734

Labels

See “Nameplates” section for information.

Lead Terminals

Crimp-type lead lugs/ring terminals come standard on motors as follows:

- 1. 210 frame and larger on all EQP 840 products
- 2. All EQP 841 products
- 3. All other 280 frame and larger motors

Crimp Lead Terminals

Option		Crimp
Frame	56/143/145	\$109
	182/184	\$109
	213/215	\$153
	254/256	\$153
	284/286	—
	324/326	—
	364/365	—
	404/405	—
	444/445	—
	447	—
	449/500	—
	5000/5800	—

Burndy Lugs/Two-Hole Terminals

Option		Burndy
Frame	56/143/145	\$580
	182/184	\$580
	213/215	\$744
	254/256	\$744
	284/286	\$744
	324/326	\$744
	364/365	\$744
	404/405	\$744
	444/445	\$744
	447	\$744
	449/500	\$744
	5000/5800	\$744

Lubrication

All bearings in motors with Class F insulation will be furnished with a lubricant that is capable of operating in ambient temperatures between -25° and 65°C. Please note that it is not recommended to mix greases of different bases. The mixing of different types of thickeners may destroy the composition and physical properties of the grease.

High Temperature Grease

This adder is for applications in which the ambient temperature is greater than 65°C.

Option		High Temp. Grease
Frame	143/145	\$109
	182/184	\$109
	213/215	\$109
	254/256	\$109
	284/286	\$109
	324/326	\$273
	364/365	\$273
	404/405	\$273
	444/445	\$273
	447	\$273
	449/500	\$273
	5000/5800	\$273

Low Temperature Grease

This adder is for applications in which the ambient temperature ranges from -25° to -40°C.

Option		Low Temp. Grease
Frame	143/145	\$109 (1)
	182/184	\$109 (1)
	213/215	\$109 (1)
	254/256	\$109 (1)
	284/286	\$109
	324/326	\$273
	364/365	\$273
	404/405	\$273
	444/445	\$273
	447	\$273
	449/500	\$273
	5000/5800	\$273

Special-Based Grease

This adder is for applications in which the customer specifies a grease other than the Toshiba standard. For other specific grease, contact Toshiba.

(1) All Sealed bearing design motors come standard with lithium based grease, suitable for -40°C ambient.

Nameplate(s)

Standard nameplates are 304-grade stainless steel with engraved lettering. Additional nameplates for remote-mounting and special markings are available. For requests other than what is listed below, contact Toshiba.

Duplicate or Special Nameplate

Option		Re-Nameplate	Duplicate Nameplate	Special ID Tag
	56/143/145	\$150	\$150	\$150
	182/184	\$150	\$150	\$150
	213/215	\$150	\$150	\$150
	254/256	\$150	\$150	\$150
	284/286	\$150	\$150	\$150
	324/326	\$150	\$150	\$150
	364/365	\$150	\$150	\$150
	404/405	\$150	\$150	\$150
	444/445	\$150	\$150	\$150
	447	\$150	\$150	\$150
	449/500	\$150	\$150	\$150
	5000/5800	\$150	\$150	\$150

Screens

Corrosion-resistant screens covering air inlets and outlets of open drip proof motors are available. Motors equipped with screens will meet the NEMA guarded definition.

Screens to an Open Drip Proof Motor

Option		Corrosion-Resistant	Stainless Steel
Frame	143/145	\$219	\$273
	182/184	\$273	\$328
	213/215	\$306	\$361
	254/256	\$361	\$416
	284/286	\$383	\$438
	324/326	\$438	\$547
	364/365	\$547	\$766
	404/405	\$766	\$1,094
	444/445	\$820	\$1,203
	447	\$875	\$1,258
	449/500	\$875	\$1,258
	5000/5800	\$1,094	\$1,641

Special Note:

- Corrosion-resistant screens come standard on oil well pump motors.

Service Factor

Standard stock motors are designed for 1.15 service factor unless otherwise noted. Higher service factors are available if requested. Inquiries for service factors above 1.15 should be submitted to Toshiba for review. In certain cases, a higher service factor will require an increase in frame size or a special design.

Shaft Grounding Provisions

Shaft grounding provisions help to eliminate shaft currents that can be introduced into the motor through upstream controllers (ie: adjustable speed drives). These currents can potentially lead to premature failure of the bearings, commonly referred to as “fluting.”

Option		Shaft Grounding Brush	Aegis Grounding Ring (1)
Frame	143/145	\$1,367	\$182
	182/184	\$1,367	\$208
	213/215	\$1,367	\$236
	254/256	\$1,367	\$290
	284/286	\$1,367	\$344
	324/326	\$1,477	\$398
	364/365	\$1,641	\$404
	404/405	\$1,805	\$597
	444/445	\$2,187	\$861
	447	\$2,187	\$861
	449/500	\$2,187	\$861
	5000/5800	\$2,734	—

(1) For c-face motors with drive end installation - Contact Toshiba.

Special Notes:

- Adders above do not include insulated bearings.
- Adders above are not available on explosion proof product.
- Insulating the bearings is recommended when the shaft voltage exceeds 300 mV.
- It is up to the user to determine when insulated bearings are required, especially with the use of an inverter-fed control. NEMA MG1 Part 31 suggests insulating the bearing(s) on all motors in 500 series frames and larger that are inverter-fed.
- Shaft grounding rings may be used to divert the current around the bearing with the use of Inverter-fed control.
- Toshiba recommends the non-drive end bearing be insulated on all frame sizes 440 and larger, when used with adjustable speed drives.
- Insulated bearings are not available on angular contact bearing construction.
- Where insulated bearings are used on direct coupled applications the use of insulated coupling and/or shaft grounding brush is required to reduce the risk of driven equipment bearing damage.
 - Ground rings are not suitable for Division 2 environments.
 - Division 2 suitability will be removed from the stock motor nameplate.
- If bearing thermal devices are required with the insulated bearing, a special version of the thermal device will be required.
- Contact Toshiba for availability and price.
- Adders above are suitable for Drive End and Non-Drive End Installation

Software: Engineering Data

Stock Modified

Upon request, Toshiba provides a standard data package for stock motors, at no charge. In addition, for stock modified motors, Toshiba will provide the following standard data package at no additional charge only if specified at the time of order: base general arrangement drawing, speed-torque and speed-current curve (at 100% rated voltage), nameplate data, performance data, connection diagram, instruction and maintenance manual, and spare bearings parts list.

Above data will be sent out in electronic format. If hard copy information is required, see the adder below. For software other than what is listed above or that is specified after time of order, see table below.

Prices below are **NET** adders per option.

Software	Price
Toshiba Standard Software Package After Acknowledgement (1)	\$75
Non-Standard Speed-Torque & Speed-Current Curve	\$75
Non-Standard Thermal Damage (Safe Stall Time) Curve	\$75
Non-Standard Performance Curve	\$75
Torsional Data (2)	\$100
Non-Standard Dimensional Print	\$75
Certificate of Compliance	\$75
First Page of Customer Supplied Data Sheet (3)	\$55
Additional Pages of Customer Supplied Data Sheet (3)	\$40
One Hard Copy of Standard Software Package	\$30
Express Shipping of Hard Copy of Standard Software Package	Standard Shipping Rates Apply
Other Special Request	Contact Toshiba

(1) This adder applies only if it is specified after the order has been entered and acknowledged.

(2) This adder will include shaft drawing, rotor assembly inertia, and shaft torsional stiffness values.

(3) This adder pertains to typical Toshiba performance data only.

Space Heaters

Space heaters are strip-type heaters mounted inside the frame near the coils to prevent moisture condensation in the motor during times the motor is not energized. Heater leads are brought out to the motor's main conduit box and marked H1 and H2. Standard heater voltage is 120 V single-phase unless otherwise specified.

Option	Standard	Division 2
Frame	56/143/145	\$328
	182/184	\$328
	213/215	\$328
	254/256	\$328
	284/286	\$481
	324/326	\$481
	364/365	\$722
	404/405	\$700
	444/445	\$831
	447	\$941
	449/500	\$941
	5000/5800	\$1,148

Special Note:

- Adders above are not available on explosion proof product.
- Standard Division 2 for 140-360 frames.

Terminal Blocks/Strips

Insulated stud-type terminal blocks/strips can be provided for single-voltage, single-speed applications in the standard conduit box.

Option	Terminal Block (1)	Terminal Strip (2)
	56/143/145	\$339
	182/184	\$339
	213/215	\$339
	254/256	\$339
	284/286	\$405
	324/326	\$733
	364/365	\$733
	404/405	\$733
	444/445	\$1,589
	447	\$1,589
	449/500	\$1,805
	5000/5800	\$2,527

(1) This adder refers to power leads only.

(2) This adder refers to accessory leads only.

(3) Please contact Toshiba for pricing information on this adder.

Special Note:

- Adders above are not available on explosion proof product.

Thermal Protection

Toshiba provides a wide variety of protective devices which are available as follows.

Resistance Temperature Detectors (RTDs)

Winding (Stator) RTDs – A set of six (two per phase, three leads) winding RTDs are provided with leads terminated in an auxiliary conduit box. Pricing below does not include readout device(s).

Option	Stator RTDs (Copper; 10 ohm)	Stator RTDs (Platinum; 100 ohm)	Stator RTDs (Nickel; 120 ohm)
Frame	143/145	—	—
	182/184	—	—
	213/215	—	—
	254/256	—	—
	284/286	\$4,266	\$4,266
	324/326	\$4,266	\$4,266
	364/365	\$4,266	\$4,266
	404/405	\$4,266	\$4,266
	444/445	\$4,266	\$4,266
	447	\$4,266	\$4,266
	449/500	\$4,266	\$4,266
	5000/5800	\$4,266	\$4,266

Special Note:

- Contact Toshiba for pricing on other RTD types.
- This adder is not available on explosion proof motors
- RTDs will be installed on winding end turns, not embedded in windings.

Thermostats (Klixons)

Toshiba's standard offering includes a normally-closed (NC), bi-metallic, temperature actuated element mounted on the stator winding. Leads are marked P1 and P2. Termination of the leads is in the main conduit box. Special thermostats are available upon request. Contact Toshiba for pricing and availability.

Option		Hermetically Sealed - NC (1, 2)	Klixon-NC
Frame	56/143/145	\$328	\$246
	182/184	\$328	\$246
	213/215	\$328	\$246
	254/256	\$328	\$246
	284/286	\$328	\$246
	324/326	\$459	\$345
	364/365	\$459	\$345
	404/405	\$656	\$492
	444/445	\$656	\$492
	447	\$809	\$608
	449/500	\$809	\$608
	5000/5800	\$875	\$657

- (1) Contact Toshiba for Normally Open option.
 (2) If used in Division 2 environments, hermetically sealed thermostats are required.

Special Note:

- Klixons will be installed on end turns

Winding PTC Thermistors

Non-linear resistance temperature detectors are mounted on the motor winding. This thermal protection consists of three thermistors only or three thermistors with a solid state control relay. The provided control relay is intended for mounting in a remote location.

Option		Mark A (PTC) Thermistor	Mark A (PTC) Thermistor & Module
	56/143/145	\$328	\$1,367
	182/184	\$328	\$1,367
	213/215	\$328	\$1,367
	254/256	\$328	\$1,367
	284/286	\$328	\$1,367
	324/326	\$328	\$1,367
	364/365	\$328	\$1,367
	404/405	\$328	\$1,367
	444/445	\$328	\$1,367
	447	\$328	\$1,367
	449/500	\$328	\$1,367
	5000/5800	\$328	\$1,367

Special Note:

- Adders above are not available for stock modification on explosion proof product.
- Thermistors will be installed on winding end turns

Vertical Jacking Provisions

Vertical jacking is used to assist in the proper alignment of the motor shaft with the driven equipment for shimming purposes. Provisions for four jacking bolts (one per foot) are provided. Jacking bolts are to be supplied by the customer.

Option		Vertical Jacking (1)
Frame	143/145	\$545
	182/184	\$545
	213/215	\$650
	254/256	\$650
	284/286	\$780
	324/326	\$875
	364/365	\$875
	404/405	\$984
	444/445	\$984
	447	\$984
	449/500	\$1,203
	5000/5800	\$1,203

Special Note:

- This adder comes standard on totally enclosed fan cooled frames 5011/5811.

Vertical Lifting Provisions

This modification provides vertical lifting provisions for standard footless motors that are mounted vertical shaft down only.

Option		Vertical Lifting (1)
Frame	143/145	\$328
	182/184	\$394
	213/215	\$394
	254/256	\$547
	284/286	\$547
	324/326	\$755
	364/365	\$755
	404/405	—
	444/445	—
	449/500	—
	5000/5800	—

- (1) Vertical lifting available on roundbody EQP Global® footless.

Special Notes:

- Above adders are not available on drip proof or explosion proof motors, and are not available on any foot-mounted motors.
- It is recommended that if a motor is mounted vertically, a drip-cover also be provided (See "Drip-Cover" section).

Low Voltage Modifications

Production Price List

For "Build to Order" production motors 140 through 360 frame, the List Prices below are to be used along with the List Price Adders for the needed feature(s) to generate a "TOTAL LIST" price for the specific item configured.

For "Build to Order" production motors 400 frame and larger the List Prices for the applicable rating from the Stock section of the catalog is to be used along with the List Price Adders for the needed feature(s) to generate a "TOTAL LIST" price for the specific item configured.

The applicable multiplier for the discount symbol shown below for the 140 through 360 frames OR applicable discount symbol for the 400 frame and larger should then be used to arrive at a "TOTAL NET EACH" price for the configured motor.

Contact Toshiba for any potential configured items not listed.

For 400 Frame and larger motors, the List Price for "Build to Order" production motors should be taken from the applicable Stock Motor section of the catalog.

HP	Speed (RPM)	Frame	SD List	840 List	841 List
			Discount Symbol		
			MXTFCG	MXT40G	MXT41G
1	3600	143T			
1	1800	143T	\$896	\$974	\$1,134
1	1200	145T	\$1,115	\$1,218	\$1,406
1.5	3600	143T	\$1,015	\$1,143	\$1,274
1.5	1800	145T	\$984	\$1,087	\$1,260
1.5	1200	182T	\$1,190	\$1,298	\$1,734
2	3600	145T	\$1,181	\$1,227	\$1,452
2	1800	145T	\$1,071	\$1,193	\$1,384
2	1200	184T	\$1,378	\$1,448	\$1,773
3	3600	182T	\$1,307	\$1,404	\$1,783
3	1800	182T	\$1,230	\$1,254	\$1,674
3	1200	213T	\$1,591	\$1,856	\$2,273
5	3600	184T	\$1,549	\$1,655	\$2,021
5	1800	184T	\$1,404	\$1,465	\$1,792
5	1200	215T	\$2,227	\$2,491	\$3,117
7.5	3600	213T	\$1,731	\$2,021	\$2,451
7.5	1800	213T	\$1,649	\$1,914	\$2,433
7.5	1200	254T	\$2,808	\$3,205	\$4,053
10	3600	215T	\$2,078	\$2,259	\$2,860
10	1800	215T	\$2,007	\$2,252	\$2,930
10	1200	256T	\$3,430	\$3,934	\$4,951
15	3600	254T	\$2,857	\$3,095	\$3,934
15	1800	254T	\$2,708	\$2,968	\$3,865
15	1200	284T	\$4,809	\$5,229	\$6,571
20	3600	256T	\$3,525	\$3,742	\$4,866
20	1800	256T	\$3,345	\$3,698	\$4,809
20	1200	286T	\$5,632	\$6,154	\$8,007
25	3600	284TS	\$4,541	\$4,842	\$6,000
25	1800	284T	\$4,057	\$4,475	\$5,727
25	1200	324T	\$7,178	\$7,835	\$9,704
30	3600	286TS	\$5,070	\$5,618	\$7,002
30	1800	286T	\$4,878	\$5,227	\$6,660
30	1200	326T	\$8,346	\$8,592	\$11,174
40	3600	324TS	\$6,574	\$7,433	\$9,209
40	1800	324T	\$6,307	\$6,802	\$8,850
40	1200	364T	\$10,919	\$11,647	\$15,149
50	3600	326TS	\$8,679	\$9,190	\$11,955
50	1800	326T	\$7,692	\$7,903	\$10,868
50	1200	365T	\$12,747	\$13,370	\$17,393
60	3600	364TS	\$10,696	\$12,695	\$14,149
60	1800	364T	\$10,840	\$11,987	\$14,030
75	3600	365TS	\$13,469	\$15,181	\$17,775
75	1800	365T	\$13,965	\$14,385	\$17,786

MV Modifications	MV Definite Purpose	MV Gen. Purp. Enclosed	MV General Purpose Open	LV Mods. (Stock & Prod)	Definite Purpose	IEC	Explosion Proof	TEFC General Purpose	ODP General Purpose

*Production modifications not applicable to EQP Global® motors 140 through 360 frame
(use EQPIII Series base price for these frame sizes.)*

Low Voltage Modifications

Production Modifications

Altitude	126	Insulation Modifications	133
Ambient Temperature	126	Upgrade to Class H Insulation System	133
Balance/Vibration	126	Tropicalized Coating on Motor Winding & Internal Surface	133
Bases (Adjustable).....	126	Fungus-Proof Coating on Motor Windings.....	133
Bearings.....	126	Encapsulate Windings.....	134
Sealed/Shielded Bearings.....	126	Epoxy Coating on Motor Windings	134
Sleeve Bearings.....	126	Labels.....	134
Insulated Bearings.....	126	Lead Length/Lead Terminals.....	134
Regreasable or Locked Bearings.....	127	Crimp Terminals.....	134
Change Bearings.....	127	Burndy Lugs/Two-Hole Terminals.....	134
Blowers	127	Longer Lead Length than Standard	134
Brakes	128	Neutral Lead (Three-Lead Plus a Neutral)	134
CE Approval.....	128	Lubrication.....	135
Conduit Box Modifications.....	128	High Temperature Grease	135
Auxiliary Terminal Box.....	128	Low Temperature Grease	135
Cast Iron Main Box.....	128	Oil-Mist	135
Location.....	128	Special-Based Grease Requirements.....	135
Remote-Mount Conduit Box.....	128	Nameplates	135
Connections	128	Duplicate or Special Nameplates.....	135
Couplings & Sheaves Mounted	129	Paint.....	136
Current Transformers.....	129	Screens	136
Documentation.....	129	Screens to an Open Drip Proof Motor	136
Dowel Pin Provisions	129	Seals.....	136
Drains & Breathers.....	129	Service Factor	137
Additional Drain Holes.....	129	Shafts	137
Breathers.....	129	NEMA Double-Shaft.....	137
Drip Covers.....	130	NEMA TS-Shaft to NEMA T-Shaft.....	137
Enclosures	130	NEMA TS Short Shaft.....	137
Marine Duty	130	Special Shaft (Non-NEMA)	137
Mill & Chemical Construction.....	130	Shaft Seals	137
Petro-Chemical Construction.....	130	Shaft Grounding Provisions	138
Classified-Division 2/Zone 2 Locations	130	Software: Engineering Data	138
Encoders	131	Space Heaters	139
Export Crating.....	131	Starting/Connection.....	139
Fan Covers	131	Surge Protection.....	139
Flange-Mounting	131	Terminal Blocks/Strips	139
Open Drip Proof Motors	131	Testing.....	140
Totally Enclosed Fan Cooled Motors	132	Thermal Protection	140
Totally Enclosed Explosion Proof Motors	132	Thermostats (Klixons).....	140
Frequency.....	132	Winding PTC Thermistors.....	140
Grease Fittings	132	Thermocouples.....	141
Grounding Provisions	132	Resistance Temperature Detectors (RTDs).....	141
External Grounding Provisions on Motor Frame (Base).....	132	Torque	141
External Grounding Pad to Motor Frame.....	132	Vertical Jacking Provisions.....	142
Grounding Provisions to Motor Shaft.....	132	Vertical Lifting Provisions	142
Hardware	133	Vibration Detectors.....	142
		Vibration Switch	142
		Voltage	142
		Windings (Special).....	142

Altitude

Standard designs are built for operation up to 3300 ft. (1000 m) above sea level at a maximum ambient of 40°C. Altitudes over 3300 ft. may affect frame size. Please contact Toshiba to confirm.

Ambient Temperature

Toshiba motors are designed to operate in an ambient temperature range between -25° and 40°C (-13°F and 104°F). For operation in temperatures above or below the standard, contact Toshiba.

Special Notes:

- Non-standard ambient temperatures may affect frame size and insulation class. Please contact Toshiba to confirm.
- Maximum ambient for explosion proof motors when operated on adjustable speed drives is 50°C.

Balance/Vibration

All Toshiba motors are dynamically balanced and measured in accordance with NEMA MG1 standards unless otherwise specified by the design. Toshiba motors all have a standard vibration level of 0.12 inches/second. See adder below for vibration levels lower than the Toshiba standard.

Option		Precision 0.08 in/sec. (1, 2)	Precision 0.04 in/sec. (3, 4)	Special Balance Requirements
Frame	143/145	\$284	\$438	Contact Toshiba
	182/184	\$284	\$438	
	213/215	\$284	\$438	
	254/256	\$328	\$492	
	284/286	\$328	\$492	
	324/326	\$383	\$602	
	364/365	\$383	\$820	
	404/405	\$492	\$1,203	
	444/445	\$492	\$1,641	
	447	\$930	\$2,188	
	449/500	\$930 (5)	\$2,734 (5)	
	5000/5800	\$984 (5)	\$3,281 (5)	
	5011/5811	—	—	

- (1) This vibration level is standard on all 840 products through 447 frame.
(2) This vibration level is standard on all 841 products.
(3) This vibration level is not available on Toshiba P-Base products. This precision level of vibration is not available for motors with roller bearings.
(4) This vibration level is not available on 5011/5811 frames.
(5) Contact Toshiba for 3600 RPM (2-pole motors).

Bases (Adjustable)

Contact Field Service for Spare Part Kits.

Bearings

Special bearings and designs are available on a production basis. Standard bearings can be changed for specific application requirements. The following list additions apply.

Sealed/Shielded Bearings

Open and totally enclosed general purpose motors on 250T frame and smaller contain shielded or sealed-type, non-regreasable bearings as standard. Contact Toshiba to determine actual stock design bearing information.

Option		Sealed Bearings
Frame	143/145	—
	182/184	—
	213/215	—
	254/256	—
	284/286	\$328
	324/326	\$328
	364/365	\$514
	404/405	\$820
	444/445	—
	447	—
	449/500	—
	5000/5800	—

Special Notes:

- Bearings are lubricated for life and cannot be regreased.
- Sealed bearings come standard on all 140 through 250 frame motors, except for all 841 products.

Sleeve Bearings

Contact Low Voltage Motor Application Support for price and availability.

Insulated Bearings

Insulated bearings are typically applied in applications where shaft current concerns exist (i.e. applications involving the use of adjustable speed drives). Insulating the bearings helps to prevent electrical arcing (bearing fluting) and potential premature bearing failure.

Pricing below is for insulating the bearings on both end bells.

Option		Insulating Ball Bearings	Insulating Roller
Frame	143/145	\$1,476	—
	182/184	\$1,575	—
	213/215	\$1,850	—
	254/256	\$2,250	—
	284/286	\$2,450	—
	324/326	\$2,675	—
	364/365	\$3,281	—
	404/405	\$3,609	—
	444/445	\$3,938	\$6,925 (1)
	447	\$3,938	\$6,925 (1)
	449/500	\$4,375	\$7,562 (1)
	5000	\$6,016	\$9,600
	5800	\$6,525	Contact Toshiba

(1) Contact Toshiba for delivery. Availability of bearings may vary.

Special Notes:

- Insulating the bearings is recommended when shaft voltage exceeds 300 mV.
- It is up to the user to determine when insulated bearings are required, especially with the use of inverter-fed control. NEMA MG1 Part 31 suggests insulating the bearing(s) on all motors in 500 series frames and larger when inverter-fed.
- Toshiba suggests insulating both bearings on all frame sizes 440 and larger when used with adjustable speed drives.
- When insulated bearings are used on direct-coupled applications, the use of an insulated coupling and/or a shaft grounding brush is required in order to reduce the risk of driven equipment bearing damage. Grounding brushes are not suitable for Division 2 environments.
- Insulated bearings are not available on angular contact bearing construction.
- If bearing thermal devices are required with insulated bearings, a special version of the thermal device will be required. Contact Toshiba for availability and price of this thermal device.

Regreasable or Locked Bearings

Regreasable and locked bearings come standard in all 280T frame and larger motors.

Option	Regreasable (1)	Locked (2)
Frame	143/145	\$164
	182/184	\$164
	213/215	\$219
	254/256	\$219
	284/286	Toshiba Standard
	324/326	
	364/365	
	404/405	
	444/445	
	447	
	449/500	Toshiba Standard
	5000/5800	

(1) This comes standard on all 841 motors.

(2) This comes standard on 280 frame and larger on all 840 motors, and is standard on all 841 motors.

Special Notes:

- Adders above are not available on explosion proof product.
- If special end-play tolerances with bearing lock nuts are required, contact Toshiba for pricing.

Change Bearings

Cylindrical roller bearings are used in horizontal motors where high radial loads are present for an improved L-10 life, i.e. belted applications.

Option	Roller Bearings
Frame	143/145
	182/184
	213/215
	254/256
	284/286
	324/326
	364/365
	404/405
	444/445
	447
	449/500
	5000/5800

(1) Roller Bearing standard for belt drive motors.

Special Notes:

- This is applicable only for 1800 RPM motors and slower.
- Roller bearing requests require that full belting/application details be provided prior to order acceptance.
- Adders above not available on explosion-proof product.

Blowers

Toshiba motors are suitable for use with inverter-fed controllers. Turndown capability is a function of the product selected. See individual product page for specific information. When turndown requirements exceed product capability, the use of an auxiliary blower is required. Contact Toshiba for help with determining whether a blower is required for an application. The National Electrical Code 430.126 (A) (4) mandates that motors with external-force ventilation have a form of thermal protection. See "Thermal Protection" section for the addition of thermal protection. This addition is not included in the blower adder.

Option	Blower
Frame	143/145
	182/184
	213/215
	254/256
	284/286
	324/326
	364/365
	404/405
	444/445
	447
	449/500
	5010
	5810
	5011/5811

Special Notes:

- Adders above are not available on explosion proof product.
- Blower standard Voltages as follows:
 - » 140 through 280T frames — single-phase 218 to 290 V and three-phase 209 to 340/361 to 603 V
 - » 320 through 5800 frames — three-phase 230 to 330/400 to 575 V
- On 320 frame motors and larger, blowers cannot operate on line voltages over 575 V.
- Contact Toshiba for applications requiring line voltages over 575 V.
- Blowers not available for Division 2 applications.

Brakes

Toshiba offers a brake motor series up to 280 frame to cover applications with brake needs. Please see the Definite Purpose, Brake Motor section of the catalog. For brake motors above this, please contact Toshiba for availability.

Special Notes:

- Brakes are available for Division 1 and Division 2 applications for 140 through 250 frames. Contact Toshiba for price and availability.
- 140 through 180 frames are suitable for vertical mount without modifications.

CE Approval

CE approved motors are available on select ratings. Contact Toshiba for information.

Conduit Box Modifications

Toshiba’s standard main conduit box on all motors are located in the F1 position, with the exception of oil well pump motors that have the main box located in the F2 position. (See TEFC Top Mount section of catalog for F3.)

Auxiliary Terminal Box

Termination of protective or monitoring devices can be provided in a separate auxiliary box (280 frame and larger) or a conduitlet mounted off the main terminal box (250T frame and below). All auxiliary boxes are mounted on the same side as the main terminal box unless otherwise specified.

Option		Conduitlet	Auxiliary Cast Iron Box
Frame	143/145	\$383	—
	182/184	\$383	—
	213/215	\$383	—
	254/256	\$383	—
	284/286	\$450	\$766
	324/326	\$450	\$766
	364/365	\$450	\$766
	404/405	—	\$766
	444/445	—	\$766
	447	—	\$766
	449/500	—	\$766
	5000/5800	—	\$766

Special Notes:

- Adders above are not available on explosion proof product.
- Auxiliary conduit box is provided as standard with stator RTD adder on all motors.

Cast Iron Main Box

Cast iron conduit boxes come standard on all Explosion Proof, EQP Global®, and Quarry Duty Products. Cast iron conduit boxes also come standard on 500 frame and larger quarry duty products and all TEFC 5000 frames and above.

Option		NEMA Type II
Frame	143/145	—
	182/184	—
	213/215	—
	254/256	—
	284/286	—
	324/326	—
	364/365	—
	404/405	—
	444/445	\$3,325
	447	\$3,325
	449/500	\$3,325
	5000/5800	\$3,325

Location

All motors are provided with the main terminal box in the F1 position, with the exception of oil well pump motors that have the main box located in the F2 position. For conduit box location in the F2 position, see adder below.

Option		F2 (Production)	F3 (Top-Mount)
Frame	143/145	No Charge	See TEFC Top Mount Section of Catalog for F3
	182/184	No Charge	
	213/215	No Charge	
	254/256	No Charge	
	284/286	No Charge	
	324/326	No Charge	
	364/365	No Charge	
	404/405	No Charge	
	444/445	No Charge	
	447	No Charge	
	449/500	No Charge	
	5000/5800	No Charge	

Special Notes:

- Not all motors are field-modifiable to F2 assembly.
- See “Applications” section for F2 field-modifiability.

Remote-Mount Conduit Box

For applications requiring that the conduit box be located away from the motor, Toshiba is able to supply a remote-mount conduit box. The conduit box will be supplied with the main motor, but will arrive unfastened. The remote-mount conduit box includes a main terminal box and a threaded mounting plate on the motor and the conduit box.

Option		Cast Iron Conduit Box
Frame	143/145	\$219
	182/184	\$219
	213/215	\$273
	254/256	\$273
	284/286	\$438
	324/326	\$438
	364/365	\$656
	404/405	\$656
	444/445	\$1,094
	447	\$1,094
	449/500	\$1,313
	5000/5800	\$1,750

Special Note:

- Adders above are not available on explosion proof product.

Connections

For various motor connections (Y-delta, part-winding, etc.), see “Starting/Connection” modifications section.

Couplings & Sheaves Mounted

Couplings and V-belt sheaves must be supplied (finished bored, balanced, and key-seated) to Toshiba's shaft dimensions before they can be mounted to a motor. An incoming identification number must be obtained from Toshiba, and coupling must be shipped at least three weeks in advance before scheduled motor shipment, and must include manufacturer's mounting instructions.

Option	Customer Supplied Sheave/Coupling
Frame	143/145
	182/184
	213/215
	254/256
	284/286
	324/326
	364/365
	404/405
	444/445
	447
	449/500
	5000/5800

Special Note:

- Incoming parts without a proper Toshiba identification number will not be accepted and will be returned to sender.

Current Transformers

See "Surge Protection" modifications section.

Documentation

See "Software" modifications section.

Dowel Pin Provisions

Dowel pin holes will be provided on both sides of the motor drive end. These are provided to ensure motor alignment is maintained after the motor is installed. This feature comes standard on totally enclosed fan cooled 5011 and 5811 frames.

Option	Two Per Motor
Frame	143/145
	182/184
	213/215
	254/256
	284/286
	324/326
	364/365
	404/405
	444/445
	447
	449/500
	5000/5800

Special Note:

- If four holes are required, one on each motor foot, double the above adder.

Drains & Breathers

Standard horizontally-mounted totally enclosed fan cooled and open motors are provided with drain holes. Drain holes are located at the lowest point on the motor.

Additional Drain Holes

For additional drain hole(s), see adder below.

Option	Drain Hole	Drain Hole Conduit Box (1)	Stainless T-Drain	Stainless T-Drain Conduit Box (1)
Frame	143/145	\$131	\$219	\$219
	182/184	\$131	\$219	\$219
	213/215	\$131	\$219	\$219
	254/256	\$131	\$328	\$328
	284/286	\$131	\$328	\$328
	324/326	\$131	\$328	\$328
	364/365	\$131	\$328	\$328
	404/405	\$131	\$328	\$328
	444/445	\$131	\$328	\$328
	447	\$131	\$328	\$328
	449/500	\$131	\$328	\$328
	5000/5800	\$131	\$328	\$328

(1) Conduit box drain holes are available on cast conduit boxes only.

Special Notes:

- Adders above are not available on explosion proof product.
- All EQP Global® products are provided with additional plugged drain provisions in each bearing bracket for vertical mounting configurations. Plugs must be removed for proper drainage of moisture.

Breathers

To request breather(s) be added to a motor, see adder below.

Option	Standard Breather (1)	UL Stainless Breather (2)	Standard Breather Conduit Box (3)
Frame	143/145	\$273	\$273
	182/184	\$273	\$273
	213/215	\$273	\$273
	254/256	\$383	\$383
	284/286	\$383	\$383
	324/326	\$383	\$383
	364/365	\$438	\$438
	404/405	\$438	\$438
	444/445	\$438	\$438
	447	\$438	\$438
	449/500	\$438	\$438
	5000/5800	\$438	\$438

(1) All 840 and all 841 motors are equipped with either an automatic bronze drain and breather or stainless steel T-drains as standard.

(2) Explosion proof motors have UL-listed stainless steel drain and breathers as standard (for horizontal mounting only). For vertical mounting, apply list adder "UL Stainless Breather" located in the lowest point in the bearing bracket.

(3) Standard and stainless breathers are available for cast iron conduit boxes only (not available on explosion proof motors).

Special Notes:

- EQP Global® 840 and 841 motors have tapped holes fitted with stainless steel T-drains located at the lowest point in the face of each bearing bracket (140 through 210 frames) or on the lowest point of the frame (250 through 360 frames).
- Additional breathers are not available on explosion proof product for vertical mounting.

Drip Covers

Drip covers can be furnished on standard TEFC motors for extra protection from dripping liquids and falling objects when the motor is mounted in the vertical shaft-down position. Severe duty drip covers are of fabricated steel 3⁄8" with lip.

Option		Steel - Severe Duty	Explosion Proof Motors
Frame	143/145	\$177	\$177
	182/184	\$237	\$237
	213/215	\$237	\$237
	254/256	\$237	\$237
	284/286	\$330	\$330
	324/326	\$414	\$414
	364/365	\$450	\$450
	404/405	\$475	\$475
	444/445	\$510	\$510
	447	\$510	\$510
	449/500	\$510	\$510
	5000/5800	—	—

- Special Notes:**
- The drip cover adder does not include vertical lifting provisions.
 - If lifting provisions are required, see "Vertical Lifting" modifications section.

Enclosures

This section refers to additional specifications used to define the motor's enclosure. These adders may be required in order to provide a necessary additional degree of protection for normal operation in certain environments.

Marine Duty

Marine Duty IEEE 45 must be incorporated into an EQP Series 840 or 841 base motor. Please see adders below.

Option		IEEE 45 (1)	IEEE 45 (2)	ABS Type (3, 5)	ABS Unit (4, 5)
Frame	143/145	\$383	Standard on 840 & 841 Products	\$438	Contact Toshiba
	182/184	\$383		\$438	
	213/215	\$405		\$438	
	254/256	\$438		\$438	
	284/286	\$645		\$438	
	324/326	\$700		\$438	
	364/365	\$853		\$438	
	404/405	\$1,083		\$438	
	444/445	\$1,291		\$438	
	447	\$1,542		\$438	
	449/500	\$1,542		\$438	
	5000/5800	\$1,914		—	

- (1) In above-deck applications the adder includes space heaters with leads terminating in main terminal box and tropicalization in accordance with IEEE 45 requirements.
- » IP56 degree of protection is required.
- (2) In below-deck applications, the EQP Series product meets requirement as standard.
- (3) ABS Type Approval – Includes a new nameplate with the ABS marking. Included on this nameplate is the IEEE 45/Marine Duty stamping and the IP rating.
- (4) ABS Unit Approval – Contact Toshiba for clarification, pricing, and product availability.
- (5) ABS is not available on EQP Global® series product 140 through 360 frames.

- Special Note:**
- EQP 840 and EQP 841 products through N449T frame are nameplated IEEE 45 Marine Duty as standard.

Mill & Chemical Construction

See the General Purpose TEFC "EQP Global® 840" sections of the price guide for base motor product meeting this requirement.

Petro-Chemical Construction

See the General Purpose TEFC "EQP Global® 841" sections of the price guide for base motor products meeting this requirement.

Classified-Division 2/Zone 2 Locations

Environmental/application conditions may require a special motor design and special labeling of the product to ensure proper protection and/or safety during use. If an environment and/or application has been identified as a Division 2 or Zone 2 location, Toshiba requires that a Class, Group, and Temperature code (T-code) be provided to ensure safe operation in the specified atmosphere. The adder below must be applied to the EQPIII or EQP Global® base motor list price of the proper frame size to meet the temperature code requirement (contact Toshiba for the correct motor sizing).

Option		Class I, Division 2 (1)	Class II, Division 2 (2, 3, 4)
Frame	143/145	No Charge	No Charge
	182/184	No Charge	No Charge
	213/215	No Charge	No Charge
	254/256	No Charge	No Charge
	284/286	No Charge	No Charge
	324/326	No Charge	No Charge
	364/365	No Charge	No Charge
	404/405	No Charge	No Charge
	444/445	No Charge	No Charge
	447	No Charge	No Charge
	449/500	No Charge	No Charge
	5000/5800	No Charge	No Charge

- (1) Refer to Division 2 capabilities from Appendix C
- (2) This must be incorporated into a Global Series product.
- (3) CSA certification not available for Class II, Division 2. Class II certification can be made available through special acceptance. Contact Toshiba for pricing and delivery.
- (4) Groups F & G, T3B temperature code. Group E not available.

- Special Notes:**
- For Division 1 applications, see "Totally Enclosed Explosion Proof" section of the price guide or contact Toshiba.
 - Suitability of Zone 2 application is based on the National Electric Code (NEC).
 - Refer to Motor Appendix C for Division 2 reference tables.

Encoders

Encoders are used to regulate speed on motors linked to variable speed applications, and they are available either face-mounted or shaft-mounted. Toshiba's standard offering is a BEI HS35 (shaft-mount) or Avtron M56 (face-mount). All prices below are based on Pulse Per Revolution (PPR) of 1024 single-output and dual-channel (A & B) quadrature. Encoder type must be specified upon order.

Option		NorthStar SL56 (2, 3)	NorthStar HSD38 (1)	NorthStar ISD37 (1, 4)	Avtron AV56 (2, 3)	Avtron M3 (1)
Frame	143/145	\$3,391	\$2,406	\$3,281	\$3,391	\$4,047
	182/184	\$3,391	\$2,406	\$3,281	\$3,391	\$4,047
	213/215	\$3,391	\$2,406	\$3,281	\$3,391	\$4,047
	254/256	\$3,391	\$2,406	\$3,281	\$3,391	\$4,047
	284/286	\$4,041	\$2,406	\$3,281	\$4,041	\$4,047
	324/326	\$4,041	\$2,406	\$3,281	\$4,041	\$4,047
	364/365	\$4,041	\$2,406	\$3,281	\$4,041	\$4,047
	404/405	\$4,041	\$2,406	\$3,281	\$4,041	\$4,047
	444/445	\$4,041	\$2,406	\$3,281	\$4,041	\$4,047
	447	\$4,041	\$2,406	\$3,281	\$4,041	\$4,047
	449/500	\$4,041	\$2,406	\$3,281	\$4,041	\$4,047
	5000/5800	\$4,041	\$2,406	\$3,281	\$4,041	\$4,047
Option		Avtron M4 (1)	Avtron HS35M (1)	Dynapar HS35 (1)	Dynapar HS20 (1)	BEI HS35 (1)
Frame	143/145	\$4,813	\$2,734	\$2,734	\$2,188	\$2,734
	182/184	\$4,813	\$2,734	\$2,734	\$2,188	\$2,734
	213/215	\$4,813	\$2,734	\$2,734	\$2,188	\$2,734
	254/256	\$4,813	\$2,734	\$2,734	\$2,188	\$2,734
	284/286	\$4,813	\$2,734	\$2,734	\$2,188	\$2,734
	324/326	\$4,813	\$2,734	\$2,734	\$2,188	\$2,734
	364/365	\$4,813	\$2,734	\$2,734	\$2,188	\$2,734
	404/405	\$4,813	\$2,734	\$2,734	\$2,188	\$2,734
	444/445	\$4,813	\$2,734	\$2,734	\$2,188	\$2,734
	447	\$4,813	\$2,734	\$2,734	\$2,188	\$2,734
	449/500	\$4,813	\$2,734	\$2,734	\$2,188	\$2,734
	5000/5800	\$4,813	\$2,734	\$2,734	\$2,188	\$2,734

(1) The encoder is shaft-mounted.

(2) The encoder is face-mounted.

(3) 280 frame and above are for TEAO and TEBC applications only.

(4) This encoder is suitable for Division 2 environments (Groups A, B, C, D, F, and G).

Special Notes:

- Adders above are not available on explosion proof product.
- For availability on explosion proof product, contact Toshiba.

Export Crating

Toshiba provides packaging options for different shipping requirements. Options include standard commercial packaging (for common, below-deck transport on ships) and containerized shipping. Both options are available at a net price of 8% of the motor's total sell price or a minimum of \$350, whichever is greater.

Fan Covers

Cast Iron fan covers are available for totally enclosed fan cooled enclosures.

Option		Cast Iron Fan Cover (1)
Frame	143/145	\$90
	182/184	\$110
	213/215	\$140
	254/256	\$180
	284/286	\$260
	324/326	\$300
	364/365	\$485
	404/405	\$640
	444/445	\$1000
	447	\$1,500
	449	\$2,200
	500	Contact Toshiba
	5000/5800	Contact Toshiba

(1) This feature is standard on EQPIII 840, EQPIII 841, EQP Global® 840, EQP Global® 841, and explosion proof motors.

Flange-Mounting

Flanges can be ordered through production and are also available as kits. Contact Field Service for Spare Part Kits.

Open Drip Proof Motors

Option		C-Face Footed	D-Flange Footed (1)
Frame	143/145	—	—
	182/184	—	—
	213/215	\$295	—
	254/256	\$295	—
	284/286	\$438	—
	324/326	\$481	—
	364/365	\$875	\$1,695
	404/405	\$1,094	\$2,078
	444/445	\$1,586	\$2,297
	447	\$1,695	\$2,734
	449/500	—	\$2,734 (2)
	5000/5800	—	—

(1) D-flanges are available on 2-pole (3600 RPM) or 4-pole (1800 RPM) short shaft motors only.

(2) 500 frame D-flanges are available with diameters larger than those of short shaft motors. Contact Toshiba for specific availability.

Special Note:

- 210 through 440 frames meet NEMA BA dimension for C-flanges.

Totally Enclosed Fan Cooled Motors

Option		C-Face Footed	C-Face Footless (1)	D-Flange Footed	D-Flange Footless (1)
Frame	143/145	\$109 (2)	\$175	\$438	\$492
	182/184	\$131 (2)	\$219	\$492	\$656
	213/215	\$175 (2)	\$219	\$547	\$656
	254/256	\$263 (2)	\$350	\$875	\$984
	284/286	\$438	\$514	\$930	\$1,148
	324/326	\$492	\$678	\$1,422	\$1,641
	364/365	\$820	\$1,061	\$1,695	\$2,188
	404/405	\$1,148	\$1,586	\$2,078	\$2,570
	444/445	\$1,477	\$2,242	\$2,297	\$3,063
	447	\$1,477	\$2,242	\$2,297	\$3,063
	449	\$1,641 (3)	\$2,516 (3)	\$2,734 (3)	\$3,391 (3)
	500	—	—	—	—
	5000/5800	\$2,200	—	\$2,953	—

(1) These adders do not include drip covers or vertical lifting provisions.
 (2) Motors do not meet NEMA BA dimensions (NEMA BA dimensions are available on 140 and 180 frame as production motors when specified).
 (3) This option is not available on 500 frame motors; only on N449 frames.

Totally Enclosed Explosion Proof

Option		C-Face Footed
Frame	143/145	\$241 (1)
	182/184	\$273 (1)
	213/215	\$328 (1)
	254/256	\$438 (1)
	284/286	\$766
	324/326	\$875
	364/365	\$984
	404/405	—
	444/445	—
	447	—
	449/500	—
	5000/5800	—

(1) Motors do not meet NEMA BA dimensions.

Frequency

See Voltage Section..

Grease Fittings

Standard hydraulic, Alemite/Zerk type fittings are provided with motors with regreasable bearings. For special grease fittings and drains, contact Toshiba for pricing and availability. For grease fittings, see “Regreasable Bearings” modification.

Grounding Provisions

All motor frames 140 through 5810 have CSA clamp-type grounding lugs in the conduit box. All EQP Global® 840 and EQP Global® 841 motors are provided with a UL-approved clamp-type grounding lug in the conduit box.

External Grounding Provisions on Motor Frame (Base)

All EQPIII 841 and EQP Global® 841 motors have an additional grounding provision on the motor base as standard. The grounding provisions on the motor base are ¼ to 20 UNC (unified inch coarse thread) for motors up to 50 HP, ⅜ to 16 UNC for motors above 50 HP and up to 200 HP, and ½ to 13 UNC for motors above 200 HP.

Option		Base Grounding
Frame	143/145	\$219
	182/184	\$219
	213/215	\$219
	254/256	\$219
	284/286	\$219
	324/326	\$219
	364/365	\$219
	404/405	\$219
	444/445	\$219
	447	\$219
	449/500	\$219
	5010/5810	\$219
	5011/5811	(1)

(1) Grounding provision is provided as standard.
Special Note:
 • External grounding provisions are available for explosion proof product but must be used as supplementary ground connection in conjunction to the main equipment ground provision provided In the main terminal box.

External Grounding Pad to Motor Frame

Apply the adder below for a copper ground pad with two holes mounted on the motor frame. When placing the order, the hole and tap size must be provided.

Option		Frame Grounding
Frame	143/145	—
	182/184	—
	213/215	—
	254/256	—
	284/286	—
	324/326	\$1,641
	364/365	\$1,641
	404/405	\$1,641
	444/445	\$1,641
	447	\$1,641
	449/500	\$1,641
	5000/5800	\$1,641

Grounding Provisions to Motor Shaft

See “Shaft Grounding” modifications section.

Hardware

Standard hardware is non-corrosive zinc dichromate. Stainless hardware fasteners (holding brackets, conduit box, fan cover, and inner caps) are available. Toshiba standard stainless hardware is 304 unless specified otherwise.

Option		304 SS Hardware	316 SS Hardware
Frame	143/145	\$328	\$438
	182/184	\$328	\$438
	213/215	\$383	\$492
	254/256	\$438	\$547
	284/286	\$438	\$547
	324/326	\$711	\$875
	364/365	\$766	\$875
	404/405	\$875	\$1,094
	444/445	\$930	\$1,148
	447	\$984	\$1,203
	449/500	\$984	\$1,313
	5000/5800	\$1,094	\$1,531

Special Note:

- Adders above are not available on explosion proof product.

Insulation Modifications

Insulation systems are divided into classes according to the thermal endurance by temperature rating. Standard motor insulation is non-hygroscopic Class F (utilizing Class H components), and is dipped and baked in a Class H varnish. Unusual or severe applications may require special insulation systems or winding protection.

Upgrade to Class H Insulation System

Option		Class H
Frame	143/145	\$284
	182/184	\$284
	213/215	\$284
	254/256	\$372
	284/286	\$656
	324/326	\$809
	364/365	\$1,039
	404/405	\$1,498
	444/445	\$2,122
	447	\$2,625
	449/500	\$3,281
	5000/5800	\$4,375

Special Notes:

- Adders above not available on explosion proof product.
- Class-H insulation is standard on dry kiln product.
- No UL Component Recognition (UR) approval listing for Class H.
- Class H insulation is not UL 1004 compliant.

Tropicalized Coating on Motor Winding & Internal Surface

This adder provides additional insulation coating as well as corrosion protection for all internal machined surfaces.

Option		Internal Coating
Frame	143/145	\$164
	182/184	\$164
	213/215	\$219
	254/256	\$328
	284/286	\$547
	324/326	\$766
	364/365	\$875
	404/405	\$1,203
	444/445	\$1,641
	447	\$2,406
	449/500	\$2,406
	5000/5800	\$2,734

Special Note:

- This adder comes standard on all 840 and all 841 product.

Fungus-Proof Coating on Motor Windings

Unwanted fungi may break down a motor's insulation system over time. The addition of the fungus-proof adder will protect motor windings from this type of problem.

Option		Fungus-Proof Coating
Frame	143/145	\$109
	182/184	\$109
	213/215	\$164
	254/256	\$219
	284/286	\$328
	324/326	\$438
	364/365	\$547
	404/405	\$711
	444/445	\$930
	447	\$1,203
	449/500	\$1,203
	5000/5800	\$1,531

Encapsulate Windings

The encapsulate windings adder consists of an additional epoxy resin coating on the motor winding. Protects motor internally in situations where internal components will be directly exposed to corrosive and/or humid environments.

Option		Encapsulate (1)
Frame	143/145	\$656
	182/184	\$656
	213/215	\$656
	254/256	\$1,050
	284/286	\$1,214
	324/326	\$1,313
	364/365	\$1,553
	404/405	\$2,166
	444/445	\$2,964
	447	\$3,281
	449/500	
	5000/5800	Contact Toshiba

(1) List prices apply to open drip proof motors only.

Special Note:

- Adders above are not available on explosion proof or totally enclosed fan cooled product.

Epoxy Coating on Motor Windings

This adder provides additional protection against corrosive and/or humid environments.

Option		Epoxy Coating
Frame	143/145	\$164
	182/184	\$164
	213/215	\$219
	254/256	\$328
	284/286	\$547
	324/326	\$766
	364/365	\$875
	404/405	\$1,203
	444/445	\$1,641
	447	\$2,406
	449/500	\$2,406
	5000/5800	\$2,734

Labels

See "Nameplates" section for information.

Lead Length/Lead Terminals

Crimp-type lead lugs/ring terminals come standard on motors as follows:

- 210 frame and larger on all EQP 840 products
- All EQP 841 products
- All other 280 frame and larger motors

Crimp Terminals

Option		Crimp
Frame	143/145	\$109
	182/184	\$109
	213/215	\$153
	254/256	\$153
	284/286	—
	324/326	—
	364/365	—
	404/405	—
	444/445	—
	447	—
	449/500	—
	5000/5800	—

Burndy Lugs/Two-Hole Terminals

Option		Burndy
Frame	143/145	\$580
	182/184	\$580
	213/215	\$744
	254/256	\$744
	284/286	\$744
	324/326	\$744
	364/365	\$744
	404/405	\$744
	444/445	\$744
	447	\$744
	449/500	\$744
	5000/5800	\$744

Longer Lead Length than Standard

Typical lead lengths are 5" on 143-184T, 7" on 213-256T, 10" on 284-365T, and 12" on 404-5810U frames. Prices are based on a per foot, per lead basis. Multiply the number of motor leads by the number of desired feet and then by the applicable charge below.

Option		Per Foot, Per Lead (1)
Frame	143/145	\$11
	182/184	\$11
	213/215	\$11
	254/256	\$11
	284/286	\$18
	324/326	\$18
	364/365	\$22
	404/405	\$22
	444/445	\$33
	447	\$33
	449/500	\$55
	5000/5800	\$55

(1) For standard number of leads, refer to the Toshiba Installation and Maintenance Manual.

Neutral Lead (Three-Lead Plus a Neutral)

Option		Neutral Lead
Frame	143/145	\$175
	182/184	\$175
	213/215	\$219
	254/256	\$273
	284/286	\$328
	324/326	\$558
	364/365	\$820
	404/405	\$1,291
	444/445	(1)
	447	(1)
	449/500	(1)
	5000/5800	(1)

(1) Contact Toshiba for availability and pricing.

Lubrication

All bearings in motors with Class F insulation will be furnished with a lubricant that is capable of operating in ambient temperatures between -25° and 65°C. Please note that it is not recommended to mix greases of different bases. The mixing of different types of thickeners may destroy the composition and physical properties of the grease.

High Temperature Grease

This adder is for applications in which the ambient temperature is greater than 65°C.

Option		High Temp. Grease
Frame	143/145	\$109
	182/184	\$109
	213/215	\$109
	254/256	\$109
	284/286	\$109
	324/326	\$273
	364/365	\$273
	404/405	\$273
	444/445	\$273
	447	\$273
	449/500	\$273
	5000/5800	\$273

Low Temperature Grease

This adder is for applications in which the ambient temperature ranges from -25° to -40°C.

Option		Low Temp. Grease
Frame	143/145	\$109 (1)
	182/184	\$109 (1)
	213/215	\$109 (1)
	254/256	\$109 (1)
	284/286	\$109
	324/326	\$273
	364/365	\$273
	404/405	\$273
	444/445	\$273
	447	\$273
	449/500	\$273
	5000/5800	\$273

(1) All Sealed bearing design motors come standard with lithium based grease - suitable for -40°C ambient.

Oil-Mist

Oil-mist lubrication is available on EQPIII 840 and EQPIII 841 motors only. Toshiba's EQPIII 840 and EQPIII 841 motors can be modified to accept an externally-generated oil-mist/dry sump lubrication arrangement. The type of preparation must be noted within the purchase order:

1. Oil-Mist Provisions (for future oil mist): The bearing cavity is arranged for oil-mist, but the bearings will be packed with grease for normal operation. Should the oil-mist system be connected, Toshiba recommends that the grease be cleaned from the bearings and bearing cavities.
2. Oil-Mist Ready: The bearings will receive a light coat of oil for testing and shipment; however, the oil-mist system must be connected upon receipt of product.

Option		Oil-Mist Provisions	Oil-Mist Ready
Frame	143/145	\$766	\$766
	182/184	\$766	\$766
	213/215	\$766	\$766
	254/256	\$875	\$875
	284/286	\$875	\$875
	324/326	\$1,094	\$1,094
	364/365	\$1,313	\$1,313
	404/405	\$1,750	\$1,750
	444/445	\$2,625	\$2,625
	447	\$3,172	\$3,172
	449/500	\$3,172	\$3,172
	5000/5800	\$3,828	\$3,828

Special Notes:

- Adders above are not available on explosion proof product.
- This adder is not available on general purpose vertical shaft-down or shaft-up applications. Contact Toshiba for vertical oil mist applications.
- Oil-mist options are available on our vertical solid shaft P-base products.
- For storage, refer to Toshiba's oil-mist manual.

Special-Based Grease Requirements

This adder is for applications in which the customer specifies a grease other than the Toshiba standard. For other special grease, contact Toshiba.

Nameplates

Standard nameplates are 304-grade stainless steel with engraved lettering. Additional nameplates for remote-mounting and special markings are available.

Duplicate or Special Nameplates

For requests other than what is listed below, contact Toshiba.

Option		Duplicate Nameplate	Special ID Tag
	56/143/145	\$150	\$150
	182/184	\$150	\$150
	213/215	\$150	\$150
	254/256	\$150	\$150
	284/286	\$150	\$150
	324/326	\$150	\$150
	364/365	\$150	\$150
	404/405	\$150	\$150
	444/445	\$150	\$150
	447	\$150	\$150
	449/500	\$150	\$150
	5000/5800	\$150	\$150

Paint

The standard paint finish is a self-priming, air-dried, acrylic alkyd resin finish. Beyond the standard colors offered by Toshiba, special colors and types of paints are available upon request. For special paint requirements, full specifications and color chip/manufacture color code will be required. Special paints requiring special application/curing equipment may not be available. Contact Toshiba for full details.

Option		Color Change Only	Special
Frame	143/145	\$438	Contact Toshiba
	182/184	\$438	
	213/215	\$438	
	254/256	\$547	
	284/286	\$547	
	324/326	\$656	
	364/365	\$656	
	404/405	\$766	
	444/445	\$875	
	447	\$875	
	449/500	\$984	
	5000/5800	\$1,094	

Special Note:

- TIC standard paint color is RAL 6012 green.

Screens

Corrosion-resistant screens covering air inlets and outlets of open drip proof motors are available. Motors equipped with screens will meet the NEMA guarded definition.

Screens to an Open Drip Proof Motor

Option		Corrosion-Resistant	Stainless Steel
Frame	143/145	\$219	\$273
	182/184	\$273	\$328
	213/215	\$306	\$361
	254/256	\$361	\$416
	284/286	\$383	\$438
	324/326	\$438	\$547
	364/365	\$547	\$766
	404/405	\$766	\$1,094
	444/445	\$820	\$1,203
	447	\$875	\$1,258
	449/500	\$875	\$1,258
	5000/5800	\$1,094	\$1,641

Special Note:

- Screens come standard on oil well pump motors.

Seals

Shaft seals are installed on the shaft at the bracket face to prevent the ingress of dirt and liquid.

Option		V-Ring Drive End (1)	V-Ring Both Ends (1)	Labyrinth Drive End (2)
Frame	143/145	\$142	\$284	\$492
	182/184	\$186	\$372	\$492
	213/215	\$186	\$372	\$547
	254/256	\$186	\$372	\$656
	284/286	\$197	\$394	\$766
	324/326	\$252	\$503	\$766
	364/365	\$252	\$503	\$984
	404/405	\$317	\$634	\$984
	444/445	\$328	\$656	\$1,203
	447	\$328	\$656	\$1,422
	449/500	\$350	\$700	\$1,531
	5000/5800	\$350	\$700	\$1,641
Option		Labyrinth Both Ends (2)	Taconite Drive End (3)	Taconite Both Ends (3)
Frame	143/145	\$984	\$492	\$984
	182/184	\$984	\$492	\$984
	213/215	\$1,094	\$547	\$1,094
	254/256	\$1,313	\$656	\$1,313
	284/286	\$1,531	\$766	\$1,531
	324/326	\$1,531	\$766	\$1,531
	364/365	\$1,969	\$984	\$1,969
	404/405	\$1,969	\$984	\$1,969
	444/445	\$2,406	\$1,203	\$2,406
	447	\$2,844	\$1,422	\$2,844
	449/500	\$3,063	\$1,531	\$3,063
	5000/5800	\$3,281	\$1,641	\$3,281

- (1) V-Ring shaft seals come standard on the drive end of totally enclosed motors.
- (2) Non-contact labyrinth seals come standard on both ends of all EQP 841 series products and 320 frame and larger for EQP 840 series products.
- (3) The taconite construction consists of two special bronze labyrinth seals (one on each end).

Special Notes:

- Adders above are not available on explosion proof product.
- Explosion proof products are provided with brass shaft slinger on both ends as standard. Contact Toshiba for pricing and availability for labyrinth seals.

Service Factor

Standard stock motors are designed for 1.15 service factor unless otherwise noted. Higher service factors are available if requested. Inquiries for service factors above 1.15 should be submitted to Toshiba for review. In certain cases, a higher service factor will require an increase in frame size or a special design.

Shafts

For shafts other than the Toshiba standard, see adders below.

NEMA Double-Shaft

Option	NEMA Double-Shaft
Frame	
143/145	\$153
182/184	\$153
213/215	\$208
254/256	\$273
284/286	\$405
324/326	\$591
364/365	\$667
404/405	\$733
444/445	\$973
447	\$973
449/500	\$973 (1)
5000/5800	—

(1) The NEMA double-shaft adder is defined up to N449 frame only. For 500 frame and larger, see "Special Shaft" adder section.

NEMA TS-Shaft to NEMA T-Shaft

Option	NEMA TS to NEMA T (2-Pole Motors)
Frame	
284/286	\$405
324/326	\$591
364/365	\$667
404/405	\$755

Special Note:

- T-shaft, 2-pole motors are not recommended for belted applications.

NEMA TS Short Shaft

Toshiba does not charge for this modification on a production basis for direct-coupled applications. Requests for this option will be subject to standard factory lead times.

Special Shaft (Non-NEMA)

Any special shafts beyond what is listed above require adders from both Table A and Table B below.

- Table A – Base Charge for Shaft
- Table B – Shaft Feature Adder

Table A – Base Adder for Special Shaft Requirement

Option	Quantity 1	Quantity 2 to 4	Quantity 5+
Frame			
143/145	\$656	\$295	\$109
182/184	\$656	\$295	\$109
213/215	\$766	\$295	\$109
254/256	\$831	\$328	\$131
284/286	\$930	\$372	\$186
324/326	\$1,006	\$427	\$230
364/365	\$1,192	\$481	\$273
404/405	\$1,389	\$492	\$339
444/445	\$1,641	\$678	\$416
447	\$1,750	\$711	\$416
449/500	\$1,750	\$711	\$416
5000/5800	\$2,406	\$1,148	\$656

Table B – Shaft Features/Material

Option	304 Stainless Steel (1)	316 Stainless Steel (1)	416 Stainless Steel (2)	4142 High Strength Steel	For each additional 5" length (3)
Frame					
143/145	\$175	\$328	\$131	\$66	\$66
182/184	\$175	\$328	\$131	\$66	\$66
213/215	\$372	\$711	\$273	\$98	\$98
254/256	\$514	\$1,006	\$383	\$98	\$98
284/286	\$766	\$1,498	\$569	\$120	\$120
324/326	\$1,389	\$2,734	\$984	\$153	\$153
364/365	\$1,794	\$3,588	\$1,313	\$164	\$164
404/405	\$2,581	\$5,163	\$1,936	\$186	\$186
444/445	\$2,767	\$5,534	\$2,078	\$219	\$219
447	\$2,898	\$5,797	\$2,078	\$230	\$230
449/500	\$3,063	\$6,125	\$2,188	\$230	\$230
5000/5800	\$3,281	\$6,563	\$2,461	\$273	\$273
Option	Drill & Tap in Shaft End	Steps – For Each Step or Reduced Dia.	Special Keyway	Threads	Tapers
Frame					
143/145	\$66	\$66	\$66	\$66	\$88
182/184	\$66	\$66	\$66	\$66	\$88
213/215	\$98	\$98	\$98	\$98	\$109
254/256	\$98	\$98	\$98	\$98	\$142
284/286	\$120	\$120	\$120	\$120	\$175
324/326	\$153	\$153	\$153	\$153	\$208
364/365	\$164	\$164	\$164	\$164	\$230
404/405	\$186	\$186	\$186	\$186	\$263
444/445	\$219	\$219	\$219	\$219	\$295
447	\$230	\$230	\$230	\$230	\$306
449/500	\$230	\$230	\$230	\$230	\$306
5000/5800	\$273	\$273	\$273	\$273	\$438

(1) Not available on 2-pole (3600/3000 RPM) motors.

(2) The use of 416 stainless steel is required for 2-pole motors.

(3) For lengths greater than four times the shaft diameter, contact Toshiba for availability and pricing.

Shaft Seals

See "Seals" modification section.

Shaft Grounding Provisions

Shaft grounding provisions help to eliminate shaft currents that can be introduced into the motor through upstream controllers (i.e.: adjustable speed drives). These currents can potentially lead to premature failure of the bearings, commonly referred to as “fluting.”

Option	Shaft Grounding Brush	Aegis Grounding Ring (1)
Frame	143/145	\$1,367
	182/184	\$1,367
	213/215	\$1,367
	254/256	\$1,367
	284/286	\$1,367
	324/326	\$1,477
	364/365	\$1,641
	404/405	\$1,805
	444/445	\$2,187
	447	\$2,187
	449/500	\$2,187
	5000/5800	\$2,734

(1) For c-face motors with drive end installation - Contact Toshiba

Special Notes:

- Adders above do not include insulated bearings.
- Adders above are not available on explosion proof product.
- Insulating the bearings is recommended when the shaft voltage exceeds 300 mV.
- It is up to the user to determine when insulated bearings are required, especially with the use of an inverter-fed control. NEMA MG1 Part 31 suggests insulating the bearing(s) on all motors in 500 series frames and larger that are inverter-fed.
- Shaft grounding rings may be used to divert the current around the bearing with the use of Inverter-fed control.
- Toshiba recommends the non-drive end bearing be insulated on all frame sizes 440 and larger, when used with adjustable speed drives.
- Insulated bearings are not available on angular contact bearing construction.
- Where insulated bearings are used on direct coupled applications the use of insulated coupling and/or shaft grounding brush is required to reduce the risk of driven equipment bearing damage.
 - » Ground rings are not suitable for Division 2 environments.
- If bearing thermal devices are required with the insulated bearing, a special version of the thermal device will be required.
- Contact Toshiba for availability and price.
- Adders above, are suitable for Drive End and Non-Drive End installation.

Software: Engineering Data

Upon request only at the time of order, Toshiba will provide the following standard data package is available for production motors at no charge: certified print, speed-torque and speed-current curve (at 100% rated voltage), nameplate data, performance data, connection diagram, instruction and maintenance manual, and spare bearings parts list.

Above data will be sent out in electronic format. If hard copy information is required, see the adder below. For software other than what is listed above or that is specified after time of order, see table below.

Prices below are NET adders per option.

Software	Price
Toshiba Standard Software Package (1)	\$75
Speed Torque & Speed-Current Curve	\$75
Thermal Damage (Safe Stall Time) Curve	\$75
Performance Curve	\$75
Torsional Data (3)	\$100
Non-Standard Outline Drawing	Contact Toshiba
Certificate of Compliance	\$75
First Page of Customer Supplied Data Sheet (2)	\$55
Additional Pages of Customer Supplied Data Sheet (2)	\$40
Additional Copies of Data	\$30
Express Shipping	\$50
Other Special Requests	Contact Toshiba

- (1) This adder applies only if it is specified after the order has been entered and acknowledged.
- (2) This adder pertains to typical Toshiba performance data only.
- (3) This adder will include shaft drawing, rotor assembly inertia, shaft torsional stiffness values.

Space Heaters

Space heaters are strip-type heaters mounted inside the frame near the coils to prevent moisture condensation in the motor during times the motor is not energized. Heater leads are brought out to the motor's main conduit box and marked H1 and H2. Standard heater voltage is 120 V single-phase unless otherwise specified.

Option		Standard	Division 2	Explosion Proof
Frame	143/145	\$328	\$492	\$634
	182/184	\$328	\$492	\$634
	213/215	\$328	\$492	\$634
	254/256	\$328	\$492	\$634
	284/286	\$481	\$722	\$952
	324/326	\$481	\$722	\$952
	364/365	\$580	\$870	\$1,148
	404/405	\$700	\$1,050	\$1,400
	444/445	\$831	\$1,242	\$1,652
	447	\$941	\$1,412	\$1,859
	449/500	\$941	\$1,412	\$1,859
	5000/5800	\$1,148	\$1,722	—

Terminal Blocks/Strips

Insulated stud-type terminal blocks/strips can be provided for single-voltage, single-speed applications in the standard conduit box.

Option		Terminal Block (1)	Terminal Strip (2)
Frame	143/145	\$339	\$219
	182/184	\$339	\$219
	213/215	\$339	\$219
	254/256	\$339	\$219
	284/286	\$405	\$219
	324/326	\$733	\$219
	364/365	\$733	\$219
	404/405	\$733	\$219
	444/445	\$1,589	\$219
	447	\$1,589	\$219
	449/500	\$1,805	\$219
	5000/5800	\$2,527	\$219

(1) This adder refers to power leads only.

(2) This adder refers to accessory leads only.

Special Note:

- Adders above are not available on explosion proof product.

Starting/Connection

Toshiba standard stock motors have various starting connections/configurations available. For special or non-standard starting requirements, use the modifications below.

Option		Part Winding	Wye-Delta
Frame	143/145	—	—
	182/184	—	—
	213/215	\$153	\$153
	254/256	\$208	\$208
	284/286	\$241	\$241
	324/326	\$295	\$295
	364/365	\$427	\$427
	404/405	\$667	\$667
	444/445	\$1,083	\$1,083
	447	\$1,203	\$1,203
	449/500	\$1,203	\$1,203
	5000/5800	(1)	(1)

(1) Contact Toshiba on 5000 frames and larger for price and availability.

Surge Protection

Surge protection for motors is available on 440 frames and larger.

Option		Surge Capacitors (1)	Lightning Arrestor (1)	Surge Protection Package (1)	Current Transformer (2) (One Per Phase)
Frame	449/500	\$4,750	\$16,700	\$20,925	\$5,900
	5000/5800	\$4,750	\$16,700	\$20,925	\$5,900

(1) Not available for use with ASD control.

(2) Current transformers supplied with 10:1 current ratio as standard. Specify if other current ratio is desired.

Special Notes:

- This adder comes with an oversized main terminal box.
- These adders are not suitable for Division 2 environments.

Testing

Toshiba motors are tested in compliance with IEEE Std. 112 to meet NEMA MG1 requirements. Test reports and optional testing are available for each individual motor. Duplicates/ copies of standard routine test reports are available.

Please contact Toshiba for scheduling/coordination for witness testing requirements.

Prices below are NET adders per option.

Option		Routine, Unwitnessed (Report Only)	Routine, Witnessed	Complete, Unwitnessed (2)	Complete, Witnessed (2)	Noise, Unwitnessed (1)
Frame	143/145	\$60	\$600	\$2,700	\$3,000	\$1,200
	182/184	\$60	\$600	\$2,700	\$3,000	\$1,200
	213/215	\$60	\$600	\$2,700	\$3,000	\$1,200
	254/256	\$60	\$600	\$2,700	\$3,000	\$1,200
	284/286	\$60	\$1,000	\$2,900	\$3,500	\$1,600
	324/326	\$60	\$1,000	\$3,400	\$4,000	\$1,600
	364/365	\$60	\$1,500	\$3,900	\$4,500	\$1,600
	404/405	\$60	\$1,500	\$4,400	\$5,000	\$1,600
	444/445	\$60	\$1,500	\$4,900	\$5,500	\$2,000
	447	\$60	\$1,500	\$4,900	\$5,500	\$2,000
	449/500	\$60	\$2,000	\$6,400	\$7,000	\$2,400
	5000/5800	\$60	\$2,000	\$6,400	\$7,000	\$2,400
Option		Noise, Witnessed (1)	Vibration	Insulation Resistance	Polarization Index	
Frame	143/145	\$2,000	\$1,200	\$700	\$1,000	
	182/184	\$2,000	\$1,200	\$700	\$1,000	
	213/215	\$2,000	\$1,200	\$700	\$1,000	
	254/256	\$2,000	\$1,200	\$800	\$1,100	
	284/286	\$2,400	\$1,600	\$800	\$1,100	
	324/326	\$2,400	\$1,600	\$900	\$1,200	
	364/365	\$2,400	\$1,600	\$900	\$1,200	
	404/405	\$2,400	\$1,600	\$1,000	\$1,300	
	444/445	\$3,000	\$2,000	\$1,000	\$1,300	
	447	\$3,000	\$2,000	\$1,100	\$1,400	
	449/500	\$3,000	\$2,000	\$1,100	\$1,400	
	5000/5800	\$3,000	\$2,000	\$1,100	\$1,400	

(1) Noise test consists of overall sound pressure values/readings only. For octave band measurements, contact Toshiba.

(2) Complete performance test per IEEE 112 method B.

Special Notes:

- For testing of more than one voltage or speed, multiply the adder above by the following.
 - One Additional Voltage or Speed — 1.50
 - Two Additional Voltages or Speeds — 2.00
 - Three Additional Voltages or Speeds — 2.50
- Contact Toshiba for additional voltages not listed below.

Thermal Protection

Toshiba provides a wide variety of protective devices which are available as follows.

Thermostats (Klixons)

Toshiba’s standard offering includes a normally-closed (NC), bi-metallic, temperature actuated element mounted on the stator winding. Leads are marked P1 and P2. Termination of the leads is in the main conduit box. Special thermostats are available upon request. Contact Toshiba for pricing and availability.

Option		Klixons NC	Klixons NO	Hermetically Sealed (1)
Frame	56/143/145	\$164	\$219	\$328
	182/184	\$164	\$219	\$328
	213/215	\$164	\$219	\$328
	254/256	\$164	\$219	\$328
	284/286	\$164	\$219	\$328
	324/326	\$230	\$328	\$459
	364/365	\$230	\$328	\$459
	404/405	\$328	\$438	\$656
	444/445	\$328	\$438	\$656
	447	\$405	\$547	\$809
	449/500	\$405	\$547	\$809
	5000/5800	\$438	\$656	\$875

(1) If used in Division 2 environments, hermetically sealed thermostats are required.

Winding PTC Thermistors

Non-linear resistance temperature detectors are mounted on the motor winding. This thermal protection consists of three thermistors only or three thermistors with a solid state control relay. The provided control relay is intended for mounting in a remote location.

Option		Mark A (PTC) Thermistor	Mark A (PTC) Thermistor & Module (1)
Frame	143/145	\$328	\$1,367
	182/184	\$328	\$1,367
	213/215	\$328	\$1,367
	254/256	\$328	\$1,367
	284/286	\$328	\$1,367
	324/326	\$328	\$1,367
	364/365	\$328	\$1,367
	404/405	\$328	\$1,367
	444/445	\$328	\$1,367
	447	\$328	\$1,367
	449/500	\$328	\$1,367
	5000/5800	\$328	\$1,367

(1) This adder includes auxiliary conduit.

Special Note:

- Thermistors can only be terminated in the main terminal box for explosion proof product.

Thermocouples

Winding (Stator) Thermocouples – A set of six (two per phase) winding thermocouples are provided and leads are terminated in a separate auxiliary conduit box. Pricing below does not include readout device(s).

Option		Stator Thermocouples "Type J"	Stator Thermocouples "Type T"
Frame	143/145	—	—
	182/184	—	—
	213/215	—	—
	254/256	—	—
	284/286	\$2,625	\$2,625
	324/326	\$2,625	\$2,625
	364/365	\$2,625	\$2,625
	404/405	\$2,625	\$2,625
	444/445	\$2,625	\$2,625
	447	\$2,625	\$2,625
	449/500	\$2,625	\$2,625
	5000/5800	\$2,625	\$2,625
Option		Stator Thermocouples "Type E"	Stator Thermocouples "Type K"
Frame	143/145	—	—
	182/184	—	—
	213/215	—	—
	284/286	\$2,625	\$2,625
	324/326	\$2,625	\$2,625
	364/365	\$2,625	\$2,625
	404/405	\$2,625	\$2,625
	444/445	\$2,625	\$2,625
	447	\$2,625	\$2,625
	449/500	\$2,625	\$2,625
	5000/5800	\$2,625	\$2,625

Bearing Thermocouple – Pricing includes one per bearing (total of two thermocouples) with leads terminated in separate terminal housings. Pricing below does not include readout device(s).

Option		Bearing Thermocouples "Type J"	Bearing Thermocouples "Type T"
Frame	143/145	—	—
	182/184	—	—
	213/215	—	—
	254/256	—	—
	284/286	\$3,938	\$3,938
	324/326	\$3,938	\$3,938
	364/365	\$3,938	\$3,938
	404/405	\$3,938	\$3,938
	444/445	\$3,938	\$3,938
	447	\$3,938	\$3,938
	449/500	\$3,938	\$3,938
	5000/5800	\$3,938	\$3,938
Option		Bearing Thermocouples "Type E"	Bearing Thermocouples "Type K"
Frame	143/145	—	—
	182/184	—	—
	213/215	—	—
	254/256	—	—
	284/286	\$3,938	\$3,938
	324/326	\$3,938	\$3,938
	364/365	\$3,938	\$3,938
	404/405	\$3,938	\$3,938
	444/445	\$3,938	\$3,938
	447	\$3,938	\$3,938
	449/500	\$3,938	\$3,938
	5000/5800	\$3,938	\$3,938

Resistance Temperature Detectors (RTDs)

Winding (Stator) RTDs – A set of six (two per phase, three leads) winding RTDs are provided with leads terminated in an auxiliary conduit box. Pricing below does not include readout device(s).

Option		Stator RTDs (Copper; 10 ohm)	Stator RTDs (Platinum; 100 ohm)	Stator RTDs (Nickel; 120 ohm)
Frame	143/145	—	—	—
	182/184	—	—	—
	213/215	—	—	—
	254/256	—	—	—
	284/286	\$4,266	\$4,266	\$4,266
	324/326	\$4,266	\$4,266	\$4,266
	364/365	\$4,266	\$4,266	\$4,266
	404/405	\$4,266	\$4,266	\$4,266
	444/445	\$4,266	\$4,266	\$4,266
	447	\$4,266	\$4,266	\$4,266
	449/500	\$4,266	\$4,266	\$4,266
	5000/5800	\$4,266	\$4,266	\$4,266

Special Notes:

- Contact Toshiba for pricing on other RTD types.
- This adder is not available on explosion proof motors.

Bearing RTDs – Pricing includes one RTD per bearing (a total of two RTDs) and a three-lead single element design with leads terminated in separate terminal housings. Pricing below does not include readout device(s).

Option		Bearing RTDs (Copper; 10 ohm)	Bearing RTDs (Platinum; 100 ohm)	Bearing RTDs (Nickel; 120 ohm)
Frame	143/145	—	—	—
	182/184	—	—	—
	213/215	—	—	—
	254/256	—	—	—
	284/286	\$4,813	\$4,813	\$4,813
	324/326	\$4,813	\$4,813	\$4,813
	364/365	\$4,813	\$4,813	\$4,813
	404/405	\$4,813	\$4,813	\$4,813
	444/445	\$4,813	\$4,813	\$4,813
	447	\$4,813	\$4,813	\$4,813
	449/500	\$4,813	\$4,813	\$4,813
	5000/5800	\$4,813	\$4,813	\$4,813

Special Notes:

- Contact Toshiba for pricing on other RTD types, including dual element.
- This adder is not available on explosion proof motors.

Torque

Toshiba offers standard stock NEMA Design B, C, and D motors in our catalog. For other special torque requirements (ie: starting/locked rotor, pull-up and/or breakdown torque), contact Toshiba. When available, please provide speed torque curve on the driven equipment and driven equipment inertia.

Vertical Jacking Provisions

Vertical jacking is used to assist in the proper alignment of the motor shaft with the driven equipment for shimming purposes. Provisions for four jacking bolts (one per foot) are provided. Jacking bolts are to be supplied by the customer.

Option		Vertical Jacking
Frame	143/145	\$545
	182/184	\$545
	213/215	\$650
	254/256	\$650
	284/286	\$760
	324/326	\$875
	364/365	\$875
	404/405	\$984
	444/445	\$984
	447	\$984
	449/500	\$1,203
	5000/5800	\$1,203

Special Note:

- This adder comes standard on totally enclosed fan cooled frames 5011/5811.

Vertical Lifting Provisions

This modification provides vertical lifting provisions for standard footless motors that are mounted vertical shaft down only.

Option		Vertical Lifting (2)
Frame	143/145	\$328
	182/184	\$394
	213/215	\$394
	254/256	\$547
	284/286	\$547
	324/326	\$755
	364/365	\$755
	404/405	\$952
	444/445	\$1050
	447	\$1050
	449/500	\$1203
	5000/5800	—

(1) Vertical lifting available on 500 frame motors.

(2) Contact Toshiba for footed motors.

Special Notes:

- Above adders not available on open drip proof or explosion proof motors, and are not available on any foot-mounted motors.
- It is recommended that if a motor is mounted vertically, a drip-cover also be provided (see "Drip-Cover" section).

Vibration Detectors

These detectors are for single direction monitoring (horizontal, vertical, or axial). For total coverage of all three directions, three detectors must be provided. Monitoring direction must be specified at time of order.

Vibration Switch

Robertshaw – This adder consists of a self-contained detector and switch. A Robertshaw is an acceleration-sensitive instrument that measures peak vibratory shock at the point of measurement.

Option		Provisions Only for Robertshaw (1, 3)	Robertshaw Sensor (2, 3)	Provisions for Accelerometer or Velocity Sensor (4)	Metrix Accelerometer Sensor Both Ends (5)
Frame	143/145	—	—	\$547	—
	182/184	—	—	\$547	—
	213/215	—	—	\$547	—
	254/256	\$1,039	\$4,266	\$547	—
	284/286	\$1,039	\$4,266	\$547	—
	324/326	\$1,039	\$4,266	\$547	—
	364/365	\$1,039	\$4,266	\$547	—
	404/405	\$1,039	\$4,266	\$547	—
	444/445	\$1,039	\$4,266	\$1,039	\$4,520
	447	\$1,039	\$4,266	\$1,039	\$4,520
	449/500	\$1,039	\$4,266	\$1,039	\$4,520
	5000/5800	\$1,039	\$4,266	\$1,039	\$4,520

(1) Provisions for mounting are based on a Robertshaw model number 366.

(2) Standard model number offering is 366 (not suitable for Division 2 applications – Contact Toshiba for Division 2).

(3) This adder is not available on explosion proof motors.

(4) Pricing is based on Toshiba providing a single 1"-spot face surface with a ¼"-28 drill and tapped hole, unless specified otherwise.

(5) Pricing is based on Metrix Vibration Sensor Model ST5484E.

Voltage

Motors are designed to operate successfully at plus or minus ten percent (10%) rated voltage; or plus or minus five percent (5%) of rated frequency; or combined variation not to exceed ten percent (10%). For 60 Hz voltages other than 230/460, 460, 575, please refer to the list adder for an applicable charge.

This adder applies to 600 V motors or below only. Contact Toshiba for voltages above 600 that are not listed in this catalog.

Option		60 Hz	50 Hz
Frame	143/145	\$175	Contact Toshiba
	182/184	\$175	
	213/215	\$219	
	254/256	\$273	
	284/286	\$328	
	324/326	\$558	
	364/365	\$820	
	404/405	\$1,291	
	444/445	\$1,750	
	447	\$2,144	
	449/500	\$2,144	
	5000/5800	\$2,636	

Windings (Special)

See "Voltage" modifications section.

Medium Voltage General Purpose Series Open Enclosure Motors

Toshiba's general purpose, medium voltage open enclosure motor series is designed to meet the industry's ever-increasing need for improved energy conservation and product reliability. These motors offer some of the highest efficiency and torque ratings while producing some of the lowest vibration ratings in the industry—leading to a longer life and greater reliability. This motor series is recommended for indoor and outdoor use.

The general purpose, medium voltage open enclosure motor is available in a high efficiency design with a die cast aluminum rotor and anti-friction ball bearing as standard or with an optional copper bar rotor and/or sleeve bearings. These motor offerings are completely customizable due to our in-house design, engineering, and manufacturing capabilities. This allows us to not only meet but exceed your specific application requirements.

Standard Features:

- Open Drip Proof, Weather-Protected Type I, or Weather-Protected Type II
- High Efficiency
- 2300/4160, 2300/4000, or 4000 V; Three-Phase, 60 Hz
- 1.15 Service Factor*
- Horizontal Foot-Mounted Direct-Coupled Applications
- Class F Form-Wound Insulation
- Class B Temperature Rise at 1.0 Service Factor by Resistance*
- IP22, IP23, or IP24
- Vacuum-Pressure Impregnated System
- Cast Iron, End Brackets, & Main Terminal Box (Fabricated Steel Main Terminal Box for 6800 & Larger Frames)
- Anti-Friction or Sleeve Bearings
- Aluminum Die Cast or Copper Bar Rotor
- Polyurea Base Grease or ISO VG Oil
- 304 Stainless Steel Nameplate

**Except Where Noted*


Applications:

- Pumps
- Fans
- Compressors
- Conveyors
- Mixers
- Material Handling
- General Applications

Warranty:

- From Date of Manufacture: 18 Months**
- From Date of Installation: 12 Months**

***Whichever Comes First*

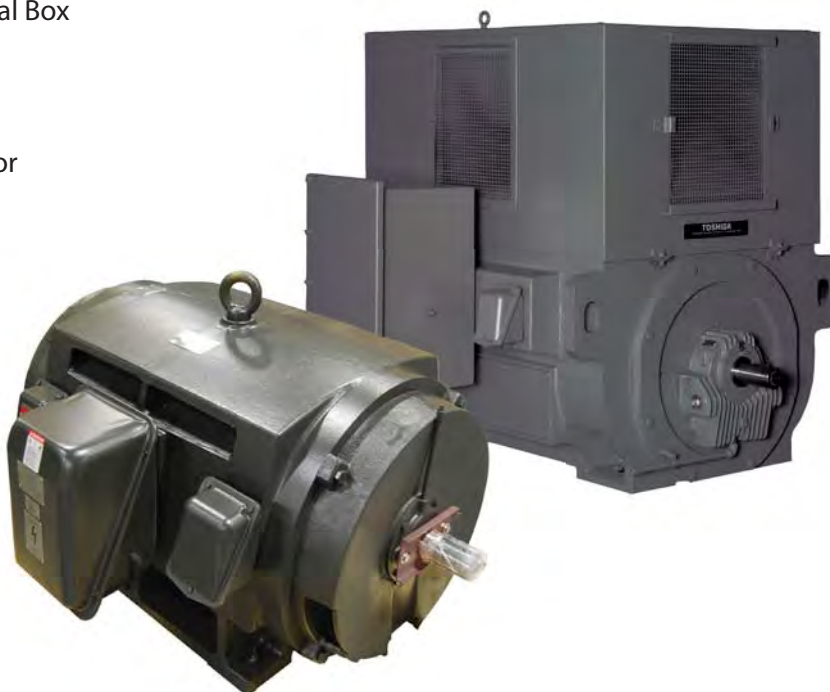

ODP General Purpose

TEFC General Purpose

TEFC 840

TEFC 841

Explosion Proof

Definite Purpose

LV Stock Motor Mods.

LV Production Motor Mods.

MV General Purpose

MV Motor Modifications

Open Enclosure

ODP

> High Efficiency



Toshiba’s general purpose, open drip proof, high efficiency motor series are designed to meet the industry’s ever-increasing need for improved energy conservation and product reliability. These product lines offer a high torque and low vibration design leading to longer life and greater reliability. These motor offerings are completely customizable due to our in-house design, engineering, and manufacturing capabilities. This allows us to not only meet but exceed your specific application requirements.

ODP Product Scope:

Horsepower:	200 to 900 HP
Speed:	3600, 1800, 1200, or 900 RPM*
Voltage:	2300/4160 or 4000 V**
Enclosure:	Open Drip Proof: IP22
Frame Size:	445T through 5810
Construction:	Cast Iron Frame, End Brackets, & Main Terminal Box
Insulation:	Class F with Class B Rise at 1.0 Service Factor by Resistance (except where noted)
Environment:	Recommended for Indoor Use

*Contact Toshiba for availability on lower speed designs

**Contact Toshiba for availability on 6000, 60 Hz motors

Additional Options Available; See Catalog Production Modifications Section

HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
200	3600	2300/4160	445TS	ANTI-FRICTION	3500	F2002VLG3JF	49/28	92.4		MXTDPM	\$30,580
200	1800	2300/4160	445T	ANTI-FRICTION	3500	F2004VLF3JF	50/29	93.6	6, 8	MXTDPM	\$30,311
200	1200	2300/4160	505US	ANTI-FRICTION	4000	F2006VLF3JF	52/31	92.6		MXTDPM	\$36,201
250	3600	2300/4160	505USS	ANTI-FRICTION	4000	F2502VLG3JF	60/34	92.4		MXTDPM	\$33,386
250	1800	2300/4160	447TS	ANTI-FRICTION	3500	F2504VLF3JF	60/34	94.3	6	MXTDPM	\$32,427
250	1200	2300/4160	505US	ANTI-FRICTION	4000	F2506VLF3JF	63/37	93.2		MXTDPM	\$37,505
250	900	2300/4160	5810US	ANTI-FRICTION	5500	F2508VLF3JM	62/36	93.5	12	MXTDPM	\$65,955
300	3600	2300/4160	505USS	ANTI-FRICTION	4000	F3002VLG3JF	72/40	94.1		MXTDPM	\$34,762
300	1800	2300/4160	505US	ANTI-FRICTION	4000	F3004VLF3JF	70/40	94		MXTDPM	\$34,884

Open Enclosure

ODP

> High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
300	1200	2300/4160	505US	ANTI-FRICTION	4000	F3006VLF3JF	71/41	94.7	6	MXTDPM	\$38,905
300	900	2300/4160	5810US	ANTI-FRICTION	5500	F3008VLF3JM	74/43	93.8	12	MXTDPM	\$67,333
350	3600	2300/4160	507USS	ANTI-FRICTION	4000	F3502VLG3JF	81/45	93.9		MXTDPM	\$36,779
350	1800	2300/4160	505US	ANTI-FRICTION	4000	F3504VLF3JF	80/44	95.1		MXTDPM	\$37,059
350	1200	2300/4160	507US	ANTI-FRICTION	4000	F3506VLF3JF	84/49	94.5	6	MXTDPM	\$41,751
350	900	2300/4160	5810US	ANTI-FRICTION	5500	F3508VLF3JM	86/49	94.1	12	MXTDPM	\$71,782
400	3600	2300/4160	507USS	ANTI-FRICTION	4000	F4002VLG3JF	91/51	94.6	6	MXTDPM	\$37,982
400	1800	2300/4160	507US	ANTI-FRICTION	4000	F4004VLF3JF	90/52	94.5	6	MXTDPM	\$38,170
400	1200	2300/4160	509US	ANTI-FRICTION	4500	F4006VLF3JF	99/58	95.2		MXTDPM	\$51,088
400	900	2300/4160	5810US	ANTI-FRICTION	5500	F4008VLF3JM	98/56	94.1	12	MXTDPM	\$73,031
450	3600	2300/4160	509USS	ANTI-FRICTION	4500	F4502VLG3JF	102/56	95.4	6	MXTDPM	\$41,639
450	1800	2300/4160	509US	ANTI-FRICTION	4500	F4504VLF3JF	100/56	95.5	6	MXTDPM	\$43,320
450	1200	2300/4160	509US	ANTI-FRICTION	4500	F4506VLF3JF	109/64	95	3	MXTDPM	\$57,537
450	900	2300/4160	5810US	ANTI-FRICTION	5500	F4508VLF3JM	109/63	94.4	12	MXTDPM	\$76,202
500	3600	2300/4160	509USS	ANTI-FRICTION	4500	F5002VLG3JF	112/61	94.8	6	MXTDPM	\$42,761
500	1800	2300/4160	509US	ANTI-FRICTION	4500	F5004VLF3JF	114/64	95.4	6	MXTDPM	\$44,940
500	1200	2300/4160	5810US	ANTI-FRICTION	5500	F5006VLF3JM	114/66	95.3	12	MXTDPM	\$76,916
500	900	2300/4160	5810US	ANTI-FRICTION	5500	F5008VLF3JM	122/70	95.2	12	MXTDPM	\$79,793
600	1800	2300/4160	5810US	ANTI-FRICTION	5500	F6004VLF3JM	135/78	93.7	12	MXTDPM	\$85,533
600	1200	2300/4160	5810US	ANTI-FRICTION	5500	F6006VLF3JM	139/81	95.4	12	MXTDPM	\$86,099
700	1800	2300/4160	5810US	ANTI-FRICTION	5500	F7004VLF3JM	157/90	93.7	12	MXTDPM	\$87,873
700	1200	2300/4160	5810US	ANTI-FRICTION	5500	F7006VLF3JM	162/93	96.1	12	MXTDPM	\$88,377
800	1800	2300/4160	5810US	ANTI-FRICTION	5500	F8004VLF3JM	178/103	94.2	12	MXTDPM	\$89,742
900	1800	2300/4160	5810US	ANTI-FRICTION	5500	F9004VLF3JM	200/115	94.7	12	MXTDPM	\$91,900

FL Amps and FL EFF are average expected design values and not guaranteed.

The weights listed above are estimated.

Please contact Toshiba for information on product availability.

"CF"= Consult Factory

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Open Enclosure

WPI

> High Efficiency



Toshiba’s general purpose WPI, high efficiency motor series are designed to meet the industry’s ever-increasing need for improved energy conservation and product reliability. These product lines offer a high torque and low vibration design leading to longer life and greater reliability. These motor offerings are completely customizable due to our in-house design, engineering, and manufacturing capabilities. This allows us to not only meet but exceed your specific application requirements.

Additional Options Available; See Catalog Production Modifications Section

WPI Product Scope:

Horsepower:	400 to 11,000 HP
Speed:	3600, 1800, 1200, or 900 RPM*
Voltage:	2300/4000, or 4000 V**
Enclosure:	Weather-Protected Type I: IP23
Frame Size:	5011/5012 through 1429
Construction:	Cast Iron Frame, End Brackets, & Main Terminal Box for 5812 and smaller (Fabricated Steel Main Terminal Box for 6800 and Larger frames). Thick-Walled Heavy Fabricated Steel Frame for 1083 through 1429
Insulation:	Class F with Class B Rise at 1.0 Service Factor by Resistance (except where noted)
Environment:	Recommended for Indoor Use

*Contact Toshiba for availability on lower speed designs

**Contact Toshiba for availability on 6000 and 13,200 V, 60 Hz motors

General Features:

- Winding RTDs (100 Ohm Platinum, Two-Phase) – Wired to an Auxiliary Box
- Space Heater (120V/1/60) – Wired to Auxiliary Box
- NDE Insulated Bearing for 5012, 5812, & 6800 Frames (for Anti-Friction Ball Bearing)
- NDE Insulated Bearing Housing for 450, 1080, & 1420 Frames (for Anti-Friction Ball Bearing)
- Copper Bar Rotor Construction where noted
- Insulated Sleeve Bearings on both ends or Bearing Housing

HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
400	3600	2300/4000	5011/12USS	ANTI-FRICTION	5000	4003WPAK11F-A	94/54	93.7	4	MXTWP1	\$65,086
400	3600	2300/4000	5011/12USS	ANTI-FRICTION	5000	4003WPAK11F-C	94/54	93.2	12	MXTWP1	\$86,458
400	3600	2300/4000	5011/12USS	SLEEVE	5000	4003WPQK11F-A	94/54	93.4	4, 10	MXTWP1	\$82,641
400	3600	2300/4000	5011/12USS	SLEEVE	5000	4003WPQK11F-C	94/54	93.1	10, 12	MXTWP1	\$104,013
400	1800	2300/4000	5011/12US	ANTI-FRICTION	5000	4004WPAK11E-A	95/55	92.9		MXTWP1	\$67,547
400	1800	2300/4000	5011/12US	ANTI-FRICTION	5000	4004WPAK11E-C	93/54	92.5	12	MXTWP1	\$88,919

Open Enclosure

WPI

> High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
400	1200	2300/4000	5011/12US	ANTI-FRICTION	5000	4006WPAK11E-A	99/57	92.7		MXTWP1	\$74,079
400	1200	2300/4000	5011/12US	ANTI-FRICTION	5000	4006WPAK11E-C	103/60	93.8	12	MXTWP1	\$95,450
450	3600	2300/4000	5011/12USS	ANTI-FRICTION	5000	4503WPAK11F-A	104/60	94.1	4	MXTWP1	\$65,550
450	3600	2300/4000	5011/12USS	ANTI-FRICTION	5000	4503WPAK11F-C	104/60	93.6	4, 12	MXTWP1	\$86,921
450	3600	2300/4000	5011/12USS	SLEEVE	5000	4503WPQK11F-A	104/60	93.8	4, 10	MXTWP1	\$83,105
450	3600	2300/4000	5011/12USS	SLEEVE	5000	4503WPQK11F-C	104/60	93.6	4, 10, 12	MXTWP1	\$104,477
450	1800	2300/4000	5011/12US	ANTI-FRICTION	5000	4504WPAK11E-A	106/61	93.2		MXTWP1	\$68,513
450	1800	2300/4000	5011/12US	ANTI-FRICTION	5000	4504WPAK11E-C	101/58	92.7	12	MXTWP1	\$89,884
450	1200	2300/4000	5011/12US	ANTI-FRICTION	5000	4506WPAK11E-A	113/65	93.5		MXTWP1	\$75,044
450	1200	2300/4000	5011/12US	ANTI-FRICTION	5000	4506WPAK11E-C	116/67	94	12	MXTWP1	\$96,416
500	3600	2300/4000	5011/12USS	ANTI-FRICTION	5000	5003WPAK11F-A	114/66	93.9	4	MXTWP1	\$66,411
500	3600	2300/4000	5011/12USS	ANTI-FRICTION	5000	5003WPAK11F-C	114/66	93.5	4, 12	MXTWP1	\$87,783
500	3600	2300/4000	5011/12USS	SLEEVE	5000	5003WPQK11F-A	114/66	93.6	4, 10	MXTWP1	\$83,966
500	3600	2300/4000	5011/12USS	SLEEVE	5000	5003WPQK11F-C	114/66	93.5	4, 10, 12	MXTWP1	\$105,337
500	1800	2300/4000	5011/12US	ANTI-FRICTION	5000	5004WPAK11E-A	114/66	93.3		MXTWP1	\$68,981
500	1800	2300/4000	5011/12US	ANTI-FRICTION	5000	5004WPAK11E-C	113/65	92.9	12	MXTWP1	\$90,353
500	1200	2300/4000	5011/12US	ANTI-FRICTION	5000	5006WPAK11E-A	128/74	93.6		MXTWP1	\$75,513
500	1200	2300/4000	5011/12US	ANTI-FRICTION	5000	5006WPAK11E-C	130/75	94.2	12	MXTWP1	\$96,884
600	3600	2300/4000	5011/12USS	ANTI-FRICTION	5000	6003WPAK11F-A	137/79	94.4	4	MXTWP1	\$68,218
600	3600	2300/4000	5011/12USS	ANTI-FRICTION	5000	6003WPAK11F-C	137/79	94.1	4, 12	MXTWP1	\$89,589
600	3600	2300/4000	5011/12USS	SLEEVE	5000	6003WPQK11F-A	137/79	94.1	4, 10	MXTWP1	\$85,773
600	3600	2300/4000	5011/12USS	SLEEVE	5000	6003WPQK11F-C	137/79	94.1	4, 10, 12	MXTWP1	\$107,144
600	1800	2300/4000	5011/12US	ANTI-FRICTION	5000	6004WPAK11E-A	139/80	93.5		MXTWP1	\$69,968
600	1800	2300/4000	5011/12US	ANTI-FRICTION	5000	6004WPAK11E-C	133/77	93.4	12	MXTWP1	\$91,339
600	1200	2300/4000	5011/12US	ANTI-FRICTION	5000	6006WPAK11E-C	157/90	94.2	12	MXTWP1	\$99,141
600	900	4000	5811/12US	ANTI-FRICTION	7300	6008WPAL11E-A	93	94.3		MXTWP1	\$91,427
600	900	4000	5811/12US	ANTI-FRICTION	7300	6008WPAL11E-C	84	94.7	12	MXTWP1	\$114,835
700	3600	2300/4000	5011/12USS	ANTI-FRICTION	5000	7003WPAK11F-A	158/91	94.5	4	MXTWP1	\$73,397
700	3600	2300/4000	5011/12USS	ANTI-FRICTION	5000	7003WPAK11F-C	158/91	94.3	4, 12	MXTWP1	\$94,768
700	3600	2300/4000	5011/12USS	SLEEVE	5000	7003WPQK11F-A	158/91	94.2	4, 10	MXTWP1	\$90,952
700	3600	2300/4000	5011/12USS	SLEEVE	5000	7003WPQK11F-C	158/91	94.3	4, 10, 12	MXTWP1	\$112,323
700	1800	2300/4000	5011/12US	ANTI-FRICTION	5000	7004WPAK11E-A	165/95	94		MXTWP1	\$78,143

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Open Enclosure

WPI

> High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
700	1800	2300/4000	5011/12US	ANTI-FRICTION	5000	7004WPAK11E-C	151/87	93.7	12	MXTWP1	\$99,514
700	1200	4000	5811/12US	ANTI-FRICTION	7300	7006WPAK11E-A	100	93.5		MXTWP1	\$86,361
700	1200	4000	5811/12US	ANTI-FRICTION	7300	7006WPAK11E-C	100	93.5	12	MXTWP1	\$109,767
700	900	4000	5811/12US	ANTI-FRICTION	7300	7008WPAL11E-A	108	94.3		MXTWP1	\$93,627
700	900	4000	5811/12US	ANTI-FRICTION	7300	7008WPAL11E-C	99	94.9	12	MXTWP1	\$117,033
800	3600	2300/4000	5011/12USS	ANTI-FRICTION	5000	8003WPAK11F-A	180/104	94.1	4	MXTWP1	\$78,079
800	3600	2300/4000	5011/12USS	ANTI-FRICTION	5000	8003WPAK11F-C	180/104	94.1	4, 12	MXTWP1	\$99,450
800	3600	4000	5811/12USS	ANTI-FRICTION	7300	8003WPAL11F-A	102	95.2	4	MXTWP1	\$89,680
800	3600	2300/4000	5011/12USS	SLEEVE	5000	8003WPQK11F-A	180/104	93.8	4, 10	MXTWP1	\$95,633
800	3600	2300/4000	5011/12USS	SLEEVE	5000	8003WPQK11F-C	180/104	94.1	4, 10, 12	MXTWP1	\$117,006
800	3600	4000	5811/12USS	ANTI-FRICTION	7300	8003WPAL11F-C	103	95.1	4, 12	MXTWP1	\$89,680
800	1800	2300/4000	5011/12US	ANTI-FRICTION	5000	8004WPAK11E-A	187/108	93.6		MXTWP1	\$82,696
800	1800	2300/4000	5011/12US	ANTI-FRICTION	5000	8004WPAK11E-C	174/100	94.1	12	MXTWP1	\$104,068
800	1200	4000	5811/12US	ANTI-FRICTION	7300	8006WPAL11E-A	115	94.5		MXTWP1	\$94,989
800	1200	4000	5811/12US	ANTI-FRICTION	7300	8006WPAL11E-C	108	94.8	12	MXTWP1	\$118,397
800	900	4000	6810/11/12US	ANTI-FRICTION	14500	8008WPAL11E-C	108	94.9	12	MXTWP1	\$194,312
800	900	4000	6810/11/12US	SLEEVE	15000	8008WPQL11E-C	108	94.9	10, 12	MXTWP1	\$208,999
900	3600	4000	5811/12USS	ANTI-FRICTION	7300	9003WPAL11F-A	114	95.4	4	MXTWP1	\$90,155
900	3600	4000	5811/12USS	ANTI-FRICTION	7300	9003WPAL11F-C	110	95.8	4, 12	MXTWP1	\$113,562
900	3600	4000	5811/12USS	SLEEVE	7500	9003WPQL11F-A	114	95.3	4, 10	MXTWP1	\$108,431
900	3600	4000	5811/12USS	SLEEVE	7500	9003WPQL11F-C	110	95.7	4, 10, 12	MXTWP1	\$131,881
900	1800	4000	5811/12US	ANTI-FRICTION	7300	9005WPAL11E-A	113	95.5	4	MXTWP1	\$91,870
900	1800	4000	5811/12US	ANTI-FRICTION	7300	9005WPAL11E-C	117	95.6	4, 12	MXTWP1	\$115,276
900	1800	4000	5811/12 US	SLEEVE	7500	9005WPQL11E-A	113	95.5	4, 10	MXTWP1	\$110,189
900	1800	4000	5811/12 US	SLEEVE	7500	9005WPQL11E-C	113	95.5	4, 10, 12	MXTWP1	\$133,596
900	1200	4000	5811/12US	ANTI-FRICTION	7300	9006WPAL11E-A	124	94.5		MXTWP1	\$97,331
900	1200	4000	5811/12US	ANTI-FRICTION	7300	9006WPAL11E-C	125	94.9	12	MXTWP1	\$120,739
900	900	4000	6810/11/12US	ANTI-FRICTION	14500	9008WPAL11E-C	121	95	12	MXTWP1	\$196,820
900	900	4000	6810/11/12US	SLEEVE	15000	9008WPQL11E-C	121	95	10, 12	MXTWP1	\$211,627
1000	3600	4000	5811/12USS	ANTI-FRICTION	7300	M203WPAL11F-A	126	95.5	4	MXTWP1	\$91,390
1000	3600	4000	5811/12USS	ANTI-FRICTION	7300	M203WPAL11F-C	122	96	4, 12	MXTWP1	\$114,797
1000	3600	4000	5811/12USS	SLEEVE	7500	M203WPQL11F-A	126	95.4	4, 10	MXTWP1	\$109,708
1000	3600	4000	5811/12USS	SLEEVE	7500	M203WPQL11F-C	122	95.9	4, 10, 12	MXTWP1	\$133,115

Open Enclosure

WPI

> High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
1000	1800	4000	5811/12US	ANTI-FRICTION	7300	M205WPAL11E-A	128	95.4	4	MXTWP1	\$94,096
1000	1800	4000	5811/12US	ANTI-FRICTION	7300	M205WPAL11E-C	131	95.7	4, 12	MXTWP1	\$117,502
1000	1800	4000	5811/12 US	SLEEVE	7500	M205WPQL11E-A	128	95.4	4, 10	MXTWP1	\$112,414
1000	1800	4000	5811/12 US	SLEEVE	7500	M205WPQL11E-C	131	95.6	4, 10, 12	MXTWP1	\$135,820
1000	1200	4000	5811/12US	ANTI-FRICTION	7300	M206WPAL11E-A	140	94.5	3, 14	MXTWP1	\$99,975
1000	1200	4000	5811/12US	ANTI-FRICTION	7300	M206WPAL11E-C	137	94.6	3, 12, 14	MXTWP1	\$123,383
1000	1200	4000	6810/11/12US	ANTI-FRICTION	14500	M207WPAL11E-C	125	94.7	4, 12	MXTWP1	\$209,380
1000	1200	4000	6810/11/12US	SLEEVE	15000	M207WPQL11E-C	125	94.7	4, 10, 12	MXTWP1	\$225,607
1000	900	4000	6812/13US	ANTI-FRICTION	15500	M208WPAL11E-C	134	95.2	12	MXTWP1	\$206,520
1000	900	4000	6812/13 US	SLEEVE	15000	M208WPQL11E-C	134	95.2	10, 12	MXTWP1	\$221,327
1250	3600	4000	5811/12USS	ANTI-FRICTION	7300	M253WPAL11F-A	158	95.7	4	MXTWP1	\$96,433
1250	3600	4000	5811/12USS	ANTI-FRICTION	7300	M253WPAL11F-C	153	96.2	4, 12	MXTWP1	\$119,840
1250	3600	4000	5811/12USS	SLEEVE	7500	M253WPQL11F-A	158	95.6	4, 10	MXTWP1	\$114,751
1250	3600	4000	5811/12USS	SLEEVE	7500	M253WPQL11F-C	153	96.1	4, 10, 12	MXTWP1	\$138,158
1250	1800	4000	5811/12US	ANTI-FRICTION	7300	M255WPAL11E-A	159	95.5	4	MXTWP1	\$100,627
1250	1800	4000	5811/12US	ANTI-FRICTION	7300	M255WPAL11E-C	162	95.9	4, 12	MXTWP1	\$124,034
1250	1800	4000	5811/12 US	SLEEVE	7500	M255WPQL11E-A	159	95.5	4, 10	MXTWP1	\$118,945
1250	1800	4000	5811/12 US	SLEEVE	7500	M255WPQL11E-C	162	95.8	4, 10, 12	MXTWP1	\$142,353
1250	1200	4000	6810/11/12US	ANTI-FRICTION	14500	M257WPAL11E-C	157	94.9	4	MXTWP1	\$213,190
1250	1200	4000	6810/11/12US	SLEEVE	15000	M257WPQL11E-C	157	94.9	4, 10, 12	MXTWP1	\$227,997
1250	900	4000	6812/13US	ANTI-FRICTION	15500	M258WPAL11E-C	169	95.3	12	MXTWP1	\$218,600
1250	900	4000	6812/13 US	SLEEVE	15000	M258WPQL11E-C	169	95.3	10, 12	MXTWP1	\$233,407
1500	3600	4000	5811/12USS	ANTI-FRICTION	7300	M303WPAL11F-A	189	95.8	4	MXTWP1	\$101,155
1500	3600	4000	5811/12USS	ANTI-FRICTION	7300	M303WPAL11F-C	183	96.2	4, 12	MXTWP1	\$124,562
1500	3600	4000	5811/12USS	SLEEVE	7500	M303WPQL11F-A	189	95.7	4, 10	MXTWP1	\$119,473
1500	3600	4000	5811/12USS	SLEEVE	7500	M303WPQL11F-C	183	96.1	4, 10, 12	MXTWP1	\$142,880
1500	1800	4000	5811/12USS	ANTI-FRICTION	7300	M305WPAL11E-A	189	95.6	4	MXTWP1	\$104,211
1500	1800	4000	5811/12USS	ANTI-FRICTION	7300	M305WPAL11E-C	193	96	4, 12	MXTWP1	\$127,617
1500	1800	4000	5811/12USS	SLEEVE	7500	M305WPQL11E-A	189	95.6	4, 10	MXTWP1	\$122,529
1500	1800	4000	5811/12USS	SLEEVE	7500	M305WPQL11E-C	193	95.9	4, 10, 12	MXTWP1	\$145,935
1500	1200	4000	6810/11/12US	ANTI-FRICTION	14500	M307WPAL11E-C	187	95	4, 12	MXTWP1	\$219,320
1500	1200	4000	6810/11/12US	SLEEVE	15000	M307WPQL11E-C	187	95	4, 10, 12	MXTWP1	\$234,127
1500	900	4000	6812/13US	ANTI-FRICTION	14500	M308WPAL11E-C	205	95.4	12	MXTWP1	\$228,730
1500	900	4000	6812/13US	SLEEVE	15000	M308WPQL11E-C	205	95.4	10, 12	MXTWP1	\$243,537

Open Enclosure

WPI

> High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
1750	3600	4000	5811/12USS	ANTI-FRICTION	7300	M353WPAL11F-A	224	95.8	4	MXTWP1	\$104,493
1750	3600	4000	5811/12USS	ANTI-FRICTION	7300	M353WPAL11F-C	216	96.1	4, 12	MXTWP1	\$127,900
1750	3600	4000	5811/12USS	SLEEVE	7500	M353WPQL11F-A	224	95.6	4, 10	MXTWP1	\$122,811
1750	3600	4000	5811/12USS	SLEEVE	7500	M353WPQL11F-C	216	95.9	4, 12, 14	MXTWP1	\$146,219
1750	1800	4000	5811/12US	ANTI-FRICTION	7300	M355WPAL11E-A	221	95.5	4, 14	MXTWP1	\$106,082
1750	1800	4000	5811/12US	SLEEVE	7500	M355WPQL11E-A	221	95.5	4, 10, 14	MXTWP1	\$124,400
1750	1800	4000	6810/11/12US	ANTI-FRICTION	14500	M355WPAL11E-CF	219	95.8	4, 12	MXTWP1	\$219,230
1750	1800	4000	6810/11/12US	SLEEVE	15000	M355WPQL11E-CF	219	95.8	4, 10, 12	MXTWP1	\$234,037
1750	1200	4000	6810/11/12US	ANTI-FRICTION	14500	M357WPAL11E-C	218	95.3	12	MXTWP1	\$227,712
1750	1200	4000	6810/11/12US	SLEEVE	15000	M357WPQL11E-C	218	95.3	4, 10, 12	MXTWP1	\$242,519
1750	900	4000	R1083	ANTI-FRICTION	17000	J1758GLF3I-M	239	95.9	11, 12	MXTWP1	\$253,556
1750	900	4000	R1083	SLEEVE	17000	J1758GLFLI-M	240	95.7	11, 12	MXTWP1	\$275,006
2000	3600	4000	5811/12USS	ANTI-FRICTION	7300	M403WPAL11F-A	253	95.8	4, 14	MXTWP1	\$108,298
2000	3600	4000	5811/12USS	ANTI-FRICTION	7300	M403WPAL11F-C	245	96.1	4, 12, 14	MXTWP1	\$131,704
2000	3600	4000	5811/12USS	SLEEVE	7500	M403WPQL11F-A	253	95.7	4, 10, 14	MXTWP1	\$126,616
2000	3600	4000	6810/11/12 USS	SLEEVE	15000	M403WPQL11F-CF	249	95.2	4, 10, 12	MXTWP1	\$248,541
2000	1800	4000	6810/11/12US	ANTI-FRICTION	14500	M405WPAL11E-C	250	95.9	4, 12	MXTWP1	\$225,832
2000	1800	4000	6810/11/12US	SLEEVE	15000	M405WPQL11E-C	250	95.9	4, 10, 12	MXTWP1	\$240,639
2000	1200	4000	6810/11/12US	ANTI-FRICTION	14500	M407WPAL11E-C	250	95.3	4, 12	MXTWP1	\$238,610
2000	1200	4000	6810/11/12US	SLEEVE	15000	M407WPQL11E-C	250	95.3	4, 10, 12	MXTWP1	\$253,417
2000	900	4000	R1083	ANTI-FRICTION	17000	J2008GLF3I-M	271	96.2	11, 12	MXTWP1	\$259,630
2000	900	4000	R1083	SLEEVE	17000	J2008GLFLI-M	271	96	11, 12	MXTWP1	\$281,080
2250	3600	4000	6810/11/12 USS	SLEEVE	15000	M453WPQL11F-C	279	95.4	4, 10, 12	MXTWP1	\$265,389
2250	1800	4000	6810/11/12US	ANTI-FRICTION	14500	M455WPAL11E-C	278	96	4, 12	MXTWP1	\$238,103
2250	1800	4000	6810/11/12US	SLEEVE	15000	M455WPQL11E-C	278	96	4, 10, 12	MXTWP1	\$252,910
2250	1200	4000	6812/13US	ANTI-FRICTION	15500	M457WPAL11E-C	281	95.6	4, 12	MXTWP1	\$249,680
2250	1200	4000	6812/13 US	SLEEVE	15000	M457WPQL11E-C	281	95.6	4, 10, 12	MXTWP1	\$264,487
2250	900	4000	R1083	ANTI-FRICTION	17000	J2258GLF3I-M	303	96.4	11, 12	MXTWP1	\$262,585
2250	900	4000	R1083	SLEEVE	17000	J2258GLFLI-M	304	96.2	11, 12	MXTWP1	\$284,035
2500	3600	4000	6810/11/12 USS	SLEEVE	15000	M503WPQL11F-C	309	95.7	4, 10, 12	MXTWP1	\$278,639
2500	1800	4000	6810/11/12US	ANTI-FRICTION	14500	M505WPAL11E-C	309	96.3	4, 12	MXTWP1	\$247,402
2500	1800	4000	6810/11/12US	SLEEVE	15000	M505WPQL11E-C	309	96.3	4, 10, 12	MXTWP1	\$262,209
2500	1200	4000	6812/13US	ANTI-FRICTION	15500	M507WPAL11E-C	318	95.9	4, 12	MXTWP1	\$261,320
2500	1200	4000	6812/13 US	SLEEVE	15000	M507WPQL11E-C	318	95.9	4, 10, 12	MXTWP1	\$276,127
2500	900	4000	R1085	ANTI-FRICTION	17000	J2508GLF3I-M	335	96.5	11, 12	MXTWP1	\$268,366

Open Enclosure

WPI

> High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
2500	900	4000	R1085	SLEEVE	17000	J2508GLFLI-M	336	96.3	11, 12	MXTWP1	\$289,816
2750	3600	4000	6810/11/12 USS	SLEEVE	15000	M553WPQL11F-C	337	96.3	4, 10, 12	MXTWP1	\$293,765
2750	1800	4000	6812/13US	ANTI-FRICTION	15500	M555WPAL11F-C	368	96	4, 12	MXTWP1	\$259,730
2750	1800	4000	6812/13 US	SLEEVE	15000	M555WPQL11F-C	368	96	4, 10, 12	MXTWP1	\$274,537
2750	1200	4000	6812/13US	ANTI-FRICTION	15500	M557WPAL11F-C	368	95.9	3, 4, 12, 14	MXTWP1	\$272,190
2750	1200	4000	6812/13 US	SLEEVE	15000	M557WPQL11F-C	368	95.9	3, 4, 10, 12, 14	MXTWP1	\$286,997
2750	900	4000	R1087	ANTI-FRICTION	17000	J2758GLF3I-M	377	95.8	11, 12	MXTWP1	\$281,667
2750	900	4000	R1087	SLEEVE	17000	J2758GLFLI-M	377	95.8	11, 12	MXTWP1	\$303,117
3000	3600	4000	6810/11/12 USS	SLEEVE	15000	M603WPQL11F-C	370	96.1	4, 10, 12	MXTWP1	\$306,465
3000	1800	4000	6812/13US	ANTI-FRICTION	15500	M605WPAL11E-C	369	96.5	4, 12	MXTWP1	\$272,389
3000	1800	4000	6812/13 US	SLEEVE	15000	M605WPQL11E-C	369	96.5	4, 10, 12	MXTWP1	\$287,196
3000	900	4000	R1087	ANTI-FRICTION	17000	J3008GLF3I-M	416	95.6	11, 12	MXTWP1	\$296,882
3000	900	4000	R1087	SLEEVE	17000	J3008GLFLI-M	416	95.6	11, 12	MXTWP1	\$318,332
3500	3600	4000	6810/11/12USS	SLEEVE	15000	M703WPQL11F-C	431	96.2	4, 10, 12	MXTWP1	\$319,281
3500	1800	4000	6812/13US	ANTI-FRICTION	15500	M705WPAL11E-C	431	96.6	4, 12	MXTWP1	\$283,780
3500	1800	4000	6812/13US	SLEEVE	15000	M705WPQL11E-C	431	96.6	4, 10, 12	MXTWP1	\$298,587
3500	1200	4000	R1085	ANTI-FRICTION	17000	J3507GLF3I-M	458	95.9	4, 11, 12	MXTWP1	\$305,664
3500	1200	4000	R1085	SLEEVE	17000	J3507GLFLI-M	458	95.9	4, 11, 12	MXTWP1	\$327,114
3500	900	4000	R1087	ANTI-FRICTION	17000	J3508GLF3I-M	482	95.7	11, 12	MXTWP1	\$332,568
3500	900	4000	R1087	SLEEVE	17000	J3508GLFLI-M	482	95.7	11, 12	MXTWP1	\$354,018
4000	3600	4000	6810/11/12 USS	SLEEVE	15000	M803WPQL11F-CF	485	95.6	3, 10, 12, 14	MXTWP1	\$324,890
4000	3600	4000	6812/13 USS	SLEEVE	15000	M803WPQL11F-C	490	96	4, 10, 12	MXTWP1	\$326,710
4000	1800	4000	450-1600	ANTI-FRICTION	15500	M805WPAL11E-CF	495	96.6	4, 12	MXTWP1	\$321,420
4000	1800	4000	450-1600	SLEEVE	16000	M805WPQL11E-CF	495	96.6	4, 10, 12	MXTWP1	\$332,805
4000	1800	4000	6812/13US	ANTI-FRICTION	15500	M805WPAL11E-C	495	96.6	3, 4, 14	MXTWP1	\$297,360
4000	1800	4000	6812/13 US	SLEEVE	15000	M805WPQL11E-C	495	96.6	3, 4, 10, 14	MXTWP1	\$312,167
4000	1200	4000	R1087	ANTI-FRICTION	17000	J4007GLF3I-M	522	95.9	4, 11, 12	MXTWP1	\$336,557
4000	1200	4000	R1087	SLEEVE	17000	J4007GLFLI-M	522	95.9	4, 11, 12	MXTWP1	\$358,007
4000	900	4000	R1089	ANTI-FRICTION	17000	J4008GLF3I-M	547	95.8	11, 12	MXTWP1	\$346,580
4000	900	4000	R1089	SLEEVE	17000	J4008GLFLI-M	547	95.8	11, 12	MXTWP1	\$368,030
4500	3600	4000	6812/13 USS	SLEEVE	15000	M903WPQL11F-C	538	96.3	4, 10, 12	MXTWP1	\$329,640
4500	1800	4000	R1085	ANTI-FRICTION	17000	J4505GLF3I-M	575	96.8	4, 11, 12	MXTWP1	\$326,412
4500	1200	4000	1087	ANTI-FRICTION	17000	J4507GLF3I-M	585	96.1	4, 11, 12	MXTWP1	\$354,336
4500	1200	4000	1087	SLEEVE	17000	J4507GLFLI-M	585	96.1	4, 11, 12	MXTWP1	\$375,786
4500	1200	4000	R1085	ANTI-FRICTION	17000	J4507GLF3I-MF	585	96.1	4, 11, 12, 14	MXTWP1	\$344,585

ODP General Purpose

Open Enclosure

WPI

> High Efficiency



TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
4500	900	4000	1089	ANTI-FRICTION	17000	J4508GLF3I-M	613	96	11, 12	MXTWP1	\$378,704
4500	900	4000	1089	SLEEVE	17000	J4508GLFLI-M	613	96	11, 12	MXTWP1	\$400,154
5000	3600	4000	450-1600	SLEEVE	16000	C203WPQL11F-C	603	96.9	4, 10, 12	MXTWP1	\$342,468
5000	3600	4000	6812/13USS	SLEEVE	15000	C203WPQL11F-CF	617	96.5	4, 10, 12	MXTWP1	\$332,760
5000	1800	4000	1087	ANTI-FRICTION	17000	J5005GLF3I-M	624	96.3	4, 11, 12	MXTWP1	\$338,480
5000	1800	4000	1087	SLEEVE	17000	J5005GLFLI-M	624	96.3	4, 11, 12	MXTWP1	\$338,480
5000	1200	4000	1089	ANTI-FRICTION	17000	J5007GLF3I-M	649	96	4, 11, 12	MXTWP1	\$362,502
5000	1200	4000	1089	SLEEVE	17000	J5007GLFLI-M	649	96	4, 11, 12	MXTWP1	\$383,952
5000	900	4000	1425	ANTI-FRICTION	18000	J5008GLF3I-M	676	96.2	11, 12	MXTWP1	\$389,642
5000	900	4000	1425	SLEEVE	18000	J5008GLFLI-M	676	96.2	11, 12	MXTWP1	\$411,092
6000	1800	4000	1087	ANTI-FRICTION	17000	J6005GLF3I-M	748	96.3	4, 11, 12	MXTWP1	\$345,776
6000	1800	4000	1087	SLEEVE	17000	J6005GLFLI-M	748	96.3	4, 11, 12	MXTWP1	\$345,776
6000	1200	4000	1089	ANTI-FRICTION	17000	J6007GLF3I-M	778	96.3	4, 11, 12	MXTWP1	\$384,225
6000	1200	4000	1089	SLEEVE	17000	J6007GLFLI-M	778	96.3	4, 11, 12	MXTWP1	\$405,675
6000	900	4000	1425	ANTI-FRICTION	18000	J6008GLF3I-M	810	96.2	11, 12	MXTWP1	\$406,554
6000	900	4000	1425	SLEEVE	18000	J6008GLFLI-M	810	96.2	11, 12	MXTWP1	\$428,004
7000	1800	4000	1089	ANTI-FRICTION	17000	J7005GLF3I-M	873	96.5	4, 11, 12	MXTWP1	\$352,498
7000	1800	4000	1089	SLEEVE	17000	J7005GLFLI-M	873	96.5	4, 11, 12	MXTWP1	\$352,498
7000	1200	4000	1425	ANTI-FRICTION	18000	J7007GLF3I-M	904	96.4	4, 11, 12	MXTWP1	\$314,487
7000	1200	4000	1425	SLEEVE	18000	J7007GLFLI-M	904	96.4	4, 11, 12	MXTWP1	\$335,937
7000	900	4000	1427	ANTI-FRICTION	18000	J7008GLF3I-M	923	96.7	11, 12	MXTWP1	\$418,689
7000	900	4000	1427	SLEEVE	18000	J7008GLFLI-M	923	96.7	11, 12	MXTWP1	\$440,139
8000	1800	4000	1089	ANTI-FRICTION	17000	J8005GLF3I-M	995	96.5	4, 11, 12	MXTWP1	\$358,964
8000	1800	4000	1089	SLEEVE	17000	J8005GLFLI-M	995	96.5	4, 11, 12	MXTWP1	\$358,964
8000	1200	4000	1425	ANTI-FRICTION	18000	J8007GLF3I-M	1028	96	4, 11, 12	MXTWP1	\$326,478
8000	1200	4000	1425	SLEEVE	18000	J8007GLFLI-M	1028	96	4, 11, 12	MXTWP1	\$347,928
8000	900	4000	1429	ANTI-FRICTION	18000	J8008GLF3I-M	1054	96.7	11, 12	MXTWP1	\$432,442
8000	900	4000	1429	SLEEVE	18000	J8008GLFLI-M	1054	96.7	11, 12	MXTWP1	\$453,892
9000	1800	4000	1425	ANTI-FRICTION	18000	J9005GLF3I-M	1121	96.7	4, 11, 12	MXTWP1	\$364,742
9000	1800	4000	1425	SLEEVE	18000	J9005GLFLI-M	1121	96.7	4, 11, 12	MXTWP1	\$364,742
9000	1200	4000	1427	ANTI-FRICTION	18000	J9007GLF3I-M	1141	96.8	4, 11, 12	MXTWP1	\$347,306
9000	1200	4000	1427	SLEEVE	18000	J9007GLFLI-M	1141	96.8	4, 11, 12	MXTWP1	\$368,756
9000	900	4000	1429	ANTI-FRICTION	18000	J9008GLF3I-M	1177	96.8	11, 12	MXTWP1	\$449,632
9000	900	4000	1429	SLEEVE	18000	J9008GLFLI-M	1177	96.8	11, 12	MXTWP1	\$471,082
10000	1800	4000	1427	ANTI-FRICTION	18000	K1005GLF3I-M	1243	96.7	4, 11, 12	MXTWP1	\$379,105

Open Enclosure

WPI

> High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
10000	1800	4000	1427	SLEEVE	18000	K1005GLFLI-M	1243	96.7	4, 11, 12	MXTWP1	\$379,105
10000	1200	4000	1427	ANTI-FRICTION	18000	K1007GLF3I-M	CF	CF	4, 11, 12	MXTWP1	\$368,770
10000	1200	4000	1427	SLEEVE	18000	K1007GLFLI-M	CF	CF	4, 11, 12	MXTWP1	\$390,220
11000	1800	4000	1427	ANTI-FRICTION	18000	K1105GLF3I-M	CF	CF	4, 11, 12	MXTWP1	\$393,552
11000	1800	4000	1427	SLEEVE	18000	K1105GLFLI-M	CF	CF	4, 11, 12	MXTWP1	\$393,552
11000	1200	4000	1429	ANTI-FRICTION	18000	K1107GLF3I-M	CF	CF	4, 11, 12	MXTWP1	\$385,488
11000	1200	4000	1429	SLEEVE	18000	K1107GLFLI-M	CF	CF	4, 11, 12	MXTWP1	\$406,938

FL Amps and FL EFF are average expected design values and not guaranteed.
The weights listed above are estimated.
Please contact Toshiba for information on product availability.
"CF"= Consult Factory

Open Enclosure

WP11

> High Efficiency



Toshiba’s general purpose, medium voltage WP11, high efficiency motor series is designed to meet the industry’s ever-increasing need for improved energy conservation and product reliability. This product line offers a high torque and low vibration design leading to longer life and greater reliability. These motor offerings are completely customizable due to our in-house design, engineering, and manufacturing capabilities. This allows us to not only meet but exceed your specific application requirements.

Product Scope:

Horsepower:	400 to 11,000 HP
Speed:	3600, 1800, 1200, or 900 RPM*
Voltage:	2300/4000 or 4000 V**
Enclosure:	Weather-Protected Type II: IP24
Frame Size:	5011/12US through 1429
Construction:	Cast Iron Frame, End Brackets, & Main Terminal Box (Fabricated Steel Main Terminal Box for IEC, 6800 and Larger Frames). Thick-Walled Heavy Fabricated Steel Frame for 1080 through 1420
Insulation:	Class F with Class B Rise at 1.0 Service Factor
Environment:	Suitable for Indoor or Outdoor Use

*Contact Toshiba for availability on lower speed designs
**Contact Toshiba for availability on 6000 and 13,200 V, 60 Hz motors

Special Features:

- Winding RTDs (Two per Phase)
- NDE Insulated Bearing for 450, 5000, 5800, & 6800 Frames (for Anti-Friction Ball Bearing)
- NDE Insulated Bearing Housing for 1080 & 1420 Frames (for Anti-Friction Ball Bearing)
- Space Heater
- High Pressure die Cast Aluminum Rotor, available in Copper Bar Rotor Construction where noted
- Available with Insulated Sleeve Bearings *(Where Noted)*
- Additional Options Available; See Catalog Production Modifications Section

(Where Noted)

HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
400	3600	2300/4000	5011/12USS	ANTI-FRICTION	5000	4003WTAK11F-A	94/54	93.7	4	MXTWP2	\$65,873
400	3600	2300/4000	5011/12USS	ANTI-FRICTION	5000	4003WTAK11F-C	94/54	93.3	4, 12	MXTWP2	\$87,245
400	3600	2300/4000	5011/12USS	SLEEVE	5000	4003WTQK11F-A	94/54	93.5	4, 10	MXTWP2	\$83,429
400	3600	2300/4000	5011/12USS	SLEEVE	5000	4003WTQK11F-C	94/54	93.3	4, 10, 12	MXTWP2	\$104,800
400	1800	2300/4000	5011/12US	ANTI-FRICTION	5000	4004WTAK11E-A	94/54	93.1		MXTWP2	\$68,387
400	1800	2300/4000	5011/12US	ANTI-FRICTION	5000	4004WTAK11E-C	89/51	92.7	12	MXTWP2	\$85,942
400	1200	2300/4000	5011/12US	ANTI-FRICTION	5000	4006WTAK11E-A	97 /56	92.9		MXTWP2	\$77,905
400	1200	2300/4000	5011/12US	ANTI-FRICTION	5000	4006WTAK11E-C	103/60	94	12	MXTWP2	\$99,277
400	900	4000	5811/12US	ANTI-FRICTION	7300	4008WTAL11E-A	60	94.3		MXTWP2	\$84,223
400	900	4000	5811/12US	ANTI-FRICTION	7300	4008WTAL11E-C	60	94.3	12	MXTWP2	\$107,630
450	3600	2300/4000	5011/12USS	ANTI-FRICTION	5000	4503WTAK11F-A	104/60	94.1	4	MXTWP2	\$66,953
450	3600	2300/4000	5011/12USS	ANTI-FRICTION	5000	4503WTAK11F-C	104/60	93.7	4, 12	MXTWP2	\$88,324
450	3600	2300/4000	5011/12USS	SLEEVE	5000	4503WTQK11F-A	104/60	93.9	4, 10	MXTWP2	\$84,509
450	3600	2300/4000	5011/12USS	SLEEVE	5000	4503WTQK11F-C	104/60	93.7	4, 10, 12	MXTWP2	\$105,880

Open Enclosure

WP11

> High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
450	1800	2300/4000	5011/12US	ANTI-FRICTION	5000	4504WTAK11E-A	106/61	93.4		MXTWP2	\$69,975
450	1800	2300/4000	5011/12US	ANTI-FRICTION	5000	4504WTAK11E-C	103/59	93.1	12	MXTWP2	\$91,347
450	1200	2300/4000	5011/12US	ANTI-FRICTION	5000	4506WTAK11E-A	113 /65	93.6		MXTWP2	\$79,676
450	1200	2300/4000	5011/12US	ANTI-FRICTION	5000	4506WTAK11E-C	116/67	94.3	12	MXTWP2	\$101,048
450	900	4000	5811/12US	ANTI-FRICTION	7300	4508WTAL11E-A	66	93.8		MXTWP2	\$86,972
450	900	4000	5811/12US	ANTI-FRICTION	7300	4508WTAL11E-C	61	95.4	12	MXTWP2	\$110,378
500	3600	2300/4000	5011/12USS	ANTI-FRICTION	5000	5003WTAK11F-A	114/66	93.9	4	MXTWP2	\$69,208
500	3600	2300/4000	5011/12USS	ANTI-FRICTION	5000	5003WTAK11F-C	114/66	93.6	4, 12	MXTWP2	\$90,579
500	3600	2300/4000	5011/12USS	SLEEVE	5000	5003WTQK11F-A	114/66	93.7	4, 10	MXTWP2	\$86,762
500	3600	2300/4000	5011/12USS	SLEEVE	5000	5003WTQK11F-C	114/66	93.6	4, 10, 12	MXTWP2	\$108,134
500	1800	2300/4000	5011/12US	ANTI-FRICTION	5000	5004WTAK11E-A	114/66	93.5		MXTWP2	\$72,210
500	1800	2300/4000	5011/12US	ANTI-FRICTION	5000	5004WTAK11E-C	112/65	93.2	12	MXTWP2	\$93,582
500	1200	2300/4000	5011/12US	ANTI-FRICTION	5295	5006WTAK11E-A	126/73	93.8		MXTWP2	\$83,182
500	1200	2300/4000	5011/12US	ANTI-FRICTION	5295	5006WTAK11E-C	130/75	94.5	12	MXTWP2	\$104,553
500	900	4000	5811/12 US	ANTI-FRICTION	7300	5008WTAL11E-C	69	93.9	12	MXTWP2	\$112,930
500	900	4000	5811/12US	ANTI-FRICTION	7300	5008WTAL11E-A	75	95.6		MXTWP2	\$89,523
600	3600	2300/4000	5011/12USS	ANTI-FRICTION	5000	6003WTAK11F-A	137/79	94.2	4	MXTWP2	\$72,103
600	3600	2300/4000	5011/12USS	ANTI-FRICTION	4500	6003WTAK11F-C	137/69	94.3	4, 12	MXTWP2	\$93,475
600	3600	2300/4000	5011/12USS	SLEEVE	5000	6003WTQK11F-A	137/79	94.2	4, 10	MXTWP2	\$89,659
600	3600	2300/4000	5011/12USS	SLEEVE	5000	6003WTQK11F-C	137/69	94.3	4, 10, 12	MXTWP2	\$111,030
600	1800	2300/4000	5011/12US	ANTI-FRICTION	5000	6004WTAK11E-A	137/79	93.7		MXTWP2	\$73,589
600	1800	2300/4000	5011/12US	ANTI-FRICTION	5000	6004WTAK11E-C	130/75	93.4	12	MXTWP2	\$94,960
600	1200	4000	5811/12 US	ANTI-FRICTION	7300	6006WTAL11E-A	86	93.4		MXTWP2	\$89,069
600	1200	4000	5811/12 US	ANTI-FRICTION	7300	6006WTAL11E-C	86	93.4	12	MXTWP2	\$112,475
600	900	4000	5811/12 US	ANTI-FRICTION	7300	6008WTAL11E-C	84	94.2	12	MXTWP2	\$118,317
600	900	4000	5811/12US	ANTI-FRICTION	7300	6008WTAL11E-A	93	95.6		MXTWP2	\$94,911
700	3600	2300/4000	5011/12USS	ANTI-FRICTION	5000	7003WTAK11F-A	159/92	94.5	4	MXTWP2	\$77,280
700	3600	2300/4000	5011/12USS	ANTI-FRICTION	5000	7003WTAK11F-C	158/91	94.4	4, 12	MXTWP2	\$98,651
700	3600	2300/4000	5011/12USS	SLEEVE	5000	7003WTQK11F-A	159/92	94.3	4, 10	MXTWP2	\$94,835
700	3600	2300/4000	5011/12USS	SLEEVE	5000	7003WTQK11F-C	158/91	94.4	4, 10, 12	MXTWP2	\$116,206
700	3600	4000	5809/10/11USS	ANTI-FRICTION	7000	7003WTAL11F-AF	88	94.7	4	MXTWP2	\$81,855
700	3600	4000	5809/10/11USS	ANTI-FRICTION	7000	7003WTAL11F-CF	89	94.8	4, 12	MXTWP2	\$102,742
700	3600	4000	5809/10/11USS	SLEEVE	7300	7003WTQL11F-AF	88	94.5	4, 10	MXTWP2	\$97,648
700	3600	4000	5809/10/11USS	SLEEVE	7300	7003WTQL11F-CF	89	94.5	4, 10, 12	MXTWP2	\$119,470

ODP General Purpose

Open Enclosure

WP11

> High Efficiency



TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
700	1800	2300/4000	5011/12US	ANTI-FRICTION	5000	7004WTAK11E-A	165/95	94.2		MXTWP2	\$78,801
700	1800	2300/4000	5011/12US	ANTI-FRICTION	5000	7004WTAK11E-C	151/87	93.9	12	MXTWP2	\$100,173
700	1200	4000	5811/12 US	ANTI-FRICTION	7300	7006WTAL11E-C	94	93.5	12	MXTWP2	\$113,389
700	1200	4000	5811/12US	ANTI-FRICTION	7300	7006WTAL11E-A	100	95.6		MXTWP2	\$89,982
700	900	4000	5811/12 US	ANTI-FRICTION	7300	7008WTAL11E-C	99	94.2	12	MXTWP2	\$120,981
700	900	4000	5811/12US	ANTI-FRICTION	7300	7008WTAL11E-A	108	95.8		MXTWP2	\$97,574
800	3600	2300/4000	5011/12USS	ANTI-FRICTION	5000	8003WTAK11F-A	182/105	94.1	4	MXTWP2	\$80,606
800	3600	2300/4000	5011/12USS	ANTI-FRICTION	5000	8003WTAK11F-C	178/103	94.4	4, 12	MXTWP2	\$101,977
800	3600	2300/4000	5011/12USS	SLEEVE	5000	8003WTQK11F-CF	175/101	94.9	4, 10, 12	MXTWP2	\$119,689
800	3600	4000	5809/10/11USS	ANTI-FRICTION	7000	8003WTAL11F-AF	100	94.7	4	MXTWP2	\$83,102
800	3600	4000	5809/10/11USS	ANTI-FRICTION	7000	8003WTAL11F-CF	101	95.1	4, 12	MXTWP2	\$105,477
800	3600	4000	5809/10/11USS	SLEEVE	7300	8003WTQL11F-AF	100	94.4	4, 10	MXTWP2	\$99,687
800	3600	4000	5809/10/11USS	SLEEVE	7300	8003WTQL11F-CF	101	95	4, 10, 12	MXTWP2	\$123,472
800	3600	4000	5811/12USS	ANTI-FRICTION	6725	8003WTAL11F-A	102	95.2	4	MXTWP2	\$84,641
800	3600	4000	5811/12USS	ANTI-FRICTION	7300	8003WTAL11F-C	99	94.5	4, 12	MXTWP2	\$108,049
800	3600	4000	5811/12USS	SLEEVE	7500	8003WTQL11F-A	102	95	4, 10	MXTWP2	\$102,960
800	3600	4000	5811/12USS	SLEEVE	7500	8003WTQL11F-C	99	95.8	4, 10, 12	MXTWP2	\$126,367
800	1800	2300/4000	5011/12US	ANTI-FRICTION	5000	8004WTAK11E-A	185/107	93.5	3	MXTWP2	\$82,511
800	1800	4000	5811/12 US	ANTI-FRICTION	7300	8005WTAL11E-A	108	94.5	4	MXTWP2	\$88,517
800	1800	4000	5811/12 US	ANTI-FRICTION	7300	8005WTAL11E-C	108	95	4, 12	MXTWP2	\$111,924
800	1800	4000	5811/12 US	SLEEVE	7500	8005WTQL11E-A	103	93.9	4, 10	MXTWP2	\$106,835
800	1800	4000	5811/12 US	SLEEVE	7500	8005WTQL11E-C	103	93.9	4, 10, 12	MXTWP2	\$130,243
800	1200	4000	5811/12 US	ANTI-FRICTION	7300	8006WTAL11E-C	108	94.6	12	MXTWP2	\$122,222
800	1200	4000	5811/12US	ANTI-FRICTION	7550	8006WTAL11E-A	115	94.6		MXTWP2	\$98,816
800	900	4000	6810/11/12US	ANTI-FRICTION	14500	8008WTAL11E-C	108	94.6	12	MXTWP2	\$193,838
800	900	4000	6810/11/12US	SLEEVE	15000	8008WTQL11E-C	108	94.7	10, 12	MXTWP2	\$209,089
900	3600	2300/4000	5011/12USS	SLEEVE	5000	9003WTQK11F-CF	193/113	95	4, 10, 12	MXTWP2	\$124,470
900	3600	4000	5809/10/11USS	ANTI-FRICTION	7000	9003WTAL11F-AF	113	94.8		MXTWP2	\$85,374
900	3600	4000	5809/10/11USS	ANTI-FRICTION	7000	9003WTAL11F-CF	112	95.2	4, 12	MXTWP2	\$107,442
900	3600	4000	5809/10/11USS	SLEEVE	7300	9003WTQL11F-AF	113	95.4	4, 10	MXTWP2	\$103,414
900	3600	4000	5809/10/11USS	SLEEVE	7300	9003WTQL11F-CF	112	96.3	4, 10, 12	MXTWP2	\$125,335
900	3600	4000	5811/12USS	ANTI-FRICTION	6941	9003WTAL11F-A	114	95.4	4	MXTWP2	\$91,036
900	3600	4000	5811/12USS	ANTI-FRICTION	7300	9003WTAL11F-C	110	96.3	4	MXTWP2	\$114,442
900	3600	4000	5811/12USS	SLEEVE	7500	9003WTQL11F-A	114	95.3	4, 10	MXTWP2	\$110,424
900	3600	4000	5811/12USS	SLEEVE	7500	9003WTQL11F-C	110	95.7	4, 10, 12	MXTWP2	\$132,760

Open Enclosure

WP11

> High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
900	1800	4000	5811/12US	ANTI-FRICTION	7300	9005WTAL11E-A	114	94.5	4	MXTWP2	\$93,698
900	1800	4000	5811/12US	ANTI-FRICTION	7800	9005WTAL11E-C	117	95	4, 12	MXTWP2	\$117,105
900	1800	4000	5811/12US	SLEEVE	8000	9005WTQL11E-A	114	95.5	4, 10	MXTWP2	\$112,016
900	1800	4000	5811/12US	SLEEVE	8000	9005WTQL11E-C	117	95.5	4, 10, 12	MXTWP2	\$135,423
900	1200	4000	5811/12 US	ANTI-FRICTION	7300	9006WTAL11E-C	125	94.5	12	MXTWP2	\$124,626
900	1200	4000	5811/12US	ANTI-FRICTION	6865	9006WTAL11E-A	124	95		MXTWP2	\$101,219
900	900	4000	6810/11/12US	ANTI-FRICTION	14500	9008WTAL11E-C	121	95.4	12	MXTWP2	\$202,725
900	900	4000	6810/11/12US	SLEEVE	15000	9008WTQL11E-C	121	95.2	10, 12	MXTWP2	\$217,976
1000	3600	2300/4000	5011/12USS	SLEEVE	5000	M203WTQK11F-CF	222/128	94.7	4, 10, 12	MXTWP2	\$128,712
1000	3600	4000	5809/10/11USS	ANTI-FRICTION	7000	M203WTAL11F-AF	123	95.2	4	MXTWP2	\$88,112
1000	3600	4000	5809/10/11USS	ANTI-FRICTION	7000	M203WTAL11F-CF	125	95.4	4, 12	MXTWP2	\$109,355
1000	3600	4000	5809/10/11USS	SLEEVE	7300	M203WTQL11F-AF	124	95.2	4, 10	MXTWP2	\$105,450
1000	3600	4000	5809/10/11USS	SLEEVE	7300	M203WTQL11F-CF	125	95	4, 10, 12	MXTWP2	\$128,319
1000	3600	4000	5811/12USS	ANTI-FRICTION	7091	M203WTAL11F-A	126	95	4	MXTWP2	\$96,083
1000	3600	4000	5811/12USS	ANTI-FRICTION	7300	M203WTAL11F-C	122	95.5	4, 12	MXTWP2	\$119,490
1000	3600	4000	5811/12USS	SLEEVE	7500	M203WTQL11F-A	126	95.1	4, 10	MXTWP2	\$114,401
1000	3600	4000	5811/12USS	SLEEVE	7801	M203WTQL11F-C	122	95.5	4, 10, 12	MXTWP2	\$137,809
1000	1800	4000	5811/12US	ANTI-FRICTION	6870	M205WTAL11E-A	126	95.1	4	MXTWP2	\$97,635
1000	1800	4000	5811/12US	ANTI-FRICTION	7300	M205WTAL11E-C	131	95.7	4, 12	MXTWP2	\$121,043
1000	1800	4000	5811/12US	SLEEVE	8000	M205WTQL11E-A	126	95	4, 10	MXTWP2	\$115,954
1000	1800	4000	5811/12US	SLEEVE	8000	M205WTQL11E-C	131	95.4	4, 10, 12	MXTWP2	\$139,361
1000	1200	4000	5811/12 US	ANTI-FRICTION	7300	M206WTAL11E-C	137	94.6	3, 12, 14	MXTWP2	\$127,453
1000	1200	4000	5811/12US	ANTI-FRICTION	7300	M206WTAL11E-A	135	95	3, 14	MXTWP2	\$104,047
1000	900	4000	6812/13US	ANTI-FRICTION	15500	M208WTAL11E-C	134	95	12	MXTWP2	\$212,716
1000	900	4000	6812/13 US	SLEEVE	14000	M208WTQL11E-C	134	95.6	12	MXTWP2	\$227,967
1250	3600	4000	5809/10/11USS	ANTI-FRICTION	7000	M253WTAL11F-AF	155	95.5	4	MXTWP2	\$97,360
1250	3600	4000	5809/10/11USS	ANTI-FRICTION	7000	M253WTAL11F-CF	156	95.4	4, 12	MXTWP2	\$115,887
1250	3600	4000	5809/10/11USS	SLEEVE	7300	M253WTQL11F-AF	155	95.4	4, 10	MXTWP2	\$116,740
1250	3600	4000	5809/10/11USS	SLEEVE	7300	M253WTQL11F-CF	156	94.5	4, 10, 12	MXTWP2	\$136,709
1250	3600	4000	5811/12USS	ANTI-FRICTION	7288	M253WTAL11F-A	158	94.9	4	MXTWP2	\$100,308
1250	3600	4000	5811/12USS	ANTI-FRICTION	7400	M253WTAL11F-C	153	95.2	4, 12	MXTWP2	\$123,716
1250	3600	4000	5811/12USS	SLEEVE	7000	M253WTQL11F-A	158	95.2	4, 10	MXTWP2	\$118,627
1250	3600	4000	5811/12USS	SLEEVE	7906	M253WTQL11F-C	153	95.7	4, 10, 12	MXTWP2	\$142,034
1250	1800	4000	5811/12US	ANTI-FRICTION	8100	M255WTAL11E-A	157	95.8	4	MXTWP2	\$104,434
1250	1800	4000	5811/12US	ANTI-FRICTION	7800	M255WTAL11E-C	162	95.7	4, 12	MXTWP2	\$127,840
1250	1800	4000	5811/12US	SLEEVE	8100	M255WTQL11E-A	157	96.1	4, 10	MXTWP2	\$122,753
1250	1800	4000	5811/12US	SLEEVE	8100	M255WTQL11E-C	162	95.4	4, 10, 12	MXTWP2	\$146,159

Open Enclosure

WP11

> High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
1250	1200	4000	6810/11/12US	ANTI-FRICTION	14500	M257WTAL11E-C	157	95.4	4, 12	MXTWP2	\$219,586
1250	1200	4000	6812/13 US	SLEEVE	14000	M257WTQL11E-C	157	95.4	4, 12	MXTWP2	\$234,837
1250	900	4000	6812/13US	ANTI-FRICTION	15500	M258WTAL11E-C	169	95.4	12	MXTWP2	\$225,158
1250	900	4000	6812/13 US	SLEEVE	14000	M258WTQL11E-C	169	95.4	12	MXTWP2	\$240,409
1500	3600	4000	5809/10/11USS	ANTI-FRICTION	7000	M303WTAL11F-CF	187	95.7	4, 12	MXTWP2	\$126,475
1500	3600	4000	5809/10/11USS	SLEEVE	7300	M303WTQL11F-CF	187	95.8	4, 10, 12	MXTWP2	\$142,366
1500	3600	4000	5811/12USS	ANTI-FRICTION	7434	M303WTAL11F-A	189	97	4	MXTWP2	\$105,349
1500	3600	4000	5811/12USS	ANTI-FRICTION	7500	M303WTAL11F-C	183	94.5	4, 12	MXTWP2	\$128,756
1500	3600	4000	5811/12USS	SLEEVE	7500	M303WTQL11F-A	189	95	4, 10	MXTWP2	\$123,667
1500	3600	4000	5811/12USS	SLEEVE	8044	M303WTQL11F-C	183	95.3	4, 10, 12	MXTWP2	\$147,075
1500	1800	4000	5811/12US	ANTI-FRICTION	8100	M305WTAL11E-A	189	95.3	3, 4, 14	MXTWP2	\$108,057
1500	1800	4000	5811/12US	ANTI-FRICTION	7900	M305WTAL11E-C	193	95.8	3, 4, 12, 14	MXTWP2	\$131,464
1500	1800	4000	5811/12US	SLEEVE	8100	M305WTQL11E-A	189	96.2	3, 4, 10, 14	MXTWP2	\$126,376
1500	1800	4000	5811/12US	SLEEVE	8100	M305WTQL11E-C	193	95.4	3, 4, 10, 12, 14	MXTWP2	\$149,783
1500	1800	4000	6810/11/12US	ANTI-FRICTION	14500	M305WTAL11E-CF	196	96.2	4, 12	MXTWP2	\$223,612
1500	1800	4000	6810/11/12US	SLEEVE	15000	M305WTQL11E-CF	196	95.4	4, 10, 12	MXTWP2	\$239,280
1500	1200	4000	6810/11/12US	ANTI-FRICTION	14500	M307WTAL11E-C	187	95.4	4, 12	MXTWP2	\$225,900
1500	1200	4000	6812/13 US	SLEEVE	14000	M307WTQL11E-C	187	96.8	4, 12	MXTWP2	\$241,151
1500	900	4000	6812/13US	ANTI-FRICTION	15500	M308WTAL11E-C	205	95.8	12	MXTWP2	\$235,592
1500	900	4000	6812/13 US	SLEEVE	14000	M308WTQL11E-C	205	95	12	MXTWP2	\$250,843
1750	3600	4000	5811/12USS	ANTI-FRICTION	7300	M353WTAL11F-A	224	96.8	4	MXTWP2	\$109,216
1750	3600	4000	5811/12USS	ANTI-FRICTION	7300	M353WTAL11F-C	216	95.8	4, 12	MXTWP2	\$132,622
1750	3600	4000	5811/12USS	SLEEVE	7500	M353WTQL11F-A	224	95	4, 10	MXTWP2	\$127,534
1750	3600	4000	5811/12USS	SLEEVE	8237	M353WTQL11F-C	216	95.2	4, 10, 12	MXTWP2	\$150,941
1750	1800	4000	6810/11/12US	ANTI-FRICTION	14500	M355WTAL11E-C	219	95.2	4, 12	MXTWP2	\$225,807
1750	1800	4000	6810/11/12US	SLEEVE	15000	M355WTQL11E-C	219	95.5	4, 10, 12	MXTWP2	\$241,058
1750	1200	4000	6810/11/12US	ANTI-FRICTION	14500	M357WTAL11E-C	218	95.5	4, 12	MXTWP2	\$234,543
1750	1200	4000	6812/13 US	SLEEVE	14000	M357WTQL11E-C	218	95.6	4, 12	MXTWP2	\$249,795
1750	900	4000	R1083	ANTI-FRICTION	17000	J1758NLF3I-M	239	95.9	11, 12	MXTWP2	\$248,427
1750	900	4000	R1083	SLEEVE	17000	J1758NLF1I-M	240	95.7	11, 12	MXTWP2	\$270,306
2000	3600	4000	5811/12USS	SLEEVE	8551	M403WTQL11F-C	245	96	4, 10, 12	MXTWP2	\$157,329
2000	3600	4000	6810/11/12US	SLEEVE	15000	M403WTQL11F-CF	249	96.1	4, 10, 12	MXTWP2	\$252,997
2000	1800	4000	6810/11/12US	ANTI-FRICTION	14500	M405WTAL11E-C	250	96.1	4, 12	MXTWP2	\$232,607
2000	1800	4000	6810/11/12US	SLEEVE	15000	M405WTQL11E-C	250	95.6	4, 10, 12	MXTWP2	\$247,858
2000	1200	4000	6810/11/12US	ANTI-FRICTION	14500	M407WTAL11E-C	250	95.6	4, 12	MXTWP2	\$245,768
2000	1200	4000	6812/13 US	SLEEVE	14000	M407WTQL11E-C	250	95.3	4, 12	MXTWP2	\$261,020
2000	900	4000	R1083	ANTI-FRICTION	17000	J2008NLF3I-M	271	96.2	11, 12	MXTWP2	\$261,762
2000	900	4000	R1083	SLEEVE	17000	J2008NLF1I-M	271	96	11, 12	MXTWP2	\$283,641

Open Enclosure

WP11

> High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
2250	3600	4000	6810/11/12US	SLEEVE	15000	M453WTQL11F-C	279	96.3	4, 10, 12	MXTWP2	\$273,351
2250	1800	4000	6810/11/12US	ANTI-FRICTION	14500	M455WTAL11E-C	278	96.3	4, 12	MXTWP2	\$245,246
2250	1800	4000	6810/11/12US	SLEEVE	15000	M455WTQL11E-C	278	96.3	4, 10, 12	MXTWP2	\$260,497
2250	1200	4000	6812/13US	ANTI-FRICTION	15500	M457WTAL11E-C	281	95.5	4, 12	MXTWP2	\$257,170
2250	1200	4000	6812/13 US	SLEEVE	14000	M457WTQL11E-C	281	95.5	4, 12	MXTWP2	\$272,422
2250	900	4000	R1083	ANTI-FRICTION	17000	J2258NLF3I-M	303	96.4	11, 12	MXTWP2	\$267,836
2250	900	4000	R1083	SLEEVE	17000	J2258NLF1I-M	304	96.2	11, 12	MXTWP2	\$289,715
2500	3600	4000	6810/11/12US	SLEEVE	15000	M503WTQL11F-C	309	95.8	4, 10, 12	MXTWP2	\$286,998
2500	1800	4000	6810/11/12US	ANTI-FRICTION	14500	M505WTAL11E-C	309	96.4	4, 12	MXTWP2	\$254,824
2500	1800	4000	6810/11/12US	SLEEVE	15000	M505WTQL11E-C	309	96.4	4, 10, 12	MXTWP2	\$270,075
2500	1200	4000	6812/13US	ANTI-FRICTION	15500	M507WTAL11E-C	318	95.4	4, 12	MXTWP2	\$269,160
2500	1200	4000	6812/13 US	SLEEVE	14000	M507WTQL11E-C	318	95.4	4, 12	MXTWP2	\$284,411
2500	900	4000	R1085	ANTI-FRICTION	17000	J2508NLF3I-M	335	96.5	11, 12	MXTWP2	\$273,733
2500	900	4000	R1085	SLEEVE	17000	J2508NLF1I-M	336	96.3	11, 12	MXTWP2	\$295,612
2750	3600	4000	6810/11/12 USS	SLEEVE	14500	M553WTQL11F-C	337	95.7	4, 12	MXTWP2	\$302,578
2750	1800	4000	6812/13US	ANTI-FRICTION	15500	M555WTAL11F-C	338	96.3	4, 12	MXTWP2	\$267,522
2750	1800	4000	6812/13 US	SLEEVE	15000	M555WTQL11F-C	338	96.3	4, 12	MXTWP2	\$282,773
2750	1200	4000	6812/13US	ANTI-FRICTION	15500	M557WTAL11F-C	368	95.9	3, 4, 12, 14	MXTWP2	\$280,356
2750	1200	4000	6812/13 US	SLEEVE	15000	M557WTQL11F-C	368	95.9	3, 4, 12, 14	MXTWP2	\$295,607
2750	900	4000	R1087	ANTI-FRICTION	17000	J2758NLF3I-M	377	95.8	11, 12	MXTWP2	\$287,300
2750	900	4000	R1087	SLEEVE	17000	J2758NLF1I-M	377	95.8	11, 12	MXTWP2	\$309,179
3000	3600	4000	6810/11/12US	SLEEVE	15000	M603WTQL11F-C	370	96.3	4, 10, 12	MXTWP2	\$315,659
3000	1800	4000	6812/13US	ANTI-FRICTION	15500	M605WTAL11E-C	369	96.7	4, 12	MXTWP2	\$280,561
3000	1800	4000	6812/13 US	SLEEVE	14000	M605WTQL11E-C	369	96.7	4, 12	MXTWP2	\$295,812
3000	900	4000	R1087	ANTI-FRICTION	17000	J3008NLF3I-M	416	95.6	11, 12	MXTWP2	\$302,819
3000	900	4000	R1087	SLEEVE	17000	J3008NLF1I-M	416	95.6	11, 12	MXTWP2	\$324,698
3500	3600	4000	6810/11/12US	SLEEVE	15000	M703WTQL11F-C	431	96.2	4, 10, 12	MXTWP2	\$328,859
3500	1800	4000	6812/13US	ANTI-FRICTION	15500	M705WTAL11E-C	431	96.6	4, 12	MXTWP2	\$292,293
3500	1800	4000	6812/13 US	SLEEVE	14000	M705WTQL11E-C	431	96.1	4, 12	MXTWP2	\$307,545
3500	1200	4000	R1085	ANTI-FRICTION	17000	J3507NLF3I-M	458	95.9	4, 11, 12	MXTWP2	\$311,777
3500	1200	4000	R1085	SLEEVE	17000	J3507NLF1I-M	458	95.9	4, 11, 12	MXTWP2	\$333,656
3500	900	4000	R1087	ANTI-FRICTION	17000	J3508NLF3I-M	482	95.7	11, 12	MXTWP2	\$339,219
3500	900	4000	R1087	SLEEVE	17000	J3508NLF1I-M	482	95.7	11, 12	MXTWP2	\$361,098
4000	3600	4000	6812/13 USS	SLEEVE	14000	M803WTQL11F-C	495	96.2	4, 12	MXTWP2	\$336,680
4000	1800	4000	450-1600	ANTI-FRICTION	15500	M805WTAL11E-CF	509	96.7	4, 12	MXTWP2	\$324,120
4000	1800	4000	450-1600	SLEEVE	16000	M805WTQL11E-CF	509	96.7	4, 10, 12	MXTWP2	\$338,621
4000	1800	4000	6812/13US	ANTI-FRICTION	15500	M805WTAL11E-C	495	96.6	3, 4, 12, 14	MXTWP2	\$306,281
4000	1800	4000	6812/13 US	SLEEVE	14000	M805WTQL11E-C	495	96.6	3, 4, 12, 14	MXTWP2	\$321,532
4000	1200	4000	R1087	ANTI-FRICTION	17000	J4007NLF3I-M	522	95.9	4, 11, 12	MXTWP2	\$343,288

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Open Enclosure

WP11

> High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
4000	1200	4000	R1087	SLEEVE	17000	J4007NLF1I-M	522	95.9	4, 11, 12	MXTWP2	\$365,167
4000	900	4000	R1089	ANTI-FRICTION	17000	J4008NLF3I-M	547	95.8	11, 12	MXTWP2	\$353,511
4000	900	4000	R1089	SLEEVE	17000	J4008NLF1I-M	547	95.8	11, 12	MXTWP2	\$375,390
4500	3600	4000	6812/13 USS	SLEEVE	14000	M903WTQL11F-C	553	97.1	4, 12	MXTWP2	\$348,644
4500	1800	4000	450-1600	ANTI-FRICTION	15500	M905WTAL11E-C	575	97.1	4, 12	MXTWP2	\$328,225
4500	1800	4000	450-1600	SLEEVE	16000	M905WTQL11E-C	575	97.1	4, 10, 12	MXTWP2	\$343,186
4500	1800	4000	R1085	ANTI-FRICTION	17000	J4505NLF3I-M	575	96.8	4, 11, 12	MXTWP2	\$332,940
4500	1800	4000	R1085	SLEEVE	17000	J4507NLF3I-M	585	96.1	4, 11, 12	MXTWP2	\$361,422
4500	1200	4000	1087	ANTI-FRICTION	17000	J4507NLF1I-M	585	96.1	4, 11, 12	MXTWP2	\$383,301
4500	1200	4000	1087	ANTI-FRICTION	17000	J4507NLF3I-MF	585	96.1	4, 11, 12, 14	MXTWP2	\$351,476
4500	900	4000	1089	ANTI-FRICTION	17000	J4508NLF3I-M	613	96	11, 12	MXTWP2	\$386,278
4500	900	4000	1089	SLEEVE	17000	J4508NLF1I-M	613	96	11, 12	MXTWP2	\$408,157
5000	3600	4000	450-1600	SLEEVE	16000	C203WTQL11E-C	603	97	4, 10, 12	MXTWP2	\$355,860
5000	1800	4000	1087	ANTI-FRICTION	17000	J5005NLF3I-M	624	96.3	4, 11, 12	MXTWP2	\$345,249
5000	1800	4000	1087	SLEEVE	17000	J5005NLF1I-M	624	96.3	4, 11, 12	MXTWP2	\$361,059
5000	1200	4000	1089	ANTI-FRICTION	17000	J5007NLF3I-M	649	96	4, 11, 12	MXTWP2	\$369,752
5000	1200	4000	1089	SLEEVE	17000	J5007NLF1I-M	649	96	4, 11, 12	MXTWP2	\$391,631
5000	900	4000	1425	ANTI-FRICTION	18000	J5008NLF3I-M	676	96.2	11, 12	MXTWP2	\$397,434
5000	900	4000	1425	SLEEVE	18000	J5008NLF1I-M	676	96.2	11, 12	MXTWP2	\$419,313
6000	1800	4000	1087	ANTI-FRICTION	17000	J6005NLF3I-M	748	96.3	4, 11, 12	MXTWP2	\$352,691
6000	1800	4000	1087	SLEEVE	17000	J6005NLF1I-M	748	96.3	4, 11, 12	MXTWP2	\$368,501
6000	1200	4000	1089	ANTI-FRICTION	17000	J6007NLF3I-M	778	96.3	4, 11, 12	MXTWP2	\$391,909
6000	1200	4000	1089	SLEEVE	17000	J6007NLF1I-M	778	96.3	4, 11, 12	MXTWP2	\$413,788
6000	900	4000	1425	ANTI-FRICTION	18000	J6008NLF3I-M	810	96.2	11, 12	MXTWP2	\$414,685
6000	900	4000	1425	SLEEVE	18000	J6008NLF1I-M	810	96.2	11, 12	MXTWP2	\$436,564
7000	1800	4000	1089	ANTI-FRICTION	17000	J7005NLF3I-M	873	96.5	4, 11, 12	MXTWP2	\$359,547
7000	1800	4000	1089	SLEEVE	17000	J7005NLF1I-M	873	96.5	4, 11, 12	MXTWP2	\$375,357
7000	1200	4000	1425	ANTI-FRICTION	18000	J7007NLF3I-M	904	96.4	4, 11, 12	MXTWP2	\$320,776
7000	1200	4000	1425	SLEEVE	18000	J7007NLF1I-M	904	96.4	4, 11, 12	MXTWP2	\$342,655
7000	900	4000	1427	ANTI-FRICTION	18000	J7008NLF3I-M	923	96.7	11, 12	MXTWP2	\$427,062
7000	900	4000	1427	SLEEVE	18000	J7008NLF1I-M	923	96.7	11, 12	MXTWP2	\$448,941
8000	1800	4000	1089	ANTI-FRICTION	17000	J8005NLF3I-M	995	96.5	4, 11, 12	MXTWP2	\$366,143
8000	1800	4000	1089	SLEEVE	17000	J8005NLF1I-M	995	96.5	4, 11, 12	MXTWP2	\$381,953
8000	1200	4000	1425	ANTI-FRICTION	18000	J8007NLF3I-M	1028	96	4, 11, 12	MXTWP2	\$333,007
8000	1200	4000	1425	SLEEVE	18000	J8007NLF1I-M	1028	96	4, 11, 12	MXTWP2	\$354,886
8000	900	4000	1429	ANTI-FRICTION	18000	J8008NLF3I-M	1054	96.7	11, 12	MXTWP2	\$441,090
8000	900	4000	1429	SLEEVE	18000	J8008NLF1I-M	1054	96.7	11, 12	MXTWP2	\$462,969
9000	1800	4000	1425	ANTI-FRICTION	18000	J9005NLF3I-M	1121	96.7	4, 11, 12	MXTWP2	\$372,036

Open Enclosure

WP11

> High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
9000	1800	4000	1425	SLEEVE	18000	J9005NLFLI-M	1121	96.7	4, 11, 12	MXTWP2	\$387,846
9000	1200	4000	1427	ANTI-FRICTION	18000	J9007NLF3I-M	1141	96.8	4, 11, 12	MXTWP2	\$354,252
9000	1200	4000	1427	SLEEVE	18000	J9007NLFLI-M	1141	96.8	4, 11, 12	MXTWP2	\$376,131
9000	900	4000	1429	ANTI-FRICTION	18000	J9008NLF3I-M	1177	96.8	11, 12	MXTWP2	\$458,624
9000	900	4000	1429	SLEEVE	18000	J9008NLFLI-M	1177	96.8	11, 12	MXTWP2	\$480,503
10000	1800	4000	1427	ANTI-FRICTION	18000	K1005NLF3I-M	1243	96.7	4, 11, 12	MXTWP2	\$386,687
10000	1800	4000	1427	SLEEVE	18000	K1005NLFLI-M	1243	96.7	4, 11, 12	MXTWP2	\$402,497
10000	1200	4000	1427	ANTI-FRICTION	18000	K1007NLF3I-M	CF	CF	4, 11, 12	MXTWP2	\$376,145
10000	1200	4000	1427	SLEEVE	18000	K1007NLFLI-M	CF	CF	4, 11, 12	MXTWP2	\$398,024
11000	1800	4000	1427	ANTI-FRICTION	18000	K1105NLF3I-M	CF	CF	4, 11, 12	MXTWP2	\$401,423
11000	1800	4000	1427	SLEEVE	18000	K1105NLFLI-M	CF	CF	4, 11, 12	MXTWP2	\$417,233
11000	1200	4000	1429	ANTI-FRICTION	18000	K1107NLF3I-M	CF	CF	4, 11, 12	MXTWP2	\$393,197
11000	1200	4000	1429	SLEEVE	18000	K1107NLFLI-M	CF	CF	4, 11, 12	MXTWP2	\$415,076

FL Amps and FL EFF are average expected design values and not guaranteed.

The weights listed above are estimated.

Please contact Toshiba for information on product availability.

"CF" = Consult Factory

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

MV Modifications	MV Definite Purpose	MV Gen. Purp. Enclosed	MV General Purpose Open	LV Mods. (Stock & Prod)	Definite Purpose	IEC	Explosion Proof	TEFC General Purpose	ODP General Purpose

Medium Voltage General Purpose Series Totally Enclosed Motors

Toshiba's general purpose, medium voltage totally enclosed motor series includes our totally enclosed fan cooled (TEFC), Totally Enclosed Water-Air Cooled (TEWAC) and Totally Enclosed Air-Air Cooled (TEAAC) Motor. Designed to meet the industry's ever-increasing need for improved energy conservation and product reliability, these motors offer some of the highest efficiency and torque ratings while producing some of the lowest vibration ratings in the industry—leading to a longer life and greater reliability. This motor series can be used on indoor and outdoor applications.

The general purpose, medium voltage totally enclosed motor is available in a high efficiency design with a die cast aluminum or Copper bar rotor and anti-friction ball bearing or Self Cooled Sleeve bearings. These motor offerings are completely customizable due to our in-house design, engineering, and manufacturing capabilities. This allows us to not only meet but exceed your specific application requirements.

Standard Features:

- Totally Enclosed Fan Cooled, Air-to-Air Cooled, and Totally Enclosed Water to Air Cooled
- High Efficiency
- 2300/4000, or 4000 V, Three-Phase, 60 Hz*
- Horizontal Foot-Mounted Direct-Coupled or belted (where noted) Applications
- Class F Form-Wound Insulation
- Class B Temperature Rise at 1.0 Service Factor by Resistance (Except where noted)
- IP44, IP54, & IP55
- Vacuum-Pressure Impregnated System
- Cast Iron Frame, End Brackets
- Cast Iron Terminal Box & Fabricated Steel Box
- Anti-Friction Ball or Sleeve Bearing
- Aluminum Die Cast or Copper Rotor
- Polyurea Base Grease or ISO VG Oil
- 304 Stainless Steel Nameplate

*Contact Toshiba for 6000, 6600, or 13,200 V options.

Applications:

- Pumps
- Fans
- Compressors
- Conveyors
- Mixers
- Material
- General Applications

Warranty:

- From Date of Manufacture: 18 Months**
- From Date of Installation: 12 Months**

**Whichever Comes First



Totally Enclosed TEFC

> High Efficiency



Toshiba’s general purpose, medium voltage totally enclosed fan cooled motor offering is designed to meet the industry’s ever-increasing need for improved energy conservation and product performance. This product line offers exceptionally high torque and a low vibration design, leading to a longer life and greater reliability. These motors are completely customizable due to our in-house design, engineering, and manufacturing capabilities, allowing us to not only meet but exceed your specific application requirements.

Product Scope:

Horsepower:	100 to 2500 HP
Speed:	3600, 1800, 1200, 900 or 720 RPM*
Voltage:	2300/4000 or 4000 V*
Enclosure:	Totally Enclosed Fan Cooled
Frame Size:	449T through N8810
Construction:	Cast Iron (Frame & End Brackets)
Insulation:	Class F with Class B Rise at 1.0 Service Factor by RM
Environment:	Suitable for Indoor or Outdoor

**Contact Toshiba for availability on 2300, 6000 and 6600 V motors*

General Purpose Features:

- 449, 509, 5810 , 680, & N6810 through N8810 Frames
- Cast Iron Main T/box for 449T & Fabricated Main Terminal Box 509 and larger
- Horizontal Foot-Mounted for Direct or Belted Coupled (where noted)
- Fabricated Steel Fan Cover for 5800 and Larger (Cast iron for 509 and smaller)
- Winding & Bearing RTDs for N6810 through N8810 Frames
- Space Heater for N6810 through N8810 Frames
- Insulated NDE Ball Bearing Housing for N6810 through N8810 Frames
- Copper Bar Rotor for 509 Frame and Larger Only

*(Additional Frame Options and Features Available;
See Catalog Production Modifications Section)*

HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
100	3600	2300/4000	N449TS	ANTI-FRICTION	3500	1003FCAK11B-A	24/14	91.7	4, 6	MXTFCM	\$44,054
100	1800	2300/4000	N449T	ANTI-FRICTION	3500	1004FCAK11A-A	24/14	93	2	MXTFCM	\$43,375
100	1800	2300/4000	N449TS	ANTI-FRICTION	3500	1004FCAK11B-A	24/14	93		MXTFCM	\$43,375
100	1200	2300/4000	N449T	ANTI-FRICTION	3500	1006FCAK11A-A	25/15	94.1	2	MXTFCM	\$51,650
100	1200	2300/4000	N449TS	ANTI-FRICTION	3500	1006FCAK11B-A	25/15	94.1		MXTFCM	\$51,650
125	3600	2300/4000	N449TS	ANTI-FRICTION	3500	1253FCAK11B-A	29/17	92.4	4	MXTFCM	\$44,732
125	1800	2300/4000	N449T	ANTI-FRICTION	3500	1254FCAK11A-A	31/18	93.6	2	MXTFCM	\$44,054
125	1800	2300/4000	N449TS	ANTI-FRICTION	3500	1254FCAK11B-A	31/18	93.6		MXTFCM	\$44,054
125	1200	2300/4000	N449T	ANTI-FRICTION	3500	1256FCAK11A-A	31/18	95	2	MXTFCM	\$52,318
125	1200	2300/4000	N449TS	ANTI-FRICTION	3500	1256FCAK11B-A	31/18	95		MXTFCM	\$52,318
150	3600	2300/4000	N449TS	ANTI-FRICTION	3500	1503FCAK11B-A	35/20	93	4	MXTFCM	\$45,722
150	1800	2300/4000	N449T	ANTI-FRICTION	3500	1504FCAK11A-A	36/21	94.1		MXTFCM	\$45,266
150	1800	2300/4000	N449TS	ANTI-FRICTION	3500	1504FCAK11B-A	36/21	94.1		MXTFCM	\$45,266

Totally Enclosed

TEFC

> High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
150	1200	2300/4000	N449T	ANTI-FRICTION	3500	1506FCAK11A-A	36/21	95		MXTFCM	\$53,310
150	1200	2300/4000	N449TS	ANTI-FRICTION	3500	1506FCAK11B-A	36/21	95		MXTFCM	\$53,310
200	3600	2300/4000	N449TS	ANTI-FRICTION	3500	2003FCAK11B-A	45/27	93.6	4	MXTFCM	\$48,543
200	1800	2300/4000	N449T	ANTI-FRICTION	3500	2004FCAK11A-A	47/27	95	2	MXTFCM	\$46,653
200	1800	2300/4000	N449TS	ANTI-FRICTION	3500	2004FCAK11B-A	47/27	95		MXTFCM	\$46,653
200	1200	2300/4000	N449T	ANTI-FRICTION	3500	2006FCAK11A-A	48/28	95.4	2	MXTFCM	\$54,800
200	1200	2300/4000	N449TS	ANTI-FRICTION	3500	2006FCAK11B-A	48/28	95.4		MXTFCM	\$54,800
200	900	4000	509E	ANTI-FRICTION	4000	2008FCAL11E-CF	31.7	94.1	12	MXTFCM	\$74,350
200	720	4000	D509E	ANTI-FRICTION	4000	F2009FLF3I-C	32.1	92.6	12	MXTFCM	\$78,408
250	3600	2300/4000	N449TS	ANTI-FRICTION	3500	2503FCAK11B-A	57/33	94.5	4	MXTFCM	\$49,844
250	1800	2300/4000	N449T	ANTI-FRICTION	3500	2504FCAK11A-A	59/34	95.4	2	MXTFCM	\$48,242
250	1800	2300/4000	N449TS	ANTI-FRICTION	3500	2504FCAK11B-A	59/34	95.4		MXTFCM	\$48,242
250	1200	2300/4000	N449T	ANTI-FRICTION	3500	2506FCAK11A-A	61/35	95.8	2	MXTFCM	\$56,263
250	1200	2300/4000	N449TS	ANTI-FRICTION	3500	2506FCAK11B-A	61/35	95.8		MXTFCM	\$56,263
250	900	4000	D509E	ANTI-FRICTION	4000	2508FCAL11E-CF	38.6	94.5	12	MXTFCM	\$76,514
250	720	4000	D509E	ANTI-FRICTION	4000	F2509FLF3I-C	40	93.3	12	MXTFCM	\$79,882
300	3600	2300/4000	N449TS	ANTI-FRICTION	3500	3003FCAK11B-A	69/40	95	4, 6	MXTFCM	\$51,122
300	1800	2300/4000	N449T	ANTI-FRICTION	3500	3004FCAK11A-A	71/41	95.8	2, 6	MXTFCM	\$50,287
300	1800	2300/4000	N449TS	ANTI-FRICTION	3500	3004FCAK11B-A	71/41	95.8	6	MXTFCM	\$50,287
300	1200	4000	509E	ANTI-FRICTION	4000	2006FCAL11E-CF	40.5	94.6	12	MXTFCM	\$81,740
300	900	4000	H509E	ANTI-FRICTION	4000	2008FCAL11E-CF	45.3	94.8	12	MXTFCM	\$84,280
300	720	4000	H509E	ANTI-FRICTION	4000	F3009FLF3I-C	47.9	94	12	MXTFCM	\$88,340
350	3600	2300/4000	L449TS	ANTI-FRICTION	3500	3503FCAK11B-AF	83/48	93.6	4, 6	MXTFCM	\$52,986
350	3600	2300/4000	N449TS	ANTI-FRICTION	3500	3503FCAK11B-A	83/48	93.6	4, 6, 14	MXTFCM	\$52,489
350	1800	4000	509E	ANTI-FRICTION	4000	3504FCAL11E-CF	44.8	94.2	12	MXTFCM	\$72,599
350	1800	2300/4000	L449T	ANTI-FRICTION	3500	3504FCAK11A-AF	83/48	95.8	2	MXTFCM	\$51,650
350	1800	2300/4000	N449T	ANTI-FRICTION	3500	3504FCAK11A-A	83/48	95.8	2, 14	MXTFCM	\$51,650
350	1800	2300/4000	N449TS	ANTI-FRICTION	3500	3504FCAK11B-A	83/48	95.8	14	MXTFCM	\$51,320
350	1200	4000	D509E	ANTI-FRICTION	4000	3506FCAL11E-CF	47	94.9	12	MXTFCM	\$83,507
350	900	4000	H509E	ANTI-FRICTION	4000	3508FCAL11E-CF	51.8	94.8	12	MXTFCM	\$87,340
350	720	4000	5810L	ANTI-FRICTION	6500	F3509FLF3I-C	55.7	94.5	12	MXTFCM	\$90,240
400	3600	4000	H509US	ANTI-FRICTION	4000	4003FCAL11F-CF	48.3	95.5	12	MXTFCM	\$78,580
400	1800	4000	D509E	ANTI-FRICTION	4000	4004FCAL11E-CF	51.1	94.5	12	MXTFCM	\$81,240
400	1200	4000	H509E	ANTI-FRICTION	4000	4006FCAL11E-CF	53.5	95.1	12	MXTFCM	\$84,360
400	900	4000	5810L	ANTI-FRICTION	6500	4008FCAL11E-CF	58.3	94.7	12	MXTFCM	\$91,508
400	720	4000	686S	ANTI-FRICTION	1100	F4009FLF3I-C	63.3	95	12	MXTFCM	\$112,548
450	3600	4000	5810S	ANTI-FRICTION	6500	4503FCAL11F-CF	54.3	95.7	12	MXTFCM	\$84,772
450	1800	4000	H509E	ANTI-FRICTION	4000	4504FCAL11E-CF	57.4	94.8	12	MXTFCM	\$83,695
450	1200	4000	H509E	ANTI-FRICTION	4000	4506FCAL11E-CF	59.9	95.3	12	MXTFCM	\$86,412
450	900	4000	688S	ANTI-FRICTION	7500	4508FCAL11E-CF	64.6	94.5	12	MXTFCM	\$98,340
450	720	4000	688S	ANTI-FRICTION	7500	F4509FLF3I-C	71.4	95.4	12	MXTFCM	\$115,470
500	3600	4000	5811S	ANTI-FRICTION	6500	5003FCAL11F-CF	60	95.7	12	MXTFCM	\$86,350
500	1800	4000	H509E	ANTI-FRICTION	4000	5004FCAL11E-CF	64	95.1	12	MXTFCM	\$85,750
500	1200	4000	5810L	ANTI-FRICTION	6500	5006FCAL11E-CF	66	95.4	12	MXTFCM	\$94,857
500	900	4000	688S	ANTI-FRICTION	7500	5008FCAL11E-CF	71	94.3	12	MXTFCM	\$142,580
500	720	4000	6809L	ANTI-FRICTION	11000	F5009FLF3I-C	79	94.2	12	MXTFCM	\$138,996
600	3600	4000	688H	SLEEVE	7500	6003FCQL11F-CF	72.3	95.7	12	MXTFCM	\$102,358
600	1800	4000	688S	ANTI-FRICTION	7500	6004FCAL11E-CF	76.2	95.5	12	MXTFCM	\$104,459
600	1200	4000	6809L	ANTI-FRICTION	11000	6006FCAL11E-CF	79.2	95.3	12	MXTFCM	\$108,221

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed

TEFC

> High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
600	900	4000	6809L	ANTI-FRICTION	11000	6008FCAL11E-CF	83.1	94.1	12	MXTFCM	\$158,396
600	720	4000	6811L	ANTI-FRICTION	11000	F6009FLF3I-C	94.8	94	12	MXTFCM	\$146,960
700	3600	4000	6810H	SLEEVE	11000	7003FCQL11F-CF	84.2	95.7	12	MXTFCM	\$158,324
700	1800	4000	6809L	ANTI-FRICTION	11000	7004FCAL11E-CF	88.7	95.9	12	MXTFCM	\$138,360
700	1200	4000	6809L	ANTI-FRICTION	11000	7006FCAL11E-CF	92	95.2	12	MXTFCM	\$127,540
700	900	4000	6810L	ANTI-FRICTION	11000	7008FCAL11E-CF	95.1	94.4	12	MXTFCM	\$162,312
700	720	4000	6811L	ANTI-FRICTION	11000	F7009FLF3I-C	110.3	94.2	12	MXTFCM	\$154,360
800	3600	4000	6811H	SLEEVE	11000	8003FCQL11F-CF	96.2	96	12	MXTFCM	\$162,450
800	1800	4000	6810L	ANTI-FRICTION	11000	8004FCAL11E-CF	101.2	96.2	12	MXTFCM	\$142,804
800	1200	4000	6810L	ANTI-FRICTION	11000	8006FCAL11E-CF	104.7	95.2	12	MXTFCM	\$148,360
800	900	4000	6811L	ANTI-FRICTION	11000	8008FCAL11E-CF	106.9	95.6	12	MXTFCM	\$168,673
800	720	4000	6811L	ANTI-FRICTION	11000	F8009FLF3I-C	125.9	94.9	12	MXTFCM	\$159,668
900	3600	4000	6811H	SLEEVE	11000	9003FCQL11F-CF	108.2	95.3	12	MXTFCM	\$178,368
900	1800	4000	6811L	ANTI-FRICTION	11000	9004FCAL11E-CF	115	96	12	MXTFCM	\$168,412
900	1200	4000	6811L	ANTI-FRICTION	11000	9006FCAL11E-CF	118	96	12	MXTFCM	\$181,442
900	900	4000	N7808	ANTI-FRICTION	15000	J9008FLF3I-C	120	95.8	1, 12	MXTFCM	\$184,384
900	720	4000	N7808	ANTI-FRICTION	15000	J9009FLF3I-C	120	95.8	1, 12	MXTFCM	\$197,964
1000	1800	4000	N6810	ANTI-FRICTION	12000	J1004FLF3I-C	126.1	96.3	1, 12	MXTFCM	\$146,870
1000	1200	4000	N6810	ANTI-FRICTION	12000	J1006FLF3I-C	131	96	1, 12	MXTFCM	\$150,709
1000	900	4000	N7808	ANTI-FRICTION	15000	J1008FLF3I-C	133	95.8	1, 12	MXTFCM	\$181,359
1000	720	4000	N7808	ANTI-FRICTION	15000	J1010FLF3I-C	133	95.8	1, 12	MXTFCM	\$208,355
1250	1800	4000	N6810	ANTI-FRICTION	12000	J1254FLF3I-C	158	96	1, 12	MXTFCM	\$164,937
1250	1200	4000	N7808	ANTI-FRICTION	15000	J1256FLF3I-C	162	95.8	1, 12	MXTFCM	\$195,627
1250	900	4000	N8810	ANTI-FRICTION	18700	J1258FLF3I-C	164	95.8	1, 12	MXTFCM	\$238,719
1500	1800	4000	N7808	ANTI-FRICTION	15000	J1504FLF3I-C	186	96.5	1, 12	MXTFCM	\$194,276
1500	1200	4000	N7808	ANTI-FRICTION	15000	J1506FLF3I-C	195	95.8	1, 12	MXTFCM	\$214,399
1500	900	4000	N8810	ANTI-FRICTION	18700	J1508FLF3I-C	197	95.8	1, 12	MXTFCM	\$262,365
1750	1800	4000	N7808	ANTI-FRICTION	15000	J1754FLF3I-C	216	96.5	1, 12	MXTFCM	\$207,933
1750	1200	4000	N8810	ANTI-FRICTION	18700	J1756FLF3I-C	222	96.5	1, 12	MXTFCM	\$257,635
2000	1800	4000	N8810	ANTI-FRICTION	18700	J2004FLF3I-C	247	96.5	1, 12	MXTFCM	\$242,965
2000	1200	4000	N8810	ANTI-FRICTION	18700	J2006FLF3I-C	253	96.5	1, 12	MXTFCM	\$271,822
2250	1800	4000	N8810	ANTI-FRICTION	18700	J2254FLF3I-C	278	96.5	1, 12	MXTFCM	\$247,791
2250	1200	4000	N8810	ANTI-FRICTION	18700	J2256FLF3I-C	284	96.5	1, 12	MXTFCM	\$285,623
2500	1800	4000	N8810	ANTI-FRICTION	18700	J2504FLF3I-C	305	96.5	1, 12	MXTFCM	\$267,093

FL Amps and FL EFF are average expected design values and not guaranteed.
The weights listed above are estimated.
Please contact Toshiba for information on product availability.
“CF”= Consult Factory

Totally Enclosed

DURA-BULL®

> High Efficiency



DURA-BULL TX®



The Dura-Bull TX® offers what our customers care about most—superior performance, tri-mount capability, low maintenance, short delivery times, and competitive pricing. Its low temperature, low vibration design, advanced insulation system for variable frequency drive applications, latest edition API capabilities, along with its other standard features, provide additional value that our customers have come to expect from Toshiba.

Product Scope:

Horsepower:	200 to 1250 HP
Speed:	3600, 1800, 1200, or 900 RPM*
Voltage:	4000 V*
Enclosure:	Totally Enclosed Fan Cooled
Frame Size:	5011 through 6811
Construction:	Cast Iron (Frame & End Brackets)
Insulation:	Class F with Class B Rise at 1.0 Service Factor by RM (Except where noted)

*Contact Toshiba for availability on 2300, 6000 and 6600 V motors

Dura-Bull TX® Features:

- 5011, 5811, & 6811 Frames
- Tri-Mount Capability for Quick and Easy Field Replacement —5009, 5010, 5011, 5809, 5810, 5811, 6809, 6810, & 6811 with Same BA
- Copper Bar Design with API Style End Ring
- Insulated Sleeve Bearings on Both Ends – IP55
- Main T-Box Capable of F1 or F2 Field-Mounting; Top-Mount (F3) Available as Option for 5000 Frames
- Cartridge-Type Field-Replaceable Grease Outlet
- Winding Stator RTDs in Separate Auxiliary Terminal Box - F2
- Space Heaters in Separate Auxiliary Terminal Box -F2
- Bearing RTD Provisions - F2
- Provisions for Vertical Jacking Screws
- Insulated NDE Ball Bearing IP54 for Anti-Friction
- Cast Iron Main T/box for 5811 and Smaller and Type II Fabricated Steel Main T/box for 6811
- Cast Iron Fan Cover for 5811 and Smaller (Option for Fabricated Steel) and Fabricated Steel Fan Cover for 6811

*Additional Frame Options and Features Available;
See Catalog Production Modifications Section*

HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
200	900	4000	5009/10/11US	ANTI-FRICTION	6000	2008FTAL11E-A	31	93.6		MXTFCM	\$62,273
200	900	4000	5009/10/11US	ANTI-FRICTION	6000	2008FTAL11E-C	31	93.6	12	MXTFCM	\$83,723
250	1200	4000	5009/10/11US	ANTI-FRICTION	5000	2506FTAL11E-A	36	94.5		MXTFCM	\$61,438
250	1200	4000	5009/10/11US	ANTI-FRICTION	5000	2506FTAL11E-C	36	94.5	12	MXTFCM	\$82,888
250	900	4000	5009/10/11US	ANTI-FRICTION	6100	2508FTAL11E-A	38	93.6		MXTFCM	\$62,852
250	900	4000	5009/10/11US	ANTI-FRICTION	6100	2508FTAL11E-C	38	93.6	12	MXTFCM	\$84,302
300	1800	4000	5009/10/11US	ANTI-FRICTION	4397	3004FTAL11E-A	43	94.5		MXTFCM	\$53,708
300	1800	4000	5009/10/11US	ANTI-FRICTION	5000	3004FTAL11E-C	43	94.5	12	MXTFCM	\$76,147
300	1800	4000	5009/10/11US	SLEEVE	5000	3004FTQL11E-A	43	94.5		MXTFCM	\$72,141

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods.
(Stock & Prod)

MV General Purpose Open

MV Gen. Purp.
Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed

DURA-BULL®

> High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
300	1800	4000	5009/10/11US	SLEEVE	5000	3004FTQL11E-C	43	94.5	12	MXTFCM	\$94,581
300	1200	4000	5009/10/11US	ANTI-FRICTION	4523	3006FTAL11E-A	45	94.5		MXTFCM	\$62,309
300	1200	4000	5009/10/11US	ANTI-FRICTION	5000	3006FTAL11E-C	45	94.5	12	MXTFCM	\$84,749
300	900	4000	5009/10/11US	ANTI-FRICTION	6200	3008FTAL11E-A	46	94.1		MXTFCM	\$66,079
300	900	4000	5009/10/11US	ANTI-FRICTION	6200	3008FTAL11E-C	46	94.1	12	MXTFCM	\$87,529
350	3600	4000	5009/10/11USS	ANTI-FRICTION	4407	3503FTAL11F-A	46	93.6	4	MXTFCM	\$55,393
350	3600	4000	5009/10/11USS	ANTI-FRICTION	5000	3503FTAL11F-C	44	95	4, 12	MXTFCM	\$77,832
350	3600	4000	5009/10/11USS	SLEEVE	4407	3503FTQL11F-A	46	93.6	4	MXTFCM	\$70,893
350	3600	4000	5009/10/11USS	SLEEVE	5000	3503FTQL11F-C	44	95	4, 12	MXTFCM	\$92,343
350	1800	4000	5009/10/11US	ANTI-FRICTION	4371	3504FTAL11E-A	50	94.5		MXTFCM	\$54,602
350	1800	4000	5009/10/11US	ANTI-FRICTION	5000	3504FTAL11E-C	50	94.5	12	MXTFCM	\$77,042
350	1800	4000	5009/10/11US	SLEEVE	5000	3504FTQL11E-A	44	93		MXTFCM	\$73,034
350	1800	4000	5009/10/11US	SLEEVE	5000	3504FTQL11E-C	44	93.6	4, 12	MXTFCM	\$95,475
350	1200	4000	5009/10/11US	ANTI-FRICTION	4697	3506FTAL11E-A	51	94.1		MXTFCM	\$63,172
350	1200	4000	5009/10/11US	ANTI-FRICTION	5000	3506FTAL11E-C	51	94.5	12	MXTFCM	\$85,613
350	900	4000	5809/10/11US	ANTI-FRICTION	6700	3508FTAL11E-A	52	94.1		MXTFCM	\$77,683
350	900	4000	5809/10/11US	ANTI-FRICTION	6700	3508FTAL11E-C	52	94.1	12	MXTFCM	\$99,133
400	3600	4000	5009/10/11USS	ANTI-FRICTION	5800	4003FTAL11F-A	52	94.1	4	MXTFCM	\$60,628
400	3600	4000	5009/10/11USS	ANTI-FRICTION	5000	4003FTAL11F-C	50	94.1	4, 12	MXTFCM	\$83,069
400	3600	4000	5809/10/11USS	SLEEVE	5800	4003FTQL11F-A	52	94.1	4	MXTFCM	\$87,887
400	3600	4000	5809/10/11USS	SLEEVE	5000	4003FTQL11F-C	50	94.1	4, 12	MXTFCM	\$105,478
400	1800	4000	5009/10/11US	ANTI-FRICTION	4628	4004FTAL11E-A	56	95		MXTFCM	\$61,976
400	1800	4000	5009/10/11US	ANTI-FRICTION	5000	4004FTAL11E-C	50	94.1	12	MXTFCM	\$84,417
400	1800	4000	5009/10/11US	SLEEVE	5000	4004FTQL11E-A	50	94.1		MXTFCM	\$80,410
400	1800	4000	5009/10/11US	SLEEVE	5000	4004FTQL11E-C	50	94.1	12	MXTFCM	\$102,850
400	1200	4000	5009/10/11US	ANTI-FRICTION	6500	4006FTAL11E-A	61	94.5		MXTFCM	\$65,480
400	1200	4000	5009/10/11US	ANTI-FRICTION	5000	4006FTAL11E-C	61	94.5	12	MXTFCM	\$87,920
400	900	4000	5809/10/11US	ANTI-FRICTION	6800	4008FTAL11E-A	60.5	94.1		MXTFCM	\$81,746
400	900	4000	5809/10/11US	ANTI-FRICTION	6800	4008FTAL11E-C	60.5	94.1	12	MXTFCM	\$103,196
450	3600	4000	5009/10/11USS	ANTI-FRICTION	4594	4503FTAL11F-A	59	94.5	4	MXTFCM	\$62,661
450	3600	4000	5009/10/11USS	ANTI-FRICTION	5052	4503FTAL11F-C	56	95.4	4, 12	MXTFCM	\$85,100
450	3600	4000	5809/10/11USS	SLEEVE	7000	4503FTQL11F-A	56	94.5	4	MXTFCM	\$94,680
450	3600	4000	5809/10/11USS	SLEEVE	6500	4503FTQL11F-C	56	94.5	4, 12	MXTFCM	\$107,734
450	1800	4000	5009/10/11US	ANTI-FRICTION	4730	4504FTAL11E-A	63	95		MXTFCM	\$65,651
450	1800	4000	5009/10/11US	ANTI-FRICTION	5000	4504FTAL11E-C	56	94.1	12	MXTFCM	\$88,092
450	1800	4000	5009/10/11US	SLEEVE	5000	4504FTQL11E-A	56	94.1		MXTFCM	\$84,085
450	1800	4000	5009/10/11US	SLEEVE	5000	4504FTQL11E-C	56	94.1	12	MXTFCM	\$106,525
450	1200	4000	5009/10/11US	ANTI-FRICTION	5003	4506FTAL11E-A	70	94.5		MXTFCM	\$70,750
450	1200	4000	5009/10/11US	ANTI-FRICTION	5000	4506FTAL11E-C	70	94.1	12	MXTFCM	\$94,760
450	1200	4000	5809/10/11US	SLEEVE	5003	4506FTQL11E-A	70	94.5		MXTFCM	\$94,274
450	1200	4000	5809/10/11US	SLEEVE	5000	4506FTQL11E-C	70	94.1	12	MXTFCM	\$115,724
450	900	4000	5809/10/11US	ANTI-FRICTION	6900	4508FTAL11E-A	68	94.5		MXTFCM	\$84,714
450	900	4000	5809/10/11US	ANTI-FRICTION	6900	4508FTAL11E-C	68	94.5	12	MXTFCM	\$106,164
500	3600	4000	5809/10/11USS	ANTI-FRICTION	6500	5003FTAL11F-A	66	94.5	4	MXTFCM	\$109,239
500	3600	4000	5809/10/11USS	ANTI-FRICTION	7000	5003FTAL11F-C	62	94.5	4, 12	MXTFCM	\$77,616
500	3600	4000	5809/10/11USS	SLEEVE	7000	5003FTQL11F-A	66	94.5	4	MXTFCM	\$102,193
500	3600	4000	5809/10/11USS	SLEEVE	6500	5003FTQL11F-C	62	94.5	4, 12	MXTFCM	\$96,850
500	1800	4000	5009/10/11US	ANTI-FRICTION	4892	5004FTAL11E-A	70	95		MXTFCM	\$68,367
500	1800	4000	5009/10/11US	ANTI-FRICTION	6800	5004FTAL11E-C	70	95	12	MXTFCM	\$90,806

Totally Enclosed

DURA-BULL®

> High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
500	1800	4000	5009/10/11US	SLEEVE	5000	5004FTQL11E-A	62	94.1		MXTFCM	\$90,806
500	1800	4000	5009/10/11US	SLEEVE	5000	5004FTQL11E-C	62	94.1	4, 12	MXTFCM	\$86,798
500	1200	4000	5809/10/11US	ANTI-FRICTION	6274	5006FTAL11E-A	69	95.4		MXTFCM	\$80,163
500	1200	4000	5809/10/11US	ANTI-FRICTION	6500	5006FTAL11E-C	65	94.5	12	MXTFCM	\$106,460
500	1200	4000	5809/10/11US	SLEEVE	6274	5006FTQL11E-A	69	95.4		MXTFCM	\$95,663
500	1200	4000	5809/10/11US	SLEEVE	6500	5006FTQL11E-C	65	94.5	12	MXTFCM	\$117,113
500	900	4000	5809/10/11US	ANTI-FRICTION	7000	5008FTAL11E-A	61	94.1		MXTFCM	\$91,662
500	900	4000	5809/10/11US	ANTI-FRICTION	7000	5008FTAL11E-C	61	94.1	12	MXTFCM	\$113,112
600	3600	4000	5809/10/11USS	ANTI-FRICTION	7016	6003FTAL11F-A	78	95	4	MXTFCM	\$81,231
600	3600	4000	5809/10/11USS	ANTI-FRICTION	7000	6003FTAL11F-C	74	95	4, 12	MXTFCM	\$105,807
600	3600	4000	5809/10/11USS	SLEEVE	7000	6003FTQL11F-A	74	95	4	MXTFCM	\$100,466
600	3600	4000	5809/10/11USS	SLEEVE	6500	6003FTQL11F-C	74	95	4, 12	MXTFCM	\$125,042
600	3600	4000	6809/10/11USS	SLEEVE	15000	6003FTQL11F-CF	74	94.1	4, 12	MXTFCM	\$156,701
600	1800	4000	5809/10/11US	ANTI-FRICTION	6714	6004FTAL11E-A	78	94.5		MXTFCM	\$83,646
600	1800	4000	5809/10/11US	ANTI-FRICTION	6535	6004FTAL11E-C	76	94.5	12	MXTFCM	\$108,222
600	1800	4000	5809/10/11US	SLEEVE	7000	6004FTQL11E-A	75	95		MXTFCM	\$102,880
600	1800	4000	5809/10/11US	SLEEVE	7000	6004FTQL11E-C	76	94.5	12	MXTFCM	\$127,456
600	1200	4000	5809/10/11US	ANTI-FRICTION	6681	6006FTAL11E-A	83	95.8		MXTFCM	\$90,230
600	1200	4000	5809/10/11US	ANTI-FRICTION	6681	6006FTAL11E-C	83	95.8	12	MXTFCM	\$111,680
600	1200	4000	5809/10/11US	SLEEVE	6681	6006FTQL11E-A	83	95.8		MXTFCM	\$105,730
600	1200	4000	5809/10/11US	SLEEVE	6681	6006FTQL11E-C	83	95.8	12	MXTFCM	\$127,180
600	900	4000	6809/10/11US	ANTI-FRICTION	15000	6008FTAL11E-C	85	95.4	12	MXTFCM	\$172,229
600	900	4000	6809/10/11US	SLEEVE	15000	6008FTQL11E-C	85	95.4	12	MXTFCM	\$187,729
700	3600	4000	6809/10/11USS	SLEEVE	14000	7003FTQL11E-C	86	94.1	4, 12	MXTFCM	\$164,320
700	1800	4000	5809/10/11US	ANTI-FRICTION	7047	7004FTAL11E-A	92	95		MXTFCM	\$91,874
700	1800	4000	5809/10/11US	ANTI-FRICTION	6600	7004FTAL11E-C	88	94.5	12	MXTFCM	\$116,452
700	1800	4000	5809/10/11US	SLEEVE	7000	7004FTQL11E-A	86	95		MXTFCM	\$111,109
700	1800	4000	5809/10/11US	SLEEVE	7000	7004FTQL11E-C	88	94.5	12	MXTFCM	\$135,686
700	1200	4000	5809/10/11US	ANTI-FRICTION	7084	7006FTAL11E-A	96	95.8		MXTFCM	\$95,400
700	1200	4000	5809/10/11US	ANTI-FRICTION	7084	7006FTAL11E-C	96	95.8	12	MXTFCM	\$116,850
700	900	4000	6809/10/11US	ANTI-FRICTION	15000	7008FTAL11E-C	99	95.4	12	MXTFCM	\$173,586
700	900	4000	6809/10/11US	SLEEVE	15000	7008FTQL11E-C	99	95.4	12	MXTFCM	\$189,086
800	3600	4000	6809/10/11USS	SLEEVE	14000	8003FTQL11E-C	97	94.5	4, 12	MXTFCM	\$173,480
800	1800	4000	5809/10/11US	ANTI-FRICTION	7237	8004FTAL11E-A	105	95		MXTFCM	\$93,989
800	1800	4000	5809/10/11US	ANTI-FRICTION	7000	8004FTAL11E-C	100	95	12	MXTFCM	\$118,566
800	1800	4000	5809/10/11US	SLEEVE	7000	8004FTQL11E-A	102	95		MXTFCM	\$113,223
800	1800	4000	5809/10/11US	SLEEVE	7000	8004FTQL11E-C	100	95	12	MXTFCM	\$137,801
800	1200	4000	6809/10/11US	ANTI-FRICTION	9000	8006FTAL11E-C	101	95.8	12	MXTFCM	\$158,664
800	1200	4000	6809/10/11US	SLEEVE	9000	8006FTQL11E-C	101	95.8	12	MXTFCM	\$172,382
800	900	4000	6809/10/11US	ANTI-FRICTION	15000	8008FTAL11E-C	114	95.8	12	MXTFCM	\$175,182
800	900	4000	6809/10/11US	ANTI-FRICTION	15000	8008FTAL11E-C	114	95.8	12	MXTFCM	\$175,182
900	3600	4000	6809/10/11USS	SLEEVE	14500	9003FTQL11E-C	109	95	4, 12	MXTFCM	\$186,628
900	1800	4000	6809/10/11US	ANTI-FRICTION	9000	9004FTAL11E-C	115	94.5	12	MXTFCM	\$172,542
900	1800	4000	6809/10/11US	SLEEVE	9000	9004FTQL11E-C	115	94.5	12	MXTFCM	\$185,330
900	1200	4000	6809/10/11US	ANTI-FRICTION	9000	9006FTAL11E-C	113	95.8	12	MXTFCM	\$176,420
900	1200	4000	6809/10/11US	SLEEVE	9000	9006FTQL11E-C	113	95.8	12	MXTFCM	\$189,868
1000	3600	4000	6809/10/11USS	SLEEVE	15000	M203FTQL11E-C	121	95.4	4, 12	MXTFCM	\$208,250
1000	1800	4000	6809/10/11US	ANTI-FRICTION	9000	M204FTAL11E-C	127	94.5	12	MXTFCM	\$195,409
1000	1800	4000	6809/10/11US	SLEEVE	9000	M204FTQL11E-C	127	94.5	12	MXTFCM	\$206,884

Totally Enclosed

DURA-BULL®

> High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
1000	1200	4000	6809/10/11US	ANTI-FRICTION	9000	M206FTAL11E-C	127	94.5	12	MXTFCM	\$185,664
1000	1200	4000	6809/10/11US	SLEEVE	9000	M206FTQL11E-C	127	94.5	12	MXTFCM	\$207,114
1250	1800	4000	6809/10/11US	ANTI-FRICTION	9000	M254FTAL11E-C	158	95	12	MXTFCM	\$204,312
1250	1800	4000	6809/10/11US	SLEEVE	9000	M254FTQL11E-C	158	95	12	MXTFCM	\$214,388

FL Amps and FL EFF are average expected design values and not guaranteed.

The weights listed above are estimated.

Please contact Toshiba for information on product availability.

"CF" = Consult Factory

Totally Enclosed Explosion Proof (TEXP)

> High Efficiency



Explosion Proof Features:

- Frame Sizes; 449T, 509, 5800, 680 and 6800
- Copper Bar Design only
- Insulated Sleeve Bearings on both ends
- Thermally Protected Winding
- Space Heaters in Separate Auxiliary Terminal Box
- Bearing RTD Provisions - F2
- Insulated NDE Ball Bearing
- IP55 Protection
- Non Sparking brass Shaft seal on DE
- Cast Iron Main T/box

The general purpose, totally enclosed explosion proof, premium efficiency motor series is built to meet the UL and CSA Listed Hazardous Locations requirements. This product line is designed for use in Class I, Division 1, Group D, and Class II, Division 1, Groups F, and G. It is ideal for indoor and outdoor use and offers the performance and reliability the motor industry has come to expect from Toshiba, which makes the Explosion Proof motor the clear choice for your toughest environments and applications.

Product Scope:

Horsepower:	200 to 1000 HP
Speed:	3600, 1800, 1200, 900, or 720 RPM
Voltage:	2300/4000 or 4000 V*
Enclosure:	Totally Enclosed Fan Cooled
Frame Size:	449T Through 6811
Construction:	Cast Iron (Frame, End Brackets, and Terminal Box)
Vibration:	Typically 0.12 Inches/Second or Less (Unfiltered)
Insulation:	Class F

*Contact Toshiba for additional voltage options

- Cast iron fan cover for 509 and smaller (Option for fabricated steel) and Fabricated Steel fan cover for 5800 and larger
- Div1, Class I – Group D (Consult factory for Group C option)
- Div1, Class II – Group F&G (Consult Factory for Group E option)
- Consult factory for applicable temperature code
- UL listed File No. E43726
- CSA Master Contract – MC 200618

HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
200	3600	2300/4000	N449TS	ANTI-FRICTION	3500	2003XPAK11B-C	43 / 24.2	92.9	4, 12	MXTFCM	\$60,432
200	1800	2300/4000	N449T	ANTI-FRICTION	3500	2004XPAK11A-C	45 / 25.8	93.1	12	MXTFCM	\$59,349
200	1200	2300/4000	N449T	ANTI-FRICTION	3500	2006XPAK11A-C	48 / 27.3	93.8	12	MXTFCM	\$64,975
200	900	4000	509E	ANTI-FRICTION	4000	2008XPAL11A-C	31.7	94.1	12	MXTFCM	\$71,112
200	720	4000	D509E	ANTI-FRICTION	4000	F2009YLF3I-C	32.1	92.6	12	MXTFCM	\$83,486
250	3600	4000	509US	ANTI-FRICTION	4000	2503XPAL11F-C	30.2	93.9	4, 12	MXTFCM	\$69,047
250	1800	2300/4000	449T	ANTI-FRICTION	3500	2504XPAK11A-C	56 / 32.1	93.5	12	MXTFCM	\$63,615
250	1200	4000	509E	ANTI-FRICTION	4000	2506XPAL11E-C	33.9	94.2	12	MXTFCM	\$73,516
250	900	4000	D509E	ANTI-FRICTION	4000	2508XPAL11E-C	38.6	94.5	12	MXTFCM	\$82,812
250	720	4000	D509E	ANTI-FRICTION	4000	F2509YLF3I-C	40	93.3	12	MXTFCM	\$85,305
300	3600	4000	H509US	ANTI-FRICTION	4500	3003XPAL11F-C	36.3	94.7	4, 12	MXTFCM	\$84,054
300	1800	4000	509E	ANTI-FRICTION	4000	3004XPAL11E-C	38.5	93.8	12	MXTFCM	\$68,436
300	1200	4000	509E	ANTI-FRICTION	4000	3006XPAL11E-C	40.5	94.6	12	MXTFCM	\$74,098
300	900	4000	H509E	ANTI-FRICTION	4500	3008XPAL11E-C	45.3	94.8	12	MXTFCM	\$89,087
300	720	4000	H509E	ANTI-FRICTION	4500	F3009YLF3I-C	47.9	94	12	MXTFCM	\$92,908
350	3600	4000	H509US	ANTI-FRICTION	4500	3503XPAL11F-C	42.3	95.2	4, 12	MXTFCM	\$85,744

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed
Explosion Proof (TEXP)
> High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
350	1800	4000	509E	ANTI-FRICTION	4000	3504XPAL11E-C	44.8	94.2	12	MXTFCM	\$73,830
350	1200	4000	D509E	ANTI-FRICTION	4500	3506XPAL11E-C	47	94.9	12	MXTFCM	\$80,537
350	900	4000	H509E	ANTI-FRICTION	4500	3508XPAL11E-C	51.8	94.8	12	MXTFCM	\$90,896
350	720	4000	5810L	ANTI-FRICTION	6500	F3509YLF3I-C	55.7	94.5	12	MXTFCM	\$131,636
400	3600	4000	H509US	ANTI-FRICTION	4500	4003XPAL11F-C	48.3	95.5	4, 12	MXTFCM	\$88,884
400	1800	4000	D509E	ANTI-FRICTION	4500	4004XPAL11E-C	51.1	94.5	12	MXTFCM	\$82,254
400	1200	4000	H509E	ANTI-FRICTION	4500	4006XPAL11E-C	53.5	95.1	12	MXTFCM	\$87,498
400	900	4000	5811L	ANTI-FRICTION	7000	4008XPAL11E-C	58.3	94.7	12	MXTFCM	\$132,361
400	720	4000	686S	ANTI-FRICTION	7500	F4009YLF3I-C	63.6	95	12	MXTFCM	\$141,003
450	3600	4000	5810S	ANTI-FRICTION	6500	4503XPAL11F-C	54.3	95.7	4, 12	MXTFCM	\$130,428
450	1800	4000	H509E	ANTI-FRICTION	5000	4504XPAL11E-C	57.4	94.8	12	MXTFCM	\$87,293
450	1200	4000	H509E	ANTI-FRICTION	5000	4506XPAL11E-C	59.9	95.3	12	MXTFCM	\$88,408
450	900	4000	688S	ANTI-FRICTION	7500	4508XPAL11E-C	64.6	94.5	12	MXTFCM	\$140,172
450	720	4000	688S	ANTI-FRICTION	7500	F4509YLF3I-C	71.4	95.4	12	MXTFCM	\$148,838
500	3600	4000	5811S	ANTI-FRICTION	7000	5003XPAL11F-C	60.3	95.7	4, 12	MXTFCM	\$135,259
500	1800	4000	H509E	ANTI-FRICTION	4500	5004XPAL11E-C	63.7	95.1	12	MXTFCM	\$89,693
500	1200	4000	5810L	ANTI-FRICTION	6500	5006XPAL11E-C	66.4	95.4	12	MXTFCM	\$134,051
500	900	4000	688S	ANTI-FRICTION	7500	5008XPAL11E-C	70.8	94.3	12	MXTFCM	\$151,877
500	720	4000	6809L	ANTI-FRICTION	11000	F5009YLF3I-C	79.2	94.2	12	MXTFCM	\$174,750
600	3600	4000	688H	SLEEVE	7500	6003XPQL11F-C	72.3	95.7	4, 12	MXTFCM	\$154,920
600	1800	4000	688S	ANTI-FRICTION	7500	6004XPAL11E-C	76.2	95.5	12	MXTFCM	\$140,259
600	1200	4000	6809L	ANTI-FRICTION	11000	6006XPAL11E-C	79.2	95.3	12	MXTFCM	\$169,352
600	900	4000	6809L	ANTI-FRICTION	11000	6008XPAL11E-C	83.1	94.1	12	MXTFCM	\$173,837
600	720	4000	6811L	ANTI-FRICTION	12000	F6009YLF3I-C	94.8	94	12	MXTFCM	\$192,017
700	3600	4000	6810H	SLEEVE	11000	7003XPQL11F-C	84.2	95.7	4, 12	MXTFCM	\$180,668
700	1800	4000	6809L	ANTI-FRICTION	11000	7004XPAL11E-C	88.7	95.9	12	MXTFCM	\$174,750
700	1200	4000	6809L	ANTI-FRICTION	11000	7006XPAL11E-C	92	95.2	12	MXTFCM	\$177,334
700	900	4000	6810L	ANTI-FRICTION	11000	7008XPAL11E-C	95.1	94.4	12	MXTFCM	\$185,561
700	720	4000	6811L	ANTI-FRICTION	12000	F7009YLF3I-C	110.3	94.2	12	MXTFCM	\$194,109
800	3600	4000	6811H	SLEEVE	12000	8003XPQL11F-C	96.2	96	4, 12	MXTFCM	\$195,643
800	1800	4000	6810L	ANTI-FRICTION	11000	8004XPAL11E-C	101.2	96.2	12	MXTFCM	\$184,291
800	1200	4000	6810L	ANTI-FRICTION	11000	8006XPAL11E-C	104.7	95.2	12	MXTFCM	\$192,020
800	900	4000	6811L	ANTI-FRICTION	12000	8008XPAL11E-C	106.9	95.6	12	MXTFCM	\$194,193
800	720	4000	6811L	ANTI-FRICTION	12000	F8009YLF3I-C	125.9	94.5	12	MXTFCM	\$198,300
900	3600	4000	6811H	SLEEVE	12000	9003XPQL11F-C	108.2	97	4, 12	MXTFCM	\$198,058
900	1800	4000	6811L	ANTI-FRICTION	12000	9004XPAL11E-C	113.6	96.3	12	MXTFCM	\$188,273
900	1200	4000	6811L	ANTI-FRICTION	12000	9006XPAL11E-C	117.3	95.3	12	MXTFCM	\$195,462
900	900	4000	6811L	ANTI-FRICTION	12000	9008XPAL11E-C	118.6	98.2	12	MXTFCM	\$196,850
1000	1800	4000	6811L	ANTI-FRICTION	12000	M204XPAL11E-C	126.1	96.3	12	MXTFCM	\$196,850

FL Amps and FL EFF are average expected design values and not guaranteed.
The weights listed above are estimated.
Please contact Toshiba for information on product availability.
“CF”= Consult Factory

Totally Enclosed TEFC 840

> High Efficiency



This TEFC 840 motor offers severe duty IP55 protection for the toughest material processing applications such as compressors, pumps, fans, and conveyors. Its low temperature and low vibration design provides additional durability to withstand these harsh environments, decreasing maintenance requirements and chances of failures while ultimately increasing the motor's lifespan. Built with certain IEEE Std. 841™ specifications, Toshiba's TEFC 840 motor is the ideal solution for the oil and gas, mining and mineral, and pulp and paper industries.

NEW PRODUCT

Product Scope:

Horsepower:	100 to 500 HP
Speed:	3600, 1800, 1200, or 900 RPM
Voltage:	2300/4000 or 4000 V*
Enclosure:	Totally Enclosed Fan Cooled
Frame Size:	449T through 5809/10/11 US

*Contact Toshiba for additional voltage and frame sizes

General Features:

- IP55 Degree of Protection for Motor & T-Boxes
- Non-Contacting Labyrinth Seals on Both Bearings
- Insulation System Capable of Withstanding an Immersion Test in Accordance with NEMA MG 1
- Tropicalization Treatment on Windings
- Cast Iron Frame & Brackets with Cast Iron or Fabricated Steel Terminal Box(es) & Fan Cover
- Grounding Lugs on Motor Frame & Inside Main T-Box
- 0.005-Inch Precision Foot Flatness
- Non-Sparking, Epoxy-Coated Aluminum Internal Fan
- Direction of Rotation Arrow for Motors with Uni-Directional Rotation
- Gasketed Main T-Box & Auxiliary T-Box
- Lead Separator Gaskets
- Corrosion-Resistant Drain & Breather at Lowest Part of Motor Frame & Inside Main T-Box
- Precision Unfiltered Vibration Velocity
 - 2-Pole: 0.10 Inches/Second
 - 4- & 6-Pole: 0.08 Inches/Second
 - 8-Pole: 0.06 Inches/Second
- Severe Duty, Corrosion-Resistant, Rust-Inhibitive Paint System on Motor & Shaft/Rotor Assembly
- Corrosion-Resistant Hardware
- Standard Non-Witnessed Routine Testing per IEEE 112

HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
100	3600	2300/4000	N449TS	ANTI-FRICTION	3500	1003XSAK11B-A	24/14	91.7	4, 6	MXTFCM	\$53,775
100	1800	2300/4000	N449T	ANTI-FRICTION	3500	1004XSAK11A-A	24/14	93	2	MXTFCM	\$53,096
100	1800	2300/4000	N449TS	ANTI-FRICTION	3500	1004XSAK11B-A	24/14	93		MXTFCM	\$53,096
100	1200	2300/4000	N449T	ANTI-FRICTION	3500	1006XSAK11A-A	25/15	94.1	2	MXTFCM	\$61,371
100	1200	2300/4000	N449TS	ANTI-FRICTION	3500	1006XSAK11B-A	25/15	94.1		MXTFCM	\$61,371
125	3600	2300/4000	N449TS	ANTI-FRICTION	3500	1253XSAK11B-A	29/17	92.4	4	MXTFCM	\$54,453
125	1800	2300/4000	N449T	ANTI-FRICTION	3500	1254XSAK11A-A	31/18	93.6	2	MXTFCM	\$53,775
125	1800	2300/4000	N449TS	ANTI-FRICTION	3500	1254XSAK11B-A	31/18	93.6		MXTFCM	\$53,775
125	1200	2300/4000	N449T	ANTI-FRICTION	3500	1256XSAK11A-A	31/18	95	2	MXTFCM	\$64,655
125	1200	2300/4000	N449TS	ANTI-FRICTION	3500	1256XSAK11B-A	31/18	95		MXTFCM	\$62,039
150	3600	2300/4000	N449TS	ANTI-FRICTION	3500	1503XSAK11B-A	35/20	93	4	MXTFCM	\$55,443
150	1800	2300/4000	N449T	ANTI-FRICTION	3500	1504XSAK11A-A	36/21	94.1		MXTFCM	\$54,987
150	1800	2300/4000	N449TS	ANTI-FRICTION	3500	1504XSAK11B-A	36/21	94.1		MXTFCM	\$54,987
150	1200	2300/4000	N449T	ANTI-FRICTION	3500	1506XSAK11A-A	36/21	95		MXTFCM	\$63,031

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed
TEFC 840
> High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
150	1200	2300/4000	N449TS	ANTI-FRICTION	3500	1506XSAK11B-A	36/21	95		MXTFCM	\$63,031
200	3600	2300/4000	N449TS	ANTI-FRICTION	3500	2003XSAK11B-A	45/27	93.6	4	MXTFCM	\$58,264
200	1800	2300/4000	N449T	ANTI-FRICTION	3500	2004XSAK11A-A	47/27	95	2	MXTFCM	\$56,374
200	1800	2300/4000	N449TS	ANTI-FRICTION	3500	2004XSAK11B-A	47/27	95		MXTFCM	\$56,374
200	1200	2300/4000	N449T	ANTI-FRICTION	3500	2006XSAK11A-A	48/28	95.4	2	MXTFCM	\$64,521
200	1200	2300/4000	N449TS	ANTI-FRICTION	3500	2006XSAK11B-A	48/28	95.4		MXTFCM	\$64,521
200	900	4000	5009/10/11 US	ANTI-FRICTION	5000	2008XSAL11E-A	30	93.6	11	MXTFCM	\$73,058
200	900	4000	5009/10/11 US	ANTI-FRICTION	5000	2008XSAL11E-C	28	93	11, 12	MXTFCM	\$93,458
250	3600	2300/4000	N449TS	ANTI-FRICTION	3500	2503XSAK11B-A	57/33	94.5	4	MXTFCM	\$60,629
250	1800	2300/4000	N449T	ANTI-FRICTION	3500	2504XSAK11A-A	59/34	95.4	2	MXTFCM	\$59,027
250	1800	2300/4000	N449TS	ANTI-FRICTION	3500	2504XSAK11B-A	59/34	95.4		MXTFCM	\$59,027
250	1200	2300/4000	N449T	ANTI-FRICTION	3500	2506XSAK11A-A	61/35	95.8	2	MXTFCM	\$67,048
250	1200	2300/4000	N449TS	ANTI-FRICTION	3500	2506XSAK11B-A	61/35	95.8		MXTFCM	\$67,048
250	1200	4000	5009/10/11US	ANTI-FRICTION	5000	2506XSAL11E-AF	37	94.3	11	MXTFCM	\$72,223
250	1200	4000	5009/10/11US	ANTI-FRICTION	5000	2506XSAL11E-CF	37	94.3	11, 12	MXTFCM	\$94,623
250	900	4000	5009/10/11 US	ANTI-FRICTION	5000	2508XSAL11E-A	38	93.6	11	MXTFCM	\$73,637
250	900	4000	5009/10/11 US	ANTI-FRICTION	5000	2508XSAL11E-C	36	93	11, 12	MXTFCM	\$94,860
300	3600	2300/4000	N449TS	ANTI-FRICTION	3500	3003XSAK11B-A	69/40	95	4, 6	MXTFCM	\$61,907
300	1800	2300/4000	N449T	ANTI-FRICTION	3500	3004XSAK11A-A	71/41	95.8	2, 6	MXTFCM	\$61,072
300	1800	2300/4000	N449TS	ANTI-FRICTION	3500	3004XSAK11B-A	71/41	95.8	6	MXTFCM	\$61,072
300	1800	4000	5009/10/11US	ANTI-FRICTION	5000	3004XSAL11E-AF	46	94.5	11	MXTFCM	\$64,493
300	1800	4000	5009/10/11US	ANTI-FRICTION	5000	3004XSAL11E-CF	40	93.5	11, 12	MXTFCM	\$86,932
300	1200	4000	5009/10/11 US	ANTI-FRICTION	5000	3006XSAL11E-A	45	94.5	11	MXTFCM	\$73,094
300	1200	4000	5009/10/11 US	ANTI-FRICTION	5000	3006XSAL11E-C	45	94.5	11, 12	MXTFCM	\$95,534
300	900	4000	5009/10/11 US	ANTI-FRICTION	5000	3008XSAL11E-A	46	94.1	11	MXTFCM	\$76,864
300	900	4000	5009/10/11 US	ANTI-FRICTION	5000	3008XSAL11E-C	43	93.6	11, 12	MXTFCM	\$95,360
350	3600	2300/4000	N449TS	ANTI-FRICTION	3500	3503XSAK11B-A	83/48	93.6	4, 6, 14	MXTFCM	\$63,274
350	3600	4000	5009/10/11 USS	ANTI-FRICTION	5000	3503XSAL11F-A	46	93.6	4, 11	MXTFCM	\$66,178
350	3600	4000	5009/10/11 USS	ANTI-FRICTION	5000	3503XSAL11F-C	44	95	4, 11, 12	MXTFCM	\$88,617
350	1800	2300/4000	L449T	ANTI-FRICTION	3500	3504XSAK11A-A	83/48	95.8	2, 14	MXTFCM	\$62,178
350	1800	2300/4000	L449TS	ANTI-FRICTION	3500	3504XSAK11B-A	83/48	95.8	14	MXTFCM	\$62,178
350	1800	4000	5009/10/11US	ANTI-FRICTION	5000	3504XSAL11E-AF	50	94.7	11	MXTFCM	\$65,387
350	1800	4000	5009/10/11US	ANTI-FRICTION	5000	3504XSAL11E-CF	50	94.7	11, 12	MXTFCM	\$87,827
350	1200	4000	5009/10/11 US	ANTI-FRICTION	5000	3506XSAL11E-A	51	94.1	11	MXTFCM	\$73,957
350	1200	4000	5009/10/11 US	ANTI-FRICTION	5000	3506XSAL11E-C	51	94.5	11, 12	MXTFCM	\$96,398
350	900	4000	5809/10/11 US	ANTI-FRICTION	7000	3508XSAL11E-A	52	94.1	11	MXTFCM	\$88,468
350	900	4000	5809/10/11 US	ANTI-FRICTION	7000	3508XSAL11E-C	50	93.6	11, 12	MXTFCM	\$110,868
400	3600	4000	5009/10/11 USS	ANTI-FRICTION	5000	4003XSAL11F-A	52	94.1	4, 11	MXTFCM	\$71,413
400	3600	4000	5809/10/11 USS	ANTI-FRICTION	7000	4003XSAL11F-C	50	94.1	4, 11, 12	MXTFCM	\$93,854
400	1800	4000	5009/10/11 US	ANTI-FRICTION	5000	4004XSAL11E-A	56	95	11	MXTFCM	\$72,761
400	1800	4000	5009/10/11 US	ANTI-FRICTION	5000	4004XSAL11E-C	50	94.1	11, 12	MXTFCM	\$95,202
400	1200	4000	5009/10/11 US	ANTI-FRICTION	5000	4006XSAL11E-A	61	94.5	11	MXTFCM	\$76,265
400	1200	4000	5009/10/11 US	ANTI-FRICTION	5000	4006XSAL11E-C	58	94.1	11, 12	MXTFCM	\$98,705
400	900	4000	5809/10/11 US	ANTI-FRICTION	7000	4008XSAL11E-A	61	94.1	11	MXTFCM	\$92,531
400	900	4000	5809/10/11 US	ANTI-FRICTION	7000	4008XSAL11E-C	58	93.6	11, 12	MXTFCM	\$114,931
450	3600	4000	5009/10/11 USS	ANTI-FRICTION	5000	4503XSAL11F-A	59	94.5	4, 11	MXTFCM	\$73,446
450	3600	4000	5809/10/11 USS	ANTI-FRICTION	7000	4503XSAL11F-C	56	95.4	4, 11, 12	MXTFCM	\$95,885
450	1800	4000	5009/10/11 US	ANTI-FRICTION	5000	4504XSAL11E-A	63	95	11	MXTFCM	\$76,436
450	1800	4000	5009/10/11 US	ANTI-FRICTION	5000	4504XSAL11E-C	56	94.1	11, 12	MXTFCM	\$98,877

Totally Enclosed

TEFC 840

> High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
450	1200	4000	5009/10/11 US	ANTI-FRICTION	5000	4506XSAL11E-A	70	94.5	11	MXTFCM	\$81,535
450	1200	4000	5009/10/11 US	ANTI-FRICTION	5000	4506XSAL11E-C	66	94.1	11, 12	MXTFCM	\$105,545
450	900	4000	5809/10/11 US	ANTI-FRICTION	7000	4508XSAL11E-A	68	94.5	11	MXTFCM	\$95,499
450	900	4000	5809/10/11 US	ANTI-FRICTION	7000	4508XSAL11E-C	64	94.1	11, 12	MXTFCM	\$117,899
500	3600	4000	5809/10/11 USS	ANTI-FRICTION	7000	5003XSAL11F-A	66	94.5	4, 11	MXTFCM	\$88,401
500	3600	4000	5809/10/11 USS	ANTI-FRICTION	7000	5003XSAL11F-C	62	94.5	4, 12	MXTFCM	\$112,978
500	1800	4000	5009/10/11 US	ANTI-FRICTION	5000	5004XSAL11E-A	70	95	11	MXTFCM	\$79,152
500	1800	4000	5009/10/11 US	ANTI-FRICTION	5000	5004XSAL11E-C	62	94.1	11, 12	MXTFCM	\$101,591
500	1200	4000	5809/10/11 US	ANTI-FRICTION	7000	5006XSAL11E-A	69	95.4	11	MXTFCM	\$90,948
500	1200	4000	5809/10/11 US	ANTI-FRICTION	7000	5006XSAL11E-C	64	94.5	11, 12	MXTFCM	\$113,348
500	900	4000	5809/10/11 US	ANTI-FRICTION	7000	5008XSAL11E-A	61	94.1	11	MXTFCM	\$102,447
500	900	4000	5809/10/11 US	ANTI-FRICTION	7000	5008XSAL11E-C	58	94.1	11, 12	MXTFCM	\$123,622

FL Amps and FL EFF are average expected design values and not guaranteed.
The weights listed above are estimated.
Please contact Toshiba for information on product availability.
"CF"= Consult Factory

Totally Enclosed TEAAC

> High Efficiency



Toshiba’s general purpose, medium voltage totally enclosed air-to-air cooled motor offering includes a top hat design. Designed to meet the industry’s ever-increasing need for improved energy conservation and product performance, this product line offer exceptionally high torque and a low vibration design, leading to longer life and greater reliability.

Toshiba’s medium voltage motor offerings are completely customizable due to our in-house design, engineering, and manufacturing capabilities. This allows us to not only meet, but exceed your specific application requirements.

Product Scope:

Horsepower:	450 to 8000 HP
Speed:	3600, 1800, 1200, or 900 RPM*
Voltage:	4000 V, Option for 2300 V**
Enclosure:	Totally Enclosed Air-to-Air Cooled
Frame Size:	5010 through 1089
Construction:	Cast Iron (Frame, End Brackets, & Main Terminal Box) & Fabricated Steel (Frame & Main Terminal Box). Thick-Walled Heavy Fabricated Steel Frame for 1080 through 1420, & 8800 Frame
Insulation:	Class F with Class B Rise at 1.0 Service Factor by RM
Environment:	Suitable for Indoor or Outdoor

*Contact Toshiba for availability on lower speed designs
 **Contact Toshiba for availability on 6000 and 13,200 V, 60 Hz motors

Special Features:

- Multi-Mount Capability on 5811/12US Frame (Optional for 5810/12), 6810/11/12, & 6812/13
- Winding Stator RTDs (100 Ω; Two per Phase) in Auxiliary Terminal Box
- Space Heaters (120 V Single Phase) wired to an auxiliary Terminal Box
- Bearing RTD Provisions
- NDE Insulated Anti-Friction Bearing for 450 & 6800 Frames and Smaller
- NDE Insulated Bearing Housing for 1080 & 8800 Frames
- Insulated Sleeve Bearings for 6800 and Smaller Frames
- Copper Bar Rotor Construction with Phosphorous free brazing

Additional Options Available;
 See Catalog Production Modifications Section

HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
450	1200	4000	T5010L	ANTI-FRICTION	5000	F4506WLF3I-C	56	92.6	12	MXTAAM	\$124,812
450	1200	4000	T5010L	SLEEVE	5000	F4506WLF3I-C	56	93.8	12	MXTAAM	\$140,312
450	900	4000	5811/12US	ANTI-FRICTION	9100	4508TCAL11E-A	68	93.6		MXTAAM	\$108,806
450	900	4000	5811/12US	ANTI-FRICTION	9100	4508TCAL11E-C	63	93.6	12	MXTAAM	\$132,213
450	900	4000	T5012L	ANTI-FRICTION	5500	F4508WLF3I-C	60	94.3	12	MXTAAM	\$130,412
450	900	4000	T5012L	SLEEVE	5000	F4508WLF3I-C	60	94.3	12	MXTAAM	\$145,912
500	3600	4000	T5010H	ANTI-FRICTION	5000	F5003WLF3I-C	66	93.8	4, 12	MXTAAM	\$106,580
500	3600	4000	T5010H	SLEEVE	5000	F6003WLF3I-C	66	93.8	4, 12	MXTAAM	\$122,080
500	1800	4000	T5010L	ANTI-FRICTION	5000	F5004WLF3L-C	65	93.2	12	MXTAAM	\$121,377
500	1800	4000	T5010L	SLEEVE	5000	F5004WLF3L-C	65	93.2	12	MXTAAM	\$136,877

Totally Enclosed
TEAAC
➤ High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
500	1200	4000	T5010L	ANTI-FRICTION	5000	F5006WLF3I-C	73	93.5	12	MXTAAM	\$126,360
500	1200	4000	T5010L	SLEEVE	5000	F5006WFLI-C	73	93.5	12	MXTAAM	\$141,860
500	900	4000	5811/12US	ANTI-FRICTION	9100	5008TCAL11E-A	75	93.6		MXTAAM	\$109,211
500	900	4000	5811/12US	ANTI-FRICTION	9100	5008TCAL11E-C	70	94.1	12	MXTAAM	\$132,618
500	900	4000	T5012L	ANTI-FRICTION	5500	F5008WLF3I-C	75	93.9	12	MXTAAM	\$136,477
500	900	4000	T5012L	SLEEVE	5000	F5008WFLI-C	75	93.9	12	MXTAAM	\$151,977
600	3600	4000	T5010H	ANTI-FRICTION	5000	F6003WLF3I-C	79	94.3	4, 12	MXTAAM	\$108,777
600	3600	4000	T5010H	SLEEVE	5000	F6003WFLI-C	79	94.3	4, 12	MXTAAM	\$124,277
600	1800	4000	T5010L	ANTI-FRICTION	5000	F6004WLF3I-C	75	93.4	12	MXTAAM	\$123,575
600	1800	4000	T5010L	SLEEVE	5000	F6004WFLI-C	75	93.4	12	MXTAAM	\$139,075
600	1200	4000	5811/12US	ANTI-FRICTION	9100	6006TCAL11E-A	85	93.6		MXTAAM	\$110,757
600	1200	4000	5811/12US	ANTI-FRICTION	9100	6006TCAL11E-C	80	94.1	12	MXTAAM	\$134,163
600	1200	4000	T5010L	ANTI-FRICTION	5000	F6006WLF3I-C	93	94.2	12	MXTAAM	\$127,650
600	1200	4000	T5010L	SLEEVE	5000	F6006WFLI-C	93	94.2	12	MXTAAM	\$143,150
600	900	4000	5811/12US	ANTI-FRICTION	9100	6008TCAL11E-A	89	93.6		MXTAAM	\$111,191
600	900	4000	5811/12US	ANTI-FRICTION	9100	6008TCAL11E-C	83	94.1	12	MXTAAM	\$134,599
700	3600	4000	5811/12USS	ANTI-FRICTION	9100	7003TCAL11F-A	89	94.5	4	MXTAAM	\$93,727
700	3600	4000	5811/12USS	ANTI-FRICTION	9100	7003TCAL11F-C	87	95	4, 12	MXTAAM	\$117,134
700	3600	4000	T5010H	ANTI-FRICTION	5000	F7003WLF3I-C	91	94.2	4, 12	MXTAAM	\$109,640
700	3600	4000	5811/12USS	SLEEVE	9100	7003TCQL11F-A	89	93.6	4	MXTAAM	\$112,045
700	3600	4000	5811/12USS	SLEEVE	9100	7003TCQL11F-C	87	94.1	4, 12	MXTAAM	\$135,452
700	3600	4000	T5010H	SLEEVE	5000	F7003WFLI-C	91	94.2	4, 12	MXTAAM	\$150,952
700	1800	4000	5811/12US	ANTI-FRICTION	9100	7005TCAL11E-A	90	94.5	4	MXTAAM	\$106,495
700	1800	4000	5811/12US	ANTI-FRICTION	9100	7005TCAL11E-C	89	94.5	4, 12	MXTAAM	\$129,902
700	1800	4000	T5010L	ANTI-FRICTION	5000	F7004WLF3I-C	95	93.9	4	MXTAAM	\$128,685
700	1800	4000	5811/12US	SLEEVE	9100	7005TCQL11E-A	90	94.5	4	MXTAAM	\$124,813
700	1800	4000	5811/12US	SLEEVE	9100	7005TCQL11E-C	89	94.5	12	MXTAAM	\$148,221
700	1800	4000	T5010L	SLEEVE	5000	F7004WFLI-C	95	93.9	12	MXTAAM	\$144,185
700	1200	4000	5811/12US	ANTI-FRICTION	9100	7006TCAL11E-A	100	93.6	14	MXTAAM	\$115,868
700	1200	4000	5811/12US	ANTI-FRICTION	9100	7006TCAL11E-C	93	94.1	12, 14	MXTAAM	\$139,275
700	1200	4000	6810/11/12US	ANTI-FRICTION	15000	7007TCAL11E-CF	95	94.5	4	MXTAAM	\$197,664
700	1200	4000	6810/11/12US	SLEEVE	15500	7007TCQL11E-CF	95	94.5	4, 12	MXTAAM	\$209,478
700	900	4000	T5012L	ANTI-FRICTION	5500	F7008WLF3I-C	99	94.9	12	MXTAAM	\$139,640
700	900	4000	T5012L	SLEEVE	5000	F7008WFLI-C	99	94.9	12	MXTAAM	\$155,140
800	3600	4000	5811/12USS	ANTI-FRICTION	9100	8003TCAL11F-A	101	95	4	MXTAAM	\$96,376

Totally Enclosed

TEAAC

> High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
800	3600	4000	5811/12USS	ANTI-FRICTION	9100	8003TCAL11F-C	99	95.4	4, 12	MXTAAM	\$119,782
800	3600	4000	T5010H	ANTI-FRICTION	5000	F8003WLF3I-C	99	95.6	4, 12	MXTAAM	\$112,312
800	3600	4000	5811/12USS	SLEEVE	9100	8003TCQL11F-A	101	94.1	4	MXTAAM	\$114,694
800	3600	4000	5811/12USS	SLEEVE	9100	8003TCQL11F-C	99	94.5	4, 12	MXTAAM	\$138,101
800	3600	4000	T5010H	SLEEVE	5000	F8003WLFLI-C	99	95.6	4, 12	MXTAAM	\$127,812
800	1800	4000	5811/12US	ANTI-FRICTION	9100	8005TCAL11E-A	105	94.5	4	MXTAAM	\$108,207
800	1800	4000	5811/12US	ANTI-FRICTION	9100	8005TCAL11E-C	101	95	4, 12	MXTAAM	\$131,614
800	1800	4000	T5010L	ANTI-FRICTION	5000	F8004WLF3I-C	107	93.5	4	MXTAAM	\$132,472
800	1800	4000	5811/12US	SLEEVE	9100	8005TCQL11E-A	105	94.5	4	MXTAAM	\$126,525
800	1800	4000	5811/12US	SLEEVE	9100	8005TCQL11E-C	101	95	12	MXTAAM	\$149,933
800	1800	4000	T5010L	SLEEVE	5000	F8004WLFLI-C	107	93.5	12	MXTAAM	\$147,972
800	1200	4000	6810/11/12US	ANTI-FRICTION	15000	8007TCAL11E-C	108	94.5	4	MXTAAM	\$201,360
800	1200	4000	T6808L	ANTI-FRICTION	6400	F8006WLF3I-C	108	94.8	4, 12	MXTAAM	\$202,480
800	1200	4000	6810/11/12US	SLEEVE	15500	8007TCQL11E-C	108	94.5	12	MXTAAM	\$214,740
800	1200	4000	T6808L	SLEEVE	9700	F8006WLFLI-C	108	94.8	12	MXTAAM	\$217,980
800	900	4000	T6808L	ANTI-FRICTION	6400	F8008WLF3I-C	108	94.9	12	MXTAAM	\$224,360
800	900	4000	T6808L	SLEEVE	9700	F8008WLFLI-C	108	94.9	12	MXTAAM	\$239,860
900	3600	4000	5811/12USS	ANTI-FRICTION	9100	9003TCAL11F-A	113	95	4	MXTAAM	\$103,535
900	3600	4000	5811/12USS	ANTI-FRICTION	9100	9003TCAL11F-C	111	95.4	4, 12	MXTAAM	\$126,942
900	3600	4000	T5012H	ANTI-FRICTION	5500	F9003WLF3I-C	110	95.8	4, 12	MXTAAM	\$115,824
900	3600	4000	5811/12USS	SLEEVE	9100	9003TCQL11F-A	113	94.5	4	MXTAAM	\$121,854
900	3600	4000	5811/12USS	SLEEVE	9100	9003TCQL11F-C	111	94.5	4, 12	MXTAAM	\$145,260
900	3600	4000	T5012H	SLEEVE	5000	F9003WLFLI-C	110	95.8	4, 12	MXTAAM	\$131,324
900	1800	4000	5811/12US	ANTI-FRICTION	9100	9005TCAL11E-A	115	95	4	MXTAAM	\$109,767
900	1800	4000	5811/12US	ANTI-FRICTION	9100	9005TCAL11E-C	114	95	4, 12	MXTAAM	\$133,174
900	1800	4000	T5012L	ANTI-FRICTION	5500	F9004WLF3I-C	117	95.6	4	MXTAAM	\$135,508
900	1800	4000	5811/12US	SLEEVE	9100	9005TCQL11E-A	115	95	4	MXTAAM	\$128,085
900	1800	4000	5811/12US	SLEEVE	9100	9005TCQL11E-C	114	95	12	MXTAAM	\$151,493
900	1800	4000	T5012L	SLEEVE	5000	F9004WLFLI-C	117	95.6	12	MXTAAM	\$151,008
900	1200	4000	6810/11/12US	ANTI-FRICTION	15000	9007TCAL11E-C	122	94.5	4, 12	MXTAAM	\$204,450
900	1200	4000	T6808L	ANTI-FRICTION	6400	F9006WLF3I-C	124	94.5	4, 12	MXTAAM	\$205,699
900	1200	4000	6810/11/12US	SLEEVE	15500	9007TCQL11E-C	122	94.5	12	MXTAAM	\$218,360
900	1200	4000	T6808L	SLEEVE	9700	F9006WLFLI-C	124	94.5	12	MXTAAM	\$221,199
900	900	4000	T6810L	ANTI-FRICTION	8200	F9008WLF3I-C	121	95	12	MXTAAM	\$229,587
900	900	4000	T6810L	SLEEVE	9700	F9008WLFLI-C	121	95	12	MXTAAM	\$245,087
1000	3600	4000	5811/12USS	ANTI-FRICTION	9100	M203TCAL11F-A	125	95.4	4	MXTAAM	\$117,844
1000	3600	4000	5811/12USS	ANTI-FRICTION	9100	M203TCAL11F-C	122	95.8	4, 12	MXTAAM	\$141,252

Totally Enclosed
TEAAC
 ➤ High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
1000	3600	4000	T5012H	ANTI-FRICTION	5500	F10003WLF3I-C	122	96	4, 12	MXTAAM	\$118,680
1000	3600	4000	5811/12USS	SLEEVE	9100	M203TCQL11F-A	125	94.5	4	MXTAAM	\$136,163
1000	3600	4000	5811/12USS	SLEEVE	9100	M203TCQL11F-C	122	95	4, 12	MXTAAM	\$159,570
1000	3600	4000	T5012H	SLEEVE	5000	F10003WFLI-C	122	96	4, 12	MXTAAM	\$134,180
1000	1800	4000	5811/12US	ANTI-FRICTION	9100	M205TCAL11E-A	130	95	4	MXTAAM	\$122,315
1000	1800	4000	5811/12US	ANTI-FRICTION	9100	M205TCAL11E-C	127	95.4	4, 12	MXTAAM	\$145,721
1000	1800	4000	T5012L	ANTI-FRICTION	5500	F10004WLF3I-C	131	95.7	4	MXTAAM	\$144,380
1000	1800	4000	5811/12US	SLEEVE	9100	M205TCQL11E-A	130	95	4	MXTAAM	\$140,633
1000	1800	4000	5811/12US	SLEEVE	9100	M205TCQL11E-C	127	95.4	12	MXTAAM	\$164,040
1000	1800	4000	T5012	SLEEVE	5000	F10004WFLI-C	131	95.7	12	MXTAAM	\$159,880
1000	900	4000	T6812L	ANTI-FRICTION	9700	F10008WLF3I-C	134	95.2	12	MXTAAM	\$236,470
1000	900	4000	T6812L	SLEEVE	9700	F10008WFLI-C	134	95.2	12	MXTAAM	\$251,970
1250	3600	4000	5811/12USS	ANTI-FRICTION	9100	M253TCAL11F-A	155	95.8	3, 4, 14	MXTAAM	\$124,562
1250	3600	4000	5811/12USS	ANTI-FRICTION	9100	M253TCAL11F-C	152	95.8	3, 4, 12, 14	MXTAAM	\$147,968
1250	3600	4000	5811/12USS	SLEEVE	9100	M253TCQL11F-A	155	95	3, 4, 14	MXTAAM	\$142,880
1250	3600	4000	5811/12USS	SLEEVE	9100	M253TCQL11F-C	152	95.4	3, 4, 12, 14	MXTAAM	\$166,287
1250	3600	4000	6810/11/12USS	SLEEVE	15500	M253TCQL11F-CF	152	94.5	4, 12	MXTAAM	\$214,380
1250	1800	4000	6810/11/12US	ANTI-FRICTION	15000	M255TCAL11F-CF	158	95.4	4, 12	MXTAAM	\$202,340
1250	1800	4000	6810/11/12US	SLEEVE	15500	M255TCQL11F-CF	158	95.4	4, 12	MXTAAM	\$213,960
1250	1200	4000	6810/11/12US	ANTI-FRICTION	15000	M257TCAL11F-C	162	95	4, 12	MXTAAM	\$256,302
1250	1200	4000	6810/11/12US	SLEEVE	15500	M257TCQL11F-C	162	95	4, 12	MXTAAM	\$269,410
1250	900	4000	T8808L	ANTI-FRICTION	12000	J1258WLF3I-C	169	95.3	12	MXTAAM	\$265,870
1250	900	4000	T8808L	SLEEVE	15000	J1258WFLI-C	169	95.3	12	MXTAAM	\$281,370
1500	3600	4000	T6808H	SLEEVE	9700	J1503WFLI-C	183	96.2	4, 12	MXTAAM	\$238,680
1500	3600	4000	6810/11/12USS	SLEEVE	15500	M303TCQL11F-C	187	94.5	4, 12	MXTAAM	\$254,621
1500	1800	4000	6810/11/12US	ANTI-FRICTION	15000	M305TCAL11F-C	189	95.4	4, 12	MXTAAM	\$213,470
1500	1800	4000	6810/11/12US	SLEEVE	15500	M305TCQL11F-C	189	95.4	4, 12	MXTAAM	\$228,640
1500	1200	4000	6810/11/12US	ANTI-FRICTION	15000	M307TCAL11F-C	193	95	4, 12	MXTAAM	\$258,360
1500	1200	4000	6810/11/12US	SLEEVE	15500	M307TCQL11F-C	193	95	4, 12	MXTAAM	\$274,058
1500	900	4000	T8808L	ANTI-FRICTION	12000	J1508WLF3I-C	205	95.4	12	MXTAAM	\$278,212
1500	900	4000	T8808L	SLEEVE	15000	J1508WFLI-C	205	95.4	12	MXTAAM	\$293,712
1750	3600	4000	6810/11/12USS	SLEEVE	15500	M353TCQL11F-C	215	95	4, 12	MXTAAM	\$264,399
1750	1800	4000	6810/11/12US	ANTI-FRICTION	15000	M355TCAL11F-C	219	95.4	4, 12	MXTAAM	\$246,302
1750	1800	4000	6810/11/12US	SLEEVE	15500	M355TCQL11F-C	219	95.4	4, 12	MXTAAM	\$258,604
1750	1200	4000	6812/13US	ANTI-FRICTION	15000	M357TCAL11F-C	226	95	4, 12	MXTAAM	\$262,380
1750	1200	4000	6812/13US	SLEEVE	15500	M357TCQL11F-C	226	95	4, 12	MXTAAM	\$276,087
1750	900	4000	R1083J	ANTI-FRICTION	18500	J1758WLF3I-C	245	95.4	12	MXTAAM	\$296,372
1750	900	4000	R1083J	SLEEVE	18500	J1758WFLI-C	245	95.4	12	MXTAAM	\$311,872
2000	3600	4000	6812/13USS	SLEEVE	15500	M403TCQL11F-C	242	95	4, 12	MXTAAM	\$285,760

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed
TEAAC

> High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
2000	1800	4000	6810/11/12US	ANTI-FRICTION	15000	M405TCAL11F-C	250	95.8	4, 12	MXTAAM	\$263,417
2000	1800	4000	6810/11/12US	SLEEVE	15500	M405TCQL11F-C	250	95.8	4, 12	MXTAAM	\$278,005
2000	1200	4000	T6812L	ANTI-FRICTION	9700	J2006WLF3I-C	250	95.3	12	MXTAAM	\$264,580
2000	1200	4000	T6812L	SLEEVE	9700	J2006WFLI-C	250	95.3	12	MXTAAM	\$280,080
2000	900	4000	R1083J	ANTI-FRICTION	18500	J2008WLF3I-C	275	95.6	12	MXTAAM	\$298,660
2000	900	4000	R1083J	SLEEVE	18500	J2008WFLI-C	275	95.6	12	MXTAAM	\$314,160
2500	3600	4000	450-1600	SLEEVE	16000	M503TCQL11F-C	300	95.4	4, 12	MXTAAM	\$309,480
2500	1800	4000	6812/13US	ANTI-FRICTION	15000	M505TCAL11F-C	311	96.2	4, 12	MXTAAM	\$291,227
2500	1800	4000	6812/13US	SLEEVE	15500	M505TCQL11F-C	311	96.2	4, 12	MXTAAM	\$305,125
2500	1200	4000	T8808L	ANTI-FRICTION	12000	J2506WLF3I-C	318	95.9	12	MXTAAM	\$286,941
2500	1200	4000	T8808L	SLEEVE	15000	J2506WFLI-C	318	95.9	12	MXTAAM	\$302,441
2500	900	4000	R1085E	ANTI-FRICTION	20000	J2508WLF3I-C	345	95.7	12	MXTAAM	\$304,568
2500	900	4000	R1085E	SLEEVE	20000	J2508WFLI-C	345	95.7	12	MXTAAM	\$320,068
3000	3600	4000	T8810H	SLEEVE	15000	J3003WFLI-C	370	96.1	4, 12	MXTAAM	\$315,280
3000	1800	4000	450-1600	ANTI-FRICTION	16000	M605TCAL11F-C	371	96.5	4, 12	MXTAAM	\$306,470
3000	1800	4000	450-1600	SLEEVE	16000	M605TCQL11F-C	371	96.5	4, 12	MXTAAM	\$324,708
3000	1200	4000	R1083J	ANTI-FRICTION	18500	J3006WLF3I-C	385	95.9	4, 12	MXTAAM	\$296,780
3000	1200	4000	R1083J	SLEEVE	18500	J3006WFLI-C	385	95.9	12	MXTAAM	\$318,230
3000	900	4000	R1087J	ANTI-FRICTION	23500	J3008WLF3I-C	405	96.3	12	MXTAAM	\$308,412
3000	900	4000	R1087J	SLEEVE	23500	J3008WFLI-C	405	96.3	12	MXTAAM	\$329,862
3500	3600	4000	T8810H	SLEEVE	15000	J3503WFLI-C	431	96.2	4, 12	MXTAAM	\$324,760
3500	1800	4000	T8810L	ANTI-FRICTION	15000	J3504WLF3I-C	431	96.6	12	MXTAAM	\$312,470
3500	1800	4000	T8810L	SLEEVE	15000	J3504WFLI-C	431	96.6	12	MXTAAM	\$333,920
3500	1200	4000	R1085E	ANTI-FRICTION	20000	J3506WLF3I-C	450	96	12	MXTAAM	\$306,715
3500	1200	4000	R1085E	SLEEVE	20000	J3506WFLI-C	450	96	12	MXTAAM	\$328,165
3500	900	4000	R1087E	ANTI-FRICTION	23500	J3508WLF3I-C	470	96.4	12	MXTAAM	\$314,690
3500	900	4000	R1087E	SLEEVE	23500	J3508WFLI-C	470	96.4	12	MXTAAM	\$336,140
4000	3600	4000	T8810T	SLEEVE	15000	J4003WFLI-C	495	96.5	4, 12	MXTAAM	\$328,673
4000	1800	4000	T8810L	ANTI-FRICTION	15000	J4004WLF3I-C	495	96.6	12	MXTAAM	\$316,870
4000	1800	4000	T8810L	SLEEVE	15000	J4004WFLI-C	495	96.6	12	MXTAAM	\$338,320
4000	1200	4000	R1087E	ANTI-FRICTION	23500	J4006WLF3I-C	510	96.7	12	MXTAAM	\$313,470
4000	1200	4000	R1087E	SLEEVE	23500	J4006WFLI-C	510	96.7	12	MXTAAM	\$334,920
4000	900	4000	R1089E	ANTI-FRICTION	27500	J4008WLF3I-C	535	96.5	12	MXTAAM	\$318,690
4000	900	4000	R1089E	SLEEVE	27500	J4008WFLI-C	535	96.5	12	MXTAAM	\$340,140
4500	1800	4000	R1085E	ANTI-FRICTION	20000	J4504WLF3I-C	575	97	12	MXTAAM	\$323,558
4500	1800	4000	R1087E	SLEEVE	23500	J4504WFLI-C	560	96.7	12	MXTAAM	\$345,008
4500	1200	4000	R1087E	ANTI-FRICTION	23500	J4506WLF3I-C	570	96.8	12	MXTAAM	\$319,687
4500	1200	4000	R1087E	SLEEVE	23500	J4506WFLI-C	570	96.8	12	MXTAAM	\$341,137

Totally Enclosed TEAAC > High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
4500	900	4000	R1089E	ANTI-FRICTION	27500	J4508WLF3I-C	600	96.6	12	MXTAAM	\$325,805
4500	900	4000	R1089E	SLEEVE	27500	J4508WLF3I-C	600	96.6	12	MXTAAM	\$347,255
5000	1800	4000	R1087E	ANTI-FRICTION	23500	J5004WLF3I-C	620	96.8	12	MXTAAM	\$329,680
5000	1800	4000	R1087E	SLEEVE	23500	J5004WLF3I-C	620	96.8	12	MXTAAM	\$351,130
5000	1200	4000	R1089E	ANTI-FRICTION	27500	J5006WLF3I-C	635	96.8	12	MXTAAM	\$328,072
5000	1200	4000	R1089E	SLEEVE	27500	J5006WLF3I-C	635	96.8	12	MXTAAM	\$349,522
6000	1800	4000	R1087E	ANTI-FRICTION	23500	J6004WLF3I-C	700	96.5	12	MXTAAM	\$336,804
6000	1800	4000	R1087E	SLEEVE	23500	J6004WLF3I-C	700	96.5	12	MXTAAM	\$358,254
6000	1200	4000	R1089E	ANTI-FRICTION	27500	J6006WLF3I-C	721	96.4	12	MXTAAM	\$337,512
6000	1200	4000	R1089E	SLEEVE	27500	J6006WLF3I-C	721	96.4	12	MXTAAM	\$358,962
7000	1800	4000	R1089E	ANTI-FRICTION	27500	J7004WLF3I-C	815	96.6	12	MXTAAM	\$341,208
7000	1800	4000	R1089E	SLEEVE	27500	J7004WLF3I-C	815	96.6	12	MXTAAM	\$362,658
8000	1800	4000	R1089E	ANTI-FRICTION	27500	J8004WLF3I-C	958	96.8	12	MXTAAM	\$356,812
8000	1800	4000	R1089E	SLEEVE	27500	J8004WLF3I-C	958	96.8	12	MXTAAM	\$378,262

FL Amps and FL EFF are average expected design values and not guaranteed.

The weights listed above are estimated.

Please contact Toshiba for information on product availability.

"CF"= Consult Factory

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed

Water-Air-Cooled

> High Efficiency



NEW

PRODUCT

Toshiba's general purpose, medium voltage totally enclosed water-to-air cooled motor offering includes a top hat design. Designed to meet the industry's ever-increasing need for improved energy conservation and product performance, this product line offer exceptionally high torque and a low vibration design, leading to longer life and greater reliability.

Toshiba's medium voltage motor offerings are completely customizable due to our in-house design, engineering, and manufacturing capabilities. This allows us to not only meet, but exceed your specific application requirements.

Product Scope:

Horsepower:	400 to 5500 HP
Speed:	3600, 1800, 1200, or 900 RPM*
Voltage:	2300/4000 or 4000 V**
Enclosure:	Totally Enclosed Water-to-Air Cooled
Frame Size:	5012 through 450-1600
Construction:	Cast Iron (Frame, End Brackets, & Main Terminal Box) For 5012 & 5812 Fabricated Steel Main Box for 6800 and Larger
Insulation:	Class F with Class B Rise at 1.0 Service Factor by RM
Environment:	Suitable for Indoor or Outdoor

*Contact Toshiba for availability on lower speed designs
**Contact Toshiba for availability on 6000 and 13,200 V, 60 Hz motors

Standard Features:

- Winding Stator RTDs (100 Ω; Two per Phase) in Auxiliary Terminal Box
- Space Heaters (120 V Single Phase) in Auxiliary Terminal Box
- Bearing RTD Provisions
- NDE Insulated Anti-Friction Bearing for 5000 & 6800 Frames
- Insulated Sleeve Bearings on Both Ends
- Carbon Steel Single Wall Material. Cooler with 90/10 Cu/Ni Tube Material
- High Pressure Die Cast Aluminum rotor up to 5812USS
- Phosphorous Free Brazing Copper Bar Rotor for 6800 and Larger Frames
- Multi-Mount Frames:
 - 5011/12US
 - 5811/5812US (Option for 5810/12US)
 - 6810/11/12US
 - 6812/13US
- Industrial or Fresh Water inlet for Water-Air Cooler

Special Features:

- Check MVM modification Section for other options

HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
400	3600	2300/4000	5011/12USS	ANTI-FRICTION	5500	4003TWAK11F-A	94/54	93.6	4	MXTWAC	\$71,142
400	3600	2300/4000	5011/12USS	ANTI-FRICTION	5500	4003TWAK11F-C	94/54	92.4	4, 12	MXTWAC	\$94,308
400	3600	2300/4000	5011/12USS	SLEEVE	5500	4003TWQK11F-A	94/54	93	4	MXTWAC	\$87,882
400	3600	2300/4000	5011/12USS	SLEEVE	5500	4003TWQK11F-C	94/54	93	4, 12	MXTWAC	\$111,048
400	1800	2300/4000	5011/12US	ANTI-FRICTION	5500	4004TWAK11E-A	94/54	92.4		MXTWAC	\$73,857
400	1800	2300/4000	5011/12US	ANTI-FRICTION	5500	4004TWAK11E-C	89/51	92.4	12	MXTWAC	\$92,817
400	1200	2300/4000	5011/12US	ANTI-FRICTION	5500	4006TWAK11E-A	97 /56	92.4		MXTWAC	\$84,137
400	1200	2300/4000	5011/12US	ANTI-FRICTION	5500	4006TWAK11E-C	103/60	93.6	12	MXTWAC	\$105,587
400	900	4000	5811/12US	ANTI-FRICTION	7800	4008TWA11E-A	60	94.1		MXTWAC	\$90,960
400	900	4000	5811/12US	ANTI-FRICTION	7800	4008TWA11E-C	60	94.1	12	MXTWAC	\$116,240

Totally Enclosed
Water-Air-Cooled
 ➤ High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
450	3600	2300/4000	5011/12USS	ANTI-FRICTION	5500	4503TWAK11F-A	104/60	94.1	4	MXTWAC	\$72,309
450	3600	2300/4000	5011/12USS	ANTI-FRICTION	5500	4503TWAK11F-C	104/60	93	4, 12	MXTWAC	\$95,475
450	3600	2300/4000	5011/12USS	SLEEVE	5500	4503TWQK11F-A	104/60	93.6	4	MXTWAC	\$89,049
450	3600	2300/4000	5011/12USS	SLEEVE	5500	4503TWQK11F-C	104/60	93.6	4, 12	MXTWAC	\$112,215
450	1800	2300/4000	5011/12US	ANTI-FRICTION	5500	4504TWAK11E-A	106/61	93		MXTWAC	\$75,573
450	1800	2300/4000	5011/12US	ANTI-FRICTION	5500	4504TWAK11E-C	103/59	92.4	12	MXTWAC	\$98,654
450	1200	2300/4000	5011/12US	ANTI-FRICTION	5500	4506TWAK11E-A	113 /65	93		MXTWAC	\$86,050
450	1200	2300/4000	5011/12US	ANTI-FRICTION	5500	4506TWAK11E-C	116/67	94.1	12	MXTWAC	\$109,131
450	900	4000	5811/12US	ANTI-FRICTION	7800	4508TVAL11E-A	66	93.6		MXTWAC	\$93,929
450	900	4000	5811/12US	ANTI-FRICTION	7800	4508TVAL11E-C	61	94.1	12	MXTWAC	\$119,208
500	3600	2300/4000	5011/12USS	ANTI-FRICTION	5500	5003TWAK11F-A	114/66	93.6	4	MXTWAC	\$74,744
500	3600	2300/4000	5011/12USS	ANTI-FRICTION	5500	5003TWAK11F-C	114/66	93	4, 12	MXTWAC	\$97,910
500	3600	2300/4000	5011/12USS	SLEEVE	5500	5003TWQK11F-A	114/66	93.6	4	MXTWAC	\$91,484
500	3600	2300/4000	5011/12USS	SLEEVE	5500	5003TWQK11F-C	114/66	93.6	4, 12	MXTWAC	\$114,650
500	1800	2300/4000	5011/12US	ANTI-FRICTION	5500	5004TWAK11E-A	114/66	93		MXTWAC	\$77,986
500	1800	2300/4000	5011/12US	ANTI-FRICTION	5500	5004TWAK11E-C	112/65	92.4	12	MXTWAC	\$101,068
500	1200	2300/4000	5011/12US	ANTI-FRICTION	5500	5006TWAK11E-A	126/73	93		MXTWAC	\$89,836
500	1200	2300/4000	5011/12US	ANTI-FRICTION	5500	5006TWAK11E-C	130/75	94.1	12	MXTWAC	\$112,917
500	900	4000	5811/12US	ANTI-FRICTION	7800	5008TVAL11E-A	69	94.5		MXTWAC	\$96,684
500	900	4000	5811/12US	ANTI-FRICTION	7800	5008TVAL11E-C	75	93.6	12	MXTWAC	\$121,964
600	3600	2300/4000	5011/12USS	ANTI-FRICTION	5500	6003TWAK11F-A	137/79	94.1	4	MXTWAC	\$77,871
600	3600	2300/4000	5011/12USS	ANTI-FRICTION	5500	6003TWAK11F-C	137/79	93.6	4, 12	MXTWAC	\$101,037
600	3600	2300/4000	5011/12USS	SLEEVE	5500	6003TWQK11F-A	137/79	94.1	4	MXTWAC	\$94,611
600	3600	2300/4000	5011/12USS	SLEEVE	5500	6003TWQK11F-C	137/79	94.1	4, 12	MXTWAC	\$117,777
600	1800	2300/4000	5011/12US	ANTI-FRICTION	5500	6004TWAK11E-A	137/79	93		MXTWAC	\$79,473
600	1800	2300/4000	5011/12US	ANTI-FRICTION	5500	6004TWAK11E-C	130/75	93	12	MXTWAC	\$102,556
600	1200	4000	5811/12US	ANTI-FRICTION	7800	6006TVAL11E-A	86	93		MXTWAC	\$96,194
600	1200	4000	5811/12US	ANTI-FRICTION	7800	6006TVAL11E-C	86	93	12	MXTWAC	\$121,473
600	900	4000	5811/12US	ANTI-FRICTION	7800	6008TVAL11E-A	84	94.5		MXTWAC	\$102,503
600	900	4000	5811/12US	ANTI-FRICTION	7800	6008TVAL11E-C	93	94.1	12	MXTWAC	\$127,782
700	3600	2300/4000	5011/12USS	ANTI-FRICTION	5500	7003TWAK11F-A	159/92	94.1	4	MXTWAC	\$83,462
700	3600	2300/4000	5011/12USS	ANTI-FRICTION	5500	7003TWAK11F-C	158/91	94.1	4, 12	MXTWAC	\$106,628
700	3600	2300/4000	5011/12USS	SLEEVE	5500	7003TWQK11F-A	159/92	94.1	4	MXTWAC	\$100,202
700	3600	2300/4000	5011/12USS	SLEEVE	5500	7003TWQK11F-C	158/91	94.1	4, 12	MXTWAC	\$123,368
700	3600	4000	5811/12USS	ANTI-FRICTION	7800	7003TVAL11F-CF	89	94.5	12	MXTWAC	\$146,534
700	3600	4000	5811/12USS	SLEEVE	8000	7003TWQL11F-AF	88	94.5	4	MXTWAC	\$140,108
700	3600	4000	5811/12USS	SLEEVE	8000	7003TWQL11F-CF	89	94.5	4, 12	MXTWAC	\$186,440
700	1800	2300/4000	5011/12US	ANTI-FRICTION	5500	7004TWAK11E-A	165/95	93.6		MXTWAC	\$85,105
700	1800	2300/4000	5011/12US	ANTI-FRICTION	5500	7004TWAK11E-C	151/87	93.6	12	MXTWAC	\$108,186
700	1200	4000	5811/12US	ANTI-FRICTION	7800	7006TVAL11E-A	94	94.1		MXTWAC	\$97,180
700	1200	4000	5811/12US	ANTI-FRICTION	7800	7006TVAL11E-C	100	94.5	12	MXTWAC	\$122,460
700	900	4000	5811/12US	ANTI-FRICTION	7800	7008TVAL11E-A	99	94.5		MXTWAC	\$105,379
700	900	4000	5811/12US	ANTI-FRICTION	7800	7008TVAL11E-C	108	94.1	12	MXTWAC	\$130,659
800	3600	2300/4000	5011/12USS	ANTI-FRICTION	5500	8003TWAK11F-A	182/ 105	94	4	MXTWAC	\$87,054
800	3600	2300/4000	5011/12USS	ANTI-FRICTION	5500	8003TWAK11F-C	178/ 103	94	4, 12	MXTWAC	\$110,220
800	3600	2300/4000	5011/12USS	SLEEVE	5500	8003TWQK11F-A	182/ 105	94	4	MXTWAC	\$103,794
800	3600	2300/4000	5011/12USS	SLEEVE	5500	8003TWQK11F-C	175 / 101	94.9	4, 12	MXTWAC	\$126,960
800	3600	4000	5811/12USS	ANTI-FRICTION	7800	8003TVAL11F-AF	102	95.2	4	MXTWAC	\$91,412

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed
Water-Air-Cooled
> High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
800	1800	2300/4000	5011/12US	ANTI-FRICTION	5500	8004TWAK11E-A	185 / 107	93.5		MXTWAC	\$89,111
800	1800	2300/4000	5011/12US	ANTI-FRICTION	5500	8004TWAK11E-C	185 / 107	93.5	12	MXTWAC	\$110,135
800	1800	4000	5811/12US	SLEEVE	8000	8004TWQL11E-A	107	93		MXTWAC	\$105,851
800	1800	4000	5811/12US	SLEEVE	8000	8004TWQL11E-C	108	93.6	12	MXTWAC	\$129,017
800	1200	4000	5811/12US	ANTI-FRICTION	7800	8006TWAL11E-A	103	94.5		MXTWAC	\$106,721
800	1200	4000	5811/12US	ANTI-FRICTION	7800	8006TWAL11E-C	108	93.6	12	MXTWAC	\$131,999
800	900	4000	5811/12US	ANTI-FRICTION	7800	8008TWAL11E-C	103	94.5	12	MXTWAC	\$209,345
800	900	4000	5811/12US	SLEEVE	8000	8008TWQL11E-C	108	94.5	12	MXTWAC	\$225,816
900	3600	4000	5811/12USS	ANTI-FRICTION	7800	9003TWAL11F-A	114	95.4	4	MXTWAC	\$98,318
900	3600	4000	5811/12USS	ANTI-FRICTION	7800	9003TWAL11F-C	110	95.8	4, 12	MXTWAC	\$121,484
900	3600	4000	5811/12USS	SLEEVE	8000	9003TWQL11F-A	114	95.3	4	MXTWAC	\$115,058
900	3600	4000	5811/12USS	SLEEVE	8000	9003TWQL11F-C	110	95.7	12	MXTWAC	\$138,224
900	1800	4000	5811/12US	ANTI-FRICTION	7800	9005TWAL11E-A	110	95.4	4	MXTWAC	\$101,193
900	1800	4000	5811/12US	ANTI-FRICTION	7800	9005TWAL11E-C	114	95	4, 12	MXTWAC	\$124,359
900	1800	4000	5811/12US	SLEEVE	8000	9005TWQL11E-A	110	95.4	4	MXTWAC	\$117,933
900	1800	4000	5811/12US	SLEEVE	8000	9005TWQL11E-C	114	95.4	4, 12	MXTWAC	\$141,099
900	1200	4000	5811/12US	ANTI-FRICTION	7800	9006TWAL11E-A	117	95.4		MXTWAC	\$109,316
900	1200	4000	5811/12US	ANTI-FRICTION	7800	9006TWAL11E-C	114	95.4	12	MXTWAC	\$132,482
900	900	4000	5811/12US	ANTI-FRICTION	7800	9008TWAL11E-C	117	95.4	12	MXTWAC	\$218,943
900	900	4000	5811/12US	SLEEVE	8000	9008TWQL11E-C	125	94.5	12	MXTWAC	\$235,414
1000	3600	2300/4000	5011/12USS	SLEEVE	5500	M203TWQK11F-CF	222 / 128	94.7	4, 12	MXTWAC	\$132,343
1000	3600	4000	5811/12USS	ANTI-FRICTION	7800	M203TWAL11F-A	126	95.4	4	MXTWAC	\$103,769
1000	3600	4000	5811/12USS	ANTI-FRICTION	7800	M203TWAL11F-C	122	95.8	4, 12	MXTWAC	\$126,935
1000	3600	4000	5811/12USS	SLEEVE	8000	M203TWQL11F-A	126	95.4	4	MXTWAC	\$120,509
1000	3600	4000	5811/12USS	SLEEVE	8000	M203TWQL11F-C	122	95.8	4, 12	MXTWAC	\$160,415
1000	1800	4000	5811/12USS	ANTI-FRICTION	7800	M205TWAL11E-A	122	95.8	4	MXTWAC	\$105,445
1000	1800	4000	5811/12US	ANTI-FRICTION	7800	M205TWAL11E-C	126	95.4	4, 12	MXTWAC	\$128,611
1000	1800	4000	5811/12US	SLEEVE	8000	M205TWQL11E-A	131	95.4	4	MXTWAC	\$122,185
1000	1800	4000	5811/12US	SLEEVE	8000	M205TWQL11E-C	126	95.4	4, 12	MXTWAC	\$145,351
1000	1200	4000	5811/12US	ANTI-FRICTION	7800	M206TWAL11E-A	131	95.4		MXTWAC	\$112,370
1000	1200	4000	5811/12US	ANTI-FRICTION	7800	M206TWAL11E-C	137	94.5	12	MXTWAC	\$135,536
1000	900	4000	5811/12US	ANTI-FRICTION	7800	M208TWAL11E-C	135	94.5	12	MXTWAC	\$229,733
1000	900	4000	6812/13US	SLEEVE	15000	M208TWQL11E-C	134	95	12	MXTWAC	\$246,204
1250	3600	4000	5811/12USS	ANTI-FRICTION	7800	M253TWAL11F-A	158	95.4	4	MXTWAC	\$108,332
1250	3600	4000	5811/12USS	ANTI-FRICTION	7800	M253TWAL11F-C	153	95.8	4, 12	MXTWAC	\$131,498
1250	3600	4000	5811/12USS	SLEEVE	8000	M253TWQL11F-A	158	95.4	4	MXTWAC	\$125,072
1250	3600	4000	5811/12USS	SLEEVE	8000	M253TWQL11F-C	153	95.8	4, 12	MXTWAC	\$164,978
1250	1800	4000	5811/12US	ANTI-FRICTION	7800	M255TWAL11E-A	157	95.4	4	MXTWAC	\$112,788
1250	1800	4000	5811/12US	ANTI-FRICTION	7800	M255TWAL11E-C	162	95.8	4, 12	MXTWAC	\$135,954
1250	1800	4000	5811/12US	SLEEVE	8000	M255TWQL11E-A	157	95.4	4	MXTWAC	\$129,528
1250	1800	4000	5811/12US	SLEEVE	8000	M255TWQL11E-C	162	95.8	4, 12	MXTWAC	\$152,694
1250	1200	4000	6810/11/12US	ANTI-FRICTION	14500	M257TWAL11E-C	157	94.5	4, 12	MXTWAC	\$237,152
1250	1200	4000	6810/11/12US	SLEEVE	15000	M257TWQL11E-C	157	94.5	4, 12	MXTWAC	\$253,623
1250	900	4000	6812/13US	ANTI-FRICTION	14500	M258TWAL11E-C	169	95	12	MXTWAC	\$243,170
1250	900	4000	6812/13US	SLEEVE	15000	M258TWQL11E-C	169	95	12	MXTWAC	\$259,641
1500	3600	4000	5811/12USS	ANTI-FRICTION	7800	M303TWAL11F-A	189	95.4	4	MXTWAC	\$113,776
1500	3600	4000	5811/12USS	ANTI-FRICTION	7800	M303TWAL11F-C	183	95.8	4, 12	MXTWAC	\$136,942
1500	3600	4000	5811/12USS	SLEEVE	8000	M303TWQL11F-A	189	95.4	4	MXTWAC	\$130,516

Totally Enclosed
Water-Air-Cooled
 > High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
1500	3600	4000	5811/12USS	SLEEVE	8000	M303TWQL11F-C	183	95.8	4, 12	MXTWAC	\$170,422
1500	1800	4000	5811/12US	ANTI-FRICTION	7800	M305TWAL11E-A	189	95.4	4	MXTWAC	\$116,701
1500	1800	4000	5811/12US	ANTI-FRICTION	7800	M305TWAL11E-C	193	95.8	4, 12	MXTWAC	\$139,867
1500	1800	4000	5811/12US	SLEEVE	8000	M305TWQL11E-A	189	95.4	4	MXTWAC	\$133,441
1500	1800	4000	5811/12US	SLEEVE	8000	M305TWQL11E-C	193	95.8	4, 12	MXTWAC	\$156,607
1500	1200	4000	6810/11/12US	ANTI-FRICTION	14500	M307TWAL11E-C	196	95	4, 12	MXTWAC	\$243,972
1500	1200	4000	6810/11/12US	SLEEVE	15000	M307TWQL11E-C	196	95	4, 12	MXTWAC	\$260,443
1500	900	4000	6812/13US	ANTI-FRICTION	14500	M308TWAL11E-C	187	95	12	MXTWAC	\$254,439
1500	900	4000	6812/13US	SLEEVE	15000	M308TWQL11E-C	187	95	12	MXTWAC	\$270,910
1750	3600	4000	5811/12USS	ANTI-FRICTION	7800	M353TWAL11F-A	224	95.8	4	MXTWAC	\$117,953
1750	3600	4000	5811/12USS	ANTI-FRICTION	7800	M353TWAL11F-C	216	95.8	4, 12	MXTWAC	\$141,119
1750	3600	4000	5811/12USS	SLEEVE	8000	M353TWQL11F-A	224	95.4	4	MXTWAC	\$134,693
1750	3600	4000	5811/12USS	SLEEVE	8000	M353TWQL11F-C	216	95.8	4, 12	MXTWAC	\$157,859
1750	1800	4000	6810/11/12 US	ANTI-FRICTION	14500	M355TWAL11E-C	219	95.8	4, 12	MXTWAC	\$243,871
1750	1800	4000	6810/11/12 US	SLEEVE	15000	M355TWQL11E-C	219	95.8	4, 12	MXTWAC	\$267,037
1750	1200	4000	6810/11/12US	ANTI-FRICTION	14500	M357TWAL11E-C	218	95	4, 12	MXTWAC	\$253,306
1750	1200	4000	6810/11/12US	SLEEVE	15000	M357TWQL11E-C	218	95	4, 12	MXTWAC	\$269,778
1750	900	4000	6812/13US	ANTI-FRICTION	14500	M358TWAL11E-C	245	95	12	MXTWAC	\$298,357
2000	3600	4000	5811/12USS	SLEEVE	8000	M403TWQL11F-C	245	95.8	4, 12	MXTWAC	\$169,915
2000	3600	4000	6810/11/12USS	SLEEVE	15000	M403TWQL11F-CF	249	95	4, 12	MXTWAC	\$273,236
2000	1800	4000	6810/11/12 US	ANTI-FRICTION	14500	M405TWAL11E-C	250	95.8	12	MXTWAC	\$251,215
2000	1800	4000	6810/11/12 US	SLEEVE	15000	M405TWQL11E-C	250	95.8	4, 12	MXTWAC	\$274,381
2000	1200	4000	6810/11/12US	ANTI-FRICTION	14500	M407TWAL11E-C	250	95	4, 12	MXTWAC	\$265,429
2000	1200	4000	6810/11/12US	SLEEVE	15000	M407TWQL11E-C	250	95	4, 12	MXTWAC	\$281,901
2250	3600	4000	6810/11/12USS	SLEEVE	15000	M453TWQL11F-C	279	95.4	4, 12	MXTWAC	\$295,219
2250	1800	4000	6810/11/12 US	ANTI-FRICTION	14500	M455TWAL11E-C	278	95.8	4, 12	MXTWAC	\$264,865
2250	1800	4000	6810/11/12 US	SLEEVE	15000	M455TWQL11E-C	278	95.8	4, 12	MXTWAC	\$288,031
2250	1200	4000	6812/13US	ANTI-FRICTION	14500	M457TWAL11E-C	281	95.4	4, 12	MXTWAC	\$277,743
2250	1200	4000	6812/13US	SLEEVE	15000	M457TWQL11E-C	281	95.4	4, 12	MXTWAC	\$300,909
2500	3600	4000	6810/11/12USS	SLEEVE	15000	M503TWQL11F-C	309	95.4	4, 12	MXTWAC	\$309,957
2500	1800	4000	6810/11/12 US	ANTI-FRICTION	14500	M505TWAL11E-C	309	96.2	4, 12	MXTWAC	\$275,209
2500	1800	4000	6810/11/12 US	SLEEVE	15000	M505TWQL11E-C	309	96.2	4, 12	MXTWAC	\$298,375
2500	1200	4000	6812/13US	ANTI-FRICTION	14500	M507TWAL11E-C	318	95.8	4, 12	MXTWAC	\$290,692
2500	1200	4000	6812/13US	SLEEVE	15000	M507TWQL11E-C	318	95.8	4, 12	MXTWAC	\$313,858
2750	3600	4000	6810/11/12 USS	SLEEVE	15000	M553TWQL11F-C	337	96.2	4, 12	MXTWAC	\$326,784
2750	1800	4000	6812/13 US	ANTI-FRICTION	14500	M555TWAL11F-C	338	96.5	4, 12	MXTWAC	\$288,923
2750	1800	4000	6812/13 US	SLEEVE	15000	M555TWQL11F-C	338	96.5	4, 12	MXTWAC	\$312,089
2750	1200	4000	6812/13US	ANTI-FRICTION	14500	M557TWAL11F-C	368	95.8	4, 12	MXTWAC	\$302,784
2750	1200	4000	6812/13US	SLEEVE	15000	M557TWQL11E-C	368	95.8	4, 12	MXTWAC	\$325,950
3000	3600	4000	6810/11	SLEEVE	15000	M603TWQL11F-C	370	95.8	4, 12	MXTWAC	\$340,911
3000	1800	4000	6812/13 US	ANTI-FRICTION	14500	M605TWAL11E-C	369	96.5	12	MXTWAC	\$303,005
3000	1800	4000	6812/13 US	SLEEVE	15000	M605TWQL11E-C	369	96.5	4, 12	MXTWAC	\$326,171
3500	3600	4000	6810/11	SLEEVE	15000	M703TWQL11F-C	431	96.2	4, 12	MXTWAC	\$355,167
3500	1800	4000	6812/13 US	ANTI-FRICTION	14500	M705TWAL11E-C	431	96.5	12	MXTWAC	\$315,676
3500	1800	4000	6812/13 US	SLEEVE	15000	M705TWQL11E-C	431	96.5	4, 12	MXTWAC	\$338,842
4000	3600	4000	6812/13 USS	SLEEVE	15000	M803TWQL11F-C	495	96.5	4, 12	MXTWAC	\$363,614
4000	1800	4000	450-1600	ANTI-FRICTION	16000	M805TWAL11E-CF	509	97.1	4, 12	MXTWAC	\$337,435
4000	1800	4000	450-1600	ANTI-FRICTION	16000	M805TWQL11E-CF	509	97.1	4, 12	MXTWAC	\$360,601

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Totally Enclosed

Water-Air-Cooled

> High Efficiency



HP	Speed (RPM)	Volts	Frame	Bearing	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
4000	1800	4000	6812/13 US	ANTI-FRICTION	14500	M805TWAL11E-C	495	96.5	12	MXTWAC	\$330,783
4000	1800	4000	6812/13 US	SLEEVE	15000	M805TWQL11E-C	495	96.5	4, 12	MXTWAC	\$353,949
4500	3600	4000	6812/13 USS	SLEEVE	15000	M903TWQL11F-C	553	96.2	4, 12	MXTWAC	\$376,535
4500	1800	4000	450-1600	ANTI-FRICTION	16000	M905TWAL11E-C	575	96.8	4, 12	MXTWAC	\$354,483
4500	1800	4000	450-1600	SLEEVE	16000	M905TWQL11E-C	575	96.8	4, 12	MXTWAC	\$377,649
5000	3600	4000	450-1600	SLEEVE	16000	C203TWQL11F-C	603	96.8	4, 12	MXTWAC	\$384,328
5000	3600	4000	6812/13USS	SLEEVE	15000	C203TWQL11F-CF	603	96.8	4, 12	MXTWAC	\$380,388
5500	3600	4000	6812/13USS	SLEEVE	15000	C223TWQL11F-C	663	97	4, 12	MXTWAC	\$388,486

FL Amps and FL EFF are average expected design values and not guaranteed.
 The weights listed above are estimated.
 Please contact Toshiba for information on product availability.
 "CF"= Consult Factory

MV
Modifications

MV Definite
Purpose

MV Gen. Purp.
Enclosed

MV General
Purpose Open

LV Mods.
(Stock & Prod)

Definite
Purpose

IEC

Explosion
Proof

TEFC General
Purpose

ODP General
Purpose

ODP General Purpose
TEFC General Purpose
Explosion Proof
IEC
Definite Purpose
LV Mods. (Stock & Prod)
MV General Purpose Open
MV Gen. Purp. Enclosed
MV Definite Purpose
MV Modifications

Definite Purpose VTX[®] Vertical Hollow Shaft Medium Voltage Motors

**NEW
PRODUCT**

The VTX medium voltage motor is designed specifically for use in geothermal power generation applications. Industry players previously used vertical hollow shaft motors that were only designed for irrigation or mine de-watering pump applications and lacked the rugged and durable industrial designs needed to withstand the severe applications and extreme thrust loads inherent in geothermal power plant applications. Toshiba's VTX motor series is built and tested to perform under these harsh geothermal environments.

Standard Features:

- Maximum Continuous Up to 50,000 lb. Thrust Load Rating
- Inverter Duty
- Hollow Shaft with Long Steady Bushing
- ODE & DE Bearing Brackets Designed with Oil Reservoir & Coated to Prevent Oil Leakage
- Water Circulation Coil for Higher Thrust Requirement

Applications:

- Geothermal
- Petrochemical & Gas
- Pumps



Definite Purpose

VTX® Vertical Hollow Shaft

> High Efficiency



The VTX medium voltage motor is designed specifically for use in geothermal power generation applications. Industry players previously used vertical hollow shaft motors that were only designed for irrigation or mine de-watering pump applications and lacked the rugged and durable industrial designs needed to withstand the severe applications and extreme thrust loads inherent in geothermal power plant applications. Toshiba's VTX motor series is built and tested to perform under these harsh geothermal environments.

Product Scope:

Horsepower: 400 to 1600 HP

Speed (60 Hz): 1800 RPM*

Voltage (60 Hz): 2300/4160 or, 4160 V*

Frame Size: 5000P, 5800P

Protection: WPI or WPII

Service Factor: 1.15

Construction: Cast Iron Frame, Fabricated Steel T-Box, & Bonnet Stove Pipe

Insulation: Class F, Exceeds NEMA MG1 Part 31 (Inverter Duty)

Vibration: Typically 0.08 Inches/Second or Less (Unfiltered)

Environment: Suitable for Indoor or Outdoor

Non-reverse

Ratchet: Available

Rotor Bar

Design: Die-cast Aluminum or Copper Bar

Standard Features:

- Maximum Continuous Up to 50,000 lb. Thrust Load Rating
- Inverter Duty
- Hollow Shaft with Long Steady Bushing
- ODE & DE Bearing Brackets Designed with Oil Reservoir & Coated to Prevent Oil Leakage
- Water Circulation Coil for Higher Thrust Requirement

HP	Speed (RPM)	Volts	Frame	BD Dimension	Max Downthrust Cap	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
WPI												
400	1800	2300/4160	5012PH	24.5	30000	9550	4005WPVJ1TZ-A	91 / 52	94.5	4	MXTWP1	\$146,240
500	1800	2300/4160	5012PH	24.5	30000	9550	4505WPVJ1TZ-A	98 / 56	95.5	4	MXTWP1	\$150,348
600	1800	2300/4160	5012PH	24.5	30000	9550	5005WPVJ1TZ-A	112 / 64	95.4	4	MXTWP1	\$158,470
700	1800	2300/4160	5012PH	24.5	30000	9550	6005WPVJ1TZ-A	140 / 80	93.5	4	MXTWP1	\$165,108
800	1800	2300/4160	5012PH	24.5	30000	9550	7005WPVJ1TZ-A	166 / 95	94	4	MXTWP1	\$172,477
900	1800	2300/4160	5012PH	24.5	30000	9550	8005WPVJ1TZ-C	188 / 108	93.6	4, 12	MXTWP1	\$177,414
900	1800	2300/4160	5012PH	24.5	30000	9550	9005WPVJ1TZ-C	197 / 113	95.5	4, 12	MXTWP1	\$182,450
1000	1800	4160	5812PH	30.5	50000	11500	M185WPVI1UZ-C	110	94.1	4, 12	MXTWP1	\$194,820
1000	1800	2300/4160	5012PH	30.5	50000	9550	M205WPVJ1UZ-CF	213 / 122	94.4	4, 12	MXTWP1	\$184,366
1000	1800	4160	5812PH	30.5	50000	11500	M205WPVI1UZ-C	122	94.4	4, 12	MXTWP1	\$201,514
1250	1800	4160	5812PH	30.5	50000	11500	M255WPVI1UZ-C	151	94.9	4, 12	MXTWP1	\$208,280

Definite Purpose

VTX® Vertical Hollow Shaft

> High Efficiency



HP	Speed (RPM)	Volts	Frame	BD Dimension	Max Downthrust Cap	Weight (lbs.)	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
1500	1800	4160	5812PH	30.5	50000	11500	M305WPVI1UZ-C	181	95.2	4, 12	MXTWP1	\$222,760
1600	1800	4160	5812PH	30.5	50000	11500	M325WPVI1UZ-C	193	95.4	4, 12	MXTWP1	\$236,698
WP11												
400	1800	2300/4160	5012PH	24.5	30000	9550	4005WTVJ1TZ-A	92 / 52	94.5	4	MXTWP2	\$148,724
500	1800	2300/4160	5012PH	24.5	30000	9550	4505WTVJ1TZ-A	99 / 56	95.5	4	MXTWP2	\$151,694
600	1800	2300/4160	5012PH	24.5	30000	9550	5005WTVJ1TZ-A	112 / 64	95.4	4	MXTWP2	\$161,364
700	1800	2300/4160	5012PH	24.5	30000	9550	6005WTVJ1TZ-A	140 / 80	93.5	4	MXTWP2	\$167,334
800	1800	2300/4160	5012PH	24.5	30000	9550	7005WTVJ1TZ-A	166 / 95	94	4	MXTWP2	\$174,304
900	1800	2300/4160	5012PH	24.5	30000	9550	8005WTVJ1TZ-C	188 / 108	93.6	4, 12	MXTWP2	\$179,275
900	1800	2300/4160	5012PH	24.5	30000	9550	9005WTVJ1TZ-C	197 / 113	95.5	4, 12	MXTWP2	\$185,245
1000	1800	4160	5812PH	30.5	50000	11500	M185WTVI1UZ-C	110	94.1	4, 12	MXTWP2	\$197,238
1000	1800	2300/4160	5012PH	30.5	50000	9550	M205WTVJ1UZ-CF	213 / 122	94.4	4, 12	MXTWP2	\$187,958
1000	1800	4160	5812PH	30.5	50000	11500	M205WTVI1UZ-C	122	94.4	4, 12	MXTWP2	\$204,885
1250	1800	4160	5812PH	30.5	50000	11500	M255WTVI1UZ-C	151	94.9	4, 12	MXTWP2	\$211,316
1500	1800	4160	5812PH	30.5	50000	11500	M305WTVI1UZ-C	181	95.2	4, 12	MXTWP2	\$225,286
1600	1800	4160	5812PH	30.5	50000	11500	M325WTVI1UZ-C	193	95.4	4, 12	MXTWP2	\$239,698

FL Amps and FL EFF are average expected design values and not guaranteed.
The weights listed above are estimated.
Please contact Toshiba for information on product availability.
“CF”= Consult Factory

Definite Purpose Vertical Solid Shaft Medium Voltage Motors

NEW PRODUCT

Toshiba's definite purpose, totally enclosed fan cooled, Vertical Solid Shaft motors are designed with the petrochemical and material processing industries in mind. These motors are built to withstand the toughest conditions and offer some of the highest efficiency and torque ratings—leading to a longer life and greater reliability. In addition, our LP design meets API 610 specifications for chemical processing applications and all motors include a patent-pending lubrication system that provides improved flow and circulation of grease and oil for longer bearing life. The Vertical P-Base motor can be used in indoor and outdoor applications, exceeds NEMA MG1 Part 31 requirements, and is available in normal, medium, and high thrust.

Standard Features:

- Totally Enclosed Fan Cooled
- Frame: 449, 509, 680, 5800, & 6810
- IP54 Mill & Chemical Duty
- 4000 V or 2300/4000V
- 1.15 Service Factor
- Multiple "BD" Diameters (20.0", 24.5" and 30.5") options
- Three-Phase
- 60 Hz
- Class F Insulation - Form Wound with VPI System
- Exceeds Insulation Requirements of NEMA MG1 Part 31 (Inverter Duty)
- All Cast Iron for 449 Frame, Frame & Brackets for 509 Frame and Larger
- HP (Normal Thrust), LP (Medium Thrust), or VP (High Thrust)
- Positive Displacement Grease Lubrication System
- Base P-Flange with Various "BD" Diameters
- Drip Cover Options are Available

Special Features:

- Special Design with Higher Thrust Values are Available
- Consult Factory for Other "BD" Diameters Options
- Consult Factory for Other HP, Speed and Voltage Options

Applications:

- Booster Pumps
- Centrifugal Pumps
- Non-Clog pumps
- In-Line Pumps
- Vertical Turbine Pumps



Definite Purpose

Vertical Solid Shaft

Normal, Medium & High Thrust

> High Efficiency



Toshiba’s definite purpose, totally enclosed fan cooled, high efficiency, Vertical P-Base Footless normal, medium, and high thrust motors are designed with the petrochemical and material processing industries in mind. These motors are built to withstand the toughest conditions and offer some of the highest efficiency and torque ratings—leading to a longer life and greater reliability. In addition, our medium thrust design meets API 610 specifications for chemical processing applications and all motors include a patent-pending lubrication system that provides improved flow and circulation of grease and oil for longer bearing life.

Product Scope:

Horsepower:	100 to 1000 HP
Speed:	3600, 1800, 1200 or 900 RPM
Voltage:	23000/4000 or 4000 V
Enclosure:	Totally Enclosed Fan Cooled
Frame Size:	N449HP through 6800VLP
Construction:	All Cast Iron
Thrust Ratings:	Normal, Medium, & High Thrust Levels
Insulation:	Class F, Exceeds NEMA MG1 Part 31 (Inverter Duty)

Contact factory for other HP, RPM, Voltage, and Thrust capabilities

HP	Speed (RPM)	Volts	Frame	BD Dimension	Max Downthrust Cap	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
Normal Thrust											
100	3600	2300/4000	N449HP20	20	990	1003FTVK1SW-A	24/14	91.7	4, 6	MXTFCM	\$49,340
100	1800	2300/4000	N449HP20	20	1370	1004FTVK1SW-A	24/14	93		MXTFCM	\$48,580
100	1200	2300/4000	N449HP20	20	1780	1006FTVK1SW-A	25/15	94.1		MXTFCM	\$57,848
125	3600	2300/4000	N449HP20	20	1030	1253FTVK1SW-A	29/17	92.4	4	MXTFCM	\$50,099
125	1800	2300/4000	N449HP20	20	1480	1254FTVK1SW-A	31/18	93.6		MXTFCM	\$49,340
125	1200	2300/4000	N449HP20	20	1740	1256FTVK1SW-A	31/18	95		MXTFCM	\$58,596
150	3600	2300/4000	N449HP20	20	1000	1503FTVK1SW-A	35/20	93	4	MXTFCM	\$51,208
150	1800	2300/4000	N449HP20	20	1430	1504FTVK1SW-A	36/21	94.1		MXTFCM	\$50,697
150	1200	2300/4000	N449HP20	20	1670	1506FTVK1SW-A	36/21	95		MXTFCM	\$59,707
200	3600	2300/4000	N449HP20	20	940	2003FTVK1SW-A	45/27	93.6	4	MXTFCM	\$54,368
200	1800	2300/4000	N449HP20	20	1350	2004FTVK1SW-A	47/27	95		MXTFCM	\$52,251
200	1200	2300/4000	N449HP20	20	1710	2006FTVK1SW-A	48/28	95.4		MXTFCM	\$61,376
200	900	4000	509HP20	20	CF	2008FTVL1SW-C	32	94.1	12	MXTFCM	\$68,421
250	3600	2300/4000	N449HP20	20	860	2503FTVK1SW-A	57/33	94.5	4	MXTFCM	\$55,825
250	1800	2300/4000	N449HP20	20	1360	2504FTVK1SW-A	59/34	95.4		MXTFCM	\$54,031
250	1200	2300/4000	N449HP20	20	1610	2506FTVK1SW-A	61/35	95.8		MXTFCM	\$63,014
250	900	4000	509HP20	20	2130	2508FTVK1SW-A	39	94.5	12	MXTFCM	\$71,506
300	3600	2300/4000	N449HP20	20	820	3003FTVK1SW-A	69/40	95	4, 6	MXTFCM	\$57,256
300	1800	2300/4000	N449HP20	20	1340	3004FTVK1SW-A	71/41	95.8	2, 6	MXTFCM	\$56,321
300	1200	2300/4000	N449HP20	20	1570	3006FTVK1SW-A	71/41	95.8	6	MXTFCM	\$65,884
300	900	4000	509HP20	24.5	CF	3008FTVL1TW-C	45.3	94.8	12	MXTFCM	\$72,908
350	3600	2300/4000	N449HP20	20	820	3503FTVK1SW-A	83/48	93.6	4, 6	MXTFCM	\$59,344
350	1800	2300/4000	N449HP20	20	1340	3504FTVK1SW-A	83/48	95.8	14	MXTFCM	\$57,478
350	1200	4000	D509HP20	24.5	1720	3506FTVL1TW-C	47	94.9	12	MXTFCM	\$68,994

Definite Purpose

Vertical Solid Shaft

Normal, Medium & High Thrust

> High Efficiency



HP	Speed (RPM)	Volts	Frame	BD Dimension	Max Downthrust Cap	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
350	900	4000	H509HP24	24.5	CF	3508FTVL1TW-C	51.8	94.8	12	MXTFCM	\$75,668
400	3600	4000	H509HP24	24.5	370	4003FTVL1TW-C	48.3	95.5	4, 12	MXTFCM	\$59,608
400	1800	4000	D509HP20	24.5	1140	4004FTVL1TW-C	51.1	94.5	12	MXTFCM	\$58,887
400	1200	4000	H509HP24	24.5	1220	4006FTVL1TW-C	53.5	95.1	12	MXTFCM	\$70,664
400	900	4000	5810HP24	24.5	CF	4008FTVL1TW-C	58.3	94.7	12	MXTFCM	\$76,879
450	3600	4000	H509HP24	24.5	940	4503FTVL1TW-C	54.3	95.7	4, 12	MXTFCM	\$64,557
450	1800	4000	D509HP24	24.5	940	4504FTVL1TW-C	57.4	94.8	12	MXTFCM	\$62,407
450	1200	4000	H509HP24	24.5	1120	4506FTVL1TW-C	59.9	95.3	12	MXTFCM	\$73,613
450	900	4000	5810HP24	24.5	CF	4508FTVL1TY-C	64.6	94.5	12	MXTFCM	\$77,544
500	3600	4000	5800HP30	30.5	CF	5003FTVL1UW-C	60.3	95.7	4, 12	MXTFCM	\$71,442
500	1800	4000	H509HP24	24.5	740	5004FTVK1SW-C	63.7	95.1	12	MXTFCM	\$66,877
500	1200	4000	5800HP30	24.5	1020	5006FTVK1SW-C	66.4	95.4	12	MXTFCM	\$75,308
500	900	4000	688HP30	30.5	1230	5008FTVL1UW-C	70.8	94.3	12	MXTFCM	\$118,742
600	3600	4000	5800HP30	30.5	CF	6003FTVL1UW-C	72.3	95.7	4, 12	MXTFCM	\$75,812
600	1800	4000	5800HP30	30.5	CF	6004FTVL1UW-C	76.2	95.5	12	MXTFCM	\$69,366
600	1200	4000	688HP30	30.5	800	6006FTVL1UW-C	79.2	95.3	12	MXTFCM	\$114,770
600	900	4000	6800HP30	30.5	1030	6008FTVL1UW-C	83.1	94.1	12	MXTFCM	\$126,503
700	3600	4000	6800HP30	30.5	CF	7003FTVL1UW-C	87.2	95.7	4, 12	MXTFCM	\$124,771
700	1800	4000	5800HP30	30.5	CF	7004FTVL1UW-C	88.7	95.9	12	MXTFCM	\$94,571
700	1200	4000	6800HP30	30.5	CF	7006FTVL1UW-C	92	95.2	12	MXTFCM	\$136,408
700	900	4000	6800HP30	30.5	CF	7008FTVL1UW-C	95.1	94.4	12	MXTFCM	\$142,708
800	3600	4000	6800HP30	30.5	CF	8003FTVL1UW-C	96.2	96	4, 12	MXTFCM	\$128,366
800	1800	4000	6800HP30	30.5	CF	8004FTVL1UW-C	101.2	96.2	12	MXTFCM	\$135,409
800	1200	4000	6800HP30	30.5	CF	8006FTVL1UW-C	104.7	95.2	12	MXTFCM	\$143,614
800	900	4000	6800HP30	30.5	CF	8008FTVL1UW-C	106.9	95.6	12	MXTFCM	\$148,993
900	1800	4000	6800HP30	30.5	CF	9004FTVL1UW-C	113.6	96.3	12	MXTFCM	\$146,772
900	1200	4000	6800HP30	30.5	CF	9006FTVL1UW-C	117.3	95.3	12	MXTFCM	\$149,661
900	900	4000	6800HP30	30.5	CF	9008FTVL1UW-C	CF	CF	12	MXTFCM	\$157,842
1000	1800	4000	6800HP30	30.5	CF	M204FTVL1UW-C	126.1	96.3	12	MXTFCM	\$158,542
1000	1200	4000	6800HP30	30.5	CF	M206FTVL1UW-C	CF	CF	12	MXTFCM	\$167,807

Medium Thrust

200	1200	4000	509LP20	20	3780	2006FTVL1SX-C	48	93.8	12	MXTFCM	\$64,500
200	900	4000	509LP20	20	6030	2008FTVL1SX-C	32	94.1	12	MXTFCM	\$72,415
250	3600	4000	509LP20	20	2490	2503FTVL1SX-C	30.2	93.9	4, 12	MXTFCM	\$63,356
250	1800	4000	509LP20	20	3270	2504FTVL1SX-C	32.1	93.5	12	MXTFCM	\$59,604
250	1200	4000	509LP20	20	3680	2506FTVL1SX-C	33.9	94.2	12	MXTFCM	\$65,412
250	900	4000	D509LP20	20	7500	2508FTVL1SX-C	39	94.5	12	MXTFCM	\$73,687
300	3600	4000	H509LP24	24.5	2440	3003FTVL1TX-C	36.3	94.7	4, 12	MXTFCM	\$65,488
300	1800	4000	509LP20	20	3250	3004FTVL1SX-C	38.5	93.8	12	MXTFCM	\$62,716
300	1200	4000	509LP20	20	3630	3006FTVL1SX-C	40.5	94.6	12	MXTFCM	\$68,912
300	900	4000	H509LP20	20	7450	3008FTVL1SX-C	45.3	94.8	12	MXTFCM	\$76,558
350	3600	4000	H509LP24	24.5	2440	3503FTVL1TX-C	42.3	95.2	4, 12	MXTFCM	\$68,774
350	1800	4000	509LP20	20	3250	3504FTVL1SX-C	44.8	94.2	12	MXTFCM	\$66,504
350	1200	4000	D509LP20	20	3560	3506FTVL1SX-C	47	94.9	12	MXTFCM	\$72,488
350	900	4000	H509LP24	24.5	7400	3508FTVL1TX-C	51.8	94.8	12	MXTFCM	\$79,882
400	3600	4000	H509LP24	24.5	2480	4003FTVL1TX-C	48.3	95.5	4, 12	MXTFCM	\$73,658
400	1800	4000	D509LP20	20	3180	4004FTVL1SX-C	51.1	94.5	12	MXTFCM	\$72,577

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

Definite Purpose

Vertical Solid Shaft

Normal, Medium & High Thrust

> High Efficiency



HP	Speed (RPM)	Volts	Frame	BD Dimension	Max Downthrust Cap	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
400	1200	4000	H509LP24	24.5	6400	4006FTVL1TX-C	53.5	95.1	12	MXTFCM	\$76,872
400	900	4000	5810LP24	24.5	6700	4008FTVL1TX-C	58.3	94.7	12	MXTFCM	\$89,725
450	3600	4000	H509LP24	24.5	3280	4503FTVL1TX-C	54.3	95.7	4, 12	MXTFCM	\$77,096
450	1800	4000	D509LP24	24.5	5240	4504FTVL1TX-C	57.4	94.8	12	MXTFCM	\$76,854
450	1200	4000	H509LP24	24.5	6000	4506FTVL1TX-C	59.9	95.3	12	MXTFCM	\$79,844
450	900	4000	688LP24	24.5	CF	4508FTVL1TX-C	64.6	94.5	12	MXTFCM	\$122,350
500	3600	4000	5800LP30	30.5	CF	5003FTVL1UX-C	60.3	95.7	4, 12	MXTFCM	\$89,074
500	1800	4000	H509LP24	24.5	5040	5004FTVL1TX-C	63.7	95.1	12	MXTFCM	\$86,405
500	1200	4000	688LP30	30.5	CF	5006FTVL1UX-C	66.4	95.4	12	MXTFCM	\$124,478
500	900	4000	688LP30	30.5	5000	5008FTVL1UX-C	70.8	94.3	12	MXTFCM	\$128,974
600	3600	4000	6800LP30	30.5	CF	6003FTVL1UX-C	72.3	95.7	4, 12	MXTFCM	\$131,447
600	1800	4000	5800LP30	30.5	CF	6004FTVL1UX-C	76.2	95.5	12	MXTFCM	\$96,402
600	1200	4000	688LP30	30.5	4260	6006FTVL1UX-C	79.2	95.3	12	MXTFCM	\$137,088
600	900	4000	6800LP30	30.5	4800	6008FTVL1UX-C	83.1	94.1	12	MXTFCM	\$156,440
700	3600	4000	6800LP30	30.5	CF	7003FTVL1UX-C	87.2	95.7	4, 12	MXTFCM	\$138,966
700	1800	4000	6800LP30	30.5	CF	7004FTVL1UX-C	88.7	95.9	12	MXTFCM	\$136,502
700	1200	4000	6800LP30	30.5	CF	7006FTVL1UX-C	92	95.2	12	MXTFCM	\$144,570
700	900	4000	6800LP30	30.5	CF	7008FTVL1UX-C	95.1	94.4	12	MXTFCM	\$162,418
800	3600	4000	6800LP30	30.5	CF	8003FTVL1UX-C	96.2	96	4, 12	MXTFCM	\$158,744
800	1800	4000	6800LP30	30.5	CF	8004FTVL1UX-C	101.2	96.2	12	MXTFCM	\$156,470
800	1200	4000	6800LP30	30.5	CF	8006FTVL1UX-C	104.7	95.2	12	MXTFCM	\$162,440
800	900	4000	6800LP30	30.5	CF	8008FTVL1UX-C	106.9	95.6	12	MXTFCM	\$168,355
900	1800	4000	6800LP30	30.5	CF	9004FTVL1UX-C	113.6	96.3	12	MXTFCM	\$164,608
900	1200	4000	6800LP30	30.5	CF	9006FTVL1UX-C	117.3	95.3	12	MXTFCM	\$172,443
1000	1800	4000	6800LP30	30.5	CF	M204FTVL1UX-C	126.1	96.3	12	MXTFCM	\$184,680
High Thrust											
200	3600	4000	509VP20	20	5950	2003FTVL1SY-C	25.3	92.9	4, 12	MXTFCM	\$68,477
200	1800	4000	509VP20	20	10750	2004FTVL1SY-C	26	93.1	12	MXTFCM	\$65,812
200	1200	4000	509VP20	20	12430	2006FTVL1SY-C	48	93.8	12	MXTFCM	\$69,647
200	900	4000	509VP20	20	13070	2008FTVL1SY-C	32	94.1	12	MXTFCM	\$78,649
250	3600	4000	509VP20	20	5925	2503FTVL1SY-C	30.2	93.9	4, 12	MXTFCM	\$70,115
250	1800	4000	509VP20	20	10725	2504FTVL1SY-C	32.1	93.5	12	MXTFCM	\$68,471
250	1200	4000	509VP20	20	12405	2506FTVL1SY-C	33.9	94.2	12	MXTFCM	\$72,335
250	900	4000	D509VP20	20	12460	2508FTVL1SY-C	39	94.5	12	MXTFCM	\$76,455
300	3600	4000	H509VP24	24.5	5900	3003FTVL1TY-C	36.3	94.7	4, 12	MXTFCM	\$76,502
300	1800	4000	509VP20	20	10700	3004FTVL1SY-C	38.5	93.8	12	MXTFCM	\$73,665
300	1200	4000	509VP20	20	11210	3006FTVL1SY-C	40.5	94.6	12	MXTFCM	\$76,088
300	900	4000	H509VP20	20	12360	3008FTVL1SY-C	45.3	94.8	12	MXTFCM	\$82,366
350	3600	4000	H509VP24	24.5	5900	3503FTVL1TY-C	42.3	95.2	4, 12	MXTFCM	\$85,668
350	1800	4000	509VP20	20	10600	3504FTVL1SY-C	44.8	94.2	12	MXTFCM	\$84,772
350	1200	4000	D509VP20	20	11160	3506FTVL1SY-C	47	94.9	12	MXTFCM	\$83,642
350	900	4000	H509VP24	24.5	12160	3508FTVL1TY-C	51.8	94.8	12	MXTFCM	\$95,647
400	3600	4000	H509VP24	24.5	5700	4003FTVL1TY-C	48.3	95.5	4, 12	MXTFCM	\$97,804
400	1800	4000	D509VP20	20	9440	4004FTVL1SY-C	51.1	94.5	12	MXTFCM	\$96,470
400	1200	4000	H509VP24	24.5	10660	4006FTVL1TY-C	53.5	95.1	12	MXTFCM	\$94,772
400	900	4000	5810VP24	24.5	11660	4008FTVL1TY-C	58.3	94.7	12	MXTFCM	\$105,470
450	3600	4000	H509VP24	24.5	5600	4503FTVL1TY-C	54.3	95.7	4, 12	MXTFCM	\$108,707

Definite Purpose

Vertical Solid Shaft

Normal, Medium & High Thrust

> High Efficiency



HP	Speed (RPM)	Volts	Frame	BD Dimension	Max Downthrust Cap	Model Number	FL Amps	Nominal FL EFF	Notes	Discount Symbol	List Price
450	1800	4000	D509VP24	24.5	9240	4504FTVL1TY-C	57.4	94.8	12	MXTFCM	\$106,557
450	1200	4000	H509VP24	24.5	10560	4506FTVL1TY-C	59.9	95.3	12	MXTFCM	\$114,247
450	900	4000	5810VP24	24.5	CF	4508FTVL1TY-C	64.6	94.5	12	MXTFCM	\$127,499
500	3600	4000	5800VP30	30.5	CF	5003FTVL1UY-C	60.3	95.7	4, 12	MXTFCM	\$124,778
500	1800	4000	H509VP24	24.5	9040	5004FTVK1TY-C	63.7	95.1	12	MXTFCM	\$121,899
500	1200	4000	5800VP30	30.5	CF	5006FTVL1UY-C	66.4	95.4	12	MXTFCM	\$123,781
500	900	4000	688VP30	30.5	7720	5008FTVL1UY-C	70.8	94.3	12	MXTFCM	\$143,609
600	3600	4000	5800VP30	30.5	CF	6003FTVL1UY-C	72.3	95.7	4, 12	MXTFCM	\$139,870
600	1800	4000	5800VP30	30.5	CF	6004FTVL1UY-C	76.2	95.5	12	MXTFCM	\$136,880
600	1200	4000	688VP30	30.5	6820	6006FTVL1UY-C	79.2	95.3	12	MXTFCM	\$147,408
600	900	4000	6800VP30	30.5	CF	6008FTVL1UY-C	83.1	94.1	12	MXTFCM	\$164,770
700	3600	4000	6800VP30	30.5	CF	7003FTVL1UY-C	87.2	95.7	4, 12	MXTFCM	\$174,849
700	1800	4000	6800VP30	30.5	CF	7004FTVL1UY-C	88.7	95.9	12	MXTFCM	\$173,442
700	1200	4000	6800VP30	30.5	CF	7006FTVL1UY-C	92	95.2	12	MXTFCM	\$187,870
700	900	4000	6800VP30	30.5	CF	7008FTVL1UY-C	95.1	94.4	12	MXTFCM	\$196,447
800	3600	4000	6800VP30	30.5	CF	8003FTVL1UY-C	96.2	96	4, 12	MXTFCM	\$186,470
800	1800	4000	6800VP30	30.5	CF	8004FTVL1UY-C	101.2	96.2	12	MXTFCM	\$185,799
800	1200	4000	6800VP30	30.5	CF	8006FTVL1UY-C	104.7	95.2	12	MXTFCM	\$196,780
800	900	4000	6800VP30	30.5	CF	8008FTVL1UY-C	106.9	95.6	12	MXTFCM	\$214,334
900	1800	4000	6800VP30	30.5	19112	9004FTVL1UY-C	113.6	96.3	12	MXTFCM	\$272,480
900	1200	4000	6800VP30	30.5	CF	9006FTVL1UY-C	117.3	95.3	12	MXTFCM	\$276,884
1000	1800	4000	6800VP30	30.5	CF	M204FTVL1UY-C	126.1	96.3	12	MXTFCM	\$274,372

FL Amps and FL EFF are average expected design values and not guaranteed.

The weights listed above are estimated.

Please contact Toshiba for information on product availability.

"CF"= Consult Factory

ODP General Purpose

TEFC General Purpose

Explosion Proof

IEC

Definite Purpose

LV Mods. (Stock & Prod)

MV General Purpose Open

MV Gen. Purp. Enclosed

MV Definite Purpose

MV Modifications

MV Modifications	MV Definite Purpose	MV Gen. Purp. Enclosed	MV General Purpose Open	LV Mods. (Stock & Prod)	Definite Purpose	IEC	Explosion Proof	TEFC General Purpose	ODP General Purpose

Medium Voltage Modifications

Production Modifications

Altitude	198	Leads Terminals	202
Ambient Temperature	198	Burndy Lugs/Two-Hole Terminals	202
Balance/Vibration	198	Load Inertia	202
Bearings.....	198	Lubrication.....	202
Insulated Bearings	198	Grease – High Temperature.....	202
Oil Sump Heaters	198	Grease – Low Temperature.....	203
Roller Bearing for Belted Applications	198	Oil – Low Temperature	203
Blowers	199	Oil – Mist	203
Conduit Box Modifications.....	199	Constant Level Oilers (Trico)	203
Auxiliary Terminal Box.....	199	Forced Lube Provisions (Sleeve Bearings Only)	203
Main Box Construction	199	Nameplates	203
Remote-Mount Conduit Box	199	Duplicate or Special Nameplates	203
Couplings.....	199	Paint.....	203
Current Transformers.....	199	Seals.....	203
Differential Pressure Switch/Gauge	199	Service Factor	203
Direction of Rotation.....	199	Shafts.....	204
Dowel Pin Provisions	200	List Adders for Special Shafts	204
Drains & Breathers.....	200	Shaft Grounding Provisions	204
Breathers	200	Software: Engineering Data	204
Drains	200	Soleplates/Slide Rails/Shims.....	204
Enclosures	200	Space Heaters	204
Classified-Division 2/Zone 2 Locations	200	Surge Protection.....	205
IP Enclosure Protection.....	200	TEFC 840 Severe Duty Package.....	205
Encoders	200	Testing.....	205
Export Crating.....	201	Thermal Protection	206
Fan Covers	201	Thermocouples.....	206
Fans/Special.....	201	Resistance Temperature Detectors (RTDs)	206
Filters	201	Thermostat.....	206
Flange-Mounting	201	Thermostats (Klixons)	206
Freight.....	201	Torque	206
Frequency.....	201	Vertical Jacking Provisions.....	207
Grease Fittings	201	Vibration Detectors.....	207
Grounding Provisions	201	Vibration Monitoring Devices	207
External Grounding Pads on Motor Frame	201	Voltage	207
Grounding Provisions to Motor Shaft.....	201		
Hardware	201		
Insulation Modifications	201		
Internal Coating for Extreme Service Operation	201		
Upgrade to Class H Insulation System	202		
Additional VPI.....	202		
Tropicalize/Fungus-Proof Windings	202		

Discount Symbol: MMP002 – For Medium Voltage Motors

Modifications from this section should be added to the appropriate motor list price to generate a total list price for the motor. Apply the applicable discount/multiplier from discount symbol MMP002 to arrive at a net each price. This will be the production/modified multiplier associated with the account pricing.

Contact Toshiba for all other frames.

Altitude

Standard motors are built for operation up to 3,300 ft. (1,000 m) above sea level at a maximum ambient of 40°C within Class B rise limits when operated at rated horsepower.

Option		Over 3,300 ft.
Frames	440/500	Contact Toshiba
	5000/5800	
	680/6800/450	
	N6800–N8800*	
	1080/T8800	
	1400	

* Non-NAFTA frames

Special Notes:

- Altitudes over 3,300 ft. may affect frame size. Final frame size is subject to final design completion.

Ambient Temperature

Toshiba motors are designed to operate in an ambient temperature range between -25° and 40°C. For operation in temperatures above the standard, refer to the chart below.

Option		41° to 45°C	46° to 50°C	Below -25°C & Above 50°C
Frames	440/500	Contact Toshiba		
	5000/5800			
	680/6800/450			
	N6800–N8800*			
	1080/T8800			
	1400			

* Non-NAFTA frames

Special Notes:

- Ambient conditions may affect frame size. Final frame size is subject to final design completion.
- Sleeve bearings may require flood lubrication system for above 40°C ambient and below -25°C.
- At ambient temperatures of -40° through -26°C, oil sump heaters are recommended for motors with sleeve bearings. See “Oil Sump Heaters” adders.
- At ambient temperatures of -40° through -26°C, special low temperature grease is usually required for motors with anti-friction bearings. See “Lubrication” section for adders

Balance/Vibration

All Toshiba motors are dynamically balanced and measured in accordance with NEMA MG1 standards unless otherwise specified by the design. Toshiba Motors have a standard vibration level of 0.12 inches/second (MV-840 Product have lower vibration levels – Check 840 Section for more details). For vibration levels lower than the Toshiba standard, refer to the chart below.

Option		Precision Balance	Special Balance
Frames	440/500	Contact Toshiba	
	5000/5800		
	680/6800/450		
	N6800–N8800*		
	1080/T8800		
	1400		

* Non-NAFTA frames

Special Note:

Precision Balance:

- 0.10 inches/second for 2-pole
- 0.08 inches/second for 4-pole through 10-pole

Bearings

Special bearings and designs are available on a production basis for specific application requirements.

Insulated Bearings

Insulated bearings are typically used in applications where shaft current concerns exist. Insulating the bearings helps to prevent electrical arcing (bearing fluting) and potential premature bearing failure.

Option		Ball Bearings		Bearing Housing	
		NDE	DE	NDE	DE
Frames	440/500	\$1,969	\$1,969	N/A	N/A
	5000/5800	\$2,130	\$2,130	N/A	N/A
	680/6800/450	\$2,460	\$2,460	N/A	N/A
	N6800–N8800*	\$2,850	\$2,850	\$3,222	\$3,222
	1080/T8800	\$3,480	\$3,480	\$3,478	\$3,478
	1400	\$3,940	\$3,940	\$3,598	\$3,598

* Non-NAFTA frames

Special Notes:

- An insulated NDE bearing is included with Dura-Bull TX®, 5012, 5812, and 6800 frame motors for Anti-Friction designs.
- An insulated NDE bearing housing is included for N6800 thru N8810, 1080 and 1400 frame offering
- DE insulated roller bearing is available upon request.
- Sleeve bearings are insulated on DE and NDE bearings on motors up to and including the 6800 frame.
- NEMA MG1 Part 31 suggests insulating the bearing(s) on all motors in 500 series frames and larger when inverter-fed. Toshiba recommends insulating the bearings when shaft voltage exceeds 300 mV, but it is up to the user to determine when insulated bearings are required, especially with the use of a non-Toshiba inverter-fed control.
- When insulated bearings are used on direct-coupled applications, the use of an insulated coupling and/or a shaft grounding brush is required in order to reduce the risk of driven equipment bearing damage. Please note that grounding brushes are not suitable for Division 2 environments.
- Insulated bearings are not available on angular contact bearing construction.
- If bearing thermal devices are required with insulated bearings, a special version of the thermal device will be required. Contact Toshiba for the availability and price of this thermal device..

Oil Sump Heaters

In ambient temperatures below -25°C, oil sump heaters are required for motors with sleeve bearings.

Option		Non-Hazardous Area	Hazardous Area
Frames	440/500	N/A	N/A
	5000/5800	\$2,412	\$5,420
	680/6800/450	\$2,588	\$5,855
	N6800–N8800*	\$2,755	\$6,433
	1080/T8800	\$2,989	\$6,898
	1400	\$3,150	\$7,340

* Non-NAFTA frames

Special Notes:

- This adder applies only to motors with self-cooled sleeve bearings.
- Oil sump heaters operate at 120 or 240 V (customer to specify voltage).

Roller Bearing for Belted Applications

Cylindrical roller bearings are used in motors where high radial loads are present (i.e. belted applications) for an improved L-10 bearing life.

Option		Roller Bearing
		DE (1)
Frames	440/500	\$2,180
	5000/5800	\$3,566
	680/6800/450	\$3,765
	N6800–N8800*	\$3,765
	1080/T8800	N/A
	1400	N/A

(1) TEFC motors only

* Non-NAFTA frames

Special Notes:

- Roller bearing is available only on 1800 RPM and slower motors.
- Belted application requires full belting details and provided prior to order acceptance.
- 4142 shaft material will be provided for 6800 frame and smaller.

Blowers

The turndown capability of an inverter-fed Toshiba motor is a function of the product selected, and when turndown requirements exceed product capability, the use of an auxiliary blower is required. Contact Toshiba for help with determining whether a blower is required and for pricing.

The *National Electrical Code 430.126 (b)* mandates that motors with external force-ventilation have a form of thermal protection. See "Thermal Protection" section for the addition of thermal protection.

Conduit Box Modifications

The standard main conduit box on all Toshiba motors is located in the F1 position.

Auxiliary Terminal Box

Termination of protective or monitoring devices can be provided in a separate auxiliary box. Auxiliary box location is to be specified by the customer at time of order.

Option		NEMA 4X 304 SS	Aux. Cast Iron Box	Aux. Steel Box
Frames	440/500	\$2,470	Standard	Contact Toshiba
	5000/5800	\$2,470		
	680/6800/450	\$2,470		
	N6800-N8800*	\$2,644		
	1080/T8800	\$2,839		
	1400	\$2,985		

* Non-NAFTA frames

Special Notes:

- Auxiliary terminal Cast Iron box is provided as standard with stator RTD adder on all motors.
- Auxiliary terminal Cast Iron box is provided as standard with space heaters adders.
- Bearing RTDs are terminated at their own conduit as standard. Termination at auxiliary terminal box requires an adder. See "Thermal Protection" section.

Main Box Construction

5800 and smaller frame motors come Standard with Cast iron main box except for the following, which come with a fabricated steel main box:

- 6800 and Larger Frames
- All Motors with surge protection accessories
- All API motor offerings

Option		NEMA 4X 304 SS	NEMA Type II	Special Features
Frames	440/500	\$9,850	\$3,325	Contact Toshiba
	5000/5800	\$10,345	\$3,325	
	680/6800/450	\$12,780	\$3,440	
	N6800-N8800*	\$13,330	\$3,440	
	1080/T8800	\$13,330	\$3,680	
	1400	\$13,330	\$3,680	

* Non-NAFTA frames

Special Notes:

- A top mount main box (F3) is available on TEFC enclosure only.
- NEMA Type II main box comes with stand-offs and insulators.
- 6800 and 450 Frames come standard with Type II box

Remote-Mount Conduit Box

For applications requiring that the conduit box be located away from the motor, Toshiba is able to supply a remote-mount conduit box. The conduit box will be supplied with the main motor, but will arrive unfastened. The remote-mount conduit box includes a main terminal box and a threaded mounting plate. Contact Toshiba for prices.

Couplings

Couplings must be supplied finished, bored, balanced, and freight-allowed to Toshiba manufacturing plant. An incoming identification number must be obtained from Toshiba. The coupling must be shipped to arrive at the designated plants, at least six weeks prior to the order's acknowledged ship date and must include the manufacturer's mounting instructions.

Option		Customer-Supplied Sheave/Coupling
Frames	440/500	\$1,500
	5000/5800	\$2,750
	680/6800/450	\$3,750
	N6800-N8800*	\$3,940
	1080/T8800	\$5,450
	1400	\$5,650

* Non-NAFTA frames

Current Transformers

Window-type current transformers (one per phase). Both leads of each winding are inserted in opposite directions to measure any difference that would signify ground fault leakage.

Option		Differential CTs (One Per Phase)	Ammeter CT
Frames	440/500	\$5,594	\$1,731
	5000/5800	\$5,594	\$1,731
	680/6800/450	\$5,594	\$1,731
	N6800-N8800*	\$6,220	\$1,940
	1080/T8800	\$6,379	\$1,993
	1400	\$6,379	\$1,993

* Non-NAFTA frames

Special Notes:

- Price includes Type II main terminal box.
- Toshiba standard 50:5 current transformers will be provided unless otherwise specified by customer. Price is subject to change.
- Current transformer leads will be terminated in a separate auxiliary box.
- Ammeter CT – one per motor.

Differential Pressure Switch/Gauge

On a motor with air filters, a pressure switch is used to measure the pressure drop across the filter caused by clogging. Toshiba's standard differential pressure switch is the Dwyer Instruments Model No. 1950 series.

Option		Switch	Gauge
Frames	440/500	N/A	N/A
	5000/5800	\$2,890	\$2,640
	680/6800/450	\$2,890	\$2,640
	N6800-N8800*	N/A	N/A
	1080/T8800	\$3,120	\$2,960
	1400	\$3,120	\$2,960

* Non-NAFTA frames

Special Note:

- Differential pressure switches and gauges are available on WP/II motors.

Direction of Rotation

At time of order, the customer must specify the direction of rotation for the motor. Toshiba standard is counter clockwise (CCW) as viewed from non-drive end (NDE) of the motor. Uni-directional arrow will be provided on all motors for phase sequence connection.

Dowel Pin Provisions

Dowel pin pilot holes will be provided on two diagonal feet. These are provided to ensure motor alignment is maintained after the motor is installed. This feature comes standard on Dura-Bull TX® motors.

Option		Two Per Motor	Special
Frames	440/500	\$1,094	Contact Toshiba
	5000/5800	\$1,313	
	680/6800/450	\$1,313	
	N6800–N8800*	\$1,524	
	1080/T8800	\$1,690	
1400		\$1,690	

* Non-NAFTA frames

Drains & Breathers

All motors are provided with drain holes that are located at the lowest point on the motor.

Breathers

To request breather(s).

Option		Standard Breather Motor (3)	Stainless Breather (1)	Standard Breather Conduit Box (2)
Frames	440/500	\$328	\$438	\$438
	5000/5800	\$328	\$438	\$438
	680/6800/450	\$328	\$438	\$438
	N6800–N8800*	\$360	\$472	\$472
	1080/T8800	\$410	\$550	\$490
1400		\$450	\$620	\$520

* Non-NAFTA frames

- (1) MV-840 comes standard with SS304 frame breathers
(2) Standard and stainless breathers are available for cast iron conduit boxes only.
(3) Frame breather plugs available for totally enclosed designs only.

Drains

For additional drain hole(s).

Option		Drain Hole Conduit Box	Stainless Drain Plug Conduit Box
Frames	440/500	\$131	\$328
	5000/5800	\$131	\$328
	680/6800/450	\$131	\$328
	N6800–N8800*	\$182	\$360
	1080/T8800	\$182	\$360
1400		\$182	\$360

* Non-NAFTA frames

Special Notes:

- MV-840 comes standard with SS304 main conduit box drain plug
- Conduit box drain holes are available on cast iron conduit boxes only.
- Stainless drain plugs will be 304 SS (316 SS available; contact Toshiba).

Enclosures

Classified-Division 2/Zone 2 Locations

Environmental/application conditions may require a special motor design and special labeling of the product to ensure proper protection and/or safety during use. If an environment and/or application has been identified as a Division 2 or Zone 2 location, Toshiba requires that a Class, Group, and Temperature code (T-code) be provided to ensure safe operation in the specified atmosphere.

Option		Class I, Div 2 (1)	Class II, Div 2 (2)
Frames	440/500	\$2,970	\$4,240
	5000/5800	\$2,970	\$4,373
	680/6800/450	\$3,620	\$4,650
	N6800–N8800*	\$3,620	\$5,430
	1080/T8800	\$4,280	N/A
1400		\$4,280	N/A

* Non-NAFTA frames

- (1) All medium voltage products are suitable for a T3 (200°C) T-code under a sinewave condition based on a 1.0 service factor. For T-code ratings below 200°C, contact Toshiba for product pricing and availability. Please contact Toshiba for applications utilizing ASD control. Please note that the NEC does not require the motor to be specifically nameplated with the area classification.
(2) Class II adder is available on totally enclosed fan cooled (TEFC) enclosure only.

Special Notes:

- Low temperature space heaters are included in the above adders.
- Consult Toshiba for CSA certification and any other.
- Suitability of Zone 2 application is based on the National Electric Code (NEC).
- MV-840 comes standard with Div2, Class I group B/C/D with T3 temperature code on nameplate.

IP Enclosure Protection

This motor modification is necessary to meet IEC enclosure definition of IP55. Available on totally enclosed motors only.

Option		IP55
Frames	440/500	\$3,958
	5000/5800	\$4,038
	680/6800/450	\$4,038
	N6800–N8800*	\$5,120
	1080/T8800	\$5,250
1400		\$5,414

* Non-NAFTA frames

Special Note:

- MV-840 Offering comes Standard with IP55 protection.

Encoders

Encoders regulate speed on motors linked to variable speed applications, and they are available either face-mounted or shaft-mounted. Toshiba’s standard offering is a Dynapar HS35 (shaft-mount) or Avtron M3 (shaft-mount). All prices below are based on Pulse Per Revolution (PPR) of 1024 single-output and dual-channel (A & B) quadrature. Encoder type must be specified upon order.

Option		Dynapar HS35	Avtron M3	Special
Frames	440/500	\$2,734	\$3,820	Contact Toshiba
	5000/5800	\$2,734	\$3,820	
	680/6800/450	\$2,734	\$3,820	
	N6800–N8800*	\$3,272	\$4,410	
	1080/T8800	\$3,272	\$4,410	
1400		\$3,272	\$4,410	

* Non-NAFTA frames

Export Crating

Toshiba provides packaging options for different shipping requirements. Options include commercial packaging (for common, below-deck transport on ships) and containerized shipping.

Option		Export Crating
Frames	440/500	\$3,240
	5000/5800	\$4,120
	680/6800/450	\$4,970
	N6800-N8800*	Included
	1080/T8800	\$5,450
	1400	\$5,450

* Non-NAFTA frames

Fan Covers

Cast iron fan covers are available on totally enclosed motors up to 5811US. On TEFC and TEAAC motors larger than 5800 US, only fabricated steel covers are available.

Fans/Special

The standard material for fans on Toshiba motors is aluminum. Toshiba also offers other options for fan materials. Please contact Toshiba for availability and pricing.

Filters

Toshiba filters are 304 stainless steel with 70 micron filtration.

Option		Stainless Steel
Frames	440/500	N/A
	5000/5800	\$1,804
	680/6800/450	\$1,940
	N6800-N8800*	N/A
	1080/T8800	\$3,410
	1400	\$3,410

* Non-NAFTA frames

Special Notes:

- See separate adder for differential pressure switch.
- This adder applies to WPII motors only.
- Contact Toshiba for 10 micron option.

Flange-Mounting

Flange mounting is available only on motors with ball bearings and direct-coupled applications.

Option		Open Drip Proof		Totally Enclosed Fan Cooled		Weather Protected
		C-Face Footed	D-Flange Footed	C-Face Footed	D-Flange Footed	D-Flange Footed
Frames	440/500	\$1,586	\$2,297	\$1,477	\$2,297	N/A
	5000/5800	\$1,785	\$2,734	\$2,895	\$3,411	\$3,575 (2)
	680/6800/450	N/A	\$2,950	N/A	\$3,956	\$4,134 (2)
	N6800-N8800*	N/A	N/A	N/A	N/A	N/A
	1080/T8800	N/A	N/A	N/A	N/A	N/A
	1400	N/A	N/A	N/A	N/A	N/A

* Non-NAFTA frames

(2) Only applicable to two-pole motors.

Special Notes:

- C-face option is not available for 500 frame ODP enclosure.
- Consult factory for frames above NEMA availability.

Freight

Toshiba freight terms are in accordance with Incoterms 2010 rules. Delivery terms for NAFTA Qualified motors are FCA Houston or Hamilton Ontario "TIC Factories". **Delivery terms for Non-NAFTA Qualified motors are DDP First Port of Entry for USA or Canada.** Please contact Toshiba for delivery terms to other countries.

Frequency

Contact Toshiba for special frequency offerings.

Grease Fittings

Standard hydraulic, Alemite/Zerk-type fittings are provided with motors with regreasable bearings. For special grease fittings and drains, contact Toshiba for pricing and availability.

Grounding Provisions

All motor frames have clamp-type grounding lug inside the main conduit box.

External Grounding Pads on Motor Frame

Apply the adder below for a copper ground pad with two holes mounted on the motor frame. When placing the order, the hole and tap size must be provided.

Option		Frame Grounding	
		One	Two
Frames	440/500	\$1,641	\$2,752
	5000/5800	\$1,641	\$2,752
	680/6800/450	\$1,641	\$2,752
	N6800-N8800*	\$1,822	\$2,944
	1080/T8800	\$1,822	\$2,944
	1400	\$1,822	\$2,944

* Non-NAFTA frames

1) MV-840 offering comes STD with one 1/2" Grounding lug on motor frame

Grounding Provisions to Motor Shaft

See "Shaft Grounding" modifications section.

Hardware

Standard hardware is non-corrosive. Stainless hardware fasteners for holding brackets, conduit box, fan cover, and inner caps are available.

Option		304 SS Hardware	316 SS Hardware
Frames	440/500	\$780	\$936
	5000/5800	\$780	\$936
	680/6800/450	\$1,094	\$1,312
	N6800-N8800*	\$1,244	\$1,574
	1080/T8800	\$1,244	\$1,574
	1400	\$1,244	\$1,574

* Non-NAFTA frames

Special Note:

- This adder applies only to M10 size and smaller hardware.
- MV-840 comes standard with SS304 M12 and smaller

Insulation Modifications

Standard motor insulation is Class F with Epoxy Resin-based VPI insulation system, except for N6800 through N8800 motors which use Polyester Resin-based insulation system.

Internal Coating for Extreme Service Operation

This adder provides additional insulation coating as well as corrosion protection for all internal machined surfaces.

Option		Internal Coating
Frames	440/500	\$2,406
	5000/5800	\$2,734
	680/6800/450	\$2,970
	N6800-N8800*	\$2,970
	1080/T8800	\$3,149
	1400	\$3,149

* Not NAFTA Qualified

Special Note:

- MV-840 offering comes STD with internal coating for severe duty application.

Upgrade to Class H Insulation System

Option		Class H
Frames	440/500	\$7,340
	5000/5800	\$8,180
	680/6800/450	\$9,420
	N6800–N8800*	N/A
	1080/T8800	Contact Toshiba
	1400	

* Non-NAFTA frames

Additional VPI

Improve a motor’s insulation system by applying one additional VPI process.

Option		Additional VPI
Frames	440/500	\$2,820
	5000/5800	\$3,270
	680/6800/450	\$3,520
	N6800–N8800*	\$3,693
	1080/T8800	\$4,120
	1400	\$4,340

* Non-NAFTA frames

Tropicalize/Fungus-Proof Windings

Unwanted fungi may break down a motor’s insulation system over time. The addition of the tropicalize/fungus-proof adder will protect motor windings from this type of problem.

Option		Tropicalize/Fungus-Proof Winding
Frames	440/500	\$1,230
	5000/5800	\$1,531
	680/6800/450	\$1,820
	N6800–N8800*	\$2,050
	1080/T8800	\$2,230
	1400	\$2,403

* Non-NAFTA frames

Special Notes:

- MV-840 offering comes standard with tropicalized winding.

Leads Terminals

All Toshiba medium voltage motors come standard with single-hole terminal lugs, per NEMA MG1 standard.

Burndy Lugs/Two-Hole Terminals

Option		Burndy
Frames	440/500	\$744
	5000/5800	\$760
	680/6800/450	\$910
	N6800–N8800*	\$1,090
	1080/T8800	\$1,090
	1400	\$1,090

* Non-NAFTA frames

Load Inertia

Refer to table below for load inertia values in accordance with NEMA section MG1 Part 20.11, Table 20-1.

Standard motor is capable of accelerating the following load inertias under the following conditions:

- Rated voltage and frequency applied at the motor terminals.
- During accelerating period, connected load torque shall be equal to or less than a torque which varies as square of the speed and is equal to 100% of full-load torque at rated speed.
- Starting duty per NEMA MG1 Part 20.12: twice from a cold condition, or once when at operating temperature.
- Load inertia higher than standard may require larger frame size and/or special rotor design. Contact Toshiba.
- Half NEMA inertia for two-pole designs.

Values of Normal WK2 (lb-ft²) (NEMA MG-1 Table 20-1)				
HP	3600 RPM	1800 RPM	1200 RPM	900 RPM
300	123	1197	3239	6540
350	141	1373	3723	7530
400	158	1546	4199	8500
450	175	1714	4666	9460
500	191	1880	5,130	10,400
600	222	2,202	6,030	12,250
700	252	2,514	6,900	14,060
800	280	2,815	7,760	15,830
900	308	3,108	8,590	17,560
1,000	334	3,393	9,410	19,260
1,250	395	4,073	11,380	23,390
1,500	451	4,712	13,260	27,350
1,750	502	5,310	15,060	31,170
2,000	548	5,880	16,780	34,860
2,250	590	6,420	18,440	38,430
2,500	628	6,930	20,030	41,900
3,000	694	7,860	23,040	48,520
3,500	746	8,700	25,850	54,800
4,000	785	9,460	28,460	60,700
4,500	813	10,120	30,890	66,300
5,000	831	10,720	33,160	71,700

Lubrication

All bearings in motors with Class F insulation will be furnished with a lubricant that is capable of operating in ambient temperatures between -26° and 40°C. Please note that it is not recommended to mix greases of different bases. The mixing of different types of thickeners may destroy the composition and physical properties of the grease.

Grease – High Temperature

This adder is for applications in which the ambient temperature is from 45° to 50°C.

Option		High Temp. Grease (45° to 50°C)
Frames	440/500	\$273
	5000/5800	\$315
	680/6800/450	\$368
	N6800–N8800*	\$409
	1080/T8800	\$443
	1400	\$443

* Non-NAFTA frames

Grease – Low Temperature

This adder is for applications in which the ambient temperature ranges from -40° to -26°C.

Option		Low Temp. Grease (-40° to -26°C)
Frames	440/500	\$273
	5000/5800	\$315
	680/6800/450	\$368
	N6800-N8800*	\$409
	1080/T8800	\$443
	1400	\$443

* Non-NAFTA frames

Oil – Low Temperature

See Bearing Oil Sump Heater option.

Oil – Mist

Medium voltage motors can be provided to accept an externally-generated oil-mist/dry sump lubrication arrangement. The type of preparation must be noted within the purchase order:

1. Oil-Mist Provision (provision for future oil mist): The bearing cavity is arranged for oil-mist, but the bearings will be packed with grease for normal operation. Should the oil-mist system be connected, Toshiba recommends that the grease be cleaned from the bearings and bearing cavities.
2. Oil-Mist Ready: The bearings will receive a light coat of oil for testing and shipment; however, the oil-mist system must be connected upon receipt of product.

Option		Oil-Mist Provision	Oil-Mist Ready
Frames	440/500	\$2,625	\$2,625
	5000/5800	\$3,828	\$3,828
	680/6800/450	\$4,150	\$4,150
	N6800-N8800*	\$4,150	\$4,150
	1080/T8800	\$4,150	\$4,150
	1400	\$4,328	\$4,328

* Non-NAFTA frames

Special Notes:

- This adder is not available on general purpose vertical shaft-down or shaft-up applications.
- Oil-mist options are not available on sleeve bearing designs.

Constant Level Oilers (Trico)

Option		Oiler (1/brg)
Frames	440/500	\$1,479
	5000/5800	\$1,479
	680/6800/450	\$1,627
	N6800-N8800*	N/A
	1080/T8800	\$1,790
	1400	\$1,969

* Non-NAFTA frames

Special Notes:

- Constant Level Oiler adder is available on motors with sleeve bearings only.

Forced Lube Provisions (Sleeve Bearings Only)

Option		Carbon Steel Force Lube Provisions Only	Stainless Steel Force Lube Provisions Only
Frames	440/500	\$1,280	\$2,022
	5000/5800	\$1,280	\$2,022
	680/6800/450	\$1,408	\$2,224
	N6800-N8800*	N/A	N/A
	1080/T8800	\$1,703	\$2,690
	1400	\$1,874	\$2,960

* Non-NAFTA frames

Special Note:

- Flanges and piping (in carbon and stainless steel) are available. Please contact Toshiba for pricing.

Nameplates

Standard nameplates are 304-grade stainless steel with engraved lettering. Additional nameplates for remote-mounting and special markings are available.

Duplicate or Special Nameplates

For requests other than below, contact Toshiba.

Option		Duplicate Nameplate	Special ID Tag	316 Stainless Steel
Frame	All Frames	\$131	\$131	\$340

* Non-NAFTA frames

Paint

The standard paint finish on Toshiba motors is a self-priming, air-dried, acrylic alkyd resin finish. Beyond the standard paint finish, special colors and types of paints are available upon request. For special paint requirements, full specifications and color chip/manufacture color code will be required. Special paints requiring special application/curing equipment may not be available. Contact Toshiba for full details.

Option		Special Paint Color	Epoxy
Frames	440/500	\$875	\$3,250
	5000/5800	\$984	\$3,480
	680/6800/450	\$1,312	\$3,860
	N6800-N8800*	\$1,312	\$4,150
	1080/T8800	\$1,312	\$4,430
	1400	\$1,480	\$4,710

* Non-NAFTA frames

Seals

Shaft seals are installed on the shaft at the bracket face to prevent the ingress of dirt and liquid. Toshiba motors with sleeve bearings come standard with labyrinth seals. For motors with anti-friction bearings, the following options are available.

Option		Labyrinth Drive End	Labyrinth Both Ends	Taconite Drive End (1)	Taconite Both Ends (1)
Frames	440/500	\$2,480	\$3,306	\$2,480	\$3,306
	5000/5800	\$2,612	\$3,438	\$2,612	\$3,438
	680/6800/450	\$2,926	\$3,850	\$2,926	\$3,850
	N6800-N8800*	\$2,926	\$3,850	\$2,926	\$3,850
	1080/T8800	\$2,926	\$3,850	\$2,926	\$3,850
	1400	\$3,277	\$4,312	\$3,277	\$4,312

(1) Taconite seal construction consists of two special bronze labyrinth seals (one on each end).

Special Notes:

- Not available on ODP 5810 and smaller.

Service Factor

Standard model numbers are designed for 1.15 service factor unless otherwise noted. Higher service factors are available if requested. Inquiries for service factors above 1.15 should be submitted to Toshiba for review. In certain cases, a higher service factor will require an increase in frame size and/or a special design.

Shafts

For shafts with non-NEMA dimensions and/or non-Toshiba standard designs, see adders below.

List Adders for Special Shafts

- For NAFTA Qualified Motors: add \$2,500 + price of option(s) below
- For Non-NAFTA Qualified Motors: add \$3,000 + price of option(s) below

Option		4142 High Carbon Steel	Drill & Tap in Shaft End	Omit Keyway	
Frames	440/500	\$440	\$225	\$219	
	5000/5800	\$460	\$270	\$230	
	680/6800/450	\$546	\$302	\$273	
	N6800-N8800*	\$546	\$302	\$273	
	1080/T8800	\$546	\$302	\$273	
	1400	\$620	\$338	\$305	
Option		Threads	Tapers (1)	Up to 5" Additional Length	Forged Shaft
Frames	440/500	\$219	\$295	\$315	Contact Toshiba
	5000/5800	\$230	\$306	\$352	
	680/6800/450	\$273	\$438	\$395	
	N6800-N8800*	\$273	\$438	\$395	
	1080/T8800	\$273	\$438	\$395	
	1400	\$305	\$490	\$442	

* Non-NAFTA frames

(1) Customer must furnish taper gauge freight allowed to Toshiba factory.

Special Notes:

- 4142 shaft material comes standard on belted coupled roller bearing option.

Shaft Grounding Provisions

Shaft grounding provisions help to eliminate shaft currents that can be introduced into the motor through upstream controllers (i.e. adjustable speed drives). These currents can potentially lead to premature failure of the bearings, commonly referred to as “fluting.”

Option		Shaft Grounding (1)
Frames	440/500	\$3,080
	5000/5800	\$3,080
	680/6800/450	\$3,450
	N6800-N8800*	\$3,450
	1080/T8800	\$3,450
	1400	\$3,863

* Non-NAFTA frames

(1) For additional or alternative protection against shaft currents, see insulated bearings under “Bearings” section.

Special Notes:

- Insulating the bearings is recommended when the shaft voltage exceeds 300 mV.
- It is up to the user to determine when insulated bearings are required, especially with the use of an inverter-fed control. NEMA MG1 Part 31 suggests insulating the bearing(s) on all motors in 500 series frames and larger that are inverter-fed.
- Toshiba suggests insulating both bearings on all frame sizes 440 and larger when used with adjustable speed drives.
- When insulated bearings are used on direct coupled applications, the use of insulated coupling and/or shaft grounding brush is required to reduce the risk of driven equipment bearing damage.
- Ground brushes are not suitable for Division 2 environments.
- If bearing thermal devices are required with insulated bearings, a special version of the thermal device will be required. Please contact Toshiba for availability and pricing.

Software: Engineering Data

Toshiba provides a variety of software for stock and production motors. The following standard Toshiba data package is available at no additional charge: certified prints, nameplate data, performance data, connection diagram, instructional and maintenance manual, and spare bearings parts list.

Above data will be sent out in electronic format (PDF only). If hard copy of information is required, see the adder below. For software other than what is listed above or that is specified after time of order, see table below.

Software	Price
Toshiba Standard Software Package	Included
Speed Torque and Speed-Current Curve	Included
Thermal Damage (Safe Stall Time) Curve	Included
Performance Curve	\$160
Torsional Data (1)	\$320
Non-Standard Outline Drawing	Contact Toshiba
Certificate of Compliance	\$213
First Page of Customer Supplied Data Sheet (2)	\$213
Additional Pages of Customer Supplied Data Sheet (2)	\$32
Additional Copies of Data	\$43
Express Shipping	\$64
Other Special Requests	Contact Toshiba

* Non-NAFTA frames

(1) This adder will include shaft drawing, rotor assembly inertia, shaft torsional stiffness values.

(2) This adder pertains to typical Toshiba performance data only.

Soleplates/Slide Rails/Shims

Option		Soleplate (2 pcs)	Slide Rails	304 SS Shims
Frames	440/500	\$7,410	\$4,846	\$2,359
	5000/5800	\$8,059	\$5,380	\$2,429
	680/6800/450	\$8,786	\$6,025	\$2,671
	N6800-N8800*	\$8,786	\$6,025	\$2,671
	1080/T8800	\$8,786	\$6,025	\$2,671
	1400	\$9,610	\$6,748	\$2,939

* Non-NAFTA frames

Special Notes:

- Soleplates are for direct-coupled applications only.
- Slide Rails are for belted applications only.
- Toshiba’s standard shim pack is 3 mm thick and is 304 stainless steel materials.

Space Heaters

Space heaters are strip-type heaters mounted inside the frame near the coils to prevent moisture condensation inside the motor during times the motor is not energized. Heater leads are brought out to the motor’s auxiliary box and marked H1 and H2. Standard heater voltage is 120 V single-phase unless otherwise specified.

Option		Standard Space Heater	Low Temp Space Heater	Terminal Box Space Heater
Frames	440/500	\$1,425	\$2,850	\$1,425
	5000/5800	\$1,425	\$2,850	\$1,425
	680/6800/450	\$1,425	\$2,850	\$1,425
	N6800-N8800*	\$1,425	\$2,850	\$1,425
	1080/T8800	\$1,596	\$3,192	\$1,596
	1400	\$1,787	\$3,574	\$1,787

* Non-NAFTA frames

Special Notes:

- Space heater are included on all Dura Bull & tophat 6800 and smaller with an auxiliary terminal box
- Low Temperature space heater is included on MV-840 offering wired to separate aux box

Surge Protection

The following options add protection from power surges coming from the power source. Surge capacitors reduce the steepness of a power surge front, and lightning arrestors limit the peak voltage of such a surge. Surge capacitors are not available if the motor is used with an adjustable speed drive.

Option		Surge Capacitor (1)	Lightning Arrestors (1)	Surge Protection Package (1)
Frames	440/500	\$4,750	\$16,700	\$20,925
	5000/5800	\$4,750	\$16,700	\$20,925
	680/6800/450	\$4,750	\$16,700	\$20,925
	N6800-N8800*	\$5,320	\$18,704	\$23,436
	1080/T8800	\$5,958	\$20,948	\$26,248
1400		\$5,958	\$20,948	\$26,248

* Non-NAFTA frames

(1) Surge protection devices are not recommended for use with ASD control.

Special

Note:

- These adders include NEMA Type II main terminal box.

TEFC 840 Severe Duty Package**

The Petrochem Severe Duty Package Offers:

- IP55 Degree of Protection for Motor & T-Boxes
- Non-Contacting Labyrinth Seals on Both Bearings
- Insulation System Capable of Withstanding an Immersion Test in Accordance with NEMA MG 1
- Tropicalization Treatment on Windings
- Cast Iron Frame & Brackets with Cast Iron or Fabricated Steel Terminal Box(es) & Fan Cover
- Grounding Lugs on Motor Frame & Inside Main T-Box
- 0.005-Inch Precision Foot Flatness
- Non-Sparking, Epoxy-Coated Aluminum Internal Fan
- Direction of Rotation Arrow for Motors with Uni-Directional Rotation
- Gasketed Main T-Box & Auxiliary T-Box
- Lead Separator Gaskets
- Corrosion-Resistant Drain & Breather at Lowest Part of Motor Frame & Inside Main T-Box
- Precision Unfiltered Vibration Velocity: 2-Pole: 0.10 in/s; 4- & 6-Pole: 0.08 in/s; 8-Pole: 0.06 in/s
- Severe Duty, Corrosion-Resistant, Rust-Inhibitive Paint System on Motor & Shaft/Rotor Assembly
- Corrosion-Resistant Hardware
- Standard Non-Witnessed Routine Testing per IEEE 112

Option		TEFC 840 Package
Frames	440/500	\$12,360
	5000/5800	\$12,360
	6800	\$13,297
	680/6800	\$16,400

* Non-NAFTA frames

Special Note:

** Available on TEFC enclosure only.

Testing

All Toshiba motors are tested in compliance with IEEE Std. 112 to meet NEMA MG1 requirements. Test reports and optional testing are available for each individual motor. Duplicates/copies of standard routine test reports are available.

Please contact Toshiba for scheduling/coordination for witness testing requirements.

Option		Routine, Un-witnessed (Report Only)	Routine, Witnessed	Complete, Un-witnessed
Frames	440/500	Included	\$10,000	\$10,927
	5000/5800	Included	\$10,000	\$10,927
	680/6800/450	Included	\$10,000	\$10,927
	N6800-N8800*	Included	\$11,064	\$11,991
	1080/T8800	Included	\$12,765	\$13,829
1400		Included	\$12,765	\$13,829
Option		Complete, Witnessed	Noise, Un-witnessed (1)	Noise Witnessed (1)
Frames	440/500	\$19,404	\$3,723	\$5,957
	5000/5800	\$19,404	\$3,723	\$5,957
	680/6800/450	\$19,404	\$3,723	\$5,957
	N6800-N8800*	\$20,468	\$4,255	\$6,393
	1080/T8800	\$22,340	\$4,680	\$6,819
1400		\$22,340	\$4,680	\$6,819
Option		Vibration	Insulation Resistance	Polarization Index
Frames	440/500	\$2,659	\$1,595	\$1,914
	5000/5800	\$2,659	\$1,595	\$1,914
	680/6800/450	\$2,659	\$1,595	\$1,914
	N6800-N8800*	\$3,191	\$2,127	\$2,446
	1080/T8800	\$3,617	\$2,553	\$2,872
1400		\$3,617	\$2,553	\$2,872

* Non-NAFTA frames

(1) Noise test consists of overall sound pressure values/readings only. For octave band measurements, please contact Toshiba.

Special Notes:

- Contact Toshiba for immersion testing on medium voltage motors.
- Every motor manufactured by Toshiba is given a routine test per NEMA MG1 and IEEE 112. Test results are compared to design standards and limits to ensure freedom from electrical or mechanical defects. A standard routine test consists of:
 - » No-Load Current
 - » No-Load Watts Inputs
 - » No-Load Speed
 - » Winding Resistance
 - » High Potential Test (dielectric test)
 - » Locked Rotor Current
 - » Locked Rotor Watts Input
 - » Visual Inspection
 - » Vibration Check – Overall vibration displacement measurements tested per NEMA MG1-12
- Performance tests are performed in accordance with NEMA MG1-12 and IEEE 112 Method B (dynamometer) or Method "F1". A complete performance test consists of:
 - » Temperature rise of stator windings, drive end bearing, and frame at rated load
 - » Winding resistance
 - » Input current at 125, 100, 75, 50, and 25 percent of rated no-load HP
 - » Efficiency at 125, 100, 75, 50, and 25 percent of rated full-load HP
 - » Power factor at 125, 100, 75, 50, and 25 percent of rated full-load HP
 - » Speed (RPM) at 125, 100, 75, 50, and 25 percent of rated full-load HP
 - » Torque at 125, 100, 75, 50, and 25 percent of rated full-load HP
 - » Locked rotor torque and amps
 - » Breakdown torque
 - » No load amps and watt input

Thermal Protection

Toshiba provides a wide variety of protective devices which are available as follows.

Thermocouples

Winding (Stator) Thermocouples – A set of six winding thermocouples (two per phase) are provided and leads are terminated in a separate auxiliary conduit box. Pricing below does not include readout devices.

Option		Stator Thermocouples "Type J"	Stator Thermocouples "Type T"
Frames	440/500	\$2,625	\$2,625
	5000/5800	\$2,625	\$2,625
	680/6800/450	\$2,625	\$2,625
	N6800–N8800*	\$2,887	\$2,887
	1080/T8800	\$3,150	\$3,150
	1400	\$3,150	\$3,150
Option		Stator Thermocouples "Type E"	Stator Thermocouples "Type K"
Frames	440/500	\$2,625	\$2,625
	5000/5800	\$2,625	\$2,625
	680/6800/450	\$2,625	\$2,625
	N6800–N8800*	\$2,887	\$2,887
	1080/T8800	\$3,150	\$3,150
	1400	\$3,150	\$3,150

* Non-NAFTA frames

Bearing Thermocouple – Pricing includes one thermocouple per bearing (total of two) with leads terminated to its own cable head. Termination to an auxiliary terminal box is available at NO additional cost. Pricing below does not include readout devices.

Option		Bearing Thermocouples "Type J"	Bearing Thermocouples "Type T"	Bearing Thermocouples "Type E"
Frames	440/500	\$3,938	\$3,938	\$3,938
	5000/5800	\$3,938	\$3,938	\$3,938
	680/6800/450	\$3,938	\$3,938	\$3,938
	N6800–N8800*	\$4,331	\$4,331	\$4,331
	1080/T8800	\$4,725	\$4,725	\$4,725
	1400	\$4,725	\$4,725	\$4,725
Option		Bearing Thermocouples "Type K"		
Frames	440/500	\$3,938		
	5000/5800	\$3,938		
	680/6800/450	\$3,938		
	N6800–N8800*	\$4,331		
	1080/T8800	\$4,725		
	1400	\$4,725		

* Non-NAFTA frames

Special Note:

- Steel core hex conduit is used when terminating to the Cast Iron auxiliary terminal box.

Resistance Temperature Detectors (RTDs)

Air Inlet RTD

Option		Air Inlet RTD
Frames	440/500	\$650
	5000/5800	\$650
	680/6800/450	\$650
	N6800–N8800*	\$715
	1080/T8800	\$780
	1400	\$780

* Non-NAFTA frames

Bearing RTDs – Pricing includes one RTD per bearing (total of two) and a three-lead, single element design with leads terminated to its own cable head. Termination to an auxiliary terminal box is available at an additional cost.

Option		Bearing RTDs (Copper, 10 Ohm)	Bearing RTDs (Platinum, 100 Ohm)
Frames	440/500	\$3,590	\$3,590
	5000/5800	\$3,590	\$3,590
	680/6800/450	\$3,590	\$3,590
	N6800–N8800*	\$5,534	\$3,590
	1080/T8800	\$6,256	\$3,590
	1400	\$3,590	\$3,590
Option		Bearing RTDs (Nickel, 120 Ohm)	
Frames	440/500	\$3,590	
	5000/5800	\$3,590	
	680/6800/450	\$3,590	
	N6800–N8800*	\$3,590	
	1080/T8800	\$3,590	
	1400	\$3,590	

* Non-NAFTA frames

Special Note:

- Contact Toshiba for pricing on other RTD types including dual element.
- Provisions for bearing RTDs are standard on Dura-Bull TX® design motors so adder is only \$1,450 (list price)
- RTD provisions (One/bearing) are included in MV-840 as standard feature.
- Auxiliary terminal box is available with additional cost.

Winding (Stator) RTDs – A set of six winding RTDs (two per phase, leads) are provided with leads terminated in an auxiliary conduit box. Pricing below does not include readout devices.

Option		Stator RTDs (Copper, 10 Ohm)	Stator RTDs (Platinum, 100 Ohm)	Stator RTDs (Nickel, 120 Ohm)
Frames	440/500	\$3,086	\$3,086	\$3,086
	5000/5800	\$3,086	\$3,086	\$3,086
	680/6800/450	\$3,086	\$3,086	\$3,086
	N6800–N8800*	\$3,086	\$3,086	\$3,086
	1080/T8800	\$3,086	\$3,086	\$3,086
	1400	\$3,086	\$3,086	\$3,086

* Non-NAFTA frames

Special Notes:

- Contact Toshiba for pricing on other RTD types.
- Platinum, 100 Ohm RTDs are included as standard on medium voltage totally enclosed fan cooled Dura-Bull TX® motors, 840 , All Top hat enclosures & N6810 thru N8810

Thermostat

Thermostats (Klixons) – Toshiba's standard offering of MV-XP includes hermetically sealed normally-closed (NC), bi-metallic thermostats, temperature actuated element mounted on the stator winding. Leads are marked P1 and P2. Termination of the leads is in an auxiliary conduit box. Special thermostats are available upon request. Contact Toshiba for pricing and availability.

Torque

Toshiba offers standard torque and shall not be less than the values specified by NEMA MG1 Part 20.10.1. For other special torque requirements (i.e. starting/locked rotor, pull-up and/or breakdown torque), contact Toshiba. When available, please provide speed torque curve on the driven equipment and driven equipment inertia.

Vertical Jacking Provisions

Vertical jacking is used to assist in the proper alignment of the motor shaft with the driven equipment. Provisions for four jacking bolts (one per foot) are provided. Jacking bolts are to be supplied by the customer.

Option		Vertical Jacking Provisions
Frames	440/500	\$984
	5000/5800	\$1,203
	680/6800/450	\$1,203
	N6800–N8800*	\$1,323
	1080/T8800	\$1,443
	1400	\$1,443

* Non-NAFTA frames

Option		Vertical Jacking Screws
Frames	440/500	\$340
	5000/5800	\$480
	680/6800/450	\$540
	N6800–N8800*	\$610
	1080/T8800	\$880
	1400	

Special Note:

- Four jacking screws will be provided per motor.

Vibration Detectors

These detectors are for single-direction monitoring (horizontal, vertical, or axial). For total coverage of all three directions, three detectors must be used. Monitoring direction must be specified at time of order.

Vibration Monitoring Devices

Robertshaw – consists of a self-contained detector and switch. A Robertshaw is an acceleration-sensitive instrument that measures peak vibratory shock at the point of measurement.

Accelerometer – used to sense bearing housing vibration on motors with anti-friction bearings.

Option		Provision for Robertshaw Sensor (1)		Robertshaw Sensor (2)	
		One End	Both Ends	One End	Both Ends
Frames	440/500	\$519	\$1,039	\$2,133	\$4,266
	5000/5800	\$519	\$1,039	\$2,133	\$4,266
	680/6800/450	\$519	\$1,039	\$2,133	\$4,266
	N6800–N8800*	\$570	\$1,142	\$2,346	\$4,692
	1080/T8800	\$622	\$1,246	\$2,559	\$5,119
	1400	\$622	\$1,246	\$2,559	\$5,119
Option		Provision for Metrix Accelerometer Sensor (3)		Metrix Accelerometer Sensor/Transmitters	
		One End	Both Ends	One End	Both Ends
Frames	440/500	\$519	\$1,039	\$2,266	\$4,520
	5000/5800	\$519	\$1,039	\$2,266	\$4,520
	680/6800/450	\$519	\$1,039	\$2,266	\$4,520
	N6800–N8800*	\$570	\$1,142	\$2,492	\$4,972
	1080/T8800	\$622	\$1,246	\$2,719	\$5,424
	1400	\$622	\$1,246	\$2,719	\$5,424
Option		Termination to Aux. T-Box			
Frames	440/500	\$940			
	5000/5800	\$940			
	680/6800/450	\$940			
	N6800–N8800*	\$1,069			
	1080/T8800	\$1,130			
	1400	\$1,130			

* Non-NAFTA frames

- (1) Provisions for mounting are based on a Robertshaw model number 366. For other sensor provisions, contact Toshiba for price and availability.
- (2) Robertshaw sensors are not suitable for Division 2 applications. Please contact Toshiba for Division 2 sensors.
- (3) Pricing is based on Toshiba providing a single 1" spot face surface with a 1/4"-28 drilled and tapped hole, unless specified otherwise.

Vibration Probe – used to sense shaft vibration on motors with sleeve bearings. Contact Toshiba for other vibration probe options.

Option		Provisions for Bently-Nevada Vibration Probes		Bently-Nevada** Vibration Probes (X,Y) Non-Contacting	
		One End	Both Ends	One End	Both Ends
Frames	440/500	N/A	N/A	N/A	N/A
	5000/5800	\$2,207	\$4,415	\$12,425	\$24,851
	680/6800/450	\$2,207	\$4,415	\$12,425	\$24,851
	N6800–N8800*	N/A	N/A	N/A	N/A
	1080/T8800	\$2,648	\$5,298	\$13,667	\$27,336
	1400	\$2,648	\$5,298	\$13,667	\$27,336

* Non-NAFTA frames

Special Note:

- ** Key phasor available upon request; use \$12,500 list adder.

Voltage

Motors are designed to operate successfully at

- +/- 10% of rated voltage with rated frequency, or
- +/- 5% of rated frequency with rated voltage, or
- A combined variation in voltage and frequency of 10% of the rated values, provided the frequency variation does not exceed +/- 5% of rated frequency.

Please contact Toshiba for voltages that are not listed in this catalog.

MV Modifications	MV Definite Purpose	MV Gen. Purp. Enclosed	MV General Purpose Open	LV Mods. (Stock & Prod)	Definite Purpose	IEC	Explosion Proof	TEFC General Purpose	ODP General Purpose

Appendix A

Model Number Breakdown Type 1

First Field (One Digit)			Second Field - HP (Three Digits)			Third Field - Poles & Fan Type (One Digit)			Fourth Field - Construction (One Digit)		Fifth Field (One Digit)				
Symbol	Phase/Start	Design	Symbol	Output (HP)		Symbol	Pole	Fan Type	Symbol	Enclosure	Symbol	Ins.	S.F.		
A	Three-Phase Squirrel Cage	A	X	?	?	Reciprocal	1	Uni-CW	Single Speed	A	Open	A	1		
B		B	X	1	2	1/12	2	Bi		C	Underwater Type - Gas Filled	B	1.15		
C		C	X	2	0	1/20	3	Uni-CCW		D	Open Drip Proof Guarded	C	1.25		
D		D					4	Bi		E	Totally Enclosed	D	1.35		
I (Note 8)	Explosion Proof Drive System (UL File E53559)			1	/	8	1/8	5		Uni	F	Totally Enclosed Fan Cooled	E	1.4	
		1	/	2	1/2	6	Bi	G		Weather Protected Type-1	U	SPL			
L	Single-Phase Condensor SKD	L	3	/	4	3/4	7	Uni		K	Open Pipe Ventilated	F	1		
M		M					8	Bi		M	Splash Proof - Open Machine	G	1.15		
N		N	0	0	1	1	E	Uni		N	Weather Protected Type-2	H	1.25		
O		O	0	2	0	20	9	Bi		O		I	1.35		
P	Single-Phase Squirrel Cage SIK	L	1	5	0	150	F	Uni		P	Totally Enclosed Pipe-Ventilated Machine	J	1.4		
Q		M					A	Bi				V	SPL		
R		N	Y	?	?	1/10 Times	G	Uni		Q	Underwater Type - Oil Filled	K	1		
S		O	Y	1	5	1 1/2	B	Bi		S	Guarded - Open Machine	L	1.15		
T	Single-Phase, Two-Condensor Start & Operate SIKD	L	Y	7	5	7 1/2	H	Uni		U	Underwater Type - Water-Filled	M	1.25		
U		M	018 (Note 4)		18.5 kW		C	Bi		V	Dripproof	N	1.35		
V		N					J	Uni		Y	Explosion Proof	O	1.4		
W		O					D	Bi		R	Corrosion Proof	W	SPL		
E	Three-Phase Wound Rotor						K	Uni	Multi-Speed	W	Totally Enclosed Fan Cooled - Outdoor Use	P	1.0		
F	Other Three-Phase						M	Bi		Z	Water-Proof Machine	Q	1.15		
							N	Uni		B	Totally Enclosed Air Over (TEAO)	R	1.25		
G	Single-Phase, One Condensor SIKD						W	One Winding		H	Open Drip Proof Air Over	S	1.35		
							X	Two Winding		L	Liquid Cooling	T	1.4		
							Y	Three Winding		I	Water Cooling	X	SPL		
X	Single-Phase Shaded Pole						Z	Other		J					
Y	Other Single-Phase						Bi = Bidirectional *			T	Totally Enclosed with Water Air Cooled (TEWAC)				
							Uni = Unidirectional *								
Z	IEC Metric						*Viewed from OPE			X	Other				
Use the Below for Motors over 1000 HP											2	Brake Motor: 6 lb. ft.			
H	Three-Phase Wound Rotor: Times 10														
J	Three-Phase Squirrel Cage: Times 10														
K	Three-Phase Squirrel Cage: Times 100														
Example(s):															
H125 = 1,250 HP															
K125 = 12,500 HP															

Model Number Breakdown Type 1

Sixth Field - Mounting (One Digit)			Seventh Field - Bearings (One Digit)		Eighth Field - Voltage (One Digit)		Ninth Field (Not To Exceed Three Digits)		Tenth Field Optional Extensions (Note 6)	
Symbol	Mount Type	Shaft End	Symbol	Bearing Type	Symbol	Volts - Hz	Symbol	Features	Symbol	Features
F	Floor-Mount	Standard	1	Shielded Ball w/Plugs	A	230/460 - 60	0	Toshiba Internal Reference	A	Toshiba Internal Reference
G		Short	2	Shielded Ball w/o Plugs	B	460 - 60	1	Toshiba Internal Reference	B	Toshiba Internal Reference
A		Special	3	Open Ball Bearing w/ Plugs	C	230 - 60	2	Toshiba Internal Reference	C	Toshiba Internal Reference
R	Resilient Base	Standard	4	Roller Bearing on P.E. w/ Plugs	D	115/230 - 60	3	Toshiba Internal Reference	D	Toshiba Internal Reference
Q		Short	5	Roller Bearing on P.E. & O.P.E.	E	115 - 60	...n	Toshiba Internal Reference	E	Toshiba Internal Reference
I		Special	6	Sleeve Bearing w/Plugs	F	240/480 - 60	A	Toshiba Internal Reference	F	Toshiba Internal Reference
T	C-Face Footed	Standard	7	Sleeve Bearing w/o Plugs	G	2300 or 2400 - 60	B	Toshiba Internal Reference	G	Toshiba Internal Reference
H		Special	8	Roller Bearing on O.P.E. & Ball on P.E.	H	220/380 - 60	C	Toshiba Internal Reference	H	Toshiba Internal Reference
U		Short	9	Special Construction	I	4000 or 4160 - 60	D	Toshiba Internal Reference	I	Toshiba Internal Reference
C	C-Face Footless	Standard	0	Other	J	2300/4160 or 2300/4000 or 2400/4160 - 60	E	Toshiba Internal Reference	J	Toshiba Internal Reference
J		Special	F	Angular Contact Ball (P.E. & O.P.E.)			F	Toshiba Internal Reference	K	Toshiba Internal Reference
E	D-Flange Footed	Standard	G	Angular Contact Ball + Ball	K	6000 or 6600 - 60	G	Toshiba Internal Reference	L	Toshiba Internal Reference
K		Special	H	Angular Contact Ball + Roller	L	208/416 - 60	H	Toshiba Internal Reference	M	Toshiba Internal Reference
D	D-Flange Footless	Standard	J	Cylindrical Roller + Ball	M	13200 - 60	I	Toshiba Internal Reference	N	Toshiba Internal Reference
L		Special	K	Cylindrical Roller + Roller	N	220/440 - 60	J	Toshiba Internal Reference	O	Toshiba Internal Reference
M	Pad-Mount Footless w/o C- Face	Standard	L	Sleeve Bearing (Horiz.) - Self Lub.	O	575 - 60	K	Toshiba Internal Reference	P	Toshiba Internal Reference
P		Special	M	Sleeve Bearing for Vertical	P	Other - 60	L	Toshiba Internal Reference	Q	Toshiba Internal Reference
N	Footless Frame	Standard	N	Third Pedestal Bearing	Q	2300 - 50	M	Toshiba Internal Reference	R	Toshiba Internal Reference
V		Special	P	Fourth Pedestal Bearing (Jackshaft)	R	4000 or 4160 - 50	N	Toshiba Internal Reference	S	Toshiba Internal Reference
X	Other	---	Q	Ball + Forced Oil Lube	S	4600 - 50	O	Toshiba Internal Reference	T	Toshiba Internal Reference
S	OEM Motor	Special Shaft & Flange	R	Roller + Forced Oil Lube	T	6000 or 6600 - 50	P	Toshiba Internal Reference	U	Toshiba Internal Reference
			S	Angular Contact + Forced Oil Lube	U	230/460 - 60	Q	Toshiba Internal Reference	V	Toshiba Internal Reference
			T	Cylindrical Roller + Forced Oil Lube	V	190/380 - 50	R	Toshiba Internal Reference	W	Toshiba Internal Reference
B	OEM Motor	Standard	U	Sleeve Bearing (Horiz.) - Forced Oil Lube	W	200/400 - 50	S	Toshiba Internal Reference	X	Toshiba Internal Reference
			V	Sleeve for Vertical + Forced Oil Lube	X	220/440 - 50	T	Toshiba Internal Reference	Y	Toshiba Internal Reference
			W	Third Pedestal Bearing + Forced Oil Lube	Y	Other - 50	U	Toshiba Internal Reference	Z	Toshiba Internal Reference
			X	Fourth Pedestal Bearing + Forced Oil Lube (Jackshaft)	Z	Other	V	Toshiba Internal Reference		
							W	Toshiba Internal Reference		
							X	Toshiba Internal Reference		
							Y	Toshiba Internal Reference		
							Z	Toshiba Internal Reference		
							LX	Toshiba Internal Reference		
							LO	Toshiba Internal Reference		
							NH	Toshiba Internal Reference		
							Medium Voltage Ratings			
							C	Toshiba Internal Reference		
							D	Toshiba Internal Reference		
							E	Toshiba Internal Reference		
							F	Toshiba Internal Reference		
							M	Toshiba Internal Reference		

Appendix A

Model Number Breakdown Type 2

Horsepower or kW	Pole Speed	Enclosure / Construction	Product Family
(Three Digits)	(One Digit)	(Two Digit)	(One Digit)
— — —	—	— —	—
Horsepower 1/2 = 1/2 HP 3/4 = 3/4 HP Y75 = 7.5 HP 1000+ (HP) Rating First Digit = M <i>[M = 50 Multiplier]</i> 5000+ (HP) Rating First Digit = C <i>[C = 250 Multiplier]</i> Second & Third Digit = A Numerical Range from 20 to 99 <i>{Ex: M20 = 1000; 50 x 20 = 1000}</i> <i>{Ex: M25 = 1250; 50 x 25 = 1250}</i> KW³ X37 = 0.37 KW Y11 = 1.1 KW 018 = 18.5 KW	Single Speed 1 = 2-Pole (uni-CW) 2 = 2-Pole (Bi) 3 = 2-Pole (Uni-CCW) 4 = 4-Pole (bi) 5 = 4-Pole (Uni-CCW) 6 = 6-Pole (Bi) 7 = 6-Pole (Uni-CCW) 8 = 8-Pole (Bi) Multi-Speed N = 4/8-Pole 1 Wdg. P = 4/8-Pole 2 Wdg. Q = 4/6-Pole 2 Wdg.	BC = Blower Cooled DP = ODP FA = TEAO FC = TEFC (IP44) FN = TENV FT = TEFC (IP54) QD = Quarry Duty SD = Severe Duty TC = TEAAC WP = WP1 WT = WP2 XD = 841 Petro-Chem XP = TEXP XS = 840 Mill & Chem	A = Anti-Friction Brgs. B = Brake Motor C = Design C D = Single Label (Class I) E = Dual Label (Class I & II) F = VFD/ASD Motor G = Cooling Tower H = Close-Coupled Pump (Steel) J = Close-Coupled Pump (Cast Iron) K = Dry Kiln M = Metric ³ (KW Only) N = Steel Frame P = OWP Q = Sleeve Bearing R = Rig Motor S = Standard (default) T = Triple Rate U = Permanent Magnet V = Vertical P-Base W = SS Washdown

The standard frame offering's catalog number ends after the initial eleventh digit (i.e. shaft column). All alternate frame size offerings use an alpha-numerical sequence.

EXAMPLE:

The defined standard frame assignment is N449T, the catalog number would be: 2504FCSB31A

Alternate Frames Available:

449T Frame: Catalog Number: 2504FCSB31A-F1

505UZ Frame: Catalog Number: 2504FCSB31G-F1

Model Number Breakdown Type 2

Voltage/ Frequency	Efficiency Type	Mounting	Shaft	Suffix (Optional)
(One Digit)	(One Digit)	(One Digit)	(One Digit)	(Three Digits) - All Are Required for Proper Usage
—	—	—	—	—
60 Hz A = 230/460 B = 460 C = 575 D = 230/460/796 G = 2300 J = 2300/4160 K = 2300/4000 L = 4000 O = 6600 U = 200 50 Hz M = 230/400 N = 400 8 = 6000 60/50Hz R = 230/460 V @ 60 Hz and 190/380V @ 50 Hz T = 460 V @ 60 Hz and 380V @50 Hz V = 230/400 V @ 50 Hz and 460V @ 60Hz W = 400 V @ 50 Hz and 460 V @ 60 Hz	NEMA 1 = Standard Eff. 2 = Epact Eff. 3 = Premium Eff. 4 = NEMA Prem. Eff. 9 = Super Prem. Eff. IEC 5 = IE1 6 = IE2 7 = IE3 8 = IE4	NEMA 1 = Footed 2 = C-Face Footed 3 = D-Flange Footed 4 = C-Face Round 5 = D-Flange Round 6 = Round Body 7 = C-Face NEMA "BA" P = 10" P-Base (250~280 Frame) Q = 12" P-Base (250~320 Frame) R = 16" P-Base (280~440 Frame) S = 20" P-Base (440 Frame) T = 24" P-Base (440 Frame) U = 36" P-Base (440 Frame) IEC^{4, 5, 6} F = Footed (B3) G = FF Footed (B35) H = FT Footed (B34) J = FF Rd Body (B5) K = FT Rd Body (B14)	NEMA A = T-Shaft B = TS-Shaft C = TSS-Shaft D = TZ-Shaft E = US-Shaft F = USS-Shaft G = UZ-Shaft * H = 56C-Shaft * K = 140C-Shaft M = JM-Shaft N = Keyless Shaft P = JP-Shaft W = HP Solid Shaft (Normal Thrust) X = LP Solid Shaft (Medium Thrust) Y = VP Solid Shaft (High Thrust) Z = TP Hollow Shaft (High Thrust) IEC S = Std. Shaft Note: * = Shaft & Flange for Frame Series/Size Described	A = Alum. Rotor C = Cu Bar Rotor F = Alt. Frame Size H = Toshiba Internal Reference L = Aluminium Frame P = Purchased R = Roller Bearing T = Toshiba Internal Reference Y = 115°C Ambient Z = 135°C Ambient 2 = F2 Mount 3 = F3 Top Mount

Notes:

- (2) HP ratings covered by multiple frame assignments will follow this format as an example.
Rating: EQP111/4P/250 HP/460V/TEFC Available in 449, N449, & 505UZ Frames
- (3) To Be Used Only in Conjunction with IEC Metric Frame Ratings; 18.5 KW is Special Case
- (4) FF Flange is Similar to NEMA D-Flange with Clearance through Hole Construction
- (5) FT Flange is Same as FF Flange Except Holes are Tapped
- (6) FI Flange is Similar to NEMA C-Face Flange with Blind Threaded Holes (Not Very Popular)

Appendix B

Efficiency Tables

Full-Load Efficiencies for Energy Efficient Motors
(NEMA Table 12-11)


HP	2-Pole		4-Pole		6-Pole		8-Pole	
	Nominal Efficiency	Minimum Efficiency	Nominal Efficiency	Minimum Efficiency	Nominal Efficiency	Minimum Efficiency	Nominal Efficiency	Minimum Efficiency
Open Drip Proof Motors								
1			82.5	80.0	80.0	77.0	74.0	70.0
1.5	82.5	80.0	84.0	81.5	84.0	81.5	75.5	72.0
2	84.0	81.5	84.0	81.5	85.5	82.5	85.5	82.5
3	84.0	81.5	86.5	84.0	86.5	84.0	86.5	84.0
5	85.5	82.5	87.5	85.5	87.5	85.5	87.5	85.5
7.5	87.5	85.5	88.5	86.5	88.5	86.5	88.5	86.5
10	88.5	86.5	89.5	87.5	90.2	88.5	89.5	87.5
15	89.5	87.5	91.0	89.5	90.2	88.5	89.5	87.5
20	90.2	88.5	91.0	89.5	91.0	89.5	90.2	88.5
25	91.0	89.5	91.7	90.2	91.7	90.2	90.2	88.5
30	91.0	89.5	92.4	91.0	92.4	91.0	91.0	89.5
40	91.7	90.2	93.0	91.7	93.0	91.7	91.0	89.5
50	92.4	91.0	93.0	91.7	93.0	91.7	91.7	90.2
60	93.0	91.7	93.6	92.4	93.6	92.4	92.4	91.0
75	93.0	91.7	94.1	93.0	93.6	92.4	93.6	92.4
100	93.0	91.7	94.1	93.0	94.1	93.0	93.6	92.4
125	93.6	92.4	94.5	93.6	94.1	93.0	93.6	92.4
150	93.6	92.4	95.0	94.1	94.5	93.6	93.6	92.4
200	94.5	93.6	95.0	94.1	94.5	93.6	93.6	92.4
250	94.5	93.6	95.4	94.5	95.4	94.5	94.5	93.6
300	95.0	94.1	95.4	94.5	95.4	94.5	—	—
350	95.0	94.1	95.4	94.5	95.4	94.5	—	—
400	95.4	94.5	95.4	94.5	—	—	—	—
450	95.8	95.0	95.8	95.0	—	—	—	—
500	95.8	95.0	95.8	95.0	—	—	—	—
Totally Enclosed Fan Cooled Motors								
1	75.5	72.0	82.5	80.0	80.0	77.0	74.0	70.0
1.5	82.5	80.0	84.0	81.5	85.5	82.5	77.0	74.0
2	84.0	81.5	84.0	81.5	86.5	84.0	82.5	80.0
3	85.5	82.5	87.5	85.5	87.5	85.5	84.0	81.5
5	87.5	85.5	87.5	85.5	87.5	85.5	85.5	82.5
7.5	88.5	86.5	89.5	87.5	89.5	87.5	85.5	82.5
10	89.5	87.5	89.5	87.5	89.5	87.5	88.5	86.5
15	90.2	88.5	91.0	89.5	90.2	88.5	88.5	86.5
20	90.2	88.5	91.0	89.5	90.2	88.5	89.5	87.5
25	91.0	89.5	92.4	91.0	91.7	90.2	89.5	87.5
30	91.0	89.5	92.4	91.0	91.7	90.2	91.0	89.5
40	91.7	90.2	93.0	91.7	93.0	91.7	91.0	89.5
50	92.4	91.0	93.0	91.7	93.0	91.7	91.7	90.2
60	93.0	91.7	93.6	92.4	93.6	92.4	91.7	90.2
75	93.0	91.7	94.1	93.0	93.6	92.4	93.0	91.7
100	93.6	92.4	94.5	93.6	94.1	93.0	93.0	91.7
125	94.5	93.6	94.5	93.6	94.1	93.0	93.6	92.4
150	94.5	93.6	95.0	94.1	95.0	94.1	93.6	92.4
200	95.0	94.1	95.0	94.1	95.0	94.1	94.1	93.0
250	95.4	94.5	95.0	94.1	95.0	94.1	94.5	93.6
300	95.4	94.5	95.4	94.5	95.0	94.1	—	—
350	95.4	94.5	95.4	94.5	95.0	94.1	—	—
400	95.4	94.5	95.4	94.5	—	—	—	—
450	95.4	94.5	95.4	94.5	—	—	—	—
500	95.4	94.5	95.8	95.0	—	—	—	—

Full-Load Efficiencies for NEMA Premium® Efficiency Electric Motors Rated 600 V or Less
(NEMA Table 12-12)

HP	2-Pole		4-Pole		6-Pole		8-Pole	
	Nominal Efficiency	Minimum Efficiency	Nominal Efficiency	Minimum Efficiency	Nominal Efficiency	Minimum Efficiency	Nominal Efficiency	Minimum Efficiency
Open Drip Proof Motors								
1	77.0	74.0	85.5	82.5	82.5	80.0	75.5	72.0
1.5	84.0	81.5	86.5	84.0	86.5	84.0	77.0	74.0
2	85.5	82.5	86.5	84.0	87.5	85.5	86.5	84.0
3	85.5	82.5	89.5	87.5	88.5	86.5	87.5	85.5
5	86.5	84.0	89.5	87.5	89.5	87.5	88.8	86.5
7.5	88.5	86.5	91.0	89.5	90.2	88.5	89.5	87.5
10	89.5	87.5	91.7	90.2	91.7	90.2	90.2	88.5
15	90.2	88.5	93.0	91.7	91.7	90.2	90.2	88.5
20	91.0	89.5	93.0	91.7	92.4	91.0	91.0	89.5
25	91.7	90.2	93.6	92.4	93.0	91.7	91.0	89.5
30	91.7	90.2	94.1	93.0	93.6	92.4	91.0	90.2
40	92.4	91.0	94.1	93.0	94.1	93.0	91.7	90.2
50	93.0	91.7	94.5	93.6	94.1	93.0	91.7	91.0
60	93.6	92.4	95.0	94.1	94.5	93.6	92.4	91.7
75	93.6	92.4	95.0	94.1	94.5	93.6	93.0	93.0
100	93.6	92.4	95.4	94.5	95.0	94.1	94.1	93.0
125	94.1	93.0	95.4	94.5	95.0	94.1	94.1	93.0
150	94.1	93.0	95.8	95.0	95.4	94.5	94.1	93.0
200	95.0	94.1	95.8	95.0	95.4	94.5	94.1	93.0
250	95.0	94.1	95.8	95.0	95.8	95.0	95.0	94.1
300	95.4	94.5	95.8	95.0	—	—	—	—
350	95.4	94.5	95.8	95.0	—	—	—	—
400	95.8	95.0	95.8	95.0	—	—	—	—
450	96.2	95.4	96.2	95.4	—	—	—	—
500	96.2	95.4	96.2	95.4	—	—	—	—
Totally Enclosed Fan Cooled Motors								
1	77.0	74.0	85.5	82.5	82.5	80.0	75.5	72.0
1.5	84.0	81.5	86.5	84.0	87.5	85.5	78.5	75.5
2	85.5	82.5	86.5	84.0	88.5	86.5	84.0	81.5
3	86.5	84.0	89.5	87.5	89.5	87.5	85.5	82.5
5	88.5	86.5	89.5	87.5	89.5	87.5	86.5	84.0
7.5	89.5	87.5	91.7	90.2	91.0	89.5	86.5	84.0
10	90.2	88.5	91.7	90.2	91.0	89.5	89.5	87.5
15	91.0	89.5	92.4	91.0	91.7	90.2	89.5	87.5
20	91.0	89.5	93.0	91.7	91.7	90.2	90.2	88.5
25	91.7	90.2	93.6	92.4	93.0	91.7	90.2	88.5
30	91.7	90.2	93.6	92.4	93.0	91.7	91.7	90.2
40	92.4	91.0	94.1	93.0	94.1	93.0	91.7	90.2
50	93.0	91.7	94.5	93.6	94.1	93.0	92.4	91.0
60	93.6	92.4	95.0	94.1	94.5	93.6	92.4	91.0
75	93.6	92.4	95.4	94.5	94.5	93.6	93.6	92.4
100	94.1	93.0	95.4	94.5	95.0	94.1	93.6	92.4
125	95.0	94.1	95.4	94.5	95.0	94.1	94.1	93.0
150	95.0	94.1	95.8	95.0	95.8	95.0	94.1	93.0
200	95.4	94.5	96.2	95.4	95.8	95.0	94.5	93.6
250	95.8	95.0	96.2	95.4	95.8	95.0	95.0	94.1
300	95.8	95.0	96.2	95.4	—	—	—	—
350	95.8	95.0	96.2	95.4	—	—	—	—
400	95.8	95.0	96.2	95.4	—	—	—	—
450	95.8	95.0	96.2	95.4	—	—	—	—
500	95.8	95.0	96.2	95.4	—	—	—	—

Appendix B

Frame Dimensions

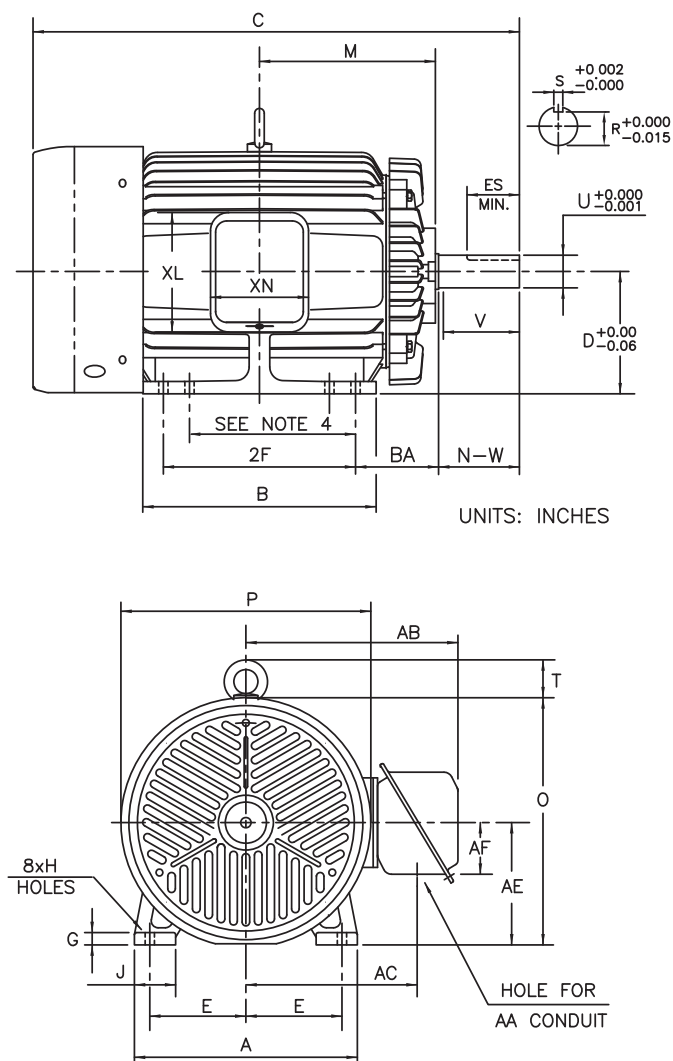

NEMA Quick Reference Chart

NEMA Frames	D	E	2F	H	BA	N-W	U	R	ES	S
48	3.00	2.12	2.75	0.34	2.50	1.50	0.500	0.453	---	flat
56	3.50	2.44	3.00	0.34	2.75	1.88	0.625	0.517	---	0.188
143	3.50	2.75	4.00	0.34	2.25	2.00	0.750	0.643	1.41	0.188
143T	3.50	2.75	4.00	0.34	2.25	2.25	0.875	0.771	1.41	0.188
145	3.50	2.75	5.00	0.34	2.25	2.00	0.750	0.643	1.41	0.188
145T	3.50	2.75	5.00	0.34	2.25	2.25	0.875	0.771	1.41	0.188
182	4.50	3.75	4.50	0.41	2.75	2.25	0.875	0.771	1.41	0.188
182T	4.50	3.75	4.50	0.41	2.75	2.75	1.125	0.986	1.78	0.250
184	4.50	3.75	4.50	0.41	2.75	2.25	0.875	0.771	1.41	0.188
184T	4.50	3.75	4.50	0.41	2.75	2.75	1.125	0.986	1.78	0.250
213	5.25	4.25	5.50	0.41	3.50	3.00	1.125	0.986	2.03	0.250
213T	5.25	4.25	5.50	0.41	3.50	3.38	1.375	1.201	2.41	0.312
215	5.25	4.25	7.00	0.41	3.50	3.00	1.125	0.986	2.03	0.250
215T	5.25	4.25	7.00	0.41	3.50	3.38	1.375	1.201	2.41	0.312
254	6.25	5.00	8.25	0.53	4.25	3.37	1.125	0.986	2.03	0.250
254U	6.25	5.00	8.25	0.53	4.25	3.75	1.375	1.201	2.78	0.312
254T	6.25	5.00	8.25	0.53	4.25	4.00	1.625	1.416	2.91	0.375
256U	6.25	5.00	10.00	0.53	4.25	3.75	1.375	1.201	2.78	0.312
256T	6.25	5.00	10.00	0.53	4.25	4.00	1.625	1.416	2.91	0.375
284U	7.00	5.50	9.50	0.53	4.75	4.88	1.625	1.416	3.78	0.375
284T	7.00	5.50	9.50	0.53	4.75	4.62	1.875	1.591	3.28	0.500
284TS	7.00	5.50	9.50	0.53	4.75	3.25	1.625	1.416	1.91	0.375
286U	7.00	5.50	11.00	0.53	4.75	4.88	1.625	1.416	3.78	0.375
286T	7.00	5.50	11.00	0.53	4.75	4.62	1.875	1.591	3.28	0.500
286TS	7.00	5.50	11.00	0.53	4.75	3.25	1.625	1.416	1.91	0.375
324U	8.00	6.25	10.50	0.66	5.25	5.62	1.875	1.591	4.28	0.500
324S	8.00	6.25	10.50	0.66	5.25	3.25	1.625	1.416	1.91	0.375
324T	8.00	6.25	10.50	0.66	5.25	5.25	2.125	1.845	3.91	0.500
324TS	8.00	6.25	10.50	0.66	5.25	3.75	1.875	1.591	2.03	0.500
326U	8.00	6.25	12.00	0.66	5.25	5.62	1.875	1.591	4.28	0.500
326S	8.00	6.25	12.00	0.66	5.25	3.25	1.625	1.416	1.91	0.375
326T	8.00	6.25	12.00	0.66	5.25	5.25	2.125	1.845	3.91	0.500
326TS	8.00	6.25	12.00	0.66	5.25	3.75	1.875	1.591	2.03	0.500
364S	9.00	7.00	11.25	0.66	5.88	3.25	1.625	1.416	1.91	0.375
364U	9.00	7.00	11.25	0.66	5.88	6.37	2.125	1.845	5.03	0.500
364US	9.00	7.00	11.25	0.66	5.88	3.75	1.875	1.591	2.03	0.500
364T	9.00	7.00	11.25	0.66	5.88	5.88	2.375	2.021	4.28	0.625
364TS	9.00	7.00	11.25	0.66	5.88	3.75	1.875	1.591	2.03	0.500
365S	9.00	7.00	12.25	0.66	5.88	3.25	1.625	1.416	1.91	0.375
365U	9.00	7.00	12.25	0.66	5.88	6.37	2.125	1.845	5.03	0.500
365US	9.00	7.00	12.25	0.66	5.88	3.75	1.875	1.591	2.03	0.500
365T	9.00	7.00	12.25	0.66	5.88	5.88	2.375	2.021	4.28	0.625
365TS	9.00	7.00	12.25	0.66	5.88	3.75	1.875	1.591	2.03	0.500
404S	10.00	8.00	12.25	0.81	6.62	3.75	1.875	1.591	2.03	0.500
404U	10.00	8.00	12.25	0.81	6.62	7.12	2.375	2.021	5.53	0.625
404US	10.00	8.00	12.25	0.81	6.62	4.25	2.125	1.845	2.78	0.500
404T	10.00	8.00	12.25	0.81	6.62	7.25	2.875	2.45	5.65	0.750
404TS	10.00	8.00	12.25	0.81	6.62	4.25	2.125	1.845	2.78	0.500
405S	10.00	8.00	13.75	0.81	6.62	3.75	1.875	1.591	2.03	0.500
405U	10.00	8.00	13.75	0.81	6.62	7.12	2.375	2.021	5.53	0.625
405US	10.00	8.00	13.75	0.81	6.62	4.25	2.125	1.845	2.78	0.500
405T	10.00	8.00	13.75	0.81	6.62	7.25	2.875	2.45	5.65	0.750
405TS	10.00	8.00	13.75	0.81	6.62	4.25	2.125	1.845	2.78	0.500
444S	11.00	9.00	14.50	0.81	7.50	4.25	2.125	1.845	2.78	0.500
444U	11.00	9.00	14.50	0.81	7.50	8.62	2.875	2.45	7.03	0.750
444US	11.00	9.00	14.50	0.81	7.50	4.25	2.125	1.845	2.78	0.500
444T	11.00	9.00	14.50	0.81	7.50	8.50	3.375	2.88	6.91	0.875
444TS	11.00	9.00	14.50	0.81	7.50	4.75	2.375	2.021	3.03	0.625
445S	11.00	9.00	16.50	0.81	7.50	4.25	2.125	1.845	2.78	0.500
445U	11.00	9.00	16.50	0.81	7.50	8.62	2.875	2.45	7.03	0.750
445US	11.00	9.00	16.50	0.81	7.50	4.25	2.125	1.845	2.78	0.500
445T	11.00	9.00	16.50	0.81	7.50	8.50	3.375	2.88	6.91	0.875
445TS	11.00	9.00	16.50	0.81	7.50	4.75	2.375	2.021	3.03	0.625
447T	11.00	9.00	20.00	0.81	7.50	8.50	3.375	2.88	6.91	0.875
447TS	11.00	9.00	20.00	0.81	7.50	4.75	2.375	2.45	3.03	0.625
Toshiba Frames	D	E	2F	H	BA	N-W	U	R	ES	S
N449T	11.00	9.00	25.00	0.81	7.50	8.50	3.375	2.88	6.91	0.875
N449TS	11.00	9.00	25.00	0.81	7.50	4.75	2.375	2.021	3.03	0.625
505UZ	12.50	10.00	18.00	0.94	8.50	11.62	3.875	3.309	10.00	1.000
505US	12.50	10.00	18.00	0.94	8.50	4.75	2.875	2.45	3.00	0.750
505USS	12.50	10.00	18.00	0.94	8.50	4.75	2.375	2.021	3.00	0.625
507UZ	12.50	10.00	18.00	0.94	8.50	11.62	3.875	3.309	10.00	1.000
507US	12.50	10.00	22.00	0.94	8.50	10.13	3.375	2.88	8.50	0.875
507USS	12.50	10.00	22.00	0.94	8.50	4.75	2.375	2.021	3.00	0.625
5010UZ	12.50	10.00	32.00	1.12	8.50	11.62	4.375	3.817	10.00	1.000
5010US	12.50	10.00	32.00	1.12	8.50	6.25	3.625	3.134	5.00	0.875
5010USS	12.50	10.00	32.00	1.12	8.50	4.75	2.375	2.021	3.00	0.625
N587UZQ	14.50	11.50	25.00	1.12	10.00	11.62	4.375	3.817	10.00	1.000
N587UZ	14.50	11.50	25.00	1.12	10.00	11.62	3.875	3.309	10.00	1.000
N587US	14.50	11.50	25.00	1.12	10.00	4.75	2.875	2.45	3.00	0.750
N587USS	14.50	11.50	25.00	1.12	10.00	4.75	2.375	2.021	3.00	0.625
5810UZ	14.50	11.50	36.00	1.20	10.00	11.62	5.250	4.55	10.00	1.250
5810US	14.50	11.50	36.00	1.20	10.00	6.75	3.625	3.134	5.00	0.875
5810USS	14.50	11.50	36.00	1.20	10.00	6.75	2.375	2.021	5.00	0.625

Appendix C

UL & CSA Explosion Proof Classifications

CAUTION!

Motors that are misused in hazardous environments can cause a fire or explosion, resulting in destruction of property, serious injury, or death. **Only the end user or a qualified underwriter should identify and select the appropriate motor class, group, division, and temperature code to meet the requirements of each installation.** Toshiba can only advise what listings and approvals Toshiba motors carry. Toshiba cannot evaluate nor recommend what motors may be suitable for use in hazardous environments.

Hazardous Locations:

For details on area classification and equipment suitability, please consult NFPA70™ National Electric Code® Articles 500 to 516.

- Class I Group C — locations containing flammable gas, flammable liquid-produced vapor, or combustible liquid-produced vapor mixed with air that may burn or explode, having either a maximum experimental safe gap (MESG) value greater than 0.45 mm and less than or equal to 0.75 mm, or a minimum igniting current ratio (MIC ratio) greater than 0.40 and less than or equal to 0.80. Please consult NFPA 497 for substances and additional information related to this group.
- Class I Group D — locations containing flammable gas, flammable liquid-produced vapor, or combustible liquid-produced vapor mixed with air that may burn or explode, having either a maximum experimental safe gap (MESG) value greater than 0.75 mm or a minimum igniting current ratio (MIC ratio) greater than 0.80. Please consult NFPA 497 for substances and additional information related to this group..
- Class II Group E — locations with atmospheres containing combustible metal dusts, including aluminum, magnesium, and their commercial alloys, or other combustible dusts whose particle size, abrasiveness, and conductivity present similar hazards in the use of electrical equipment. Please consult NFPA 499 for substances and additional information related to this group..
- Class II Group F — locations with atmospheres containing combustible carbonaceous dusts that have more than 8% total entrapped volatiles or that have been sensitized by other materials so that they present an explosion hazard. Coal, carbon black, charcoal, and coke dusts are examples of carbonaceous dusts. Please consult NFPA 499 for other substances and additional information related to this group.
- Class II Group G — locations with atmospheres containing combustible dusts not included in Group E or F, including flour, grain, wood, plastic, and chemicals. Please consult NFPA 499 for substances and additional information related to this group.

Class II Temperature Codes:

The temperature marking shall be less than the ignition temperature of the specific dust to be encountered. For organic dusts that may dehydrate or carbonize, the temperature marking shall not exceed the lower of either the ignition temperature or 165°C (329°F). Due to the low surface temperature requirements (higher temperature codes) mandated in Class II F & G, over temperature protection must be used.

- All Toshiba Explosion Proof motors are equipped with an internally-mounted normally-closed winding thermostat.

Surface Temperatures:

Surface temperatures of Toshiba's Explosion Proof motors shall not exceed the following UL and CSA maximums under fault conditions. The below temperature class (T Code) identifies the maximum motor surface temperature that will be developed under all operating conditions.

- Division 1 considers external surface temperature and includes overloads and locked rotor conditions.
- Division 2 considers internal and external surface temperatures during normal operation.

T Code	Maximum Motor Surface Temperature	
	°C	°F
T1	450°	842°
T2	300°	572°
T2A	280°	536°
T2B	260°	500°
T2C	230°	446°
T2D	215°	419°
T3	200°	392°

T Code	Maximum Motor Surface Temperature	
	°C	°F
T3A	180°	356°
T3B	165°	329°
T3C	160°	320°
T4	135°	275°
T4A	120°	248°
T5	100°	212°
T6	85°	185°

Additional Notes:

- Stock motors are not suitable for applications in temperatures below -25°C (-13°F). Contact Toshiba for further information.
- All Toshiba Explosion Proof motors are supplied with Explosion Proof UL- and CSA-approved conduit boxes as standard.
- Inverter-duty Explosion Proof motors are available; contact Toshiba for further information.

Appendix C

Division 2 Motors

The following TEFC NEMA Premium Efficiency motors are now CSA certified for Division 2, Class I, Group A, B, C, and D for sine wave and inverter duty power. They also include equivalent Zone markings for Class I Zone 2, Groups IIA, IIB, and IIC for sine wave and inverter duty power.

Division 2 Temperature-codes are provided in the standard format per the NEC Article 500 requirements. Equivalent Zone Temp-codes are provided in the "T-code = °C" format because NEC Article 505 does not allow all temp.-codes permitted by NEC 500. Inverter temp.-codes are provided in the "T-code = °C" format because they apply to both the equivalent Zone (NEC 505) requirements and NEC 500 requirements. Please reference the table below for temperature and Temp-code values.

US (NEC 500) CA (CEC Annex J)	US (NEC 505) CA (CEC Section 18)	Maximum Motor Surface Temperature °C
T1	T1	450° C
T2	T2	300° C
T2A	-	280° C
T2B	-	260° C
T2C	-	230° C
T2D	-	215° C
T3	T3	200° C
T3A	-	180° C
T3B	-	165° C
T3C	-	160° C
T4	T4	135° C
T4A	-	120° C
T5	T5	100° C
T6	T6	85° C

NOTES:


- 1) All Max HPs provided above are for a 60 Hz base. 50 Hz HPs must be derated by 5/6 of the 60 Hz HP and rounded to the nearest standard offering for 400 frames and above. For special 50 Hz requests not covered in this table, please contact Toshiba.
- 2) T-Codes will change with a warmer ambient temperature above 40 C. Consult Factory for changes.
- 3) T-Code change not required for the above ratings when Division 2 space heater arrangements are added.

HP	Speed (RPM)	Frame	Sine Wave		Inverter Power 1.0 S.F.			
			Temp Code 1.0 S.F.	Temp Code 1.15 S.F.	Inverter Temp Code	V.T. Speed Range (Hz)	C.T. Speed Range (Hz)	CHP Speed Range (Hz)
1	1800	143T	T4A	T4A	T4	1 - 60	6 - 60	60 - 90
1	1200	145T	T4A	T4A	T4	1 - 60	6 - 60	60 - 90
1.5	3600	143T	T4A	T4A	T4	1 - 60	6 - 60	60 - 90
1.5	1800	145T	T4A	T4A	T4	1 - 60	6 - 60	60 - 90
1.5	1200	182T	T4A	T4A	T4	1 - 60	6 - 60	60 - 90
2	3600	145T	T4A	T4A	T4	1 - 60	6 - 60	60 - 90
2	1800	145T	T4A	T4A	T4	1 - 60	6 - 60	60 - 90
2	1200	184T	T4A	T4A	T4	1 - 60	6 - 60	60 - 90
3	3600	182T	T4A	T4A	T4	1 - 60	6 - 60	60 - 90
3	1800	182T	T4A	T4A	T4	1 - 60	6 - 60	60 - 90
3	1200	213T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
5	3600	184T	T4A	T4A	T4	1 - 60	6 - 60	60 - 90
5	1800	184T	T4A	T4A	T4	1 - 60	6 - 60	60 - 90
5	1200	215T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
7.5	3600	213T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
7.5	1800	213T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
7.5	1200	254T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
10	3600	215T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
10	1800	215T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
10	1200	256T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
15	3600	254T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
15	1800	254T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
15	1200	284T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
20	3600	256T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
20	1800	256T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
20	1200	286T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
25	3600	284TS	T3C	T3	T3	1 - 60	6 - 60	60 - 90
25	1800	284T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
25	1200	324T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
30	3600	286TS	T3C	T3	T3	1 - 60	6 - 60	60 - 90
30	1800	286T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
30	1200	326T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
40	3600	324TS	T3C	T3	T3	1 - 60	6 - 60	60 - 90
40	1800	324T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
40	1200	364T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
50	3600	326TS	T3C	T3	T3	1 - 60	6 - 60	60 - 90
50	1800	326T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
50	1200	365T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
60	3600	364TS	T3C	T3	T3	1 - 60	6 - 60	60 - 90
60	1800	364T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
60	1200	404T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
75	3600	365TS	T3C	T3	T3	1 - 60	6 - 60	60 - 90
75	1800	365T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
75	1200	405T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
100	3600	405TS	T3C	T3	T3	1 - 60	6 - 60	60 - 90
100	1800	405T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
100	1200	444T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
125	3600	444TS	T3C	T3	T3	1 - 60	6 - 60	60 - 90
125	1800	444T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
125	1200	445T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
150	3600	445TS	T3C	T3	T3	1 - 60	6 - 60	60 - 90
150	1800	445T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
150	1200	447T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
200	3600	447TS	T3C	T3	T3	1 - 60	6 - 60	60 - 90
200	1800	447T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
200	1200	N449T	T3C	T3	T3	1 - 60	6 - 60	60 - 90
200	1200	505US	T3	T3	T2D	1 - 60	6 - 60	60 - 90
250	3600	N449TS	T3	T2D	T3	1 - 60	6 - 60	60 - 90
250	3600	5010USS	T3	T3	T2D	1 - 60	6 - 60	60 - 90
250	1800	N449T	T3	T2D	T3	1 - 60	6 - 60	60 - 90
250	1800	505US/Z	T3	T3	T2D	1 - 60	6 - 60	60 - 90
250	1200	N449T	T3	T2D	T3	1 - 60	6 - 60	60 - 90
250	1200	5010US/Z	T3	T3	T2D	1 - 60	6 - 60	60 - 90
300	3600	N449TS	T3	T2D	T3	1 - 60	6 - 60	60 - 90
300	3600	5010USS	T3	T3	T2D	1 - 60	6 - 60	60 - 90
300	1800	N449T	T3	T2D	T3	1 - 60	6 - 60	60 - 90
300	1800	5010US/Z	T3	T3	T2D	1 - 60	6 - 60	60 - 90
300	1200	N449T	T3	T2D	T3	1 - 60	6 - 60	60 - 90
300	1200	5010US/Z	T3	T3	T2D	1 - 60	6 - 60	60 - 90
350	3600	N449TS	T3	T2D	T3	1 - 60	6 - 60	60 - 90
350	3600	5010USS	T3	T3	T2D	1 - 60	6 - 60	60 - 90
350	1800	N449T	T3	T2D	T3	1 - 60	6 - 60	60 - 90
350	1800	5010US/Z	T3	T3	T2D	1 - 60	6 - 60	60 - 90
350	1200	N449T	T3	T2D	T3	1 - 60	6 - 60	60 - 90
350	1200	5010US/Z	T3	T3	T2D	1 - 60	6 - 60	60 - 90
400	3600	5010USS	T3	T3	T2D	1 - 60	6 - 60	60 - 90
400	3600	5011USS	T3	T3	T2D	1 - 60	6 - 60	60 - 90
400	1800	5010US/Z	T3	T3	T2D	1 - 60	6 - 60	60 - 90
400	1800	5011US/Z	T3	T3	T2D	1 - 60	6 - 60	60 - 90
400	1200	5010US/Z	T3	T3	T2D	1 - 60	6 - 60	60 - 90
450	3600	5010USS	T3	T3	T2C	1 - 60	20 - 60	60 - 90
450	3600	5011USS	T3	T3	T2C	1 - 60	20 - 60	60 - 90
450	1800	5010US/Z	T3	T3	T2C	1 - 60	20 - 60	60 - 90
450	1800	5011US/Z	T3	T3	T2C	1 - 60	20 - 60	60 - 90
450	1200	5810US/Z	T3	T3	T3B	1 - 60	20 - 60	60 - 90
500	3600	5010USS	T3	T3	T2C	1 - 60	20 - 60	60 - 90
500	3600	5011USS	T3	T3	T2C	1 - 60	20 - 60	60 - 90
500	1800	5011US/Z	T3	T3	T2C	1 - 60	20 - 60	60 - 90
500	1200	5810US/Z	T3	T3	T3B	1 - 60	20 - 60	60 - 90
600	1800	5810US/Z	T3	T3	T2C	1 - 60	6 - 60	60 - 90
600	1200	5810US/Z	T3	T3	T2C	1 - 60	6 - 60	60 - 90
700	1800	5810US/Z	T3	T3	T3B	1 - 60	20 - 60	60 - 90
700	1200	5811USS	T3	T3	T3B	1 - 60	20 - 60	60 - 90
800	3600	5811USS	T3	T3	T3B	1 - 60	20 - 60	60 - 90

Appendix D
IEC Motors

IEC Quick Reference Chart

IEC Frames	Mounting					Shaft						
	A	B	C	H	K	D	E	F	G	ED	DH	EG
63	100	80	40	63	7	11	23	3	8.5	10	M4	10
71	112	90	45	71	7	14	30	5	11	14	M5	12.5
80	125	100	50	80	10	19	40	6	15.5	25	M6	16
90S	140	100	56	90	10	24	50	8	20	32	M8	19
90L	140	125	56	90	10	24	50	8	20	32	M8	19
100L	160	140	63	100	12	28	60	8	24	40	M10	22
112M	190	140	70	112	12	28	60	8	24	40	M10	22
132S	216	140	89	132	12	38	80	10	33	56	M12	28
132M	216	178	89	132	12	38	80	10	33	56	M12	36
160M	254	210	108	160	15	42	110	12	37	80	M16	36
160L	254	254	108	160	15	42	110	12	37	80	M16	36
180M	279	241	121	180	15	48	110	14	42.5	80	M16	36
180L	279	279	121	180	15	48	110	14	42.5	80	M16	36
200L	318	305	133	200	19	55	110	16	49	80	M20	42
225S	356	286	149	225	19	60	140	18	53	125	M20	42
225S -2P	356	286	149	225	19	55	110	16	49	100	M20	42
225M	356	311	149	225	19	60	140	18	53	125	M20	42
225M - 2p	356	311	149	225	19	55	110	16	49	100	M20	42
250S	406	311	168	250	24	65	140	18	58	125	M20	42
250S -2p	406	311	168	250	24	60	140	18	53	125	M20	42
250M	406	349	168	250	24	65	140	18	58	125	M20	42
250M - 2P	406	349	168	250	24	60	140	18	53	125	M20	42
280S	457	368	190	280	24	75	140	20	67.5	125	M20	42
280S - 2P	457	368	190	280	24	65	140	18	58	125	M20	42
280M	457	419	190	280	24	75	140	20	67.5	125	M20	42
280M - 2P	457	419	190	280	24	65	140	18	58	125	M20	42
315S	508	406	216	315	28	80	170	22	71	160	M20	42
315S - 2p	508	406	216	315	28	65	140	18	58	125	M20	48
315M	508	457	216	315	28	80	170	22	71	160	M21	48
315M - 2p	508	457	216	315	28	65	140	18	58	125	M22	48

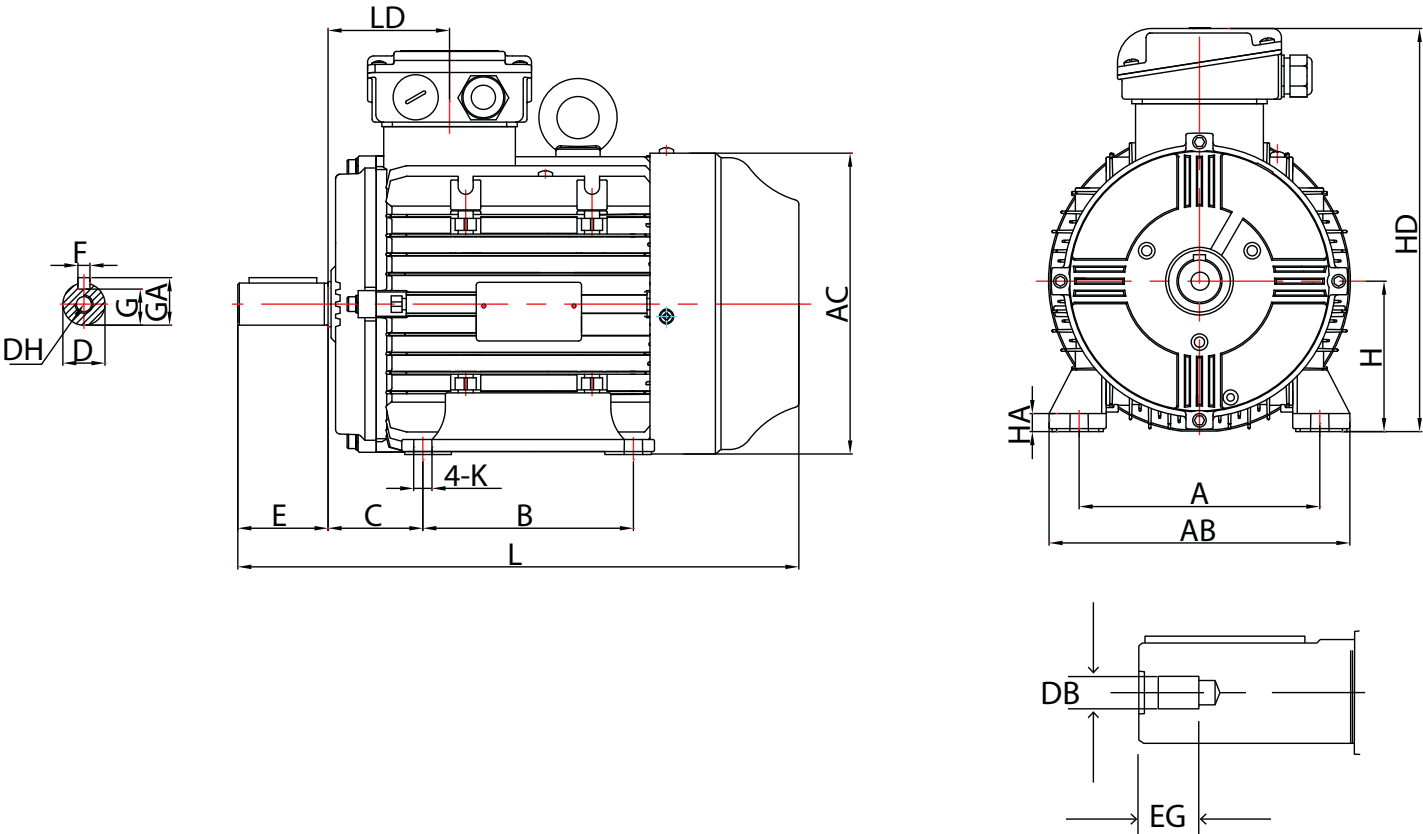

Toshiba Drives

ONE STOP FOR ALL YOUR ADJUSTABLE SPEED DRIVE NEEDS

Toshiba is a leading manufacturer of low and medium voltage adjustable speed drives ranging from 1/2 to 11,000 HP and 230 to 6,600 V. Our extensive adjustable speed drive product offering and large installed base in numerous industries demonstrates our customers' confidence in choosing Toshiba drives. Since our products are manufactured under one roof, we offer customized solutions to meet your application needs. We also have the capability to test our products together, as a complete system, before it goes out into the field—ensuring the highest level of quality, performance, and reliability.



Low Voltage Drives

AS3 ASD

Specifications

Toshiba's AS3 adjustable speed drive is designed with an emphasis on built-in communications, allowing end-users to access real-time data and refined controls to maximize system performance.

Product Scope

200 to 240 V at 0.5 to 75 HP HD (1 to 100 HP ND)
380 to 480 V at 0.5 to 450 HP HD (1 to 500 HP ND)

Highlights

- Dual Rating Through Parameter Change (Heavy Duty and Normal Duty)
 - Heavy Duty 150% Overload for 60 Seconds
 - Normal Duty 120% Overload for 60 Seconds
- Eight Programmable Digital Inputs
- Three Programmable Digital Outputs: One Form-C Relay & Two Form-A Dry Contact Relays
- Three Programmable Analog Inputs: One 4 to 20mA, One 0 to 10 VDC, & One +10 VDC
- Two Programmable Analog Outputs: Both 4 to 20mA or 0 to 10 VDC
- Embedded STO Safety Terminal Compliant with IEC 61800-5-2 and SIL3 level in IEC 61508
- Two-Wire/Four-Wire RS485
- Built-in Dual Port Ethernet IP
- Embedded Web Server
- Real-Time Clock for Past Trip Monitoring or Calendar Functionality
- QR Code Display for Additional Parameter Information and Fault Troubleshooting

Standard Features

- NEMA 1 up to 100 HP HD (125 HP ND) 460V
- Ambient Temperature: 14° to 122°F (-10° to +50°C) or 140°F (+60°C) with Derate
- Altitude: Up to 1000 Meters Without Derate
- Humidity: 95% Non-Condensing
- Advanced LCD Keypad with Capacitive Touch Wheel for Navigating and Programming
- Save, Restore & Clone Multiple Drive Settings
- Real Time Clock for Past Trip Monitoring or Calendar Functionality
- Built-Dynamic Braking Drive Circuit up to 100 HP HD (125 HP ND) 460V
- All Models Include DC Link Reactor



AS3 ASD

> 230 V Power Unit Pricing & Dimensions



VAC	HP (HD)	FLA (HD)	HP (ND)	FLA (ND)	Model Number	List Price	Frame	H	W	D	Shipping Weight (lbs.)
								Dimensions (in.)			
230	0.5	3.3	1	4.6	VFAS3-2004P	\$680	A1	12.8	5.1	8.0	9.5
230	1	4.6	2	8.0	VFAS3-2007P	\$750	A1	12.8	5.1	8.0	9.5
230	2	8.0	3	11.2	VFAS3-2015P	\$840	A1	12.8	5.1	8.0	9.9
230	3	11.2	5	18.7	VFAS3-2022P	\$990	A1	12.8	5.1	8.0	10.1
230	5	18.7	7.5	25.4	VFAS3-2037P	\$1,020	A2	15.4	6.1	9.1	17.0
230	7.5	25.4	10	32.7	VFAS3-2055P	\$1,396	A3	21.0	7.7	9.1	30.4
230	10	32.7	15	46.8	VFAS3-2075P	\$1,710	A3	21.0	7.7	9.1	30.4
230	15	46.8	20	63.4	VFAS3-2110P	\$2,390	A4	26.0	8.3	10.6	60.2
230	20	63.4	25	78.4	VFAS3-2150P	\$2,700	A4	26.0	8.3	10.6	60.2
230	25	78.4	30	92.6	VFAS3-2185P	\$3,600	A4	26.0	8.3	10.6	60.2
230	30	92.6	40	123	VFAS3-2220P	\$4,158	A5	35.7	10.4	12.3	127
230	40	123	50	149	VFAS3-2300P	\$6,570	A5	35.7	10.4	12.3	127
230	50	149	60	176	VFAS3-2370P	\$10,200	A5	35.7	10.4	12.3	127
230	60	176	75	211	VFAS3-2450P	\$12,600	A6	33.5	11.8	15.1	181
230	75	211	100	282	VFAS3-2550P	\$15,505	A6	33.5	11.8	15.1	181

> 460 V Power Unit Pricing & Dimensions

VAC	HP (HD)	FLA (HD)	HP (ND)	FLA (ND)	Model Number	List Price	Frame	H	W	D	Shipping Weight (lbs.)
								Dimensions (in.)			
460	0.5	1.5	1	2.2	VFAS3-4004PC	\$770	A1	12.8	5.1	8.0	9.9
460	1	2.2	2	4.0	VFAS3-4007PC	\$873	A1	12.8	5.1	8.0	9.9
460	2	4.0	3	5.6	VFAS3-4015PC	\$945	A1	12.8	5.1	8.0	9.9
460	3	5.6	5	9.3	VFAS3-4022PC	\$1,020	A1	12.8	5.1	8.0	10.1
460	5	9.3	7.5	12.7	VFAS3-4037PC	\$1,230	A1	12.8	5.1	8.0	10.4
460	7.5	12.7	10	16.5	VFAS3-4055PC	\$1,500	A2	15.4	5.9	9.1	17.0
460	10	16.5	15	23.5	VFAS3-4075PC	\$1,860	A2	15.4	5.9	9.1	17.0
460	15	23.5	20	31.7	VFAS3-4110PC	\$2,400	A3	21.0	7.7	9.1	30.0
460	20	31.7	25	39.2	VFAS3-4150PC	\$3,000	A3	21.0	7.7	9.1	31.3
460	25	39.2	30	46.3	VFAS3-4185PC	\$3,720	A3	21.0	7.7	9.1	31.5
460	30	46.3	40	61.5	VFAS3-4220PC	\$3,900	A4	26.0	8.3	10.6	61.7
460	40	61.5	50	74.5	VFAS3-4300PC	\$4,705	A4	26.0	8.3	10.6	62.2
460	50	74.5	60	88.0	VFAS3-4370PC	\$6,200	A4	26.0	8.3	10.6	63.3
460	60	88.0	75	106	VFAS3-4450PC	\$7,485	A5	35.7	10.4	12.3	127
460	75	106	100	145	VFAS3-4550PC	\$8,300	A5	35.7	10.4	12.3	130
460	100	145	125	173	VFAS3-4750PC	\$10,200	A5	35.7	10.4	12.3	131
460	125	173	150	211	VFAS3-4900PC	\$13,044	A6	33.5	11.8	15.1	181
460	150	211	200	250	VFAS3-4110KPC	\$14,796	A6	33.5	11.8	15.1	181
460	200	250	250	302	VFAS3-4132KPC	\$17,870	A6	33.5	11.8	15.1	181
460	250	314	350	427	VFAS3-4160KPC	\$21,835	A7	46.9	16.9	14.8	366 (230)*
460	300	387	400	481	VFAS3-4200KPC	\$25,438	A8	46.9	23.0	14.8	428 (296)*
460	350	427	450	550	VFAS3-4220KPC	\$28,849	A8	46.9	23.0	14.8	450 (230)*
460	450	550	500	616	VFAS3-4280KPC	\$39,765	A8	46.9	23.0	14.8	450 (230)*

Notes:

- Factory authorized startup is required on all ASDs 400 HP and larger.
- Frame A6 and A8 units do not include a dynamic braking circuit. This is available as an option.
- Frame A6 and larger units are rated IP00. NEMA 1 conduit adapters are available as an option.
- *DC link reactor attaches to top.

AS3 ASD

> Options Information & Pricing



AS3 Conduit Adapters

230 V AS3 Model Number	460 V AS3 Model Number	Frame	Conduit Adapter Model Number	List Price	Height Increase (in.)	Stand Alone Drive Rating		
VFAS3-2004P	VFAS3-4004PC	A1	Included	N/A		NEMA 1		
VFAS3-2007P	VFAS3-4007PC							
VFAS3-2015P	VFAS3-4015PC							
VFAS3-2022P	VFAS3-4022PC							
	VFAS3-4037PC	A2						
VFAS3-2037P	VFAS3-4055PC							
	VFAS3-4075PC	A3						
VFAS3-2055P	VFAS3-4110PC							
VFAS3-2075P	VFAS3-4150PC							
	VFAS3-4185PC							
VFAS3-2110P	VFAS3-4220PC	A4						
VFAS3-2150P	VFAS3-4300PC							
VFAS3-2185P	VFAS3-4370PC							
VFAS3-2220P	VFAS3-4450PC	A5						
VFAS3-2300P	VFAS3-4550PC							
VFAS3-2370P	VFAS3-4750PC							
VFAS3-2450P	VFAS3-4900PC	A6	NEM1306Z	\$1,250	13.7	IP00		
VFAS3-2550P	VFAS3-4110KPC							
	VFAS3-4132KPC	A7	NEM1112Z	\$1,300	15.5			
	VFAS3-4160KPC							
	VFAS3-4200KPC	A8	NEM1113Z					
	VFAS3-4220KPC							
	VFAS3-4280KPC							
	VFAS3-4200KPC	A8 + IGBT7	NEM1114Z				\$1,400	
	VFAS3-4220KPC							
	VFAS3-4280KPC							

Notes:

- AS3 units rated IP00 do not include a bottom cover.
- Stand-alone AS3 power units from frame A6 through A8 do not comply with NEMA 1 standards. The conduit adapters listed above will bring the power unit into NEMA 1 compliance.

AS3 ASD

> Options Information & Pricing



AS3 Flange-Mount Kits

230 V AS3 Model Number	460 V AS3 Model Number	Frame	Flange-Mount Kit Model Number	List Price
VFAS3-2004P	VFAS3-4004PC	A1	FOT018Z	\$300
VFAS3-2007P	VFAS3-4007PC			
VFAS3-2015P	VFAS3-4015PC			
VFAS3-2022P	VFAS3-4022PC			
	VFAS3-4037PC			
VFAS3-2037P	VFAS3-4055PC	A2	FOT019Z	\$400
	VFAS3-4075PC			
VFAS3-2055P	VFAS3-4110PC	A3	FOT020Z	\$450
VFAS3-2075P	VFAS3-4150PC			
	VFAS3-4185PC			
VFAS3-2110P	VFAS3-4220PC	A4	FOT021Z	\$650
VFAS3-2150P	VFAS3-4300PC			
VFAS3-2185P	VFAS3-4370PC			
VFAS3-2220P	VFAS3-4450PC	A5	FOT022Z	\$700
VFAS3-2300P	VFAS3-4550PC			
VFAS3-2370P	VFAS3-4750PC			
VFAS3-2450P	VFAS3-4900PC	A6	FOT023Z	\$1,050
VFAS3-2550P	VFAS3-4110KPC			
	VFAS3-4132KPC	A7	FOT013Z	\$1,050
	VFAS3-4160KPC			
	VFAS3-4200KPC	A8	FOT014Z	\$1,100
	VFAS3-4220KPC			
	VFAS3-4280KPC			
	VFAS3-4200KPC	A8 + IGBT7	FOT015Z	\$1,300
	VFAS3-4220KPC			
	VFAS3-4280KPC			

Notes:

- The flange-mount kit allows the AS3 to be installed inside an enclosure with the heat sink mounted out-the-back to reduce cooling requirements and minimize enclosure dimensions.

AS3/AS1

G9/P9

Micro Drives

GX9

Regen

GX7M/
Mining Drive

W7/WX9

Plus Pack

LV Options

Reactors
& Filters

AS3 ASD

> Options Information & Pricing

AS3 Options

Model Number	Description	Applicable Option Slot	List Price
SBP010Z	Door mounting kit for the AS3 keypad Retains the IP65 rating of the keypad	N/A	\$100
CAB0011-0A	One meter cable for remote mounting the AS3 keypad		\$40
CAB0012-0A	Two meter cable for remote mounting the AS3 keypad		\$50
CAB0015-0A	Five meter cable for remote mounting the AS3 keypad		\$60
CAN001Z	CANopen communication option card Includes two RJ45 ports	A	\$150
CAN002Z	CANopen communication option card Includes one 9 pin DB9 port		\$150
CAN003Z	CANopen communication option card Includes a 5 pin terminal block adapter		\$150
DEV003Z	DeviceNet communication option card		\$550
IPE003Z	EtherCAT communication option card		\$600
PDP003Z	PROFIBUS communication option card		\$450
PNE001Z	PROFINET communication option card		\$450
ETB013Z	I/O extension 1 option card Includes: -6 digital inputs -2 digital open collector outputs -2 analog inputs	A, B, or C	\$400
ETB014Z	I/O extension 2 option card Includes: -3 relay outputs		\$250
VEC008Z	RS422 line driver encoder feedback card	B	\$200
VEC010Z	Resolver feedback card		\$200
SFT001Z	Safety option card Provides the following IEC certified control functions -SS1, SS2, SOS, SBC, SMS, SLS, SDI, SSM Requires SBP011Z for installation	C	TBD
SBP011Z	Adapter that provides option slot C	N/A	TBD

AS3 ASD

> Options Information & Pricing



AS3/AS1

G9/P9

Micro
Drives

GX9

Regen

GX7M/
Mining Drive

W7/WX9

Plus Pack

LV Options

Reactors
& Filters

AS3 IGBT7 Dynamic Braking Transistor

230 V AS3 Model Number	460 V AS3 Model Number	Frame	IGBT7 Braking Unit Model Number	List Price
VFAS3-2004P	VFAS3-4004PC	A1	Included	N/A
VFAS3-2007P	VFAS3-4007PC			
VFAS3-2015P	VFAS3-4015PC			
VFAS3-2022P	VFAS3-4022PC			
	VFAS3-4037PC			
VFAS3-2037P	VFAS3-4055PC	A2		
	VFAS3-4075PC			
VFAS3-2055P	VFAS3-4110PC	A3		
VFAS3-2075P	VFAS3-4150PC			
	VFAS3-4185PC			
VFAS3-2110P	VFAS3-4220PC	A4		
VFAS3-2150P	VFAS3-4300PC			
VFAS3-2185P	VFAS3-4370PC			
VFAS3-2220P	VFAS3-4450PC	A5		
VFAS3-2300P	VFAS3-4550PC			
VFAS3-2370P	VFAS3-4750PC			
VFAS3-2450P	VFAS3-4900PC	A6	PB7-4132K	\$4,000
VFAS3-2550P	VFAS3-4110KPC			
	VFAS3-4132KPC			
	VFAS3-4160KPC	A7	Included	N/A
	VFAS3-4200KPC	A8	PB7-4200K	\$5,500
	VFAS3-4220KPC			
	VFAS3-4280KPC			

AS1 ASD

Specifications

The AS1 adjustable speed drive builds on Toshiba's history of supplying powerful, reliable, and versatile drives. Designed with the end-user in mind, the AS1 combines a rugged, proven power platform with the latest technologies to provide users with a smarter, stronger, more reliable drive with flexible application control.

Product Scope

200 to 240 V at 1 to 100 HP
380 to 480 V at 1 to 700 HP
500 to 690 V at 2 to 700 HP

Highlights

- 100% Continuous Overload Rating, 150% for 60 Seconds
- Eight Programmable Discrete Inputs with Selectable Sink or Source Logic
- Three Programmable Discrete Outputs: One Form-C Contact & Two Open Collector Outputs
- Three Programmable Analog Inputs: One 4 to 20 mA, One 0 to 10 VDC Input, & One ± 10 VDC Input
- Two Programmable Analog Outputs: One 4 to 20 mA or 0 to 10 VDC & One 0 to 1 mA Output or 0 to 7.5 VDC
- Two-Wire/Four-Wire RS485
- Auto-Restart Operation/Catch a Spinning Motor
- Improved PID Algorithms
- Built-In EMC Filter (Complies with the European EMC Directive)¹

Standard Features

- NEMA 1 Enclosure with Additional Conduit Adapter
- Built-In Dynamic Breaking Drive Circuit up to 250 HP²
- Past Trip Monitoring: Stores the Last Four Faults in Succession, Along with Cumulative At-Trip Times
- EOI: Integral Seven-Segment LED Keypad
- Save, Restore, & Clone Multiple Drive Settings
- Ambient Temperature: 14° to 122°F (-10° to 50°C)
- Altitude: Up to 1000 Meters without Derate
- Humidity: 95% Non-Condensing
- Standards/Compliance: IEEE, UL Listed in US & Canada, CSA, NEMA, NEC, CE, NOM-117, C-TICK, & GOST

¹ Optional on 200 V Above 15 HP

² Up to 150 HP on 600 V Units



AS1 ASD

> 230 V Power Unit Pricing & Dimensions



VAC	HP	FLA	Model Number	List Price	Frame	H	W	D	Shipping Weight (lbs.)
						Dimensions (in.)			
230	1	4.8	VFAS1-2007PL-HN	\$750	2	10.0	5.5	6.0	10.0
230	2	8.0	VFAS1-2015PL-HN	\$840	2	10.0	5.5	6.0	10.0
230	3	11.0	VFAS1-2022PL-HN	\$990	3	11.1	6.1	6.5	14.3
230	5	17.5	VFAS1-2037PL-HN	\$1,020	3	11.1	6.1	6.5	14.3
230	7.5	27.5	VFAS1-2055PL-HN	\$1,396	4	12.6	6.9	6.5	18.0
230	10	33.0	VFAS1-2075PL-HN	\$1,710	5A	12.6	8.3	7.5	26.5
230	15	54.0	VFAS1-2110PM-HN	\$2,390	5B	15.7	9.1	7.5	53.0
230	20	66.0	VFAS1-2150PM-HN	\$2,700	5B	15.7	9.1	7.5	53.0
230	25	75.0	VFAS1-2185PM-HN	\$3,600	6	16.5	9.4	8.3	66.0
230	30	88.0	VFAS1-2220PM-HN	\$4,158	6	16.5	9.4	8.3	66.0
230	40	120	VFAS1-2300PM-HN	\$6,570	7B	21.7	12.6	9.5	126
230	50	144	VFAS1-2370PM-HN	\$10,200	7B	21.7	12.6	9.5	126
230	60	176	VFAS1-2450PM-HN	\$12,600	7B	21.7	12.6	9.5	126
230	75	221	VFAS1-2550P-HN	\$15,505	9	36.2	12.2	14.6	220
230	100	285	VFAS1-2750P-HN	\$18,550	10	40.2	13.8	14.6	269

VAC	HP	FLA	Model Number	List Price	Frame	H	W	D	Shipping Weight (lbs.)
						Dimensions (in.)			
230	75	221	VFAS1-2550P-H1	\$14,175	9	26.8	12.2	14.6	167
230	100	285	VFAS1-2750P-H1	\$17,010	10	30.8	13.8	14.6	200

Notes:

- Units with H1 at the end of the model number will require an AC line reactor. DC link reactor not included.

AS1 ASD

> 460 V Power Unit

Pricing & Dimensions



VAC	HP	FLA	Model Number	List Price	Frame	H	W	D	Shipping Weight (lbs.)
						Dimensions (in.)			
460	1	2.3	VFAS1-4007PL-HN	\$873	2	10.0	5.5	6.0	10.0
460	2	4.1	VFAS1-4015PL-HN	\$945	2	10.0	5.5	6.0	10.0
460	3	5.8	VFAS1-4022PL-HN	\$1,020	2	10.0	5.5	6.0	10.0
460	5	10.5	VFAS1-4037PL-HN	\$1,230	3	11.1	6.1	6.5	14.3
460	7.5	14.3	VFAS1-4055PL-HN	\$1,500	4	12.6	6.9	6.5	18.0
460	10	17.6	VFAS1-4075PL-HN	\$1,860	4	12.6	6.9	6.5	18.0
460	15	27.7	VFAS1-4110PL-HN	\$2,400	5A	12.6	8.3	7.5	26.5
460	20	33.0	VFAS1-4150PL-HN	\$3,000	5B	15.7	9.1	7.5	53.0
460	25	41.0	VFAS1-4185PL-HN	\$3,720	5B	15.7	9.1	7.5	53.0
460	30	48.0	VFAS1-4220PL-HN	\$3,900	6	16.5	9.4	8.3	66.0
460	40	66.0	VFAS1-4300PL-HN	\$4,705	7A	21.7	9.4	9.5	95.0
460	50	79.0	VFAS1-4370PL-HN	\$6,200	7A	21.7	9.4	9.5	95.0
460	60	94.0	VFAS1-4450PL-HN	\$7,485	8	24.8	12.6	11.4	143
460	75	116	VFAS1-4550PL-HN	\$8,300	8	24.8	12.6	11.4	143
460	100	160	VFAS1-4750PL-HN	\$10,200	8	24.8	12.6	11.4	143
460	125	179	VFAS1-4900PC-HN	\$13,044	9	36.2	12.2	14.6	220
460	150	215	VFAS1-4110KPC-HN	\$14,796	10	40.2	13.8	14.6	269
460	200	259	VFAS1-4132KPC-HN	\$17,870	11	46.9	13.0	14.6	296
460	250	314	VFAS1-4160KPC-HN	\$21,835	12	46.9	16.9	14.6	405
460	300	387	VFAS1-4200KPC-HN	\$25,438	13	46.9	23.0	14.6	507
460	350	427	VFAS1-4220KPC-HN	\$28,849	13	46.9	23.0	14.6	507
460	450	550	VFAS1-4280KPC-HN	\$39,765	13	46.9	23.0	14.6	507

Notes:

- Factory-authorized startup is required on all ASDs 400 HP and larger.
- Frame 13 and higher units do not include dynamic braking circuit. This is available as an option kit.

AS1 ASD

> 460 V Power Unit Pricing & Dimensions



VAC	HP	FLA	Model Number	List Price	Frame	H	W	D	Shipping Weight (lbs.)
						Dimensions (in.)			
460	125	179	VFAS1-4900PC-H1	\$11,844	9	26.8	12.2	14.6	167
460	150	215	VFAS1-4110KPC-H1	\$13,466	10	30.8	13.8	14.6	200
460	200	259	VFAS1-4132KPC-H1	\$16,330	11	37.4	13.0	14.6	216
460	250	314	VFAS1-4160KPC-H1	\$20,160	12	37.4	16.9	14.6	243
460	300	387	VFAS1-4200KPC-H1	\$23,688	13	37.4	23.0	14.6	360
460	350	427	VFAS1-4220KPC-H1	\$26,649	13	37.4	23.0	14.6	360
460	450	550	VFAS1-4280KPC-H1	\$35,850	13	37.4	23.0	14.6	360
460	550	671	VFAS1-4355KPC-H1	\$51,040	14	45.3	34.6	14.6	640
460	600	759	VFAS1-4400KPC-H1	\$58,800	14	45.3	34.6	14.6	640
460	700	941	VFAS1-4500KPC-H1	\$74,700	15	45.3	43.6	14.6	750

Notes:

- Frame 13 and higher units do not include dynamic braking circuit. This is available as an option kit.
- Factory-authorized startup is required on all ASDs 400 HP and larger.
- Units with H1 at the end of the model number will require an AC line reactor. DC link reactor not included.

AS1 ASD

> 600/690 V Power Unit

Pricing & Dimensions



VAC	HP	FLA	Model Number	List Price	Frame	H	W	D	Shipping Weight (lbs.)
						Dimensions (in.)			
600/690	2	4.0	VFAS1-6022PL-HN	\$4,140	6	16.5	9.4	8.3	66.0
600/690	3	4.5	VFAS1-6030PL-HN	\$4,212	6	16.5	9.4	8.3	66.0
600/690	5	7.5	VFAS1-6055PL-HN	\$4,284	6	16.5	9.4	8.3	66.0
600/690	7.5	10.0	VFAS1-6075PL-HN	\$4,344	6	16.5	9.4	8.3	66.0
600/690	10	13.5	VFAS1-6110PL-HN	\$4,416	6	16.5	9.4	8.3	66.0
600/690	15	17.0	VFAS1-6150PL-HN	\$4,476	6	16.5	9.4	8.3	66.0
600/690	20	22.0	VFAS1-6185PL-HN	\$4,548	6	16.5	9.4	8.3	66.0
600/690	25	27.0	VFAS1-6220PL-HN	\$4,608	6	16.5	9.4	8.3	66.0
600/690	30	32.0	VFAS1-6300PL-HN	\$4,680	6	16.5	9.4	8.3	66.0
600/690	40	41.0	VFAS1-6370PL-HN	\$6,408	8	24.8	12.6	11.4	143
600/690	50	52.0	VFAS1-6450PL-HN	\$6,948	8	24.8	12.6	11.4	143
600/690	60	62.0	VFAS1-6550PL-HN	\$7,476	8	24.8	12.6	11.4	143
600/690	75	77.0	VFAS1-6750PL-HN	\$8,016	8	24.8	12.6	11.4	143
600/690	100	99.0	VFAS1-6900PL-HN	\$10,140	8	24.8	12.6	11.4	143

Notes:

- For models 6022 to 6110, HP and FLA ratings are valid only at 690 V.
- For all others, HP and FLA ratings are valid only at 600 V.
- For models 6150 to 6900, HP and FLA ratings at 690 V are available in the manual.

AS1 ASD

> 600/690 V Power Unit

Pricing & Dimensions



VAC	HP	FLA	Model Number	List Price	Frame	H	W	D	Shipping Weight (lbs.)
						Dimensions (in.)			
600/690	125	125	VFAS1-6110KPC-H1	\$14,940	11	46.9	13.0	14.6	370
600/690	150	144	VFAS1-6132KPC-H1	\$16,008	11	46.9	13.0	14.6	370
600/690	200	192	VFAS1-6200KPC-H1	\$22,680	13	46.9	23.0	14.6	470
600/690	250	242	VFAS1-6250KPC-H1	\$24,012	13	46.9	23.0	14.6	470
600/690	350	336	VFAS1-6315KPC-H1	\$24,540	13	46.9	23.0	14.6	470
600/690	450	412	VFAS1-6400KPC-H1	\$57,360	15	54.7	43.6	14.6	510
600/690	550	528	VFAS1-6500KPC-H1	\$63,360	15	54.7	43.6	14.6	510
600/690	700	672	VFAS1-6630KPC-H1	\$65,760	15	54.7	43.6	14.6	510

Notes:

- Units with H1 at the end of the model number will require an AC line reactor. DC link reactor not included.
- Frame 13 and higher units do not include dynamic braking circuit. This is available as an option kit.
- Factory-authorized startup is required on all ASDs 400 HP and larger.
- Current and HP ratings in this table are applicable only at 600 V; HP and FLA ratings at 690 V are available in the manual.

AS1 ASD

> Option Information & Pricing



Conduit Adapters

Model Number	Frame	List Price	Height Increase (in.)	Stand-Alone AS1 IP Rating
NEM1101Z	2	\$140	1.2	IP20
NEM1102Z	3	\$140		
NEM1103Z	4	\$150		
NEM1104Z	5A	\$150	1.4	
NEM1105Z	5B	\$155	1.5	
NEM1106Z	6	\$155	2.4	
NEM1107Z	7A	\$160	2.0	
NEM1117Z	7B	\$350	1.9	
NEM1108Z	8	\$185	5.4	
NEM1109Z	9	\$850	9.8	IP00
NEM1110Z	10	\$1,000	13.4	
NEM1111Z	11	\$1,300		
NEM1112Z	12	\$1,300	15.7	
NEM1113Z	13	\$1,300		
NEM1115Z	14	\$3,400	18.6	
NEM1116Z	15	\$4,760		

Notes:

- AS1 units rated IP20 include a bottom cover, but will not accept conduit connections at the drive enclosure.
- AS1 units rated IP00 do not include a bottom cover.
- The optional conduit adapters listed above are NEMA 1 compliant. Stand-alone AS1 power units are not NEMA 1 compliant.
- Optional Frame 13 with PB7 (NEM1114Z).
- No option for unit with PB7 on Frames 14 and 15.

AS1 ASD

> Option Information & Pricing



Flange-Mount Kits

Model Number	Frame	List Price
FOT001Z	2	\$275
FOT002Z	3	\$300
FOT003Z	4	\$350
FOT004Z	5A	\$400
FOT005Z	5B	\$450
FOT006Z	6	\$450
FOT007Z	7A	\$500
FOT008Z	7B	\$500
FOT009Z	8	\$525
FOT010Z	9	\$550
FOT011Z	10	\$600
FOT012Z	11	\$750
FOT013Z	12	\$1,050
FOT014Z	13	\$1,100
FOT015Z	13 + PB7	\$1,300

Notes:

- Flange-mount kits are only available for Frame 13 and below.
- The flange-mount kit allows the AS1 to be mounted in an enclosure with the heatsink out-the-back to reduce cooling needs and enclosure dimensions.

Communication Cards, Closed-Loop Cards, Keypads, Cables, & Cooling

Model Number	Description	List Price
RKP002Z	Remote-mountable LED keypad has 20 mm LEDs, the largest in its class, to ensure outstanding visibility Designed to fit into panels for use as an extension panel or display Can be used as a parameter copy, capable of storing parameters for up to three models One CAB001x-0A cable is necessary Remote-mounting kit not necessary for door-mounting Hardware included 	\$225
RKP004Z	Remote-mountable LCD keypad contains 23-character, eight-line display Can be used for simple setup monitoring using jog dial Snap to front of drive or can be remote-mounted Display language selectable between English & Japanese (German, Italian, Spanish, & Chinese will be available soon) Remote-mounting requires SBP006Z remote-mounting kit, CNT001Z adapter (hand-held only), & CAB001x-0A cable 	\$300
CNT001Z	RJ45 female/RJ45 adaptor Connects RKP004Z keypad to AS1 front port via CAB001x-0A cables	\$40
CAB0011-0A	One-meter cable for remote-mounting RKP00xZ keypads	\$40
CAB0012-0A	Two-meter cable for remote-mounting RKP00xZ keypads	\$50
CAB0015-0A	Five-meter cable for remote-mounting RKP00xZ keypads	\$60
SBP006Z	Mounting kit for RKP004Z LCD keypad maintains IP54 rating for IP54 LCD remote keypad Can be used with SBP007Z for IP65 installations 	\$60
SBP007Z	IP65 door attaches to SBP006Z mounting kit for RKP004Z keypad 	\$30
FAN003Z	Control fan kit allows for 60°C operation with derate for Frame 6	\$120
FAN004Z	Control fan kit allows for 60°C operation with derate for Frame 7A	\$125
FAN005Z	Control fan kit allows for 60°C operation with derate for Frame 7B	\$130
FAN006Z	Control fan kit allows for 60°C operation with derate for Frame 8	\$140

Dynamic Braking Transistor

Model Number	Description	List Price
PB7-4200K	Braking unit for VFAS1-4200KPC-Hx, VFAS1-4220KPC-Hx, VFAS1-4280KPC-Hx 	\$5,500
PB7-4400K	Braking unit for VFAS1-4355KPC-Hx, VFAS1-4400KPC-Hx, VFAS1-4500KPC-Hx Not compatible with conduit box 	\$18,500
PB7-6300K	Braking unit for VFAS1-6200KPC-Hx, VFAS1-6250KPC-Hx, VFAS1-6315KPC-Hx 	\$19,225
PB7-6400K	Braking unit for VFAS1-6400KPC-Hx, VFAS1-6500KPC-Hx, VFAS1-6630KPC-Hx Not compatible with conduit box 	\$20,700

AS1P ASD

> Part Numbering Convention

The durable AS1P adjustable speed drive (ASD) outdoor assembly is a short lead time product that is available at an affordable cost. The AS1P offers limited options to ensure its low price and quick ship time. These options include line reactors, surge arrestors, and a maximum of two door-mounted control options. All units have a NEMA 3R free standing enclosure.

Ordering Information: Use the following part numbering convention to configure the AS1P unit package when placing your order.

Example Part Number:	AS1P	4	####K	AA	#	*	*	*
Series: AS1P - AS1P Style Assembly								
Voltage: 4 - 460								
Model Number: 075 - 10 HP 110 - 15 HP 150 - 20 HP 185 - 25 HP 220 - 30 HP 300 - 40 HP 370 - 50 HP 450 - 60 HP 550 - 75 HP 750 - 100 HP 900 - 125 HP 110K - 150 HP 132K - 200 HP								
Style: AA - Includes motor circuit protector AE - Includes motor circuit protector, three-contactor bypass, and overload protection								
Reactor: 0 - No Line Reactor 3 - 3% AC Line Reactor 5 - 5% AC Line reactor								
Surge Arrestor: 0 - No surge arrestor M - Basic (MOV) surge arrestor S - Strike Sorb Surge arrestor								
2 Door Mounted Pilot Device: 0 - No Option A - 2 Position Switch B - 3 Position Switch C - Pilot Light, Amber "VFD FAULT" D - Pilot Light, red, "VFD RUN" E - Push button, Black, "RESET" F - Push button, Black, "STOP" G - Push Button, Red, "EMERGENCY STOP"								

AS1P ASD

> 460 V Assembly Unit Pricing & Dimensions



VAC	HP	FLA	Model Number	List Price	H	W	D	3% ACLR	5% ACLR
460	10	17.6	AS1P4075AA	\$6,305	70	31	20	\$688	\$763
460	15	27.7	AS1P4110AA	\$6,549	70	31	20	\$753	\$775
460	20	33.0	AS1P4150AA	\$7,279	70	31	20	\$763	\$913
460	25	41.0	AS1P4185AA	\$7,592	70	31	20	\$763	\$913
460	30	48.0	AS1P4220AA	\$7,750	70	31	20	\$793	\$1,000
460	40	66.0	AS1P4300AA	\$8,848	70	34	22	\$835	\$1,025
460	50	79.0	AS1P4370AA	\$9,397	70	34	22	\$905	\$1,250
460	60	94.0	AS1P4450AA	\$10,824	70	34	24	\$1,090	\$1,500
460	75	116	AS1P4550AA	\$11,548	70	34	24	\$1,193	\$1,750
460	100	160	AS1P4750AA	\$12,184	70	34	24	\$1,378	\$1,875
460	125	179	AS1P4900AA	\$18,582	72	38	26	\$1,543	\$2,063
460	150	215	AS1P4110KAA	\$23,577	72	38	26	3% ACLR Included	\$1,250*
460	200	159	AS1P4132KAA	\$27,581	74	38	26	3% ACLR Included	\$1,813*
460	10	17.6	AS1P4075AE	\$6,759	70	31	20	\$688	\$763
460	15	27.7	AS1P4110AE	\$7,121	70	31	20	\$753	\$775
460	20	33.0	AS1P4150AE	\$7,447	70	31	20	\$763	\$913
460	25	41.0	AS1P4185AE	\$7,812	70	31	20	\$763	\$913
460	30	48.0	AS1P4220AE	\$8,306	70	31	20	\$793	\$1,000
460	40	66.0	AS1P4300AE	\$9,251	70	34	22	\$835	\$1,025
460	50	79.0	AS1P4370AE	\$9,841	70	34	22	\$905	\$1,250
460	60	94.0	AS1P4450AE	\$10,468	70	34	24	\$1,090	\$1,500
460	75	116	AS1P4550AE	\$12,457	70	34	24	\$1,193	\$1,750
460	100	160	AS1P4750AE	\$13,546	70	34	24	\$1,378	\$1,875
460	125	179	AS1P4900AE	\$25,268	72	38	26	\$1,543	\$2,063
460	150	215	AS1P4110KAE	\$31,603	72	38	26	3% ACLR Included	\$1,250*
460	200	159	AS1P4132KAE	\$40,821	74	38	26	3% ACLR Included	\$1,813*

Basic Surge Arrestor	Strike Sorb Surge Arrestor	2 or 3 pos Switch	Reset PB	Pilot Light
\$500	\$2,375	\$375	\$250	\$250

*	Cost is to replace 3% input line reactor with 5% input line reactor.
AA	Includes AS1 unit, input circuit breaker and all necessary components for operation in a NEMA 3R outdoor enclosure.
AE	Includes AS1 unit, 3 contactor isolated bypass, input circuit breaker and all necessary components for operation in a NEMA 3R outdoor enclosure.
3% ACLR	Optional adder cost for installation of a 3% impedance input line reactor.
5% ACLR	Optional adder cost for installation of a 5% impedance input line reactor.
Basic Surge Arrestor	Optional adder cost for installation of a standard surge arrestor. Make and model may vary.
Strike Sorb Surge Arrestor	Optional adder cost for installation of 3 Raycap Strike Sorb Surge arrestors on the incoming side of the unit.
2 pos or 3 pos Switch Pushbutton	Optional adder cost for installation of a 2 or 3 position switch. E.G. LOCAL REMOTE, HAND/OFF/AUTO please specify functionality. Optional Adder cost for installation of a standard pushbutton. Please specify functionality. This may also be provided as a mushroom head E-stop PB if requested.
Pilot Light	Optional Adder cost for installation of a standard pilot light. Please specify functionality.

Note: Each AS1 unit has 2 option locations to mount 30mm control items which are highlighted in blue above. In the AE unit, These positions are taken up by an INV/OFF/BYP 3 position switch and a TEST/OFF switch so no locations are available. On AA units 2 location are available.

G9[®] ASD

Specifications

The G9 adjustable speed drive is the most advanced low voltage, severe duty drive ever offered by Toshiba. Designed with the end-user in mind, this drive combines a rugged, proven power platform with the latest in power devices and an advanced micro-processor to provide users with a smarter, stronger, more reliable drive with flexible application control.

Product Scope

200 to 240 V at 0.75 to 100 HP

380 to 480 V at 1 to 350 HP

Highlights

- 115% Continuous Overload Rating, 150% for Two Minutes¹
- Eight Programmable Discrete Inputs
- Three Programmable Discrete Output Contacts: One Form-C & Two Form-A
- Three Programmable Inputs: One 0 to 20 mA or 0 to 10 VDC Input, One 0 to 10 VDC Input, & One ± 10 VDC Input
- Two Programmable Analog Output: FM Terminal from 0 to 20 mA or 0 to 10 VDC & AM Terminal from 0 to 20 mA
- Regenerative Power Ride-Through
- DC-Link Reactors on Most HP Ratings
- Two-Wire/Four-Wire RS485
- Auto-Restart Operation/Catch a Spinning Motor

Standard Features

- UL Type-1 & NEMA 1 Enclosure
- Built-In Dynamic Braking Circuit
- 100 KAIC or 200 KAIC
- Built-In Real-Time Clock
- EOL: Backlit Plain-English LCD & Four-Digit/Seven-Digit LED Display
- Save, Restore, & Clone Multiple Drive Settings
- Ambient Temperature: 14° to 104°F (-10° to 40°C)
- Altitude: Up to 1000 Meters without Derate
- Humidity: 95% Non-Condensing
- Standards/Compliance: UL Listed in US & Canada, & American Recovery & Reinvestment Act Compliant (ARRA)



¹ 110% Continuous, 150% for One Minute (≥ 60 HP, 230 V; 100 HP, 480 V)



G9® ASD

➤ G9 230 V Power Unit
Pricing & Dimensions



VAC	HP	FLA	Model Number	List Price	Frame	H	W	D	Shipping Weight (lbs.)
						Dimensions (in.)			
230	0.75	3.5	VT130G9U2010	\$1,550	2	11.2	5.2	6.1	8
230	1	4.2	VT130G9U2015	\$1,700	2	11.2	5.2	6.1	8
230	2	6.9	VT130G9U2025	\$1,700	2	11.2	5.2	6.1	8
230	3	10.0	VT130G9U2035	\$1,850	3	12.4	6.1	6.6	12
230	5	15.2	VT130G9U2055	\$2,000	3	12.4	6.1	6.6	12
230	7.5	23.8	VT130G9U2080	\$2,300	4	15.0	6.9	6.6	17
230	10	28.6	VT130G9U2110	\$2,565	5A	15.1	8.3	7.6	21
230	15	46.8	VT130G9U2160	\$3,285	5B	19.3	9.1	7.6	38
230	20	57.2	VT130G9U2220	\$4,050	5B	19.3	9.1	7.6	38
230	25	76.0	VT130G9U2270	\$5,400	6	25.9	11.1	13.2	97
230	30	90.0	VT130G9U2330	\$6,237	7B	33.1	14.3	15.0	165
230	40	104	VT130G9U2400	\$13,050	7B	33.1	14.3	15.0	165
230	50	152	VT130G9U2500	\$15,300	7B	33.1	14.3	15.0	165
230	60	176	VT130G9U2600	\$18,900	7B	33.1	14.3	15.0	165
230	75	221	VT130G9U2750	\$21,263	9	51.7	14.6	17.6	321
230	100	285	VT130G9U210K	\$25,515	10	53.1	14.8	17.6	362

G9® ASD

> 460 V G9 Power Unit Pricing & Dimensions



VAC	HP	FLA	Model Number	List Price	Frame	H	W	D	Shipping Weight (lbs.)
						Dimensions (in.)			
460	1	2.7	VT130G9U4015	\$1,550	2	11.2	5.2	6.1	9.0
460	2	3.6	VT130G9U4025	\$1,600	2	11.2	5.2	6.1	9.0
460	3	5.0	VT130G9U4035	\$1,700	2	11.2	5.2	6.1	9.0
460	5	9.1	VT130G9U4055	\$2,050	3	12.4	6.1	6.6	12.0
460	7.5	12.4	VT130G9U4080	\$2,250	4	15.0	6.9	6.6	17.0
460	10	15.3	VT130G9U4110	\$2,790	4	15.0	6.9	6.6	17.0
460	15	24.0	VT130G9U4160	\$3,600	5A	15.1	8.3	7.6	22.0
460	20	28.6	VT130G9U4220	\$4,500	5B	19.3	9.1	7.6	38.0
460	25	35.7	VT130G9U4270	\$5,580	5B	19.3	9.1	7.6	38.0
460	30	42.0	VT130G9U4330	\$6,660	6	25.9	11.1	13.2	96.0
460	40	57.2	VT130G9U4400	\$8,145	7A	30.8	11.1	14.3	124
460	50	68.5	VT130G9U4500	\$9,923	7A	30.8	11.1	14.3	124
460	60	81.5	VT130G9U4600	\$11,228	8	36.1	14.3	15.3	183
460	75	100.8	VT130G9U4750	\$13,050	8	36.1	14.3	15.3	183
460	100	138.7	VT130G9U410K	\$15,300	8	36.1	14.3	15.3	183
460	125	179	VT130G9U412K	\$18,900	9	51.7	14.6	17.6	321
460	150	215	VT130G9U415K	\$21,263	10	53.2	15.7	17.6	362
460	200	259	VT130G9U420K	\$25,515	11	63.1	15.0	17.6	405
460	250	314	VT130G9U425K	\$30,240	12	68.5	18.9	17.6	596
460	300	387	VT130G9U430K	\$37,800	13	70.0	25.6	17.6	860
460	350	427	VT130G9U435K	\$42,525	13	70.0	25.6	17.6	860

G9® ASD

> Assembly Unit Numbering Convention

The G9 assembly unit combines the G9 power unit with commonly used options such as manual bypass and input disconnects in an easy-to-install turn-key package. G9 assembly units include a ground lug and door-mounted electronic operator interface.

Bypass units include an ASD/bypass selector switch, a bypass-start lighted push-button (red), and a bypass-stop lighted push-button (green). They are used for system control and are all located on the enclosure door.

Ordering Information: Use the following part numbering convention to configure the G9 assembly unit package when placing your order.

Example Part Number:	G9	4	###/###K	AA
Series: G9 — G9 ASD				
Voltage: 2 — 230 4 — 460				
Model Number: 010 — 0.75 HP 015 — 1 HP 025 — 2 HP 035 — 3 HP 055 — 5 HP 080 — 7.5 HP 110 — 10 HP 160 — 15 HP 220 — 20 HP 270 — 25 HP 330 — 30 HP 400 — 40 HP	500 — 50 HP 600 — 60 HP 750 — 75 HP 10K — 100 HP 12K — 125 HP 15K — 150 HP 20K — 200 HP 25K — 250 HP 30K — 300 HP 35K — 350 HP			
Style: AA — Includes motor circuit protector AE — Includes motor circuit protector, three-contactor bypass, and overload protection				

G9® ASD

> 230 V G9 Assembly Unit Pricing & Dimensions



VAC	HP	FLA	Model Number	H	W	D
				Dimensions (in.)		
230	0.75	3.5	G92010AA	36.0	24.0	10.0
230	1	4.2	G92015AA	36.0	24.0	10.0
230	2	6.9	G92025AA	36.0	24.0	10.0
230	3	10.0	G92035AA	36.0	24.0	10.0
230	5	15.2	G92055AA	36.0	24.0	10.0
230	7.5	23.8	G92080AA	48.0	24.0	12.0
230	10	28.6	G92110AA	48.0	36.0	20.0
230	15	46.8	G92160AA	48.0	36.0	20.0
230	20	57.2	G92220AA	48.0	36.0	20.0
230	25	76	G92270AA	48.0	36.0	20.0
230	30	90	G92330AA	60.0	36.0	20.0
230	40	104	G92400AA	60.0	36.0	20.0
230	50	152	G92500AA	90.0	36.0	24.0
230	60	176	G92600AA	90.0	36.0	24.0
230	75	221	G92750AA	90.0	36.0	24.0
230	100	285	G9210KAA	90.0	48.0	30.0
230	0.75	3.5	G92010AE	36.0	24.0	10.0
230	1	4.2	G92015AE	36.0	24.0	10.0
230	2	6.9	G92025AE	36.0	24.0	10.0
230	3	10.0	G92035AE	36.0	24.0	10.0
230	5	15.2	G92055AE	36.0	24.0	10.0
230	7.5	23.8	G92080AE	48.0	24.0	12.0
230	10	28.6	G92110AE	48.0	36.0	20.0
230	15	46.8	G92160AE	48.0	36.0	20.0
230	20	57.2	G92220AE	48.0	36.0	20.0
230	25	76	G92270AE	48.0	36.0	20.0
230	30	90	G92330AE	60.0	36.0	20.0
230	40	104	G92400AE	60.0	36.0	20.0
230	50	152	G92500AE	90.0	36.0	24.0
230	60	176	G92600AE	90.0	36.0	24.0
230	75	221	G92750AE	90.0	36.0	24.0
230	100	285	G9210KAE	90.0	48.0	30.0

For quotes, please contact TIC-ASD@toshiba.com

AS3/AS1

G9/P9

Micro
Drives

GX9

Regen

GX7M/
Mining Drive

W7/WX9

Plus Pack

LV Options

Reactors
& Filters

G9® ASD

➤ 460 V G9 Assembly Unit

Pricing & Dimensions



VAC	HP	FLA	Model Number	H	W	D
				Dimensions (in.)		
460	1	2.7	G94015AA	36.0	24.0	10.0
460	2	3.6	G94025AA	36.0	24.0	10.0
460	3	5.0	G94035AA	36.0	24.0	10.0
460	5	9.1	G94055AA	36.0	24.0	10.0
460	7.5	12.4	G94080AA	36.0	24.0	10.0
460	10	15.3	G94110AA	48.0	24.0	12.0
460	15	24.0	G94160AA	48.0	36.0	20.0
460	20	28.6	G94220AA	48.0	36.0	20.0
460	25	35.7	G94270AA	48.0	36.0	20.0
460	30	42.0	G94330AA	48.0	36.0	20.0
460	40	57.2	G94400AA	48.0	36.0	20.0
460	50	68.5	G94500AA	48.0	36.0	20.0
460	60	81.5	G94600AA	60.0	36.0	20.0
460	75	101	G94750AA	60.0	36.0	20.0
460	100	139	G9410KAA	90.0	36.0	24.0
460	125	179	G9412KAA	90.0	36.0	24.0
460	150	215	G9415KAA	90.0	36.0	24.0
460	200	259	G9420KAA	90.0	48.0	30.0
460	250	314	G9425KAA	90.0	48.0	30.0
460	300	387	G9430KAA	90.0	48.0	30.0
460	350	427	G9435KAA	90.0	48.0	30.0
460	1	2.7	G94015AE	36.0	24.0	10.0
460	2	3.6	G94025AE	36.0	24.0	10.0
460	3	5.0	G94035AE	36.0	24.0	10.0
460	5	9.1	G94055AE	36.0	24.0	10.0
460	7.5	12.4	G94080AE	36.0	24.0	10.0
460	10	15.3	G94110AE	48.0	24.0	12.0
460	15	24.0	G94160AE	48.0	36.0	20.0
460	20	28.6	G94220AE	48.0	36.0	20.0
460	25	35.7	G94270AE	48.0	36.0	20.0
460	30	42.0	G94330AE	48.0	36.0	20.0
460	40	57.2	G94400AE	48.0	36.0	20.0
460	50	68.5	G94500AE	48.0	36.0	20.0
460	60	81.5	G94600AE	60.0	36.0	20.0
460	75	101	G94750AE	60.0	36.0	20.0
460	100	139	G9410KAE	90.0	36.0	24.0
460	125	179	G9412KAE	90.0	36.0	24.0
460	150	215	G9415KAE	90.0	36.0	24.0
460	200	259	G9420KAE	90.0	48.0	30.0
460	250	314	G9425KAE	90.0	48.0	30.0
460	300	387	G9430KAE	90.0	48.0	30.0
460	350	427	G9435KAE	90.0	48.0	30.0



Part Number Suffix	Description
NF	Fan & filtered dust-inhibiting enclosure
N3	Fan & filtered enclosure for outdoor use
NC	NEMA 12 adder
N4	NEMA 4 adder

P9 ASD

Specifications

The P9 adjustable speed drive is a revolution in pump control. By incorporating Toshiba's proprietary, ground-breaking Virtual Linear Pump (VLP®) Technology, the P9 directly, precisely, and linearly controls pressure, temperature, level, or flow. The P9 eliminates many obstacles users thought were an integral part of pump control and sets a new standard in ingenuity, performance, and ease-of-use for the pump industry.

Product Scope

200 to 240 V at 0.75 to 125 HP
380 to 480 V at 1 to 400 HP

Highlights

- Proprietary VLP® Technology
- Maximized Energy Savings on Variable Torque Loads
- Time Based Alternation
- Booster Pump Control Across-the-Line
- Sensorless Operation
- Automatic Sleep Timer
- Sealing Water Control Interlocks
- No Flow/Low NPSH Cut-Off
- Thrust Bearing Protection
- 100% Continuous Overload Rating, 120% for 60 Seconds
- Eight Programmable Discrete Inputs with Selectable Sink or Source Logic
- Three Programmable Discrete Output Contacts: Two Form-A & One Form-C
- Three Programmable Analog Inputs: One 0 to 20 mA or 0 to 10 VDC Isolated Input, One 0 to 10 VDC Input, & One ± 10 VDC Input
- Two Programmable Analog Outputs: One 4 to 20 mA or 0 to 10 VDC & One 4 to 20 mA Output
- Two-Wire/Four-Wire Duplex RS485; MODBUS RTU or Toshiba TSB Built-In Communications
- Auto-Restart Operation/Catch a Spinning Motor

Standard Features

- NEMA 1 Enclosure
- Built-in Dynamic Braking Drive Circuit up to 350 HP
- Built-In EMC Filter (Complies with the European EMC Directive)
- Regenerative Power Ride-Through
- Past Trip Monitoring: Stores the Last Four Faults in Succession, Along with Cumulative At-Trip Times
- EOI: Backlit Plain-English LCD & Four-Digit/Seven-Segment LED Display
- Save, Restore, & Clone Multiple Drive Settings
- Ambient Temperature: 14° to 104°F (-10° to 40°C)
- Altitude: Up to 1000 Meters without Derate
- Humidity: 20 to 93% Non-Condensing
- Standards/Compliances: UL Listed in US & Canada, & American Recovery & Reinvestment Act Compliant (ARRA)



P9 ASD

> 230 V P9 Power Unit Pricing & Dimensions



VAC	HP	FLA	Model Number	List Price	Frame	H	W	D	Shipping Weight (lbs.)
						Dimensions (in.)			
230	0.75	3.2	VT130P9U2010	\$1,550	2	11.2	5.2	6.1	8
230	1	4.2	VT130P9U2015	\$1,700	2	11.2	5.2	6.1	8
230	2	6.8	VT130P9U2025	\$1,700	2	11.2	5.2	6.1	8
230	3	9.6	VT130P9U2035	\$1,850	3	12.4	6.1	6.6	12
230	5	15.2	VT130P9U2055	\$2,000	3	12.4	6.1	6.6	12
230	7.5	22	VT130P9U2080	\$2,300	4	15.0	6.9	6.6	17
230	10	28	VT130P9U2110	\$2,565	4	15.0	6.9	6.6	17
230	15	42	VT130P9U2160	\$3,285	5B	19.3	9.1	7.6	38
230	20	54	VT130P9U2220	\$3,650	5B	19.3	9.1	7.6	38
230	25	68	VT130P9U2270	\$4,500	5B	19.3	9.1	7.6	38
230	30	80	VT130P9U2330	\$5,197	6	25.9	11.1	13.2	98
230	40	104	VT130P9U2400	\$7,087	7B	33.1	14.3	15.0	165
230	50	130	VT130P9U2500	\$11,000	7B	33.1	14.3	15.0	165
230	60	154	VT130P9U2600	\$13,500	7B	33.1	14.3	15.0	165
230	75	192	VT130P9U2750	\$15,400	7B	33.1	14.3	15.0	165
230	100	248	VT130P9U210K	\$18,600	9	51.7	14.6	17.6	321
230	125	312	VT130P9U212K	\$23,000	10	53.2	15.7	17.6	362

P9 ASD

> 460 V P9 Power Unit Pricing & Dimensions



VAC	HP	FLA	Model Number	List Price	Frame	H	W	D	Shipping Weight (lbs.)
						Dimensions (in.)			
460	1	2.1	VT130P9U4015	\$1,550	2	11.2	5.2	6.1	9
460	2	3.4	VT130P9U4025	\$1,600	2	11.2	5.2	6.1	9
460	3	4.8	VT130P9U4035	\$1,700	2	11.2	5.2	6.1	9
460	5	7.6	VT130P9U4055	\$2,050	3	12.4	6.1	6.6	13
460	7.5	11	VT130P9U4080	\$2,250	3	12.4	6.1	6.6	13
460	10	14	VT130P9U4110	\$2,635	4	15.0	6.9	6.6	14
460	15	21	VT130P9U4160	\$3,100	5A	15.1	8.3	7.6	14
460	20	27	VT130P9U4220	\$3,750	5A	15.1	8.3	7.6	14
460	25	34	VT130P9U4270	\$4,200	5B	19.3	9.1	7.6	36
460	30	40	VT130P9U4330	\$4,400	5B	19.3	9.1	7.6	36
460	40	52	VT130P9U4400	\$5,200	6	25.9	11.1	13.2	98
460	50	65	VT130P9U4500	\$6,700	7A	30.8	11.1	14.3	124
460	60	77	VT130P9U4600	\$7,900	7A	30.8	11.1	14.3	124
460	75	96	VT130P9U4750	\$8,800	8	36.1	14.3	15.3	185
460	100	124	VT130P9U410K	\$11,000	8	36.1	14.3	15.3	185
460	125	156	VT130P9U412K	\$13,500	8	36.1	14.3	15.3	185
460	150	180	VT130P9U415K	\$15,400	9	51.7	14.6	17.6	321
460	200	240	VT130P9U420K	\$18,600	10	53.2	15.7	17.6	362
460	250	302	VT130P9U425K	\$23,000	11	63.1	15.0	17.6	405
460	300	361	VT130P9U430K	\$27,000	12	68.5	18.9	17.6	594
460	350	414	VT130P9U435K	\$30,400	12	68.5	18.9	17.6	594
460	400	477	VT130P9U440K	\$35,000	13	70.0	25.6	17.6	874

P9 ASD

> Assembly Unit

Part Numbering Convention



The P9 assembly unit combines the P9 power unit with commonly used options such as manual bypass and input disconnects in an easy-to-install turn-key package. P9 assembly units include a ground lug and door-mounted electronic operator interface.

Bypass units include an ASD/Bypass selector switch, a Bypass-Start lighted push-button (red), and a Bypass-Stop lighted push-button (green). They are used for system control and are all located on the enclosure door.

Ordering Information: Use the following part numbering convention to configure the P9 assembly unit package when placing your order.

Example Part Number:	P9	4	####K	AA
Series: P9 — P9 ASD				
Voltage: 2 — 230 4 — 460				
Model Number: 010 — 0.75 HP 015 — 1 HP 025 — 2 HP 035 — 3 HP 055 — 5 HP 080 — 7.5 HP 110 — 10 HP 160 — 15 HP 220 — 20 HP 270 — 25 HP 330 — 30 HP 400 — 40 HP	500 — 50 HP 600 — 60 HP 750 — 75 HP 10K — 100 HP 12K — 125 HP 15K — 150 HP 20K — 200 HP 25K — 250 HP 30K — 300 HP 35K — 350 HP 40K — 400 HP			
Style: AA — Includes motor circuit protector AE — Includes motor circuit protector, three-contactor bypass, and overload protection				

P9 ASD

> 230 V P9 Assembly Unit Pricing & Dimensions



VAC	HP	FLA	Model Number	H	W	D
230	3	9.6	P92035AA	36	24	10
230	5	15.2	P92055AA	36	24	10
230	7.5	22	P92080AA	48	24	12
230	10	28	P92110AA	48	36	20
230	15	42	P92160AA	48	36	20
230	20	54	P92220AA	48	36	20
230	25	68	P92270AA	48	36	20
230	30	80	P92330AA	60	36	20
230	40	104	P92400AA	60	36	20
230	50	130	P92500AA	90	36	24
230	60	154	P92600AA	90	36	24
230	75	192	P92750AA	90	36	24
230	100	248	P9210KAA	90	48	30
230	125	312	P9212KAA	90	48	30
230	3	9.6	P92035AE	36	24	10
230	5	15.2	P92055AE	36	24	10
230	7.5	22	P92080AE	48	24	12
230	10	28	P92110AE	48	36	20
230	15	42	P92160AE	48	36	20
230	20	54	P92220AE	48	36	20
230	25	68	P92270AE	48	36	20
230	30	80	P92330AE	60	36	20
230	40	104	P92400AE	60	36	20
230	50	130	P92500AE	90	36	24
230	60	154	P92600AE	90	36	24
230	75	192	P92750AE	90	36	24
230	100	248	P9210KAE	90	48	30
230	125	312	P9212KAE	90	48	30

For quotes, please contact TIC-ASD@toshiba.com

P9 ASD
> 460 V P9 Assembly Unit
Pricing & Dimensions


VAC	HP	FLA	Model Number	H	W	D
460	5	7.6	P94055AA	36	24	10
460	7.5	11	P94080AA	36	24	10
460	10	14	P94110AA	48	24	12
460	15	21	P94160AA	48	36	20
460	20	27	P94220AA	48	36	20
460	25	34	P94270AA	48	36	20
460	30	40	P94330AA	48	36	20
460	40	52	P94400AA	48	36	20
460	50	65	P94500AA	48	36	20
460	60	77	P94600AA	60	36	20
460	75	96	P94750AA	60	36	20
460	100	124	P9410KAA	90	36	24
460	125	156	P9412KAA	90	36	24
460	150	180	P9415KAA	90	36	24
460	200	240	P9420KAA	90	48	30
460	250	302	P9425KAA	90	48	30
460	300	361	P9430KAA	90	48	30
460	350	414	P9435KAA	90	48	30
460	400	477	P9440KAA	90	48	30
460	5	7.6	P94055AE	36	24	10
460	7.5	11	P94080AE	36	24	10
460	10	14	P94110AE	48	24	12
460	15	21	P94160AE	48	36	20
460	20	27	P94220AE	48	36	20
460	25	34	P94270AE	48	36	20
460	30	40	P94330AE	48	36	20
460	40	52	P94400AE	48	36	20
460	50	65	P94500AE	48	36	20
460	60	77	P94600AE	60	36	20
460	75	96	P94750AE	60	36	20
460	100	124	P9410KAE	90	36	24
460	125	156	P9412KAE	90	36	24
460	150	180	P9415KAE	90	36	24
460	200	240	P9420KAE	90	48	30
460	250	302	P9425KAE	90	48	30
460	300	361	P9430KAE	90	48	30
460	350	414	P9435KAE	90	48	30
460	400	477	P9440KAE	90	48	30

For quotes, please contact TIC-ASD@toshiba.com

MICRO DRIVES

S15 ASD

Specifications

The S15 adjustable speed drive is a compact and high performance drive designed for controlling a wide range of variable and constant torque applications for multiple industries. This micro-drive is capable of working with permanent magnet (PM) motors, which allows a much greater flexibility in selecting a motor for an application. In addition, expanded PID control allows a greater level of precise control and operation of difficult level control applications. No other micro-drive delivers such reliable performance and extensive capabilities at such a competitive cost.

Product Scope

200 to 240 V at 0.5 to 20 HP
380 to 460 V at 0.5 to 20 HP

Single Phase

200 to 240 V at 0.25 to 3 HP

Highlights

- 110% Continuous Overload Rating, 150% for 60 Seconds
- Three Programmable Discrete Outputs: One Form-A, One Form-C, & One Open Collector
- Six Programmable Discrete Inputs
- One Programmable Analog Outputs: 4 to 20 mA or 0 to 10 VDC
- Three Programmable Analog Inputs: One 4 to 20 mA Input, One 0 to 10 VDC Input, & One ± 10 VDC Input
- NetPac Wireless Connection
- Ten Year Life-Long Design
- Compact Design
- Capable of Working with Permanent Magnet (PM) Motors
- Safe Torque Off (STO) Compliant
- Auto-Restart Operation/Catch a Spinning Motor

Standard Features

- IP20 Enclosure; Wall-Mount
- Past Trip Monitoring: Stores the Last Eight Faults in Succession, Along with At-Trip Operation Data
- Rotary Encoder
- EOI: Four-Digit/Seven-Segment LED Display
- Ambient Temperature: 14° to 122°F (-10° to 50°C)
- Humidity: 95% Non-Condensing
- Altitude: Up to 1000 Meters without Derate
- Two-Wire RS485 Communication Port
- Compliances: UL Listed in US & Canada, CSA, & CE



S15 ASD

> S15 Power Unit Pricing & Dimensions



VAC	HP	FLA	Model Number	List Price	Frame	H	W	D	Shipping Weight (lbs.)
						Dimensions (in.)			
230 Single-Phase	0.25	1.5	VFS15S-2002PL-W1	\$410	1C2	5.1	2.8	4.0	2.9
230 Single-Phase	0.5	3.3	VFS15S-2004PL-W1	\$429	1C2	5.1	2.8	4.7	3.1
230 Single-Phase	1	4.8	VFS15S-2007PL-W1	\$454	1C2	5.1	2.8	5.3	3.5
230 Single-Phase	2	8	VFS15S-2015PL-W1	\$543	2C2	5.1	4.1	5.9	4.4
230 Single-Phase	3	11	VFS15S-2022PL-W1	\$635	2C2	5.1	4.1	5.9	4.4

VAC	HP	FLA	Model Number	List Price	Frame	H	W	D	Shipping Weight (lbs.)
						Dimensions (in.)			
230	0.5	3.3	VFS15-2004PM-W1	\$402	1C3	5.1	2.8	4.7	2.9
230	1	4.8	VFS15-2007PM-W1	\$441	1C3	5.1	2.8	5.1	3.1
230	2	8	VFS15-2015PM-W1	\$571	2F3	5.1	4.1	5.1	4.0
230	3	11	VFS15-2022PM-W1	\$648	2F3	5.1	4.1	5.1	4.2
230	5	17.5	VFS15-2037PM-W1	\$883	3F3	6.7	5.5	5.9	6.0
230	7.5	27.5	VFS15-2055PM-W1	\$1,256	4C3	8.7	5.9	6.7	10.8
230	10	33	VFS15-2075PM-W1	\$1,376	4C3	8.7	5.9	6.7	11.0
230	15	54	VFS15-2110PM-W1	\$1,838	5C3	12.2	7.1	7.5	19.4
230	20	66	VFS15-2150PM-W1	\$2,334	5C3	12.2	7.1	7.5	19.8

VAC	HP	FLA	Model Number	List Price	Frame	H	W	D	Shipping Weight (lbs.)
						Dimensions (in.)			
460	0.5	1.5	VFS15-4004PL-W1	\$540	2C4	5.1	4.2	6.0	4.0
460	1	2.3	VFS15-4007PL-W1	\$570	2C4	5.1	4.2	6.0	4.2
460	2	4.1	VFS15-4015PL-W1	\$676	2C4	5.1	4.2	6.0	4.4
460	3	5.5	VFS15-4022PL-W1	\$776	3C4	6.7	5.5	6.3	6.6
460	5	9.5	VFS15-4037PL-W1	\$935	3C4	6.7	5.5	6.3	7.3
460	7.5	14.3	VFS15-4055PL-W1	\$1,373	4C4	8.7	5.9	6.7	11.7
460	10	17	VFS15-4075PL-W1	\$1,424	4C4	8.7	5.9	6.7	11.9
460	15	27.7	VFS15-4110PL-W1	\$1,966	5C4	12.2	7.1	7.5	19.2
460	20	33	VFS15-4150PL-W1	\$2,328	5C4	12.2	7.1	7.5	19.4

S15 ASD

> S15 Option Information & Pricing



S15 Conduit Adapters

230 V Drive Model Numbers	460 V Drive Model Numbers	Model Numbers	List Price	Height Increase (in.)
VFS15-2004 VFS15-2007 VFS15S-2002 VFS15S-2004 VFS15S-2007	N/A	NEM201Z	\$80	2.57
VFS15-2015 VFS15-2022	N/A	NEM202Z	\$80	2.58
VFS15S-2015 VFS15S-2022	N/A	NEM203Z	\$80	2.58
N/A	VFS15-4004 VFS15-4007 VFS15-4015	NEM204Z	\$80	2.58
VFS15-2037	N/A	NEM205Z	\$85	2.62
N/A	VFS15-4022 VFS15-4037	NEM206Z	\$85	2.56
VFS15-2055 VFS15-2075	VFS15-4055 VFS15-4075	NEM207Z	\$85	3.70
VFS15-2110 VFS15-2150	VFS15-4110 VFS15-4150	NEM208Z	\$100	3.88

Notes:

- Conduit adapters are mounted below the power terminal strips and replace the plastic plate provided with the drive.
- Conduit adapters provide mechanical strength and a location for a conduit connector. This allows wall-mounting of the S15 where NEMA 1 standards must be met.
- The height of the S15 will increase with the addition of the conduit adapter.

S15 ASD

> S15 Option
Information & Pricing



DIN005Z Front



DIN005Z Back

DIN Rail Mounting Kits

230 V Drive Model Numbers	460 V Drive Model Numbers	Model Numbers	List Price
VFS15S-2002 VFS15S-2004 VFS15S-2007 VFS15-2004 VFS15-2007	N/A	DIN003Z	\$75
VFS15S-2015 VFS15S-2022 VFS15-2015 VFS15-2022	VFS15-4004 VFS15-4007 VFS15-4015	DIN005Z	\$100

S15 EMC Grounding Plates

230 V Drive Model Numbers	460 V Drive Model Numbers	Model Numbers	List Price
VFS15S-2002 VFS15S-2004 VFS15S-2007 VFS15-2004 VFS15-2007	N/A	EMP007Z	\$35
VFS15S-2015 VFS15S-2022 VFS15-2015 VFS15-2022	VFS15-4004 VFS15-4007 VFS15-4015 VFS15-4022 VFS15-4037	EMP008Z	\$35
VFS15-2037	N/A	EMP009Z	\$35
VFS15-2055 VFS15-2075	VFS15-4055 VFS15-4075	EMP010Z	\$35
VFS15-2110 VFS15-2150	VFS15-4110 VFS15-4150	EMP011Z	\$35

- Notes:
- Not a stock item; may be up to 16-week lead time.
 - Not compatible with conduit adapters.

S15 ASD

> S15 Option

Information & Pricing

Communication Cards, Keypads, & Cables

Model Number	Description	List Price
RKP002Z	Remote mount keypad and parameter writer Remote-mountable LED keypad has 20 mm LEDs, the largest in its class, to ensure outstanding visibility Designed to fit into panels for use as an extension panel or display Can be used as a parameter copy, capable of storing parameters for up to three models One CAB001x-0A cable is necessary Remote-mounting kit not necessary for door-mounting Hardware included 	\$225
CAB0011-0A	One-meter communication cable	\$40
CAB0012-0A	Two-meter communication cable	\$50
CAB0015-0A	Five-meter communication cable	\$60
PWU003Z	Parameter writer stores S15 parameter sets Writes program sets to drive with or without incoming power to the drive 	\$1,050
TOS-SN-10B	Remote-mount touch-pad includes 1.5-meter connection cable M3 mounting hardware not included 	\$225
PDP003Z	Profibus communication option card for S15 SBP009Z required 	\$450
DEV003Z	DeviceNet communication option card for S15 drive SBP009Z required 	\$550
IPE002Z	Ethernet IP - Modbus TCP communication option card for S15 drive SBP009Z required 	\$600

S15 ASD

> S15 Option
Information & Pricing

Model Number	Description	List Price
IPE003Z	Ethercat communication option card for S15 SBP009Z required 	\$600
SBP009Z	S15 communication option adapter 	\$70
USB001Z	USB-to-serial conversion unit Allows users to use a USB port on computers as a COMport for connecting it to an ASD for data communications USB input and RS485 or TTL output for use on S15 CAB001x-0A required 	\$200

Notes:

- All of the options listed above are not installed and ship separately.

MICRO DRIVES

S11 ASD

Specifications

The S11 adjustable speed drive provides maximum torque with precise speed control and features an easy-to-use, quiet, and compact design. A removable terminal board, larger terminals, bidirectional speed search, and PID control allow this drive to deliver reliable performance and extensive capabilities.

Product Scope

200 to 240 V at 1 to 5 HP (IP54)
380 to 500 V at 2 to 5 HP (IP54)
525 to 600 V at 2 to 20 HP

Single-Phase

200 to 240 V at 1 to 3 HP (IP54)

Highlights

- 100% Continuous Overload Rating, 150% for 60 Seconds
- Eight Programmable Discrete Inputs with Selectable Sink or Source Logic
- Two Programmable Discrete Outputs: One Open Collector & One Relay Contact
- Two Programmable Analog Inputs: One 4 to 20 mA or 0 to 10 VDC Input & One 0 to 10 VDC Input
- Reduced Dimension Compact Design Allowing For Small Footprint & Side-by-Side Mounting Capabilities
- Regenerative Power Ride-Through
- Modbus RTU Communication Protocol
- Built-In EMI Noise Filter
- Auto-Restart Operation/Catch a Spinning Motor

Standard Features

- NEMA 1/IP20 Enclosure
- Save, Restore, & Clone Multiple Drive Settings
- EOI: Backlit Plain-English LCD & Four-Digit/Seven-Digit LED Display
- Ambient Temperature: 14 to 122°F (-10° to 50°C)
- Humidity: 93% Non-Condensing
- Altitude: Up to 1000 Meters without Derate
- Compliances: UL Listed in US & Canada, CSA, & CE



S11 ASD

> S11 Power Unit
Pricing & Dimensions



VAC	HP	FLA	Model Number	List Price	Frame	H	W	D	Shipping Weight (lbs.)
						Dimensions (in.)			
600	2	2.7	VFS11-6015P-WN	\$747	B	5.6	4.1	5.9	2.9
600	3	3.9	VFS11-6022P-WN	\$834	C	7.2	5.5	5.9	4.6
600	5	6.1	VFS11-6037P-WN	\$974	C	7.2	5.5	5.9	4.8
600	7.5	9	VFS11-6055P-WN	\$1,792	D	9.1	7.1	6.7	10.3
600	10	11	VFS11-6075P-WN	\$1,994	D	9.1	7.1	6.7	10.3
600	15	17	VFS11-6110P-WN	\$2,554	E	13.0	9.6	7.5	19.4
600	20	22	VFS11-6150P-WN	\$2,762	E	13.0	9.6	7.5	19.4

AS3/AS1

G9/P9

Micro
Drives

GX9

Regen

GX7M/
Mining Drive

W7/WX9

Plus Pack

LV Options

Reactors
& Filters

S11 ASD

> S11 IP54 Power Unit
Pricing & Dimensions



S11 ASD IP54 with Disconnect

VAC	HP	FLA	Model Number	List Price	Frame	H	W	D	Shipping Weight (lbs.)
						Dimensions (in.)			
230 Single-Phase	1	4.8	VFS11S-2007PLE-WN	\$1,224	1	9.4	8.3	7.0	8.8
230 Single-Phase	2	7.8	VFS11S-2015PLE-WN	\$1,355	2	11.7	8.5	8.1	13.3
230 Single-Phase	3	11	VFS11S-2022PLE-WN	\$1,525	3	13.4	9.1	8.7	13.5
230	1	4.8	VFS11-2007PME-WN	\$1,211	1	9.4	8.3	7.0	8.8
230	3	11	VFS11-2022PME-WN	\$1,393	2	11.7	8.5	8.1	13.0
230	5	17.5	VFS11-2037PME-WN	\$1,772	3	13.4	9.1	8.7	16.8
460	2	4.1	VFS11-4015PLE-WN	\$1,428	2	11.7	8.5	8.1	13.5
460	3	5.5	VFS11-4022PLE-WN	\$1,580	3	13.4	9.1	8.7	17.2
460	5	9.5	VFS11-4037PLE-WN	\$1,933	3	13.4	9.1	8.7	17.7

S11 ASD

> S11 Option
Information & Pricing



Conduit Adapters

600 V Drive Model Numbers	ModelNumber	ListPrice	Height Increase (in.)
VFS11-6015P-WN	NEM121Z	\$70	2.7
VFS11-6022P-WN VFS11-6037P-WN	NEM130Z		3.8
VFS11-6055P-WN VFS11-6075P-WN	NEM140Z		3.9
VFS11-6110P-WN VFS11-6150P-WN	NEM150Z		

- Notes:
- Conduit adapters provide mechanical strength and a location for a conduit connector. This allows wall-mounting of the S11 where NEMA 1 standards must be met.
 - The height of the S11 will increase with the addition of the conduit adapter.
 - Conduit adapters are mounted below the power terminal strips and replace the plastic plate provided with the drive.

S11 ASD

> S11 Option

Information & Pricing

Communication Cards, Closed-Loop Cards, Keypads, Cables, & Cooling

Model Number	Description	List Price
RS4003Z	RS485 communications card replaces standard terminal strip Provides reduced I/O connections compared with standard terminal strip 	\$125
DEV001Z	DeviceNet communications card replaces standard terminal strip Provides reduced I/O connections compared with standard terminal strip 	\$450
TOS-SN-1	Remote-mount touch-pad includes two-meter connection cable M3 mounting hardware not included 	\$225
RKP005Z	Remote-mountable LED keypad with 20 mm LEDs to ensure outstanding visibility Designed to be fit into panels for use as an extension panel or display Can be used to copy drive parameters from one drive to another Capable of storing parameters for up to three drives Requires one CAB00xx-0A cable Remote-mount kit not necessary for door-mounting Hardware included 	\$225
S-OISA	Remote-mount LCD touch-pad parameter writer (includes 2-meter connection cable) Remote-mounting kit not necessary for door-mounting Hardware included 	\$250
ASD-CAB-PC	RS232 to TTL cable for PC-to-ASD communications connects to standard terminal strip 	\$65

Notes:

- All of the options listed above are not installed and ship separately.

NANO DRIVES

NC3 ASD

Specifications

The nC3 ASD is a RoHS compliant nano-sized drive with a full range of features to meet the demands of most 120/220 V industrial or HVAC applications. The nC3 may be operated from either a single or three-phase power source and is a reliable option for OEMs, allowing for easy installation and drop-in replacement for starters. The nC3 is side-by-side mountable and its vertical construction allows for an impressively small footprint.

Product Scope

200 to 240 V at 0.5 to 5 HP

Single Phase

200 to 240 V at 0.5 to 3 HP

120V at 0.5 to 1 HP (Three-Phase 230VAC Output)

Highlights

- Powerful, User-Friendly, Long-Life Nano-Sized Drive
- Features Include:
 - Automatic Torque Boost
 - Vector Control
 - PID
 - DC Braking
 - Automated Cooling Fan Control
 - Parts Replacement Alarm
- Modbus RTU Communication with RS485
- Options Include:
 - EMC Plate
- Remote Keypad IP54 Rated
- DIN Rail
- LCD Parameter Writer



NC3 ASD

> NC3 Power Unit
Pricing & Dimensions



NC3 230 V

VAC	HP	FLA	Model Number	List Price	H	W	D	Shipping Weight (lbs.)
					Dimensions (in.)			
230	0.5	2.4	VFNC3-2004P	\$299	5.2	2.9	4.8	1.8
230	1	4.2	VFNC3-2007P	\$319	5.2	2.9	5.2	1.8
230	2	7.5	VFNC3-2015P	\$399	5.2	2.9	5.2	2.7
230	3	10.0	VFNC3-2022P	\$458	5.2	4.2	5.2	2.7
230	5	16.7	VFNC3-2037P	\$599	6.7	4.2	5.6	4.4

NC3 230 V Single-Phase

VAC	HP	FLA	Model Number	List Price	H	W	D	Shipping Weight (lbs.)
					Dimensions (in.)			
230 Single-Phase	0.5	2.4	VFNC3S-2004PL	\$299	5.2	2.9	4.8	1.8
230 Single-Phase	1	4.2	VFNC3S-2007PL	\$319	5.2	2.9	5.2	1.8
230 Single-Phase	2	7.5	VFNC3S-2015PL	\$399	5.2	4.2	6.2	3.3
230 Single-Phase	3	10.0	VFNC3S-2022PL	\$458	5.2	4.2	6.2	3.3

NC3 120 V Single-Phase

VAC	HP	FLA	Model Number	List Price	H	W	D	Shipping Weight (lbs.)
					Dimensions (in.)			
120 Single-Phase	0.5	2.4	VFNC3S-1004P	\$374	5.1	2.8	4.8	2.2
120 Single-Phase	1	4.2	VFNC3S-1007P	\$510	5.1	4.1	6.1	3.3

GX9 ASD

Specifications

The GX9 severe duty adjustable speed drive is revitalizing the industry by combining Toshiba's proprietary, ground-breaking Virtual Linear Pump™ (VLP) Technology into a drive that has a 600 V class rating. By incorporating VLP Technology, the GX9 directly, precisely, and linearly controls pressure, flow, level, and temperature, which seamlessly controls multiple devices while balancing the load between them. This state-of-the-art, energy efficient adjustable speed drive is designed to withstand the most severe conditions and is engineered to provide tight speed control, while offering the industry's most user-friendly operator interface.

Product Scope

460 V at 5 to 60 HP
600 V at 5 to 1200 HP

Highlights

- Proprietary VLP Technology
- Maximize Energy Savings on Variable Torque Loads
- No Flow/Low NPSH Cut-Off
- Automatic Sleep Timer
- Sealing Water Control Interlock
- 110% Continuous Overload Rating, 150% for 60 Seconds up to 125 HP, 130% for 120 Seconds 150 HP and Above
- Eight Programmable Discrete Inputs
- Three Discrete Outputs; Two Form-A Contacts, One Form-C Contact
- Three Programmable Analog Inputs: One 0 to 20 mA or 0 to 10 VDC Isolated Input, One 0 to 10 VDC Input, & One ± 10 VDC Input
- Two Programmable Analog Outputs: One Programmable 4 to 20 mA or 0 to 10 VDC & One 4 to 20 mA Output
- Heatsink Out-the-Back Above 75 HP
- TTL Communication Port or RS485 with Optional TTL-MOD-485 Adapter
- Auto-Restart Operation/Catch a Spinning Motor

Standard Features

- NEMA 1, IP20 Gasketed & Filtered Enclosure Above 75 HP
- 18-Pulse Option from 100 to 400 HP
- Built-in Real-time Clock
- Past Trip Monitoring: Stores the Last 20 Faults in Succession, Along with Cumulative At-trip Times
- EOI: Backlit Plain-English LCD Display & Four Digit Seven Segment Display
- Ambient Temperature: -14° to 104°F (-10° to 40°C)
- Humidity: 95% Non-Condensing
- Altitude: Up to 1000 Meters without Derate
- Standards/Compliances: NEC, ANSI, & IEEE 519



GX9 ASD

> 480 V GX9 Power Unit Pricing & Dimensions



VAC	HP	FLA	Model Number	List Price	H	W	D	Shipping Weight (lbs.)
480	5	8	GX94055	\$5,900	18	9	13	35
480	7.5	11.5	GX94080	\$6,100	18	9	13	35
480	10	15	GX94110	\$6,350	18	9	13	35
480	15	23	GX94160	\$6,750	18	9	13	35
480	20	30	GX94220	\$8,200	23	11	15	80
480	25	38	GX94270	\$8,500	23	11	15	80
480	30	45	GX94330	\$8,900	23	11	15	80
480	40	57	GX94400	\$9,100	23	11	15	80
480	50	71	GX94500	\$9,250	23	11	15	80
480	60	83	GX94600	\$9,400	23	11	15	80

> 600 V GX9 Power Unit Pricing & Dimensions

VAC	HP	FLA	Model Number	List Price	H	W	D	Shipping Weight (lbs.)
600	5	6.1	GX96060	\$6,200	18	9	13	41
600	7.5	9	GX96080	\$6,400	18	9	13	41
600	10	12	GX96120	\$6,800	18	9	13	41
600	15	17	GX96160	\$7,150	18	9	13	41
600	20	22	GX96220	\$7,600	18	9	13	41
600	25	27	GX96270	\$8,800	22	11	15	80
600	30	32	GX96330	\$9,100	22	11	15	80
600	40	41	GX96400	\$9,400	22	11	15	80
600	50	52	GX96500	\$9,800	22	11	15	80
600	60	62	GX96600	\$10,000	22	11	15	80
600	75	77	GX96750	\$10,200	22	11	15	80

GX9 ASD

> Assembly Unit Part Numbering Convention



The GX9 ASD is offered in two packages. From 5 to 75 HP, the GX9 is a self-contained power unit. From 100 to 1200 HP, the GX9 is an assembly unit that includes an input circuit breaker.

The part numbering scheme for a given configuration is defined in the following section.

Ordering Information: Use the following part numbering convention to configure the GX9 series package when placing your order.

Example Part Number:	GX9	4	##K/##L	AA				
Series: GX9 — GX9 ASD								
Voltage: 6 — 600								
Model Number: 10K – 100 HP 50K — 500 HP 12K – 125 HP 60K — 600 HP 15K – 150 HP 70K — 700 HP 17K – 175 HP 80K — 800 HP 20K – 200 HP 90K — 900 HP 25K – 250 HP 10L — 1000 HP 30K – 300 HP 12L — 1200 HP 40K – 400 HP								
Style: AA – Includes input circuit breaker								

GX9 ASD

> 600 V GX9 Assembly Unit Pricing & Dimensions



VAC	HP	FLA	Model Number	List Price	H	W	D
600	100	96	GX9610KAA	\$45,000	100	30	24
600	125	118	GX9612KAA	\$47,800	100	30	24
600	150	144	GX9615KAA	\$52,300	100	30	24
600	175	168	GX9617KAA	\$57,900	100	30	24
600	200	196	GX9620KAA	\$63,400	100	30	24
600	250	247	GX9625KAA	\$69,500	100	42	26
600	300	304	GX9630KAA	\$73,600	100	42	26
600	400	384	GX9640KAA	\$79,500	100	42	26
600	500	481	GX9650KAA	\$95,000	95	32	33
600	600	601	GX9660KAA	\$98,000	95	32	33
600	700	698	GX9670KAA	\$103,000	95	32	33
600	800	770	GX9680KAA	\$110,000	95	32	33
600	900	866	GX9690KAA	\$128,700	95	48	33
600	1000	962	GX9610LAA	\$143,000	95	48	33
600	1200	1155	GX9612LAA	\$170,500	95	48	33

Notes:

- Factory-authorized startup is required on all ASDs 400 HP and larger.

GX9 ASD

> GX9 Option
Information & Pricing



Model Number	Description	List Price
67331-DEEP	Door modification to accommodate ASD-TB1-ACI for power units 5 to 20 HP	\$200
68363-DEEP	Door modification to accommodate ASD-TB1-ACI for power units 25 to 75 HP	\$200
TTL-MOD-485	TTL to 2-Wire RS485 converter to allow for two RS485 connections (one reserved for keypad)	\$250

AS3/AS1

G9/P9

Micro
Drives

GX9

Regen

GX7M/
Mining Drive

W7/WX9

Plus Pack

LV Options

Reactors
& Filters

Regen ASD

Specifications

The Regen adjustable speed drive is an active front-end, configurable solid-state AC drive that features our Virtual Lineary Pump (VLP®) technology, a vector control algorithm, and regeneration capability. The regenerative capability is used when the motor slip is positive and the torque is negative (i.e. decelerating load or overhauling load). The properly-configured ASD converts the energy produced by the negative torque of the load into three-phase AC energy that is returned to the municipal supplier automatically. The active front-end of the GX7R is required to support the regeneration function and significantly contributes to the mitigation of harmonic distortion and an increased power factor.

Product Scope

460 V at 30 to 150 HP

Highlights

- Active Front End Converter
- Bidirectional Full Power Flow Technology
- Harmonic Mitigation when Motoring
- Energy Fed Back to Supply when Regenerating
- Modular Configuration

Standard Features

- Cabinet Unit NEMA 3R Enclosure
- Input Circuit Breakers
- Overload Rating: 150% for 60 Seconds
- EOI: Backlit Plain-English LCD Display
- Ambient Temperature: -14° to 104°F (-10° to 40°C)
- Humidity: 95% Non-Condensing
- Altitude: Up to 1000 Meters without Derate
- Standards/Compliances: UL, NEC, & ANSI



GX7R Regen ASD

> Part Numbering Convention



The GX7R ASD is a configurable large-horsepower ASD. The GX7R ASD may be ordered in several different configurations. The typical cabinet configurations will include multiple modules. The modules may be single-phase or three-phase.

The part numbering scheme for a given configuration is defined in the following section.

Ordering Information: Use the following part numbering convention to configure the GX7R Regen series package when placing your order. The 30 HP, 480 V system with the modular common DC bus system is shown in the heading of the table below as an example (i.e., P/N GX7R4300)

Example Part Number:	GX7	R	4	300	
Series: GX7 — GX7R Regen ASD	R — Regen				
Voltage: 4 — 480 VAC					
Model Number: 300 — 30 HP 400 — 40 HP 550 — 50 HP 650 — 60 HP 850 — 75 HP 10K — 100 HP 13K — 125 HP 15K — 150 HP					

GX7R Regen ASD

> Unit Pricing & Dimensions



VAC	HP	FLA	Model Number	List Price	H	W	D
					Dimensions (in.)		
460	30	40	GX7R4300	\$75,700	76	40	36
460	40	52	GX7R4400	\$78,500	76	40	36
460	50	65	GX7R4550	\$82,300	76	40	36
460	60	77	GX7R4650	\$87,000	76	40	36
460	75	96	GX7R4850	\$94,150	76	40	36
460	100	124	GX7R410K	\$102,700	76	40	36
460	125*	156	GX7R413K	\$108,850	79	45	38
460	150*	180	GX7R415K	\$115,000	79	45	38

*Regen filter included in external enclosure
(26.1"H x 28"W x 26.2"D)

AS3/AS1

G9/P9

Micro
Drives

GX9

Regen

GX7M/
Mining Drive

W7/WX9

Plus Pack

LV Options

Reactors
& Filters

GX7M ASD

Specifications

The GX7M modular adjustable speed drive is the latest addition to Toshiba's award-winning adjustable speed drives product lineup. Featuring an innovative modular design, the GX7M is suitable for all high horsepower applications and supports application flexibility specific power platforms. The new innovative modular design of the GX7M allows for users to specify only the necessary components in a dynamic configuration to fit various needs and applications. Featuring stackable rack-in/rack-out modules and flexible power components, the GX7M can be easily maintained and used on a variety of applications. In addition, the drive offers higher horsepower ratings in a smaller footprint, which provides users more real estate to improve application efficiency.

Product Scope

480 V, 125 to 1500 HP
600 to 690 V, 150 to 1750 HP

Highlights

- 115% Continuous Overload Rating, 150% for 60 Seconds from 125 to 1000 HP at 480 V; 105% Continuous Overload Rating, 120% for 60 Seconds from 1200 to 1500 HP at 480 V
- 115% Continuous Overload Rating, 150% for 60 Seconds from 150 to 1200 HP at 600 V; 105% Continuous Overload Rating, 120% for 60 Seconds from 1400 to 1750 HP at 600 V
- Eight Programmable Discrete Inputs with Selectable Sink or Source Logic
- Three Programmable Discrete Form C Output Contacts
- Three Programmable Inputs: One 0 to 20 mA or 0 to 10 VDC Input, One 0 to 10 VDC Input, & One ± 10 VDC Input
- Two Programmable Analog Output: FM Terminal from 0 to 20 mA or 0 to 10 VDC & AM Terminal from 0 to 20 mA
- RS232/RS485 & TTL Communication Ports
- Built-In Proportional/Integral/Derivative (PID) Control Loop
- Modular Style Power Units for Rack In/Rack Out Capability with Drop-In Replacements
- Vertically-Stacked Modules Allow for High Horsepower Ratings with Small Footprint
- Flexible Power Components Adaptable for Various Applications with Upgradable Modules

Standard Features

- NEMA 1 Free-Standing
- EOI: Backlit Plain-English LCD Display
- Ambient Temperature: -14° to 104°F (-10° to 40°C)
- Humidity: 95% Non-Condensing
- Altitude: Up to 3300 Feet (1000 Meters) without Derate
- Standards/Compliances: UL Listed in US & Canada, NEMA, NEC, & American Recovery & Reinvestment Act Compliant (AARA)



GX7M ASD

> Part Numbering Convention



The part numbering scheme for a given configuration is defined in the following section.

Ordering Information: Use the following part numbering convention to configure the GX7M series package when placing your order.

Example Part Number:	GX7M	6	##K/##L	AA	LH/RH
Series: GX7M — GX7M ASD					
Voltage: 4 — 480 6 — 600/690					
Model Number for 480 V: 13K — 125 HP 70K — 700 HP 15K — 150 HP 81K — 800 HP 20K — 200 HP 10L — 1000 HP 26K — 250 HP 12L — 1200 HP 39K — 350 HP 14L — 1400 HP 45K — 450 HP 15L — 1500 HP 51K — 500 HP 60K — 600 HP					
Model Number for 600/690 V: 15K — 150 HP 80K — 800 HP 20K — 200 HP 10L — 1000 HP 25K — 250 HP 12L — 1200 HP 30K — 300 HP 14L — 1400 HP 40K — 400 HP 15L — 1500 HP 50K — 500 HP 16L — 1600 HP 60K — 600 HP 17L — 1750 HP 70K — 700 HP					
Style: AA — Includes input circuit breaker LH — Rectifier cabinet located on left hand side RH — Rectifier cabinet located on right hand side					

GX7M ASD

> 460 V Assembly Unit Pricing & Dimensions



VAC	HP	FLA	Model Number	List Price	H	W	D
					Dimensions (in.)		
460	125	156	GX7M413KAA	\$52,000	89	40	33.5
460	150	196	GX7M415KAA	\$55,000	89	40	33.5
460	200	241	GX7M420KAA	\$62,000	89	40	33.5
460	250	313	GX7M426KAA	\$69,000	89	40	33.5
460	350	469	GX7M439KAA	\$78,000	89	40	33.5
460	450	546	GX7M445KAA	\$85,000	89	40	33.5
460	500	623	GX7M451KAA	\$91,000	89	40	33.5
460	600	722	GX7M460KAA	\$100,000	89	40	33.5
460	700	842	GX7M470KAA	\$111,000	89	60	33.5
460	800	980	GX7M481KAA	\$129,000	89	60	33.5
460	900	1121	GX7M493KAA	\$140,000	89	60	33.5
460	1000	1203	GX7M410LAA	\$158,000	89	60	33.5
460	1200	1443	GX7M412LAA	\$170,000	89	60	33.5
460	1400	1684	GX7M414LAA	\$185,000	89	60	33.5
460	1500	1804	GX7M415LAA	\$205,000	89	60	33.5

Notes:
• Factory-authorized startup is required on all ASDs 400 HP and larger.

> 600 V Assembly Unit Pricing & Dimensions

VAC	HP	FLA	Model Number	List Price	H	W	D
					Dimensions (in.)		
600/690	150	150	GX7M615KAA	\$55,000	89	40	33.5
600/690	200	200	GX7M620KAA	\$62,000	89	40	33.5
600/690	250	250	GX7M625KAA	\$69,000	89	40	33.5
600/690	300	300	GX7M630KAA	\$78,000	89	40	33.5
600/690	400	400	GX7M640KAA	\$85,000	89	40	33.5
600/690	500	500	GX7M650KAA	\$91,000	89	40	33.5
600/690	600	600	GX7M660KAA	\$100,000	89	40	33.5
600/690	700	700	GX7M670KAA	\$111,000	89	40	33.5
600/690	800	800	GX7M680KAA	\$129,000	89	60	33.5
600/690	1000	1000	GX7M610LAA	\$140,000	89	60	33.5
600/690	1200	1200	GX7M612LAA	\$158,000	89	60	33.5
600/690	1400	1400	GX7M614LAA	\$170,000	89	60	33.5
600/690	1500	1500	GX7M615LAA	\$185,000	89	60	33.5
600/690	1600	1600	GX7M616LAA	\$205,000	89	60	33.5
600/690	1750	1750	GX7M617LAA	\$220,000	89	60	33.5

Notes:
• Factory-authorized startup is required on all ASDs 400 HP and larger.

Mining ASD

Specifications

The mining series drive combines Toshiba's innovative modular platform technology into a hardened, extreme duty sled designed to withstand the relentless environments in the mining and minerals industry. Designed for both open pit and underground applications, the mining drive is Toshiba's most advanced, heavy duty drive built to date. Based on the reliability of Toshiba's motor control algorithm technology, the mining drive is designed to handle the toughest of applications.

Product Scope

460V at 200 to 500 HP
690V at 200 to 700 HP

Highlights

- Skid-Mounted for Easy Transportation
- Modular Cell Design for Combined Single or Multiple Motor Control
- Ambient Temperature: 14° to 122°F (-10° to 50°C)
- Input Breaker or Fuse Protection & Disconnect
- Modular Design Reduces Mean Time to Repair
- Modular Filtered Cassette Fans Reduce Maintenance Time
- High-Visibility Yellow Paint
- 100% Continuous Overload Rating, 150% for 60 Seconds
- Only Front Equipment Access is Needed
- Eight Programmable Discrete Inputs with Selectable Sink or Source Logic
- Three Programmable Discrete Output Contacts: Two Form-A Contacts & One Form-C Contact
- Three Programmable Analog Inputs: One 0 to 20 mA or 0 to 10 VDC, One 0 to 10 VDC, & One +/- 10 VDC
- Two Programmable Analog Outputs: One 4 to 20 mA or 0 to 10 VDC & One 4 to 20 mA Isolated Output
- RS485 and TTL Communication Ports

Standard Features

- NEMA 3R Enclosure
- Built-In Real-Time Clock
- Past Trip Monitoring
- EOI: Door-Mounted, Backlit Plain-English LCD Display
- Humidity: 95% Non-Condensing
- Altitude: Up to 3300 Feet (1000 m) without Derate



Pricing available upon request. Please contact factory or ASD group for RFQ. Toshiba engineers will work to customize the customer's ideal Mining Drive specific to the relevant application.

Contact ASD at TIC-ASD@toshiba.com to learn more.

W7 ASD

Specifications

The W7 adjustable speed drive offers the latest technology and proven reliability, making this AC drive one of the most advanced drives on the market. Our patented 18-pulse copper-wound auto transformer design masters the needs of customer's applications by providing a reliable and efficient adjustable speed drive that eliminates significant harmonic content to the power grid.

Product Scope

18-Pulse: 460 V at 20 to 500 HP

18-Pulse: 600 to 690 V at 75 to 400 HP

Highlights

- Patented 18-Pulse Copper-Wound Input Auto-Transformer Design
- Up to 60% Reduction in Transformer Losses
- Small Footprint with Uniform 24" Depth on All Models
- Meets IEEE 519-1992 Guidelines without Added Filters
- 100% Continuous Overload Rating, 120% for 60 Seconds
- Eight Programmable Discrete Inputs with Selectable Sink or Source Logic
- Three Programmable Discrete Output Contacts: Two Form-A Contacts & One Form-C Contact
- Three Programmable Analog Inputs: One 0 to 20 mA or 0 to 10 VDC, One 0 to 10 VDC, & One ± 10 VDC
- Two Programmable Analog Outputs: One 4 to 20 mA or 0 to 10 VDC & One 4 to 20 mA Isolated Output
- Analog Isolator: Two Isolated Outputs & One Isolated Input
- Half/Full Duplex RS232/RS485 & TTL Communication Ports

Standard Features

- NEMA 1, IP20, Gasket & Filter Enclosure
- Input Fuses
- Ground Lug
- 65,000 AIC Breaker
- Customer Terminal Block
- Built-In Real-Time Clock
- EOI: Door-Mounted, Backlit Plain-English LCD Display
- Ambient Temperature: 14° to 104°F (-10° to 40°C)
- Humidity: 95% Non-Condensing
- Altitude: Up to 1000 Meters without Derate
- Standards/Compliance: UL Listed in US & Canada



W7 18 Pulse ASD

> Part Numbering Convention



The W7 series ASD is available with commonly used options such as manual bypass and input circuit breakers in an easy-to-install package.

The W7 ASD includes an auto-transformer, input fuses, ground lug, customer terminal block, door-mounted electronic operator interface, power-on pilot light (white), run pilot light (red), fault pilot light (amber), hand/off/auto selector switch, emergency stop push button, real-time clock, and analog isolator (two isolated outputs and one isolated input).

Isolated three-contactor bypass units include an ASD/Off/Bypass selector switch, ASD Test On/Off selector switch, bypass mode pilot light (red), and ASD mode pilot light (red). They are used for system control and are all located on the enclosure door.

Isolated Solid State Starter bypass units include a door-mounted solid state starter keypad, ASD/Off/Bypass selector switch, ASD Test On/Off selector switch, solid state starter mode pilot light (red), and ASD mode pilot light (red). They are used for system control and are all located on the enclosure door.

Ordering Information: Use the following part numbering convention to configure the W7 when placing your order.

This example is for a 100 HP, 460 V "AA" style integrated 18-pulse assembly with a circuit breaker.

Example Part Number:	W7	4	##K	AA	DW	
Series: W7B ASD						
Voltage: 4 — 460 6 — 600 E — 690						
Model Number: 220 — 20 HP 10K — 100 HP 35K — 350 HP 270 — 25 HP 12K — 125 HP 40K — 400 HP 330 — 30 HP 15K — 150 HP 50K — 500 HP 400 — 40 HP 17K — 175 HP 500 — 50 HP 20K — 200 HP 600 — 60 HP 25K — 250 HP 750 — 75 HP 30K — 300 HP						
Style: AA — Includes circuit breaker AE — Includes circuit breaker, isolated three-contactor bypass, overload protection AS — Includes circuit breaker, isolated solid-state bypass, overload protection						
18-Pulse Transformer: DW — Auto-transformer						
Enclosure/Other Options: Blank — NEMA 1 enclosure NC — NEMA 12 enclosure						

Notes:

- Factory-authorized startup is required on all ASDs 400 HP and larger.

W7 18 Pulse ASD

> 460 V Assembly Unit (with NEMA 1 Enclosure)
Pricing & Dimensions



VAC	HP	FLA	Model Number	List Price	H	W	D
460	20	27	W7B4220AADW	\$44,000	84	30	24
460	25	34	W7B4270AADW	\$45,000	84	30	24
460	30	42	W7B4330AADW	\$46,000	84	30	24
460	40	52	W7B4400AADW	\$48,000	84	30	24
460	50	65	W7B4500AADW	\$50,000	84	30	24
460	60	77	W7B4600AADW	\$52,000	84	30	24
460	75	96	W7B4750AADW	\$54,000	100	30	24
460	100	124	W7B410KAADW	\$56,000	100	30	24
460	125	156	W7B412KAADW	\$58,000	100	30	24
460	150	190	W7B415KAADW	\$62,000	100	30	24
460	200	240	W7B420KAADW	\$68,000	100	30	24
460	250	302	W7B425KAADW	\$82,000	100	42	24
460	300	370	W7B430KAADW	\$88,000	100	42	24
460	400	480	W7B440KAADW	\$92,000	100	42	24
460	500	628	W7B450KAADW	\$100,000	100	42	24
460	20	27	W7B4220AEDW	\$46,000	84	54	24
460	25	34	W7B4270AEDW	\$48,000	84	54	24
460	30	42	W7B4330AEDW	\$50,000	84	54	24
460	40	52	W7B4400AEDW	\$54,000	84	54	24
460	50	65	W7B4500AEDW	\$56,000	84	54	24
460	60	77	W7B4600AEDW	\$60,000	84	54	24
460	75	96	W7B4750AEDW	\$65,000	100	54	24
460	100	124	W7B410KAEDW	\$68,000	100	54	24
460	125	156	W7B412KAEDW	\$78,000	100	54	24
460	150	190	W7B415KAEDW	\$80,000	100	54	24
460	200	240	W7B420KAEDW	\$85,000	100	54	24
460	250	302	W7B425KAEDW	\$102,000	100	66	24
460	300	370	W7B430KAEDW	\$108,000	100	66	24
460	400	480	W7B440KAEDW	\$125,000	100	66	24
460	500	628	W7B450KAEDW	\$135,000	100	72	24
460	20	27	W7B4220ASDW	\$48,000	84	54	24
460	25	34	W7B4270ASDW	\$50,000	84	54	24
460	30	42	W7B4330ASDW	\$52,000	84	54	24
460	40	52	W7B4400ASDW	\$56,000	84	54	24
460	50	65	W7B4500ASDW	\$58,000	84	54	24
460	60	77	W7B4600ASDW	\$64,000	84	54	24
460	75	96	W7B4750ASDW	\$68,000	100	54	24
460	100	124	W7B410KASDW	\$72,000	100	60	24
460	125	156	W7B412KASDW	\$80,000	100	60	24
460	150	190	W7B415KASDW	\$85,000	100	60	24
460	200	240	W7B420KASDW	\$87,000	100	60	24
460	250	302	W7B425KASDW	\$104,000	100	72	24
460	300	370	W7B430KASDW	\$110,000	100	84	24
460	400	480	W7B440KASDW	\$127,000	100	84	24
460	500	628	W7B450KASDW	\$138,000	100	114	24

Notes:

- Factory-authorized startup is required on all ASDs 400 HP and larger.

W7 18 Pulse ASD

> 600/690 V Assembly Unit (NEMA 1 Enclosure)

Pricing & Dimensions



VAC	HP	FLA	Model Number	List Price	H	W	D
600/690	75	77	W7B6750AADW	\$60,000	100	30	24
600/690	100	99	W7B610KAADW	\$65,000	100	30	24
600/690	125	125	W7B612KAADW	\$69,000	100	30	24
600/690	150	150	W7B615KAADW	\$72,000	100	30	24
600/690	175	177	W7B617KAADW	\$79,000	100	30	24
600/690	200	200	W7B620KAADW	\$86,000	100	30	24
600/690	250	250	W7B625KAADW	\$102,000	100	42	24
600/690	300	300	W7B630KAADW	\$115,000	100	42	24
600/690	400	425	W7B640KAADW	\$140,300	100	42	24

Notes:

- HP rating is based on 600 V.
- Factory-authorized startup is required on all ASDs 400 HP and larger.

AS3/AS1

G9/P9

Micro
Drives

GX9

Regen

GX7M/
Mining Drive

W7/WX9

Plus Pack

LV Options

Reactors
& Filters

W7 ASD

➤ 460 V Assembly Unit (NEMA 12 Enclosure)
Pricing & Dimensions



VAC	HP	FLA	Model Number	List Price	H	W	D
					Dimensions (in.)		
460	75	96	W7B4750AADWNC	\$60,000	90	38	24
460	100	124	W7B410KAADWNC	\$62,000	90	38	24
460	125	156	W7B412KAADWNC	\$64,000	90	38	24
460	150	190	W7B415KAADWNC	\$70,000	90	40	24
460	200	240	W7B420KAADWNC	\$76,000	90	40	24
460	250	302	W7B425KAADWNC	\$88,000	90	64	24
460	300	370	W7B430KAADWNC	\$92,000	90	64	24
460	400	480	W7B440KAADWNC	\$100,000	90	64	24
460	500	628	W7B450KAADWNC	\$130,000	94	64	24
460	75	96	W7B4750AEDWNC	\$72,000	90	62	24
460	100	124	W7B410KAEDWNC	\$74,000	90	62	24
460	125	156	W7B412KAEDWNC	\$79,000	90	62	24
460	150	190	W7B415KAEDWNC	\$84,000	90	64	24
460	200	240	W7B420KAEDWNC	\$87,000	90	64	24
460	250	302	W7B425KAEDWNC	\$105,000	90	88	24
460	300	370	W7B430KAEDWNC	\$110,000	90	88	24
460	400	480	W7B440KAEDWNC	\$127,000	90	88	24
460	500	628	W7B450KAEDWNC	\$152,000	94	94	24
460	75	96	W7B4750ASDWNC	\$74,000	90	76	24
460	100	124	W7B410KASDWNC	\$76,000	90	76	24
460	125	156	W7B412KASDWNC	\$82,000	90	76	24
460	150	190	W7B415KASDWNC	\$90,000	90	78	24
460	200	240	W7B420KASDWNC	\$98,000	90	78	24
460	250	302	W7B425KASDWNC	\$118,000	90	90	24
460	300	370	W7B430KASDWNC	\$124,000	90	90	24
460	400	480	W7B440KASDWNC	\$142,000	90	90	24
460	500	628	W7B450KASDWNC	\$175,000	94	136	24

Notes:

- Factory-authorized startup is required on all ASDs 400 HP and larger.

W7 ASD

> Option Information & Pricing



General Options

Model Number	Description	List Price	
		NEMA 1	NEMA 12
RCABINET18	Right-mounting 18" wide enclosure with blank door	\$2,800	CF
PC80150P018	Subpanel for 18" cabinet	\$500	\$500
RCABINET24	Right-mounting 24" wide enclosure with blank door	\$3,200	CF
PC80150P017	Subpanel for 24" cabinet	\$600	\$600
RCABINET36	Right-mounting 36" wide enclosure with blank door	\$3,600	CF
PC80150P019	Subpanel for 36" cabinet	\$700	\$700
LCABINET18	Left-mounting 18" wide enclosure with blank door	\$2,800	CF
PC80150P018	Subpanel for 18" Cabinet	\$500	\$500
LCABINET24	Left-mounting 24" wide enclosure with blank door	\$3,200	CF
PC80150P017	Subpanel for 24" cabinet	\$600	\$600
LCABINET36	Left-mounting 36" wide enclosure with blank door	\$3,600	CF
PC80150P019	Subpanel for 36 " cabinet	\$700	\$700

Additional Options

Option Code	Description	List Price
RI	Control relay — IEC, 120 V, 2 A contacts	\$100
M1	Door-mounted volt amp meter package — IEC	\$350
MA	Door-mounted output amp meter	\$200
MF	Door-mounted output frequency meter	\$200
MV	Door-mounted output volt meter	\$200
MX	Door-mounted miscellaneous meter (order by description)	CF
PX	Miscellaneous pilot light — IEC (specify function and indicator color)	\$75
RT	Door-mounted TIC-TPR6-14 relay — IEC (RTD monitor)	\$4,400

Miscellaneous Options

Option Code	Description	List Price
BN	Push-button — NEMA, 30 mm, heavy duty, oil tight	\$300
LN	Pilot light — NEMA, 30 mm, heavy duty, oil tight, P-T-T, 120 V LED with transformer 6 V bulb (order by function indicator color)	\$300
PN	Speed-control potentiometer — NEMA, machine tool duty, 120 V, A600, 10 A contacts	\$450
RN	Control relay — NEMA, machine tool duty, 120 V, A600, 10 A contacts	\$450
SN	Selector switch — NEMA, 30 mm, heavy duty, oil tight, two or three position	\$450

CF: Consult Factory.

WX9 ASD

Specifications



The WX9 adjustable speed drive offers the latest technology and proven reliability, making this AC drive one of the most advanced modular drives on the market. Our patented 18-pulse copper-wound auto transformer design masters the needs of customer's applications by providing a reliable and efficient adjustable speed drive that eliminates significant harmonic content to the power grid. Virtual Line Pump (VLP) creates an operating domain within the drive that is directly and proportionately related to the specific system to which it is connected.

Product Scope

18-Pulse: 460 V at 500 to 800 HP

Highlights

- Patented 18-Pulse Copper-Wound Input Auto-Transformer Design
- Up to 60% Reduction in Transformer Losses
- VLP - Virtual Linear Pump Technology
- Common Bus Connection - Modular Inverter/Rectifier Assembly
- Small Footprint with Uniform 32" Depth on All Models
- Meet IEEE 519-1992 Guidelines without Added Filters
- 100% Continuous Overload Rating, 120% for 60 Seconds
- Eight Programmable Discrete Inputs with Selectable Sink or Source Logic
- Three Programmable Discrete Output Contacts: Two Form-A Contacts & One Form-C Contact
- Three Programmable Analog Inputs: One 0 to 20 mA or 0 to 10 VDC, One 0 to 10 VDC, & One ± 10 VDC
- Two Programmable Analog Outputs: One 4 to 20 mA or 0 to 10 VDC & One 4 to 20 mA Isolated Output
- Analog Isolator: Two Isolated Outputs & One Isolated Input
- Half/Full Duplex RS232/RS485 & TTL Communication Ports

Standard Features

- NEMA 1, IP20, Gasket & Filter Enclosure
- Input Fuses
- Ground Lug
- 65,000 AIC Breaker
- Customer Terminal Block
- Built-In Real-Time Clock
- EOI: Door-Mounted, Backlit Plain-English LCD Display
- Ambient Temperature: 14° to 104°F (-10° to 40°C)
- Humidity: 95% Non-Condensing
- Altitude: Up to 1000 Meters without Derate
- Standards/Compliance: UL Listed in US & Canada



AS3/AS1

G9/P9

Micro
Drives

GX9

Regen

GX7M/
Mining Drive

W7/WX9

Plus Pack

LV Options

Reactors
& Filters

WX9 ASD

> Part Numbering Convention



The WX9 series ASD is available with commonly used options such as manual bypass and input circuit breakers in an easy-to-install package. Inverter, Rectifier and 18P Transformer are modularized and constructed in a separated enclosure.

The WX9 ASD includes an auto-transformer, input fuses, ground lug, customer terminal block, door-mounted electronic operator interface, power-on pilot light (white), run pilot light (red), fault pilot light (amber), hand/off/auto selector switch, emergency stop push button, real-time clock, RJ45 front door connection and analog isolator (two isolated outputs and one isolated input).

Isolated three-contactor bypass units include an ASD/Off/Bypass selector switch, ASD Test On/Off selector switch, bypass mode pilot light (red), and ASD mode pilot light (red). They are used for system control and are all located on the enclosure door.

Isolated Solid State Starter bypass units include a door-mounted solid state starter keypad, ASD/Off/Bypass selector switch, ASD Test On/Off selector switch, solid state starter mode pilot light (red), and ASD mode pilot light (red). They are used for system control and are all located on the enclosure door.

Ordering Information: Use the following part numbering convention to configure the WX9 when placing your order.

This example is for a 800 HP, 460 V "AA" style integrated 18-pulse assembly with a circuit breaker.

Example Part Number:	W7	4	##K	AA	DW	
Series: WX9 ASD						
Voltage: 4 — 460						
Model Number: Example: WX9480KAXAADW AX - Modular Drives	50K — 500 HP 60K — 600 HP 70K — 700 HP 80K — 800 HP					
Style: AA — Includes circuit breaker AE — Includes circuit breaker, isolated three-contactor bypass, overload protection AS — Includes circuit breaker, isolated solid-state bypass, overload protection						
18-Pulse Transformer: DW — Auto-transformer						
Enclosure/Other Options: Blank — NEMA 1 enclosure						

Notes:

- Factory-authorized startup is required on all ASDs.

WX9 ASD

> 460 V Assembly Unit (NEMA 1 Enclosure)
Pricing & Dimensions



VAC	HP	FLA	Model Number	List Price	H	W	D
460	500	628	WX9450KAXAADW	\$169,000	97.5	64	32
460	600	740	WX9460KAXAADW	\$173,000	97.5	64	32
460	700	900	WX9470KAXAADW	\$179,000	97.5	64	32
460	800	960	WX9480KAXAADW	\$182,000	97.5	64	32
460	500	628	WX9450KAXAEDW	CF	CF	CF	32
460	600	740	WX9460KAXAEDW	CF	CF	CF	32
460	700	900	WX9470KAXAEDW	CF	CF	CF	32
460	800	960	WX9480KAXAEDW	CF	CF	CF	32
460	500	628	WX9450KAXASDW	CF	CF	CF	32
460	600	740	WX9460KAXASDW	CF	CF	CF	32
460	700	900	WX9470KAXASDW	CF	CF	CF	32
460	800	960	WX9480KAXASDW	CF	CF	CF	32

Notes:

- Factory-authorized startup is required on all WX9 ASDs.
- CF = Consult Factory.

Plus Pack ASD

Specifications

The Plus Pack outdoor adjustable speed drive is revolutionizing the industry by combining Toshiba's robust Plus Pack technology and Toshiba's proprietary, ground-breaking Virtual Linear Pump (VLP®) Technology. VLP Technology allows the Plus Pack to directly, precisely, and linearly control pressure, temperature, level, or flow using single or multiple devices while balancing the load between them. This innovative drive is designed to withstand even the harshest of conditions and is engineered to provide tight speed control, while offering the industry's most user-friendly operator interface.

Product Scope

380 to 480 V

6-Pulse: 60 to 1500 HP

12-Pulse: 60 to 1500 HP

18-Pulse: 60 to 800 HP



Highlights

- Proprietary VLP® Technology
- No Flow/Low NPSH Cut-Off
- Maximized Energy Savings on Variable Torque Loads
- Time-Based Alternation
- Regenerative Power Ride Through
- 18-Pulse Diode Front-End (Option)
- Non Air-to-Air Heat Exchangers
- 100% Continuous Overload Rating, 120% for 60 Seconds
- Eight Programmable Discrete Inputs with Selectable Sink or Source Logic
- Three Programmable Discrete Output Contacts: Two Form-A Contacts & One Form-C Contact
- Three Programmable Analog Inputs: One 0 to 20 mA or 0 to 10 VDC, One 0 to 10 VDC, & One ± 10 VDC
- Two Programmable Analog Outputs: One 4 to 20 mA or 0 to 10 VDC & One 4 to 20 mA Isolated Output
- Half/Full Duplex RS485/RS232 & TTL Communication Ports
- Auto-Restart Operation/Catch a Spinning Motor

Standard Features

- NEMA 1 or NEMA 3R Enclosure
- 18-Pulse Auto Phase-Shifting Transformer (Optional)
- Built-In Real-Time Clock
- Two Protective Function Activation Relay Contact Outputs
- Past Trip Monitoring: Stores the Last Four Faults in Succession, Along with Cumulative At-Trip Times
- EOI: Four-Digit/Seven-Digit LED Display
- Save, Restore, & Clone Multiple Drive Settings
- Ambient Temperature: 14° to 122°F (-10° to 50°C)
- Altitude: Up to 1500 Meters without Derate
- Humidity: 95% Non-Condensing
- Standards/Compliances: IEEE, UL Listed in US & Canada, NEMA, NEC, & American Recovery & Reinvestment Act Compliant (ARRA)



Plus Pack ASD

> Part Numbering Convention



The Plus Pack is a special configuration, larger horsepower, 7-series ASD. The NEMA 3R version is specifically designed for outdoor applications including white paint (indoor units are painted ANSI 61 grey). The Plus Pack has a 1.0 service factor. In addition, this drive includes input fuses, input disconnect, locking cabinet, and grounding lug.

Use the following part numbering system when ordering a Plus Pack.

Example Part Number:	HX7+D	4	##0/##K/##L	CB
Series: HX7+D — HX7 Plus Pack Rev. D				
Voltage: 4 — 460				
Model Number: 660 — 60 HP 60K — 600 HP 830 — 75 HP 70K — 700 HP 11K — 100 HP 81K — 800 HP 16K — 150 HP 93K — 900 HP 20K — 200 HP 10L — 1000 HP 26K — 250 HP 12L — 1200 HP 39K — 350 HP 14L40 — 1400 HP 45K — 400 HP 15L40 — 1500 HP 51K40 — 500 HP				
Style: CB — NEMA 3R, includes input circuit breaker CB1 — NEMA 1, includes input circuit breaker CC — NEMA 3R, includes 12-pulse input circuit breaker CC1 — NEMA 1, includes 12-pulse input circuit breaker CD — NEMA 3R, includes 18-pulse input circuit breaker				

Notes:

- Plus Pack units do not include dynamic braking transistors as standard.
- Factory-authorized startup is required on all ASDs 400 HP and larger.
- 12-pulse drives require a 12-pulse phase-shifting transformer (not included).
- Height dimensions listed include removable eyebolts and base.
- Width dimensions listed include heat exchanger.
- Depth dimensions listed include door devices.
- 500, 1400, and 1500 HP Plus Packs are rated 40°C maximum.
- NEMA 3R, includes 18-pulse phase-shifting auto-transformer.

Plus Pack ASD

> 6-Pulse & 12 Pulse Unit (NEMA 1 Enclosure) Pricing & Dimensions



VAC	HP	FLA	Model Number	List Price	H	W	D	Shipping Weight (lbs.)
					Dimensions (in.)			
460	250	313	HX7+D426KCB1	\$40,000	81.5	37.0	40.0	1200
460	350	469	HX7+D439KCB1	\$46,400	81.5	37.0	40.0	1200
460	400	546	HX7+D445KCB1	\$53,000	81.5	37.0	40.0	1200
460	500	623	HX7+D451K40CB1	\$60,000	81.5	37.0	40.0	1500
460	600	722	HX7+D460KCB1	\$85,000	81.5	72.0	46.0	2000
460	700	842	HX7+D470KCB1	\$88,100	81.5	72.0	46.0	2000
460	800	980	HX7+D481KCB1	\$106,800	81.5	72.0	46.0	2000
460	900	1121	HX7+D493KCB1	\$116,500	81.5	72.0	46.0	2000
460	1000	1203	HX7+D410L40CB1	\$125,000	81.5	72.0	46.0	2000
460	1200	1443	HX7+D412LCB1	\$145,000	82.5	84.0	46.0	3500
460	1400	1684	HX7+D414L40CB1	\$165,000	82.5	84.0	46.0	3500
460	1500	1804	HX7+D415L40CB1	\$185,000	82.5	84.0	46.0	3500
460	250	313	HX7+D426KCC1	\$43,000	81.5	37.0	40.0	1200
460	350	469	HX7+D439KCC1	\$50,200	81.5	37.0	40.0	1200
460	400	546	HX7+D445KCC1	\$57,000	81.5	37.0	40.0	1200
460	500	623	HX7+D451K40CC1	\$64,000	81.5	37.0	40.0	1500
460	600	722	HX7+D460KCC1	\$90,000	81.5	72.0	46.0	2000
460	700	842	HX7+D470KCC1	\$95,350	81.5	72.0	46.0	2000
460	800	980	HX7+D481KCC1	\$114,300	81.5	72.0	46.0	2000
460	900	1121	HX7+D493KCC1	\$124,500	81.5	72.0	46.0	2000
460	1000	1203	HX7+D410L40CC1	\$135,000	81.5	72.0	46.0	2000
460	1200	1443	HX7+D412LCC1	\$157,000	82.5	84.0	46.0	3500
460	1400	1684	HX7+D414L40CC1	\$177,000	82.5	84.0	46.0	3500
460	1500	1804	HX7+D415L40CC1	\$197,000	82.5	84.0	46.0	3500

Notes:

- Dimensions and weights are for estimation purposes only — height dimensions listed include removable eyebolts and base; width dimensions listed include heat exchanger; depth dimensions listed include door devices.
- Factory-authorized startup is required on all ASDs 400 HP and larger.
- 500, 1400, and 1500 HP Plus Packs are rated 40°C maximum.
- Plus Pack units do not include dynamic braking transistors as standard.
- 12-pulse drives require a 12-pulse phase-shifting transformer (not included).

Plus Pack ASD

➤ 6-Pulse & 12 Pulse Unit (NEMA 3R Enclosure)
Pricing & Dimensions



VAC	HP	FLA	Model Number	List Price	H	W	D	Shipping Weight (lbs.)
					Dimensions (in.)			
460	60	79	HX7+D4660CB	\$26,000	81.5	25.0	35.0	1000
460	75	100	HX7+D4830CB	\$27,000	81.5	25.0	35.0	1000
460	100	133	HX7+D411KCB	\$29,500	81.5	25.0	35.0	1000
460	150	196	HX7+D416KCB	\$34,000	81.5	31.5	35.0	1000
460	200	241	HX7+D420KCB	\$36,000	81.5	31.5	35.0	1000
460	250	313	HX7+D426KCB	\$44,000	81.5	46.0	42.0	1200
460	350	469	HX7+D439KCB	\$53,900	81.5	46.0	42.0	1200
460	400	546	HX7+D445KCB	\$60,500	81.5	46.0	42.0	1200
460	500	623	HX7+D451K40CB	\$69,000	81.5	61.0	42.0	1500
460	600	722	HX7+D460KCB	\$91,000	81.5	90.0	48.0	2000
460	700	842	HX7+D470KCB	\$94,600	81.5	90.0	48.0	2000
460	800	980	HX7+D481KCB	\$113,300	81.5	90.0	48.0	2000
460	900	1121	HX7+D493KCB	\$123,000	81.5	90.0	48.0	2000
460	1000	1203	HX7+D410L40CB	\$150,700	81.5	90.0	48.0	2000
460	1200	1443	HX7+D412LCB	\$172,700	82.5	110.0	48.0	3500
460	1400	1684	HX7+D414L40CB	\$185,000	82.5	110.0	48.0	3500
460	1500	1804	HX7+D415L40CB	\$200,000	82.5	110.0	48.0	3500
460	60	79	HX7+D4660CC	\$27,900	81.5	25.0	35.0	1000
460	75	100	HX7+D4830CC	\$29,000	81.5	25.0	35.0	1000
460	100	133	HX7+D411KCC	\$33,000	81.5	25.0	35.0	1000
460	150	196	HX7+D416KCC	\$35,500	81.5	31.5	35.0	1000
460	200	241	HX7+D420KCC	\$39,000	81.5	31.5	35.0	1000
460	250	313	HX7+D426KCC	\$47,000	81.5	46.0	42.0	1200
460	350	469	HX7+D439KCC	\$57,700	81.5	46.0	42.0	1200
460	400	546	HX7+D445KCC	\$64,500	81.5	46.0	42.0	1200
460	500	623	HX7+D451K40CC	\$73,000	81.5	61.0	42.0	1500
460	600	722	HX7+D460KCC	\$97,000	81.5	90.0	48.0	2000
460	700	842	HX7+D470KCC	\$101,850	81.5	90.0	48.0	2000
460	800	980	HX7+D481KCC	\$120,800	81.5	90.0	48.0	2000
460	900	1121	HX7+D493KCC	\$131,000	81.5	90.0	48.0	2000
460	1000	1203	HX7+D410L40CC	\$160,700	81.5	90.0	48.0	2000
460	1200	1443	HX7+D412LCC	\$184,700	82.5	110.0	48.0	3500
460	1400	1684	HX7+D414L40CC	\$197,000	82.5	110.0	48.0	3500
460	1500	1804	HX7+D415L40CC	\$212,000	82.5	110.0	48.0	3500

Notes:

- Dimensions and weights are for estimation purposes only — height dimensions listed include removable eyebolts and base; width dimensions listed include heat exchanger; depth dimensions listed include door devices.
- 60 to 100 HP do not utilize heat exchanger.
- 500, 1400, and 1500 HP Plus Packs are rated 40°C maximum.
- Factory-authorized startup is required on all ASDs 400 HP and larger.
- Plus Pack units do not include dynamic braking transistors as standard.
- 12-pulse drives require a 12-pulse phase-shifting transformer (not included).

Plus Pack ASD

- > 18 Pulse Unit (NEMA 3R Enclosure)
(Phase Shifting AutoTransformer Included)
Pricing & Dimensions



VAC	HP	FLA	Model Number	List Price	H	W	D	Shipping Weight (lbs.)
					Dimensions (in.)			
460	60	79	HX7+D4660CD	\$59,000	81.5	70.0	35.0	2550
460	75	100	HX7+D4830CD	\$61,500	81.5	70.0	35.0	2550
460	100	133	HX7+D411KCD	\$64,600	81.5	70.0	35.0	2550
460	150	196	HX7+D416KCD	\$71,000	81.5	70.0	35.0	2550
460	200	241	HX7+D420KCD	\$78,000	81.5	70.0	35.0	2550
460	250	313	HX7+D426KCD	\$98,900	81.5	93.5	44.0	3425
460	350	469	HX7+D439KCD	\$114,500	81.5	93.5	44.0	3650
460	400	546	HX7+D445KCD	\$128,000	81.5	93.5	44.0	3900
460	500	623	HX7+D451K40CD	\$158,000	81.5	93.5	44.0	3900
460	600	722	HX7+D460KCD	\$188,000	81.5	130.0	46.5	5700
460	700	842	HX7+D470KCD	\$210,560	81.5	130.0	46.5	5775
460	800	980	HX7+D481KCD	\$240,000	81.5	130.0	46.5	5775

Notes:

- Dimensions and weights are for estimation purposes only — height dimensions listed include removable eyebolts and base; width dimensions listed include heat exchanger; depth dimensions listed include door devices.
- 18-pulse drives have an integrated 18-pulse phase-shifting transformer.
- 500 HP 18-pulse Plus Pack is rated 40°C maximum.
- Factory-authorized startup is required on all ASDs 400 HP and larger.
- Plus Pack units do not include dynamic braking transistors as standard.

Plus Pack ASD

> Option Information & Pricing

Installed Isolated Bypass

Option Code	Description	List Price
AE	60 HP isolated three-contactor bypass	\$11,020
	75 HP isolated three-contactor bypass	\$11,950
	100 HP isolated three-contactor bypass	\$12,840
	150 HP isolated three-contactor bypass	\$14,570
	200 HP isolated three-contactor bypass	\$15,020
	250 HP isolated three-contactor bypass	\$27,240
	350 HP isolated three-contactor bypass	\$27,570
	400 HP isolated three-contactor bypass	\$29,910
	500 HP isolated three-contactor bypass	\$37,550
	600 HP isolated three-contactor bypass	\$37,770
	700 HP isolated three-contactor bypass	\$37,770
	800 HP isolated three-contactor bypass	\$37,770

Notes:

- Bypasses are only available for 6-pulse drives. Consult factory for 900 HP and larger size drives on option availability.
- Dimensions will be significantly affected with bypass adders.

Installed Dynamic Braking Transistors

Option Code	Description	List Price
DB	60 to 100 HP IGBT7	\$1,200
	150 to 200 HP IGBT7	\$1,500
	250 HP IGBT7	\$1,600
	350 to 500 HP IGBT7	\$2,000
	600 to 1500 HP IGBT7	\$3,000

Notes:

- 600 HP and larger size drives use the same size IGBT7.
- Larger units have limited braking capacity.

Plus Pack ASD

> Option Information & Pricing

Installed Junction Boxes

Option Code	Description	List Price
JB	60 to 100 HP junction box	\$1,350
	150 to 500 HP junction box (standard on 518 kVA CB CC)	\$2,225
	600 to 800 HP junction box	\$3,900
	900 to 1500 HP junction box	\$4,450

Notes:

- Junction Box included on 18-pulse units.

Installed DC Link Reactors

Option Code	Description	List Price
RD	150 HP installed DC link reactor	\$2,000
	200 HP installed DC link reactor	\$2,475
	250 HP installed DC link reactor	\$2,750
	350 HP installed DC link reactor	\$3,300
	400 HP installed DC link reactor	\$3,575
	500 HP installed DC link reactor	\$5,000
	600 HP installed DC link reactor	\$6,000
	700 HP installed DC link reactor	\$7,250
	800 HP installed DC link reactor	\$7,500
	900 HP installed DC link reactor	\$10,000
	1000 HP installed DC link reactor	\$11,000
	1200 HP installed DC link reactor	\$12,000
	1400 HP installed DC link reactor	\$14,000
	1500 HP installed DC link reactor	\$16,000

Notes:

- 60 to 100 HP Plus Pack power units do not have DC link reactor option connection points.
- DC Link Reactors included on 18-pulse units.



Installed Raycap Surge Suppressors

Option Code	Description	List Price
SS	Installed Raycap surge suppressors for CB & CD units	\$3,000
	Installed Raycap surge suppressors for CC units	\$6,000

Low Voltage ASD Options

> G9, P9, AS1 ASD Options

Communication Cards, Closed-Loop Cards, Keypads, Cables, & Cooling

Part Number	Description	Price
DEV002Z	DeviceNet communications option module snaps directly onto drive Mounts behind drive keypad control panel	\$255
PDP002Z	Profibus DP communications option module snaps directly onto drive Mounts behind drive keypad control panel	\$300
MBP001Z	ModBus Plus communications option module snaps directly onto drive Mounts behind drive keypad control panel	\$400
MBE001Z	ModBus TCP communications option module snaps directly onto drive Mounts behind drive keypad control panel	\$600
ASD-G9ETH	Ethernet IP communications option module snaps directly onto the drive Mounts behind drive keypad control panel Supports: Ethernet IP Modbus/TCP Bacnet Profinet IO	\$900
IPE001Z	Ethernet IP communications option module snaps directly onto drive Mounts behind drive keypad control panel	\$550
ETB003Z	I/O terminal block can be added to enhance your system for extra compatibility with wide range of systems: Four Discrete Inputs One Open-Collector Outputs One Thermal-Trip Input Form-C Output (One Circuit) Only one ETB003Z card can be used per drive	\$175



AS3/AS1

G9/P9

Micro
Drives

GX9

Regen

GX7M/
Mining Drive

W7/WX9

Plus Pack

LV Options

Reactors
& Filters

Low Voltage ASD Options

> G9, P9, AS1 ASD Options

Communication Cards, Closed-Loop Cards, & Communication Cables

Part Number	Description	Price
ETB004Z	I/O terminal block can be added to enhance your system for extra compatibility with a wide range of systems: - Four Discrete Inputs - One Open-Collector Outputs - One Thermal-Trip Input - Form-C Output (One Circuit) - Two Analog Inputs - Two Analog Outputs Only one ETB004Z card can be used per drive 	\$300
ETB006Z	120 V Logic Input Adapter wires into drive terminal block Contains seven 120 VAC inputs that control discrete inputs Compatible with G9/P9 drives frames 6 and above, as well as all AS1 drives	\$145
USB-485-2W	2-Wire RS485 to USB cable for PC to ASD Compatible with G9, P9, AS3, AS1, S15, Plus Pack, W7, GX7, GX9, GX7M	\$150
VEC004Z	Type-2 Push pull/open collector 12 V printed circuit board connects/mounts internally to drive, behind drive keypad control panel 	\$150
VEC005Z	Type-2 Push pull/open collector 15 V printed circuit board connects/mounts internally to drive, behind drive keypad control panel 	\$150
VEC006Z	Type-2 Push pull/open collector 24 V printed circuit board connects/mount internally to drive, behind drive keypad control panel 	\$150
VEC007Z	Type-1 RS422 (line driver) 5 V encoder card printed circuit board connects/mounts internally to drive, behind drive keypad control panel 	\$150
ASD-TB1-SIM9	Input simulator replaces standard terminal strip on any G9/P9 drive Emulates input/output control signals of drive using switches, potentiometers, indicators 	\$300

Low Voltage ASD Options

> G9, P9, AS1 ASD Options

Remote Keypads & Cables

Part Number	Description	Price
ASD-EOI-N4-G9	G9 NEMA 4 keypad Keypad should not be exposed to direct sunlight	\$750
ASD-EOI-N4-P9	P9 NEMA 4 keypad Keypad should not be exposed to direct sunlight	\$750
ASD-MTG-KIT9	Remote-mount kit for G9 EOI Frame 2 to 5 EOI extender cable ASD-CABxF is required (not included with drive)	\$300
ASD-MTG-KIT	Remote-mount kit for G9/P9 EOI Frame 6 to 13 EOI extender cable ASD-CABxF may be required if keypad is remote-mounted beyond reach of EOI cable provided with drive	\$100
ASD-MTG-KIT-P9	Remote-mount kit for P9 EOI Frame 2 to 5 EOI extender cable ASD-CABxF is required (not included with drive)	\$300
ASD-BPC	EOI panel cover provides dust protection when G9/P9 keypad has been remotely mounted or removed on Frame 6 to 13	\$85
ASD-CAB7F	7-foot EOI extender cable with ferrite cores	\$45
ASD-CAB10F	10-foot EOI extender cable with ferrite cores	\$65
ASD-CAB15F	15-foot EOI extender cable with ferrite cores	\$75

Low Voltage ASD Options

➤ GX7, GX9, W7, Plus Pack ASD Options

Internal Communication/Multi-Function Cards

Part Number	Description	Price
TTL-MOD-485	TTL to 2-Wire RS485 converter with two female RJ45 connections (input and output) Used with 7-series control boards (Plus Pack, W7, GX7, GX9, GX7M)	\$250
USB-485-2W	2-Wire RS485 to USB cable for PC to ASD Compatible with G9, P9, AS3, AS1, S15, Plus Pack, W7, GX7, GX9, GX7M	\$150
ASD-TB1-ACI	120 V Logic Input Board Replaces terminal strip supplies dry contact closures to control GX7, GX9, GX7R, GX7M, W7, Plus Pack	\$450
ASD-RTC	Real-time clock option adds time and date stamp on start, run, fault events Stores up to 100 previous faults with operation data at time of fault	\$80
ASD-ISO-1	Terminal strip signal isolator daughter board mounts onto factory terminal strip provides isolation of control board output circuit from AM/FM output from II input	\$300
ASD-MULTICOM-A	Vector feedback card supports line driver, open-collector encoders, multiple network communication protocols, including: Profibus Modbus RTU DeviceNet	\$1,520
ASD-MULTICOM-B	Vector feedback, line driver, open-collector, pulse-speed command, process PID control	\$950



Low Voltage ASD Options

> GX7, GX9, W7, Plus Pack ASD Options

Internal Communication/Multi-Function Cards

Part Number	Description	Price
ASD-MULTICOM-J	Vector feedback, pulse-input speed command, position-control command, RX2 input, multi-function output terminal, alarm-code output terminal 	\$950
ASD-MULTICOM-X	Extended terminal board provides: Eight additional programmable digital inputs Two analog outputs Two programmable form-C contacts 16-bit BCD control function 	\$900
ASD-NANOCOM	Multi-protocol communication interface provides RS485-based network connectivity (currently supports Modbus RTU Metasys N2) Chip plugs directly into B-version of 7-series ASDs Not compatible with HX7+D Plus Pack 	\$350
ASD-MULTICARD	Option card spacer necessary when installing more than one option card in drive 	\$270

AS3/AS1

G9/P9

Micro
Drives

GX9

Regen

GX7M/
Mining Drive

W7/WX9

Plus Pack

LV Options

Reactors
& Filters

Low Voltage ASD Options

> External Gateway Options

External Communication Options

Part Number	Description	Price
XLTR-200	Multi-protocol network gateway supports: Modbus RTU Metasys N2 Siemens FLN One unit connects up to three drives Requires one CAB00xx-0A cable per drive 	\$800
ETH-200	Multi-protocol network gateway supports: Ethernet IP Modbus TCP Modbus RTU One unit connects up to three drives Requires one CAB00xx-0A cable per drive 	\$1,100
EXT-PROFIBUS	Network gateway supports ProfibusDP One unit connects up to two drives Requires one CAB00xx-0A cable per drive 	\$1,150
EXT-MODBUS+	Network gateway supports Modbus+ One unit connects up to three drives Requires one CAB00xx-0A cable per drive 	\$1,450
DNET-100	Network gateway supports DeviceNet One unit connects up to three drives Requires one CAB00xx-0A cable per drive 	\$1,050
10456	Standard plug 120 VAC: 9 VDC power supply Compatible with ICC gateways listed above	\$95

Notes:

- Options are available for 7-Series and S11 ASDs.

Low Voltage ASD Options

> External Gateway Options

Millennium Series Communication Options

Part Number	Description	Price
DNET-1000	Network gateway that supports the following protocols: - DeviceNet - Modbus RTU - BACnet MS/TP - Metasys N2 	\$1,350
ECAT-1000	Network gateway that supports the following protocols: - EtherCAT - Modbus RTU - BACnet MS/TP - Metasys N2 	\$1,350
ETH-1000	Network gateway that supports the following protocols: - AB CSP (PCCC) - EtherNet/IP - BACnet/IP - BACnet MS/TP - Modbus/TCP - Modbus RTU - Profinet IO - Metasys N2 	\$1,250
PBDP-1000	Network gateway that supports the following protocols: - Profibus DP - Modbus RTU - BACnet MS/TP - Metasys N2 	\$1,350
XLTR-1000	Network gateway that supports the following protocols: - Modbus RTU - BACnet MS/TP - Metasys N2 	\$800

Notes:

- Options are available for 7-Series and 9-Series ASDs. Consult factory for installation/setup.

Low Voltage ASD Options

➤ G9, P9, AS1 ASD Installed Options

Installed Communication Cables & Closed-Loop Cards

Part Number	Description	Price
CD	DEV002Z DeviceNet communications option module snaps directly onto drive Mounts behind drive keypad control panel 	\$755
CF	PDP002Z Profibus DP communications option module snaps directly onto drive Mounts behind drive keypad control panel 	\$800
CH	MBP001Z ModBus Plus communications option module snaps directly onto drive Mounts behind drive keypad control panel 	\$900
CP	MBE001Z ModBus TCP communications option module snaps directly onto drive Mounts behind drive keypad control panel 	\$1,100
CQ	ASD-G9ETH Ethernet IP communications option module snaps directly onto drive Mounts behind drive keypad control panel Supports: Ethernet IP Modbus/TCP Bacnet Profinet IO 	\$1,400
CQ	IPE001Z Ethernet IP communications option module snaps directly onto drive Mounts behind drive keypad control panel Supports Ethernet IP 	\$1,050

Low Voltage ASD Options

> G9, P9, AS1 ASD Installed Options

Installed Communication Cables & Closed-Loop Cards

Part Number	Description	Price
CE	ETB003Z I/O terminal block can be added to enhance your system for extra compatibility with a wide range of systems: - Four Discrete Inputs - One Open-Collector Outputs - One Thermal-Trip Input - Form-C Output (One Circuit) Only one ETB003Z card can be used per drive 	\$675
CT	ETB004Z I/O terminal block can be added to enhance your system for extra compatibility with a wide range of systems: - Four Discrete Inputs - One Open-Collector Outputs - One Thermal-Trip Input - Form-C Output (One Circuit) - Two Analog Inputs - Two Analog Outputs Only one ETB004Z card can be used per drive 	\$800
CN	ETB006Z 120 V Logic Input Adapter wires into drive terminal block and has seven 120 VAC inputs that control discrete inputs (compatible with G9/P9 drives frames 6 and above and all AS1 drives)	\$645
CV	VEC004Z Type-2 Push pull/open collector 12 V printed circuit board connects/mount internally to drive, behind drive keypad control panel 	\$650
CV	VEC005Z Type-2 Push pull/open collector 15 V printed circuit board connects/mount internally to drive, behind drive keypad control panel 	\$650
CV	VEC006Z Type-2 Push pull/open collector 24 V printed circuit board connects/mount internally to drive, behind drive keypad control panel 	\$650
CU	VEC007Z Type-1 RS422 (line driver) 5 V encoder card printed circuit board connects/mounts internally to drive, behind drive keypad control panel 	\$650

Notes:

- Please consult factory when selecting options CV or CU.

Low Voltage ASD Options

➤ GX9, W7, Plus Pack ASD Installed Options

Part Number	Description	Price
CN	120 V Logic Input Board Replaces terminal strip supplies dry contact closures to control GX7, GX9, GX7R, GX7M, W7, Plus Pack 	\$950
CR	Real-time clock option adds a time and date stamp on start, run, fault events Stores up to 100 previous faults with operation data at time of fault Standard in W7 ASD 	\$580
X7	Terminal strip signal isolator daughter board mounts onto factory terminal strip and provides isolation of control board output circuit from AM/FM output from the II input Standard in W7 ASD 	\$800

Low Voltage ASD Options

➤ GX7, GX9, W7, Plus Pack ASD Installed Options

Installed Communication Cards & Closed-Loop Cards

Part Number	Description	Price
C1	Installed (ASD-MULTICOM-A) vector feedback multi-protocol communications card supports line driver, open-collector encoders, multiple network communication protocols including: - Profibus - Modbus RTU - DeviceNet 	\$2,020
CE	Installed extended terminal board (ASD-MULTICOM-X) provides: - Eight additional programmable digital inputs - Two analog outputs - Two programmable form-C contacts 16-bit BCD control function 	\$1,400
CU	Installed (ASD-MULTICOM-B) vector feedback, line driver, open-collector, pulse-speed command, process PID control 	\$1,450
CV	Installed (ASD-MULTICOM-J) vector feedback, pulse-input speed command, position-control command, RX2 input, multi-function output terminal, alarm-code output terminal 	\$1,450

Low Voltage ASD Options

> NetPac®

Part Number	Description	Price
NETPAC-USB	Toshiba NetPac Wireless connector for computer USB port 	\$250
NETPAC-2-2C	Toshiba NetPac Wireless connector for 2-wire RS-48S, includes two centimeter long cable 	\$250
NETPAC-2-2F	Toshiba NetPac Wireless connector for 2-wire RS-48S, includes two foot long cable 	\$250
NETPAC-2-2M	Toshiba NetPac Wireless connector for 2-wire RS-48S, includes two meter long cable 	\$250
NETPAC-4-2C	Toshiba NetPac Wireless connector for 4-wire RS-48S, includes two centimeter long cable 	\$250
NETPAC-4-2F	Toshiba NetPac Wireless connector for 4-wire RS-48S, includes two foot long cable 	\$250
NETPAC-4-2M	Toshiba NetPac Wireless connector for 4-wire RS-48S, includes two meter long cable 	\$250

NetPac® Compatibility Chart

Part Number	S11	S15	G9	P9	AS3	AS1	Plus Pack	W7	GX9
NETPAC-2-2C	N/A	REC	OK	OK	OK	OK	OK	OK	OK
NETPAC-2-2F	N/A	REC	OK	OK	OK	OK	OK	OK	OK
NETPAC-2-2M	N/A	REC	OK	OK	OK	OK	OK	OK	OK
NETPAC-4-2C	N/A	N/A	REC	REC	OK	OK	REC*	REC	REC
NETPAC-4-2F	N/A	N/A	REC	REC	OK	OK	REC*	REC	REC
NETPAC-4-2M	N/A	N/A	REC	REC	OK	OK	REC*	REC	REC

Notes:

- REC: Recommended for this particular model.
- REC*: Requires the 9-series keypad on HX7+D model to be removed.
- N/A: May not be applied.
- OK: May be applied to this model, a different model may be better for the application.

Low Voltage ASD Options

> Installed Gateway Options

Installed External Communication Options

Part Number	Description	Price
CG	Multi-protocol network gateway supports Modbus RTU, Metasys N2, Siemens FLN One unit connects up to three drives Includes option connection cable (CAB0011-0A)	\$1,300
CQ	Multi-protocol network gateway supports: Ethernet IP Modbus TCP Modbus RTU One unit connects up to three drives Includes option connection cable (CAB0011-0A)	\$1,600
CF	Network gateway supports ProfibusDP One unit connects up to two drives Includes option connection cable (CAB0011-0A)	\$1,650
CH	Network gateway supports Modbus Plus One unit connects up to three drives Includes option connection cable (CAB0011-0A)	\$1,950
CD	Network gateway supports DeviceNet One unit connects up to three drives Includes option connection cable (CAB0011-0A)	\$1,550

Notes:

- See compatibility chart on page 74.
- Options are available for 7-Series and S11 ASDs.

Low Voltage ASD Options

> Common Installed ASD Options

Installed Buttons

Part Number	Description	Price
BA	Automatic bypass upon ASD fault for units with bypass	\$600
B1	Non-illuminated push-button Black button for stop Red button for start Controls ASD only	\$600
BJ	Jog push-button	\$300
BX	Miscellaneous push-button	\$300

Notes:

- For NEMA-rated add \$150 to list price.

Installed Space Heaters

Part Number	Description	Price
HM	Motor space heater	\$400
HS	Cabinet anti-condensation space heater powered by incoming power Activated when ASD is not running	\$500
HT	Cabinet space heater powered by incoming power Thermostat controlled	\$600
T2	200 VA 120 V CPT for motor space heater power	\$300

Notes:

- Voltage and wattage ratings required when specifying HM option.
- Motor space heater will be remotely powered by customer's power supply unless T2 option is also specified.
- Some motors may require CPT larger than 200 VA.

Low Voltage ASD Options

> Common Installed ASD Options

Installed Thermal-Overload Relays

Part Number	Description	Price
LA	0.25 HP overload relay	\$150
LB	0.33 HP overload relay	\$150
LC	0.5 HP overload relay	\$150
LD	0.75 HP overload relay	\$150
LE	1 HP overload relay	\$150
LF	1.5 HP overload relay	\$150
LG	2 HP overload relay	\$150
LH	3 HP overload relay	\$150
LJ	5 HP overload relay	\$150
LK	7.5 HP overload relay	\$200
LL	10 HP overload relay	\$200
LM	15 HP overload relay	\$200
LN	20 HP overload relay	\$200
LP	25 HP overload relay	\$200
LQ	30 HP overload relay	\$250
LR	40 HP overload relay	\$250
LS	50 HP overload relay	\$250
LT	60 HP overload relay	\$450
LU	75 HP overload relay	\$450
LW	100 HP overload relay	\$450
LY	125 HP overload relay	\$450
LZ	150 HP overload relay	\$450
L1	200 HP overload relay	\$500
L2	250 HP overload relay	\$500
L3	300 HP overload relay	\$500
L4	350 HP overload relay	\$500
L5	400 HP overload relay	\$550

Low Voltage ASD Options

> Common Installed ASD Options

Installed Meters

Part Number	Description	Price
M1	Output voltage current meter package	\$350
MA	Output current meter	\$200
ME	Elapsed time meter	\$200
MF	Output frequency meter	\$200
MV	Output voltage meter	\$200
MX	Miscellaneous meter Order by description	CF
RT	RTD monitor/relay 12 RTD inputs (Accepts Pt100, Ni100, Ni120, and Cu10 RTDs) Door-mount display	\$4,400

- Notes:
- AM and FM analog outputs are used for meter display.
 - Please consult factory for availability and pricing if more than two meters are needed, as additional transformers may be required.
 - CF = Consult Factory.

Low Voltage ASD Options

> Common Installed ASD Options

Part number	Description	Price
PA	Pilot light for ASD mode indicator	\$300
PB	Pilot light for bypass mode indicator	\$300
PF	Pilot light for fault indicator (amber)	\$300
PG	Pilot light for stop indicator (green)	\$300
PP	Pilot light for power on indicator (white)	\$300
PR	Pilot light for run indicator (red)	\$300
PX	Pilot light for miscellaneous indicator Specify at time of order	CF

Notes:

- For NEMA-rated devices, consult factory for pricing.
- The discrete outputs OUT1, OUT2, and FLA/B/C are used to activate the pilot lights.
- For more than three active indicators, consult factory for pricing and availability of additional required hardware.
- CF = Consult Factory.

Miscellaneous Options

Part Number	Description	Price
X2	Isolated 4 to 20 mA transducer connected to AM terminal	\$550
X3	Isolated 4 to 20 mA transducer connected to FM terminal	\$550
X5	Isolated 3 to 15 PSI transducer connected to VI terminal	\$680

Low Voltage ASD Options



> Dynamic Braking Resistors

Dynamic braking resistors, also abbreviated as DBRs or PBRs (for power braking resistors), are typically designed to remove excess energy from a system in the form of heat. DBRs are normally connected in series with a chopper transistor labeled "IGBT7" across the DC bus which allows the resistor to bleed off excess voltage. Typical applications involving excess regeneration include decelerating high inertia loads and overhauling loads causing regenerative power.

Heavy duty resistors are rated at 125% braking torque and a maximum of 50% overhauling duty cycle or 100% decel rate on a two-minute period (ie. one minute on, one minute off for 50% overhauling cycle). Standard duty resistors are rated at 40% braking torque and a maximum of 20% overhauling duty cycle or 40% decel rate.

Heavy duty resistors are recommended for regenerative applications while standard duty resistors are only recommended for applications with nuisance overvoltages.

DBRs must only be used in conjunction with thermal protection properly rated for the resistor's capacity and an input contactor to open the input three-phase power to the ASD in the event that a DBR over-temperature condition occurs.

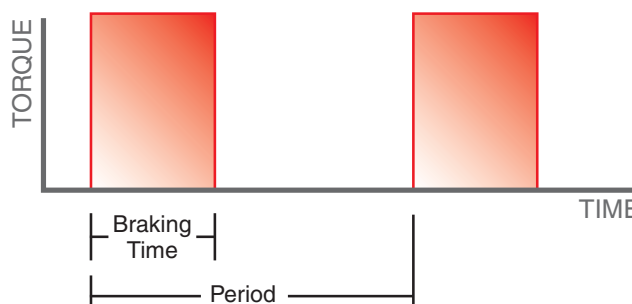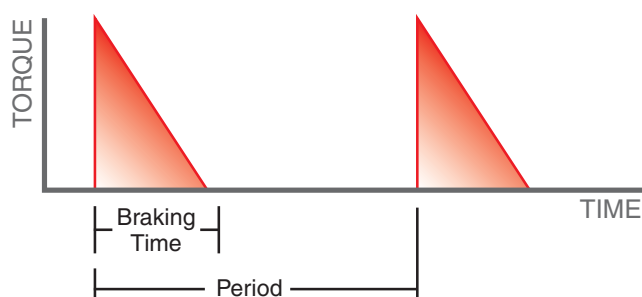

The DBR part numbering convention (BR-####-XXX*) is as follows:

BR — Braking Resistor

— Ohm Value with One Implied Decimal Place

XXX — Size in Watts

* — Watts Multiplier (0=Multiply by 1, K=Multiply by 10, L=Multiply by 100, M=Multiply by 1,000)

Notes:

- Larger HP units have limited braking capacity.
- Dynamic braking parameters must be set correctly in order for DBRs to be used, failure to do so may result in damage to the drive or resistor. Parameter settings are typeform and application specific. Please see each ASD's respective Installation and Operations Manual for more information.
- Dynamic braking transistors are not standard with all ASDs.
- Dynamic braking options listed are not necessarily the same as the options listed in the AS3, AS1, S11, or S15 Installation and Operations Manual.
- All dynamic braking resistors come in a NEMA 1 enclosure.



Low Voltage ASD Options

> Dynamic Braking Resistors

230 V Power Rating – Heavy Duty Dynamic Braking Resistors

HP	Model Number	H	W	D	List Price
0.75	BR-2000-3000	5	12	5	\$190
1	BR-1500-3250	5	12	5	\$195
2	BR-0760-6500	5	12	7	\$300
3	BR-0510-120K	5	12	10	\$400
5	BR-0300-160K	5	12	13	\$485
7.5	BR-0198-240K	5	19	10	\$660
10	BR-0155-349K	5	19	10	\$725
15	BR-0099-524K	5	26.5	10	\$900
20	BR-0073-612K	5	26.5	13	\$1,150
25	BR-0065-842K	5	26.5	16	\$1,450
30	BR-0055-112L	10	28	10	\$1,700
40	BR-0040-144L	10	28	13	\$1,940
50	BR-0033-168L	10	28	16	\$2,550
60	BR-0027-195L	10	28	16	\$3,050
75	BR-0022-250L	24	30	18	\$4,085
100	BR-0017-316L	24	30	18	\$4,520
125	BR-0013-384L	32	30	18	\$6,200

Notes:

- Dynamic braking resistors come with a normally-closed thermal switch and terminal block.

230 V Power Rating – Standard Duty Dynamic Braking Resistors

HP	Model Number	H	W	D	List Price
0.75	BR-6100-2500	5	12	5	\$190
1	BR-4500-2500	5	12	5	\$195
2	BR-2300-2500	5	12	5	\$200
3	BR-1520-3250	5	12	5	\$205
5	BR-0900-3500	5	12	5	\$210
7.5	BR-0600-8000	5	12	7	\$300
10	BR-0460-8000	5	12	7	\$320
15	BR-0300-120K	5	12	10	\$400
20	BR-0228-140K	5	12	13	\$475
25	BR-0184-160K	5	12	13	\$500
30	BR-0150-200K	5	12	16	\$575
40	BR-0112-280K	5	19	13	\$800
50	BR-0093-372K	5	19	10	\$850
60	BR-0078-527K	5	26.5	10	\$900
75	BR-0064-655K	5	26.5	13	\$1,100
100	BR-0048-622K	5	26.5	13	\$1,200
125	BR-0037-745K	5	26.5	13	\$1,250

Notes:

- Dynamic braking resistors come with a normally-closed thermal switch and terminal block.

Low Voltage ASD Options

> Dynamic Braking Resistors

460 V Power Rating – Heavy Duty Dynamic Braking Resistors

HP	Model Number	H	W	D	List Price
1	BR-6000-3500	5	12	5	\$195
2	BR-3000-6500	5	12	7	\$300
3	BR-2010-9750	5	12	10	\$400
5	BR-1200-160K	5	12	13	\$485
7.5	BR-0810-240K	5	19	10	\$660
10	BR-0600-320K	5	19	13	\$800
15	BR-0408-480K	5	26.5	13	\$1,100
20	BR-0292-656K	5	26.5	13	\$1,150
25	BR-0245-794K	5	26.5	16	\$1,350
30	BR-0198-105L	10	28	10	\$1,550
40	BR-0164-138L	10	28	16	\$2,150
50	BR-0130-168L	10	28	16	\$2,550
60	BR-0104-211L	16	30	18	\$3,110
75	BR-0080-288L	24	30	18	\$3,900
100	BR-0060-310L	32	30	18	\$4,900
125	BR-0049-395L	32	30	18	\$5,600
150	BR-0040-465L	40	30	18	\$6,800
200	BR-0030-676L	48	30	18	\$8,500
250	BR-0024-778L	48	30	18	\$9,500
300	BR-0020-873L	48	30	18	\$11,000
350	BR-0019-109M	2x40	2x30	2x18	\$13,000
400	BR-0015-116M	2x40	2x30	2x18	\$15,000
450	BR-0013-154M	2x56	2x30	2x18	\$20,000
550	BR-0011-176M	2x56	2x30	2x18	\$22,800
600	BR-0011-184M	2x56	2x30	2x18	\$23,500
700	BR-0009-222M	3x56	3x30	3x18	\$29,000

Notes:

- Dynamic braking resistors come with a normally-closed thermal switch and terminal block.
- Plus Packs 250 HP and above must use the 250 HP heavy duty dynamic braking resistor.
- Units 350 HP and above come as two separate components.

Low Voltage ASD Options

> Dynamic Braking Resistors

460 V Power Rating – Standard Duty Dynamic Braking Resistors

HP	Model Number	H	W	D	List Price
1	BR-180K-2500	5	12	5	\$195
2	BR-9250-2500	5	12	5	\$200
3	BR-6100-2500	5	12	5	\$205
5	BR-3600-3500	5	12	5	\$210
7.5	BR-2400-8000	5	12	7	\$300
10	BR-1800-7000	5	12	7	\$320
15	BR-1200-105K	5	12	10	\$400
20	BR-0920-160K	5	12	13	\$475
25	BR-0720-160K	5	12	13	\$500
30	BR-0600-200K	5	12	16	\$575
40	BR-0455-280K	5	19	13	\$700
50	BR-0368-320K	5	19	13	\$800
60	BR-0310-400K	5	19	16	\$950
75	BR-0240-480K	5	26.5	13	\$1,100
100	BR-0196-635K	5	26.5	13	\$1,150
125	BR-0153-807K	5	26.5	16	\$1,300
150	BR-0127-107L	10	28	13	\$1,775
200	BR-0091-118L	10	28	13	\$1,950
250	BR-0074-149L	10	28	13	\$2,250
300	BR-0064-230L	16	30	18	\$2,950
350	BR-0051-262L	24	30	18	\$4,000
400	BR-0046-291L	32	30	18	\$4,650
450	BR-0042-302L	24	30	18	\$4,850
550	BR-0034-336L	24	30	18	\$5,300
600	BR-0032-461L	32	30	18	\$5,900
700	BR-0026-517L	32	30	18	\$6,500

Notes:

- Dynamic braking resistors come with a normally-closed thermal switch and terminal block.

Low Voltage ASD Options

> Dynamic Braking Resistors

600/690 V Power Rating – Heavy Duty Dynamic Braking Resistors

HP	Model Price	H	W	D	List Price
		Dimensions (in.)			
2	BR-6500-7000	5	12	7	\$300
3	BR-4350-9750	5	12	10	\$400
5	BR-2600-160K	5	12	13	\$485
7.5	BR-1740-240K	5	19	10	\$660
10	BR-1280-320K	5	19	13	\$800
15	BR-0864-480K	5	26.5	13	\$1,000
20	BR-0656-640K	10	28	10	\$1,300
25	BR-0520-800K	10	28	13	\$1,600
30	BR-0437-984K	10	28	10	\$1,800
40	BR-0344-138L	10	28	13	\$2,000
50	BR-0260-176L	10	28	16	\$2,300
60	BR-0206-174L	16	30	18	\$2,800
75	BR-0166-215L	16	30	18	\$3,400
100	BR-0133-332L	24	30	18	\$4,800
125	BR-0102-417L	32	30	18	\$5,900
150	BR-0087-453L	40	30	18	\$6,800
200	BR-0064-640L	40	30	18	\$8,500
250	BR-0052-749L	56	30	18	\$9,500
300	BR-0043-956L	72	30	18	\$13,000
350	BR-0037-107M	2x40	2x30	2x18	\$15,500
400	BR-0032-128M	2x40	2x30	2x18	\$17,000
450	BR-0029-126M	2x40	2x30	2x18	\$19,000
550	BR-0024-188M	2x64	2x30	2x18	\$22,500
700	BR-0018-233M	3x56	3x30	3x18	\$26,500

Notes:

- Dynamic braking resistors come with a normally-closed thermal switch and terminal block.
- GX7/GX9 must use the 300 HP heavy duty dynamic braking resistor.
- Units 350 HP and above come as two separate components.

Low Voltage ASD Options

➤ Dynamic Braking Resistors

600/690 V Power Rating – Standard Duty Dynamic Braking Resistors

HP	Model Number	H	W	D	List Price
		Dimensions (in.)			
2	BR-200K-2500	5	12	5	\$200
3	BR-130K-2500	5	12	5	\$205
5	BR-8000-3500	5	12	5	\$210
7.5	BR-5200-5000	5	12	7	\$300
10	BR-4000-7000	5	12	7	\$320
15	BR-2700-105K	5	12	10	\$400
20	BR-2000-140K	5	12	13	\$475
25	BR-1600-160K	5	12	13	\$500
30	BR-1300-200K	5	12	16	\$575
40	BR-0980-280K	5	19	13	\$750
50	BR-0784-320K	5	19	13	\$800
60	BR-0650-400K	5	19	16	\$950
75	BR-0528-480K	5	26.5	13	\$1,100
100	BR-0400-640K	10	28	10	\$1,440
125	BR-0310-794K	5	26.5	16	\$1,300
150	BR-0264-140L	10	28	13	\$1,800
200	BR-0208-141L	10	28	13	\$2,000
250	BR-0160-164L	10	28	16	\$2,500
300	BR-0126-202L	16	30	18	\$3,200
350	BR-0117-237L	16	30	18	\$3,600
400	BR-0102-255L	24	30	18	\$4,000
450	BR-0088-317L	24	30	18	\$4,250
550	BR-0073-356L	24	30	18	\$4,900
700	BR-0055-448L	32	30	18	\$6,000

Notes:

- Dynamic braking resistors come with a normally-closed thermal switch and terminal block.

Reactors & Filters

Line Reactors

Line reactors, also referred to as chokes, are passive-power conditioning devices. Reactors are most often applied to correct or prevent power-line problems inherent in ASD applications. When applied to the input of a drive, the line reactor is intended to protect the input of the drive from power-line problems or vice versa.

Applying line reactors is simple. There are two factors to consider when selecting the amperage and percent impedance for an application. For amperage, the line reactor must meet or exceed the current flow requirements of the application. The percent impedance indicates the expected voltage drop across the reactor at full load. For instance, if the input voltage is 480 VAC a 5% impedance line reactor is applied, a 13.86 volt drop $[(480 \times .05)/1.73]$ will occur with a resultant 466 VAC output.

Typical Applications

Input

- Reducing reflected harmonics to the power-line
- High ratios between point of common coupling (PCC) ASD's power capacity
- Example: A pad-mounted transformer has a capacity of 1000 kVA, the ASD has a capacity of 11 kVA (10 HP) for a ratio of 90:1 (stiff line). Toshiba suggests that a line reactor be used where the ratio is greater than 20:1

Nuisance trips due to line voltage spikes can be minimized, as the line reactor will reduce the magnitude duration of the transients.

Output

- Adding inductance to a low impedance motor
- Excessively long motor lead-lengths must be addressed with a long lead-length filter



Reactors & Filters

> Line Reactors



230 V, 3% Impedance in NEMA 1 Enclosure


Amps	HP	Model Number	H	W	D	Weight (lbs.)	List Price
			Dimensions (in.)				
4	0.75	101063	6.5	8.0	6.0	3	\$265
6	1	101064	6.5	8.0	6.0	3	\$280
8	2	101065	6.5	8.0	6.0	3	\$285
12	3	101066	6.5	8.0	6.0	3	\$300
16	5	101067	6.5	8.0	6.0	7	\$375
25	7.5	101070	7.5	10.0	7.0	8	\$420
35	10	101072	7.5	10.0	7.0	8	\$460
55	15	101074	7.5	10.0	7.0	11	\$510
80	20	101075	9.0	12.0	8.0	22	\$680
110	40	101076	15.5	15.0	13.0	26	\$880
130	50	101077	15.5	15.0	13.0	33	\$1,090
160	60	101078	15.5	15.0	13.0	47	\$1,265

230 V, 6% Impedance in NEMA 1 Enclosure

Amps	HP	Model Number	H	W	D	Weight (lbs.)	List Price
			Dimensions (in.)				
3	0.75	PC34093P001	6.5	8.0	6.0	3	\$265
6	1	PC34093P003	6.5	8.0	6.0	3	\$300
8	2	PC34093P005	6.5	8.0	6.0	3	\$300
12	3	PC34093P007	6.5	8.0	6.0	6	\$310
16	5	PC34093P010	6.5	8.0	6.0	7	\$365
25	7.5	PC34093P015	7.5	10.0	7.0	11	\$465
35	10	PC34093P025	7.5	10.0	7.0	14	\$495
55	15	PC34093P040	9.0	12.0	8.0	22	\$660
80	20	PC34093P060	15.5	15.0	13.0	26	\$880
110	40	PC34093P075	15.5	15.0	13.0	33	\$1,100
130	50	PC34093P100	15.5	15.0	13.0	47	\$1,180
160	60	PC34093P125	15.5	15.0	13.0	50	\$1,375

Reactors & Filters

> Line Reactors



230 V, 3% Impedance Open Style

Amps	HP	Model Number	H	W	D	Weight (lbs.)	List Price
			Dimensions (in.)				
4	0.75	PC34094P000	4.0	5.0	4.0	3	\$160
6	1	PC34094P001	4.0	5.0	4.0	3	\$165
8	2	PC34094P002	4.0	5.0	4.0	3	\$175
12	3	PC34094P003	4.0	5.0	4.0	3	\$195
16	5	PC34094P005	5.0	6.0	4.0	7	\$275
25	7.5	PC34094P007	6.0	7.0	4.0	8	\$290
35	10	PC34094P010	6.0	7.0	4.0	8	\$300
55	15	PC34094P020	5.8	8.0	5.0	11	\$350
80	20	PC34094P030	7.0	9.0	6.0	22	\$465
110	40	PC34094P040	7.0	10.0	7.0	26	\$655
130	50	PC34094P050	9.0	11.0	7.0	33	\$725
160	60	PC34094P060	9.0	11.0	7.0	47	\$905

230 V, 6% Impedance Open Style

Amps	HP	Model Number	H	W	D	Weight (lbs.)	List Price
			Dimensions (in.)				
3	0.75	PC34095P001	4.0	4.3	3.0	3	\$220
6	1	PC34095P003	4.0	4.3	3.0	3	\$260
8	2	PC34095P005	4.0	5.0	4.0	3	\$260
12	3	PC34095P007	5.0	7.0	5.0	6	\$280
16	5	PC34095P010	5.0	6.0	4.0	7	\$310
25	7.5	PC34095P015	5.8	8.0	5.0	11	\$325
35	10	PC34095P025	5.8	8.0	5.0	14	\$350
55	15	PC34095P040	7.0	9.0	6.0	22	\$500
80	20	PC34095P060	9.0	11.0	6.0	31	\$600
110	40	PC34095P075	9.0	11.0	7.0	39	\$800
130	50	PC34095P100	9.0	11.0	8.0	48	\$900
160	60	PC34095P125	9.0	11.0	8.0	50	\$1,100

Reactors & Filters

> Line Reactors



460 V, 3% Impedance in A NEMA 1 Enclosure

Amps	HP	Model Number	H	W	D	Weight (lbs.)	List Price
			Dimensions (in.)				
3	1	PC34093P001	6.5	8.0	6.0	3	\$265
4	2	PC34093P002	6.5	8.0	6.0	3	\$265
6	3	PC34093P003	6.5	8.0	6.0	3	\$300
12	7.5	PC34093P007	6.5	8.0	6.0	6	\$310
16	10	PC34093P010	6.5	8.0	6.0	7	\$365
18	10	101051	7.5	10.0	7.0	11	\$420
25	15	PC34093P015	7.5	10.0	7.0	11	\$465
35	20 to 25	PC34093P025	7.5	10.0	7.0	14	\$495
45	30	PC34093P030	7.5	10.0	7.0	14	\$550
55	40	PC34093P040	9.0	12.0	8.0	22	\$660
80	50	PC34093P060	15.5	15.0	13.0	31	\$880
110	60	PC34093P075	15.5	15.0	13.0	39	\$1,100
130	75	PC34093P100	15.5	15.0	13.0	48	\$1,180
160	100	PC34093P125	15.5	15.0	13.0	50	\$1,375
200	125	PC34093P150	18.5	20.0	16.0	86	\$1,585
250	150	PC34093P200	18.5	20.0	16.0	91	\$1,905
300	200	101054	18.5	20.0	16.0	101	\$2,090
360	250	PC34093P250	18.5	20.0	16.0	90	\$2,200
420	300	PC34093P300	18.5	20.0	16.0	100	\$2,365
480	350	PC34093P400	18.5	20.0	16.0	115	\$2,575
600	400	PC34093P500	18.5	20.0	16.0	151	\$3,080
750	500	101055	36.0	28.5	30.3	283	\$4,840
850	700	101056	36.0	28.5	30.3	290	\$5,280
950	800	101057	36.0	28.5	30.3	295	\$5,830

Reactors & Filters

> Line Reactors



460 V, 3% Impedance Open Style

Amps	HP	Model Number	H	W	D	Weight (lbs.)	List Price
			Dimensions (in.)				
3	1	PC34095P001	4.0	4.3	3.0	3	\$220
4	2	PC34095P002	4.0	4.3	3.0	3	\$220
6	3	PC34095P003	4.0	4.3	3.0	3	\$260
8	5	PC34095P005	4.0	5.0	4.0	3	\$260
12	7.5	PC34095P007	5.0	7.0	5.0	6	\$280
16	10	PC34095P010	5.8	6.0	4.0	7	\$310
25	15	PC34095P015	5.8	8.0	5.0	11	\$325
35	20 to 25	PC34095P025	5.8	8.0	5.0	14	\$350
45	30	PC34095P030	5.8	8.0	5.0	14	\$450
55	40	PC34095P040	7.0	9.0	6.0	22	\$500
80	50	PC34095P060	9.0	11.0	6.0	31	\$600
110	60	PC34095P075	9.0	11.0	7.0	39	\$800
130	75	PC34095P100	9.0	11.0	8.0	48	\$900
160	100	PC34095P125	9.0	11.0	8.0	50	\$1,100
200	125	PC34095P150	11.4	14.0	8.0	86	\$1,200
250	150	PC34095P200	11.4	14.0	8.0	91	\$1,600
300	200	PC34095P240	11.4	14.0	8.0	101	\$1,800
360	250	PC34095P250	11.4	14.0	8.0	98	\$1,900
420	300	PC34095P300	11.4	14.0	8.0	100	\$2,000
480	350	PC34095P400	11.4	15.0	11.0	115	\$2,300
600	400	PC34095P500	11.4	15.0	13.0	151	\$2,750
750	500	CF	17.3	16.9	10.3	283	\$4,200
850	700	CF	17.3	16.9	10.3	290	\$4,700
950	800	CF	17.3	16.9	10.3	295	\$5,300

CF: Consult Factory.

Reactors & Filters

> Line Reactors



460 V, 5% Impedance in NEMA 1 Enclosure

Amps	HP	Model Number	H	W	D	Weight (lbs.)	List Price
			Dimensions (in.)				
3	1	PC34096P001A	6.5	8.0	6.0	3	\$270
4	2	PC34096P002	6.5	8.0	6.0	3	\$270
6	3	PC34096P003	6.5	8.0	6.0	6	\$330
12	7.5	PC34096P008	6.5	8.0	6.0	6	\$375
16	10	PC34096P010	7.5	10.0	7.0	12	\$495
18	10	101058	7.5	10.0	7.0	12	\$505
25	15	PC34096P015	7.5	10.0	7.0	14	\$515
35	20 to 25	PC34096P025	9.0	12.0	8.0	22	\$685
45	30	PC34096P030	9.0	12.0	8.0	24	\$750
55	40	PC34096P040	15.5	15.0	13.0	48	\$1,130
80	50	PC34096P050	15.5	15.0	13.0	48	\$1,130
110	60	PC34096P075	15.5	15.0	13.0	50	\$1,265
130	75	PC34096P100	18.5	20.0	16.0	81	\$1,485
160	100	PC34096P125	18.5	20.0	16.0	84	\$1,650
200	125	PC34096P150	18.5	20.0	16.0	110	\$1,870
250	150	PC34096P200	18.5	20.0	16.0	91	\$2,380
300	200	PC34096P250	18.5	20.0	16.0	122	\$2,555
360	250	PC34096P300	18.5	20.0	16.0	156	\$2,750
420	300	101144	18.5	20.0	16.0	160	\$3,080
480	350	PC34096P400	18.5	20.0	16.0	175	\$3,740
600	400	101048	36.0	28.5	30.3	275	\$4,425
750	500	PR00098P22	36.0	28.5	30.3	295	\$5,325
850	700	101049	36.0	28.5	30.3	300	\$5,900
950	800	101145	36.0	28.5	30.3	300	\$6,700

Reactors & Filters

> Line Reactors



460 V, 5% Impedance Open Style

Amps	HP	Model Number	H	W	D	Weight (lbs.)	List Price
			Dimensions (in.)				
3	1	PC34097P001A	4.0	5.0	4.0	3	\$240
4	2	PC34097P002	4.0	5.0	4.0	4	\$240
6	3	PC34097P003	5.0	7.0	5.0	6	\$290
8	5	PC34097P005	5.0	7.0	5.0	6	\$290
12	7.5	PC34097P008	5.0	7.0	5.0	6	\$330
16	10	PC34097P010	5.8	8.0	5.0	12	\$375
25	15	PC34097P015	5.8	8.0	5.0	14	\$385
35	20 to 25	PC34097P025	7.0	9.0	6.0	22	\$520
45	30	PC34097P030	7.0	9.0	6.0	24	\$590
55	40	PC34097P040	9.0	11.0	6.0	32	\$625
80	50	PC34097P060	9.0	11.0	7.0	48	\$850
110	60	PC34097P075	11.4	15.0	8.0	50	\$1,000
130	75	PC34097P100	11.4	15.0	8.0	81	\$1,200
160	100	PC34097P125	11.4	15.0	8.0	84	\$1,350
200	125	PC34097P150	11.4	15.0	8.0	110	\$1,650
250	150	PC34097P200	11.4	15.0	10.0	115	\$2,200
300	200	PC34097P250	11.4	15.0	11.0	122	\$2,350
360	250	PC34097P300	11.4	15.0	11.0	156	\$2,500
420	300	CF	11.4	15.0	13.0	160	\$2,700
480	350	PC34097P400	11.4	15.0	13.0	175	\$3,500
600	400	PC34097P450	17.3	16.9	10.3	275	\$3,750
750	500	PC34097P500	17.3	16.9	10.3	295	\$4,300
850	700	PC3497P700	17.3	16.9	10.3	300	\$5,325
950	800	CF	17.3	16.9	10.3	305	\$6,000

CF: Consult Factory.

Reactors & Filters

> Line Reactors



575 V, 3% Impedance in NEMA 1 Enclosure

Amps	HP	Model Number	H	W	D	Weight (lbs.)	List Price
			Dimensions (in.)				
8	5	101115	6.5	8.0	6.0	7	\$265
12	10	101116	6.5	8.0	6.0	7	\$290
18	15	101118	7.5	10.0	7.0	12	\$410
25	20	101120	7.5	10.0	7.0	12	\$420
27	25	101121	7.5	10.0	7.0	12	\$440
35	30	101122	7.5	10.0	7.0	16	\$465
45	40	101123	9.0	12.0	8.0	26	\$530
55	50	101124	9.0	12.0	8.0	24	\$565
80	60	101125	15.5	15.0	13.0	49	\$825
80	75	101125	15.5	15.0	13.0	49	\$825
110	100	101126	15.5	15.0	13.0	49	\$1,102
130	125	101127	15.5	15.0	13.0	47	\$1,190
160	150	101128	15.5	15.0	13.0	47	\$1,265
200	200	101129	18.5	20.0	16.0	86	\$1,375
250	250	101130	18.5	20.0	16.0	91	\$1,510

Reactors & Filters

> Line Reactors



575 V, 5% Impedance in NEMA 1 Enclosure

Amps	HP	Model Number	H	W	D	Weight (lbs.)	List Price
			Dimensions (in.)				
8	5	101094	6.5	8.0	6.0	7	\$345
12	10	101095	7.5	10.0	7.0	8	\$375
18	15	101097	7.5	10.0	7.0	12	\$495
25	20	101099	9.0	12.0	8.0	17	\$510
27	25	101100	9.0	12.0	8.0	17	\$540
35	30	101101	9.0	12.0	8.0	23	\$620
45	40	101102	15.5	15.0	13.0	26	\$690
55	50	101103	15.5	15.0	13.0	33	\$915
80	60	101104	15.5	15.0	13.0	49	\$1,130
80	75	101104	15.5	15.0	13.0	49	\$1,130
110	100	101105	18.5	20.0	16.0	53	\$1,265
130	125	101106	18.5	20.0	16.0	88	\$1,485
160	150	101107	18.5	20.0	16.0	95	\$1,620
200	200	101108	18.5	20.0	16.0	110	\$1,870
250	250	101109	18.5	20.0	16.0	115	\$2,380
300	300	101110	18.5	20.0	16.0		\$2,560

AS3/AS1

G9/P9

Micro
Drives

GX9

Regen

GX7M/
Mining Drive

W7/WX9

Plus Pack

LV Options

Reactors
& Filters

Reactors & Filters

> Line Reactors



575 V, 3% Impedance Open Style

Amps	HP	Model Number	H	W	D	Weight (lbs.)	List Price
			Dimensions (in.)				
8	5	Consult Factory					\$265
12	10						\$290
18	15						\$410
25	20						\$420
27	25						\$440
35	30						\$465
45	40						\$530
55	50						\$565
80	60						\$825
80	75						\$825
110	100						\$1,102
130	125						\$1,090
160	150						\$1,265
200	200						\$1,375
250	250						\$1,510

575 V, 5% Impedance Open Style

Amps	HP	Model Number	H	W	D	Weight (lbs.)	List Price
			Dimensions (in.)				
8	5	Consult Factory					\$345
12	10						\$375
18	15						\$495
25	20						\$510
27	25						\$540
35	30						\$620
45	40						\$690
55	50						\$915
80	60						\$1,130
80	75						\$1,130
110	100						\$1,265
130	125						\$1,485
160	150						\$1,620
200	200						\$1,870
250	250						\$2,380

Reactors & Filters

> Line Reactors



Installed AC Line Reactors

Option Code	230 V Power Rating	460 V Power Rating	3% Impedance List Price	5% Impedance List Price
R3/R5	-	1 HP	\$360	\$385
	0.75-1 HP	2 HP	\$385	\$440
	-	3 HP	\$415	\$495
	2 HP	5 HP	\$440	\$550
	3 HP	7.5 HP	\$550	\$660
	5 HP	10 HP	\$605	\$715
	7.5 HP	15 HP	\$660	\$825
	10 HP	20 HP	\$715	\$935
	-	25 HP	\$770	\$990
	15 HP	30 HP	\$825	\$1,045
	20 HP	40 HP	\$880	\$1,250
	25 HP	50 HP	\$1,100	\$1,320
	30 HP	60 HP	\$1,375	\$1,650
	40 HP	75 HP	\$1,485	\$1,760
	50 HP	100 HP	\$1,650	\$1,925
	60 HP	125 HP	\$1,925	\$2,200
	75 HP	150 HP	\$2,200	\$2,750
	100 HP	200 HP	\$2,750	\$3,025
	125 HP	250 HP	\$3,000	\$3,575
	-	300 HP	\$3,300	\$3,850
	-	350 HP	\$3,800	\$4,950
	-	400 HP	\$4,000	\$5,500
	-	500 HP	\$6,000	\$6,500
	-	600 HP	\$7,000	\$7,500
	-	700 HP	\$8,000	\$9,000
	-	800 HP	\$9,000	\$10,000
	-	900 HP	\$12,000	\$13,500
	-	1000 HP	\$13,200	\$14,500
	-	1200 HP	\$14,400	\$16,000
	-	1400 HP	\$16,800	\$18,500
	-	1500 HP	\$19,200	\$21,500

Reactors & Filters

> Long Lead Filters

Long lead filters are designed for applications with long motor leads between IGBT-switched adjustable speed drives. Typical installations include deep wells, process lines, conveyor systems. Refer to the Operating Maintenance Manual for guidelines.

Long lead filters are current-rated devices. Therefore, know the total motor load on the ASD for proper application. They are to be wired directly to the drive installed adjacent to the output terminals. Installing the filters anywhere else in the circuit will negatively affect performance.

For 230 V applications, refer to the FLA rating or double the HP for proper sizing. For instance, a 20 HP/230 V application would require a 40 HP/460 V long lead filter. Refer to your operation manual for instructions on how to change the carrier frequency and carrier frequency limitations.



460 V for Motor Lead-Lengths up to 3000 ft. 8 kHz Maximum Carrier Frequency in a NEMA 1 Enclosure

FLA	HP	Model Number	H	W	D	Weight (lbs.)	List Price
			Dimensions (in.)				
4	1 to 2	PR00100P22	6.5	8.0	6.0	8	\$840
6	3	PR00101P22	6.5	8.0	6.0	8	\$865
8	5	PR00102P22	6.5	8.0	6.0	8	\$890
12	7.5	PR00103P22	6.5	8.0	6.0	8	\$915
16	10	PR00104P22	6.5	8.0	6.0	11	\$940
25	15	PR00105P22	7.5	10.0	7.0	16	\$1,000
35	20 to 25	PR00106P22	7.5	10.0	7.0	17	\$1,030
45	30	PR00107P22	7.5	10.0	7.0	17	\$1,055
55	40	PR00108P22	9.0	12.0	8.0	18	\$1,155
80	50 to 60	PR00109P22	9.0	12.0	8.0	31	\$1,485
110	75	PR00110P22	16	15.0	13.0	58	\$2,025
130	100	PR00111P22	16	15.0	13.0	58	\$2,215
160	125	PR00112P22	16	15.0	13.0	70	\$2,470
200	150	PR00113P22	16	15.0	13.0	74	\$2,565
250	200	PR00114P22	16	15.0	13.0	82	\$2,595
300	250	PR00115P22	19	20.0	16.0	106	\$2,785
360	300	PR00116P22	19	20.0	16.0	117	\$3,095
480	350 to 400	PR00117P22	19	20.0	16.0	142	\$4,150
600	450	PR00118P22	19	20.0	16.0	148	\$4,600
750	500	CF	13	15	15	325	\$10,500

Notes:

- Consult factory for installed pricing.
- CF: Consult Factory.

Medium Voltage Drives

T300MV2® ASD

Specifications

The T300MV2® medium voltage adjustable speed drive is the most advanced drive in the industry. No other drive in the market features the latest multi-level Pulse Width Modulation (PWM) with Neutral-Point Clamping (NPC) technology. This advanced technology allows for a smaller footprint, a reduced component count, and ultimately, a lower cost. In addition, it incorporates the latest safety technology, making it one of the safest designs on the market.

Product Scope

2400 V at 300 to 3000 HP
3300 V at 300 to 8000 HP
4160 V at 300 to 11,000 HP
6600 V at 300 to 9000 HP

Highlights

- Three Cables In, Three Cables Out
- 24-Pulse Harmonic Cancellation Complies with IEEE-519 2014
- Higher True Factor (>0.96) than Running Motors Across-the-Line
- Small Footprint Through Compact Power Modules, Standard Copper-Wound Isolation Transformer, & Air-Cooling System
- Robust, High-Quality Medium Voltage IGBT Technology, Transistors, & Control Components
- Advanced Electronics to Reduce Component Count
- Additive Multi-Level PWM Output Voltage with No Neutral Shift

Standard Features

- Overload Rating, 115% for 60 Seconds (Some Frames 110% Overload)
- NEMA 1 Ventilated Gasket & Filter Enclosure with IP20 Degree of Protection
- Ten Digital Inputs: Interposing Relay may be Required
- Ten Digital Outputs: Interposing Relay may be Required
- Three Analog Inputs: Isolation Transducer Required
- Eight Analog Outputs: Isolation Transducer Required
- Medium Voltage IGBT Technology
- EOI: Plain-English LCD Display
- Ambient Temperature: 32° to 104° F (0° to 40°C)
- Altitude: Up to 1000 Meters without De-rate
- Humidity: 95% Non-Condensing
- Motor Cable Length 1000 ft. Without Additional Filter
- Standards & Compliances: NEC, NEMA, UL Listed in US & Canada, ANSI, & American Recovery & Reinvestment Act (ARRA) Compliant



T300MV2® ASD - NEMA 1

> Part Numbering Convention

The T300MV2® can be configured with commonly-used options for an easy-to-install, turn-key package. See the chart below for available configurations. Custom packages are available upon request. Drawings supplied by Toshiba's MV Drives Department.

The example, M4AAN44050AAA0, shows a standard duty T300MV2, Frame A, 60Hz, non-regen, 4160 V input, 4160 V output, 500 HP, input disconnect, cooling fan power, standard output reactor, no main input bus.

Example Part Number:	M4	A	A	N	4	4	050	A	A	A	0	xx
Series: M4 - MV2												
Frame Type: 0 - Frame 0 1 - Frame 1 2 - Frame 2 3 - Frame 3 4 - Frame 4												
Input Frequency: A - 60 Hz B - 50 Hz												
Type: N - For Non-Regen Drives R - Regen Module Drives												
Input Voltage: 2 - 2400 3 - 3300 4 - 4160 5 - 4800 6 - 6600												
Output Voltage: 2 - 2400 3 - 3300 4 - 4160 6 - 6600												
Output Rated Capacity: 030 - 300 HP 035 - 350 HP 040 - 400 HP 045 - 450 HP 050 - 500 HP 060 - 600 HP												
Configuration: A -- B -- C -- D -- E -- F -- G -- H -- J -- K -- L -- M -- N -- P -- Q -- R --		ID: Yes Yes No No Yes Yes No No Yes Yes No Yes Yes No No	CP: Yes No Yes No Yes No Yes No Yes No Yes Yes No Yes No	BYP: No No No No Yes Yes No No No No No Yes Yes Yes Yes	RFAN: No No No No No No Yes Yes Yes Yes Yes Yes Yes Yes Yes	ID - Input Disconnect CP - Internal Cooling Fan Power BYP - Bypass RFAN - Redundant Fans						
Output Options: A - Standard Reactor B - dV/dt Filter C - dV/dt Filter and Transfer		D - Transfer E - Sinewave Filter F - Sinewave Filter and Transfer										
Cooling Options: A - Standard B - Bottom Air Feed		C - Heat Exchanger Cooled D - Outdoor Converter										
Main Input Bus: 0 - None 1 - 1200 A Uninsulated 2 - 1200 A Insulated		3 - 2000 A Uninsulated 4 - 2000 A Insulated										
Additional Options: Additional numbers or letters that may be used to designate other options or identify individual units in multiple unit orders												

T300MV2® ASD

> T300MV2® - 2400 VAC Output Pricing & Dimensions



HP	FLA	Model Number	Frame	List Price	H	W	D	Shipping Weight (lbs.)
					Dimensions (in.)			
300	64	M4AAN22030AAA0	A2	\$265,000	103.7	48	48	3700
350	75	M4AAN22035AAA0	A2	\$267,250	103.7	48	48	3900
400	86	M4AAN22040AAA0	A2	\$270,000	103.7	48	48	4100
450	97	M4AAN22045AAA0	A2	\$272,500	103.7	48	48	4300
500	107	M4AAN22050AAA0	A2	\$278,000	103.7	48	48	4500
600	129	M4BAN22060AAA0	B2	\$280,000	103.7	74	43.9	7400
700	150	M4BAN22070AAA0	B2	\$285,000	103.7	74	43.9	7700
800	172	M4BAN22080AAA0	B2	\$290,000	103.7	74	43.9	8000
900	193	M4BAN22090AAA0	B2	\$296,500	103.7	74	43.9	8300
1000	215	M4BAN22100AAA0	B2	\$302,500	103.7	74	43.9	8600
1250	269	M4DAN22125AAA0	D2	\$363,000	103.7	122	43.4	11300
1500	322	M4DAN22150AAA0	D2	\$375,000	103.7	122	43.4	11800
1750	376	M4DAN22175AAA0	D2	\$382,500	103.7	122	43.4	12200
2000	430	M4DAN22200AAA0	D2	\$440,000	103.7	122	43.4	12800
2250	504	M44AN22225AAA0	4	\$631,000	103.7	222	49.5	33000
2500	537	M44AN22250AAA0	4	\$642,000	103.7	222	49.5	33000
3000	645	M44AN22300AAA0	4	\$653,916	103.7	222	49.5	33000
300	64	M4AAN22030EAA0	A2	\$310,000	103.7	78	48	4800
350	75	M4AAN22035EAA0	A2	\$312,250	103.7	78	48	5000
400	86	M4AAN22040EAA0	A2	\$315,000	103.7	78	48	5200
450	97	M4AAN22045EAA0	A2	\$317,500	103.7	78	48	5400
500	107	M4AAN22050EAA0	A2	\$323,000	103.7	78	48	5600
600	129	M4BAN22060EAA0	B2	\$325,000	103.7	104	43.4	8500
700	150	M4BAN22070EAA0	B2	\$330,000	103.7	104	43.4	8800
800	172	M4BAN22080EAA0	B2	\$335,000	103.7	104	43.4	9100
900	193	M4BAN22090EAA0	B2	\$341,500	103.7	104	43.4	9400
1000	215	M4BAN22100EAA0	B2	\$347,500	103.7	104	43.4	9700
1250	269	M4DAN22125EAA0	D2	\$411,000	103.7	152	43.4	12400
1500	322	M4DAN22150EAA0	D2	\$423,000	103.7	158	43.4	12900
1750	376	M4DAN22175EAA0	D2	\$451,500	103.7	188	43.4	20000
2000	430	M4DAN22200EAA0	D2	\$509,000	103.7	188	43.4	20600
2250	504	M44AN22225EAA0	4	\$710,000	103.7	258	49.5	35800
2500	537	M44AN22250EAA0	4	\$721,000	103.7	258	49.5	35800
3000	645	M44AN22300EAA0	4	\$732,916	103.7	258	49.5	35800

Notes:

- HP ratings above are for typical 4-pole motors.
- Dimensions do not include space required for clearance for airflow, door operation, etc.
- Bypass Starter pricing is based on fixed contactors (non draw-out type). Please select required Motor Protection relay option.
- Frames A2, B2, and D2 drives with redundant fan option will increase in height by 7" over the standard model.
- Frame 4 3000 HP: consult factory for update on UL status.
- Weights and dimensions are subject to change.
- Units with bypass start the motor across the line for "emergency maintenance bypass" use when the VFD is out of service.
- Toshiba Standard RX5 simple overload relay is included in bypass at no additional cost. RTD monitoring not included.
- AAA are Standard models; -EAA include Bypass.

T300MV2® ASD

➤ T300MV2® - 3300 VAC Output
Pricing & Dimensions



MTX2

MTX

BMV2

Regen

MV
ControllersVacuum
Contactors

LV SSS

Vacuum
BreakersIndustrial
Automation

HP	FLA	Model Number	Frame	List Price	H	W	D	Shipping Weight (lbs.)
					Dimensions (in.)			
300	47	M4AAN33030AAA0	A4μ	\$324,500	103.7	48	48	6000
400	63	M4AAN33040AAA0	A4μ	\$335,500	103.7	48	48	6000
500	78	M4AAN33050AAA0	A4	\$325,500	103.7	60	48	7600
600	94	M4AAN33060AAA0	A4	\$330,750	103.7	60	48	7600
700	109	M4AAN33070AAA0	A4	\$339,150	103.7	60	48	7600
800	125	M4BAN33080AAA0	B4	\$399,000	103.7	90	43.4	9100
900	141	M4BAN33090AAA0	B4	\$404,250	103.7	90	43.4	9100
1000	156	M4BAN33100AAA0	B4	\$431,550	103.7	90	43.4	9800
1250	195	M4BAN33125AAA0	B4	\$434,700	103.7	90	43.4	10600
1500	234	M4BAN33150AAA0	B4	\$444,150	103.7	90	43.4	11200
1750	273	M42AN33175AAA0	2	\$566,000	103.7	164	49.5	17200
2000	310	M42AN33200AAA0	2	\$574,000	103.7	164	49.5	18000
2250	352	M42AN33225AAA0	2	\$660,000	103.7	174	49.5	18800
2500	391	M43AN33250AAA0	3	\$717,000	103.7	174	49.5	22500
3000	469	M44AN33300AAA0	3	\$813,000	103.7	222	49.5	23300
3500	547	M44AN33350AAA0	4	\$895,000	103.7	222	49.5	33000
4000	625	M44AN33400AAA0	4	\$927,000	103.7	222	49.5	33000
4500	703	M44AN33450AAA0	4	\$948,000	103.7	222	49.5	33000
5000	780	M4GAN33500AAA0	G4P	\$1,320,000	103.7	308	60	44500
5500	858	M4GAN33550AAA0	G4P	\$1,386,000	103.7	308	60	44500
6000	936	M4GAN33600AAA0	G4P	\$1,650,000	103.7	403	60	47000
7000	1092	M4HAN33700AAA0	H4P	\$1,890,000	103.7	403	60	60500
8000	1240	M4HAN33800AAA0	H4P	\$1,930,000	103.7	403	60	64500
300	47	M4AAN33030EAA0	A4μ	\$372,500	103.7	78	48	7100
400	63	M4AAN33040EAA0	A4μ	\$383,500	103.7	78	48	7100
500	78	M4AAN33050EAA0	A4	\$373,500	103.7	90	48	8700
600	94	M4AAN33060EAA0	A4	\$378,750	103.7	90	48	8700
700	109	M4AAN33070EAA0	A4	\$387,150	103.7	90	48	8700
800	125	M4BAN33080EAA0	B4	\$447,000	103.7	120	43.4	10200
900	141	M4BAN33090EAA0	B4	\$452,250	103.7	120	43.4	10200
1000	156	M4BAN33100EAA0	B4	\$479,550	103.7	120	43.4	10900
1250	195	M4BAN33125EAA0	B4	\$482,700	103.7	120	43.4	11700
1500	234	M4BAN33150EAA0	B4	\$492,150	103.7	120	43.4	12300
1750	273	M42AN33175EAA0	2	\$614,000	103.7	194	49.5	18300
2000	310	M42AN33200EAA0	2	\$622,000	103.7	194	49.5	19100
2250	352	M42AN33225EAA0	2	\$720,000	103.7	210	49.5	19900
2500	391	M43AN33250EAA0	3	\$777,000	103.7	210	49.5	25300
3000	469	M44AN33300EAA0	4	\$950,000	103.7	258	49.5	26100
3500	547	M44AN33350EAA0	4	\$965,000	103.7	258	49.5	35800
4000	625	M44AN33400EAA0	4	\$997,000	103.7	258	49.5	35800
4500	703	M44AN33450EAA0	4	\$1,018,000	103.7	258	49.5	35800

Notes:

- HP ratings above are for typical 4-pole motors.
- Dimensions do not include space required or clearance for airflow, door operation, etc.
- Bypass Starter pricing is based on fixed contactors (not rack-out type). Please select required Motor Protection relay option.
- Frame 1 drives with redundant fan option will increase in height by 7" over the standard model.
- Weights and dimensions are subject to change.
- Frame H4P — consult factory for update on UL status.
- Units with bypass start the motor across the line for "emergency maintenance bypass" use when the VFD is out of service. Toshiba Standard RX5 simple overload relay is included in bypass at no additional cost. RTD monitoring not included.
- AAA are Standard models; -EAA include Bypass.

T300MV2® ASD

> T300MV2® - 4160 VAC Output
Pricing & Dimensions



HP	FLA	Model Number	List Price	Frame	H	W	D	Shipping Weight (lbs.)
					Dimensions (in.)			
300	37	M4AAN44030AAA0	\$310,000	A4μ	103.7	48	48	6000
400	50	M4AAN44040AAA0	\$312,076	A4μ	103.7	48	48	6000
500	62	M4AAN44050AAA0	\$315,000	A4μ	103.7	48	48	6000
600	74	M4AAN44060AAA0	\$318,000	A4μ	103.7	48	48	6000
700	87	M4AAN44070AAA0	\$325,500	A4	103.7	60	48	7600
800	99	M4AAN44080AAA0	\$330,750	A4	103.7	60	48	7600
900	112	M4AAN44090AAA0	\$339,150	A4	103.7	60	48	7600
1000*	124	M4AAN44100AAA0	\$344,400	A4	103.7	60	48	7600
1000	124	M4BAN44100AAA0	\$399,000	B4	103.7	90	48	9100
1250	155	M4BAN44125AAA0	\$404,250	B4	103.7	90	48	9100
1500	186	M4BAN44150AAA0	\$431,550	B4	103.7	90	48	9800
1750	217	M4BAN44175AAA0	\$434,700	B4	103.7	90	48	10600
2000	248	M4BAN44200AAA0	\$444,150	B4	103.7	90	48	11200
300	37	M40AN44030AAA0	\$274,000	0	103.7	74	43.4	8300
400	50	M40AN44040AAA0	\$295,000	0	103.7	74	43.4	8300
500	62	M40AN44050AAA0	\$300,000	0	103.7	74	43.4	8300
600	74	M40AN44060AAA0	\$305,000	0	103.7	74	43.4	8300
700	87	M40AN44070AAA0	\$310,000	0	103.7	74	43.4	8300
800	99	M40AN44080AAA0	\$315,000	0	103.7	74	43.4	8300
900	112	M40AN44090AAA0	\$323,000	0	103.7	74	43.4	8300
1000*	124	M40AN44100AAA0	\$328,000	0	103.7	74	43.4	8300
1000	124	M41AN44100AAA0	\$380,000	1	103.7	122	43.4	12500
1250	155	M41AN44125AAA0	\$385,000	1	103.7	122	43.4	12500
1500	186	M41AN44150AAA0	\$411,000	1	103.7	122	43.4	12500
1750	217	M41AN44175AAA0	\$414,000	1	103.7	122	43.4	12500
2000*	248	M41AN44200AAA0	\$423,000	1	103.7	122	43.4	12500
2250	279	M42AN44225AAA0	\$566,000	2	103.7	164	49.5	17200
2500	310	M42AN44250AAA0	\$574,000	2	103.7	164	49.5	18000
3000*	372	M42AN44300AAA0	\$660,000	2	103.7	164	49.5	18800
3000	372	M43AN44300AAA0	\$707,000	3	103.7	174	49.5	21700
3500	434	M43AN44350AAA0	\$717,000	3	103.7	174	49.5	22500
4000	496	M43AN44400AAA0	\$813,000	3	103.7	174	49.5	23300
4000	496	M44AN44400AAA0	\$880,000	4	103.7	222	49.5	33000
4500	558	M44AN44450AAA0	\$895,000	4	103.7	222	49.5	33000
5000	620	M44AN44500AAA0	\$912,000	4	103.7	222	49.5	33000
5500	682	M44AN44550AAA0	\$927,000	4	103.7	222	49.5	33000
6000*	720	M44AN44600AAA0	\$948,000	4	103.7	222	49.5	33000
6000*	744	M44AN44600AAA0	\$948,000	4	103.7	222	49.5	33000
7000	868	M4GAN44700AAA0	\$1,320,000	G4P	103.7	308	60	44500
8000*	992	M4GAN44800AAA0	\$1,650,000	G4P	103.7	308	60	47000
8000	992	M4HAN44800AAA0	\$1,860,000	H4P	103.7	403	60	56500
9000	1110	M4HAN44900AAA0	\$1,890,000	H4P	103.7	403	60	60500
10000	1240	M4HAN4410KAAA0	\$1,930,000	H4P	103.7	403	60	64500
11000	1364	M4HAN4411KAAA0	\$1,970,000	H4P	103.7	403	60	68500
300	37	M4AAN44030EAA0	\$354,000	A4μ	103.7	78	48	7100
400	50	M4AAN44040EAA0	\$357,076	A4μ	103.7	78	48	7100
500	62	M4AAN44050EAA0	\$360,000	A4μ	103.7	78	48	7100
600	74	M4AAN44060EAA0	\$363,000	A4μ	103.7	78	48	7100

T300MV2® ASD

> T300MV2® - 4160 VAC Output Pricing & Dimensions



MTX2

MTX

BMV2

Regen

MV
ControllersVacuum
Contactors

LV SSS

Vacuum
BreakersIndustrial
Automation

HP	FLA	Model Number	List Price	Frame	H	W	D	Shipping Weight (lbs.)
					Dimensions (in.)			
700	87	M4AAN44070EAA0	\$370,500	A4	103.7	90	48	8700
800	99	M4AAN44080EAA0	\$375,750	A4	103.7	90	48	8700
900	112	M4AAN44090EAA0	\$384,150	A4	103.7	90	48	8700
1000*	124	M4AAN44100EAA0	\$389,400	A4	103.7	90	48	8700
300	37	M40AN44030EAA0	\$318,000	0	103.7	104	43.4	9400
400	50	M40AN44040EAA0	\$340,000	0	103.7	104	43.4	9400
500	62	M40AN44050EAA0	\$345,000	0	103.7	104	43.4	9400
600	74	M40AN44060EAA0	\$350,000	0	103.7	104	43.4	9400
700	87	M40AN44070EAA0	\$355,000	0	103.7	104	43.4	9400
800	99	M40AN44080EAA0	\$360,000	0	103.7	104	43.4	9400
900	112	M40AN44090EAA0	\$368,000	0	103.7	104	43.4	9400
1000	124	M40AN44100EAA0	\$373,000	0	103.7	104	43.4	9400
1000	124	M41AN44100EAA0	\$425,000	1	103.7	152	43.4	13600
1250	155	M41AN44125EAA0	\$433,000	1	103.7	152	43.4	13600
1500	186	M41AN44150EAA0	\$459,000	1	103.7	152	43.4	13600
1750	217	M41AN44175EAA0	\$462,000	1	103.7	152	43.4	13600
2000*	248	M41AN44200EAA0	\$471,000	1	103.7	152	43.4	13600
1000	124	M4BAN44100EAA0	\$447,000	B4	103.7	120	48	10200
1250	155	M4BAN44125EAA0	\$452,250	B4	103.7	120	48	10200
1500	186	M4BAN44150EAA0	\$479,550	B4	103.7	120	48	10900
1750	217	M4BAN44175EAA0	\$482,700	B4	103.7	120	48	11700
2000*	248	M4BAN44200EAA0	\$492,150	B4	103.7	120	48	12300
2250	279	M42AN44225EAA0	\$614,000	2	103.7	194	49.5	18300
2500	310	M42AN44250EAA0	\$622,000	2	103.7	194	49.5	19100
3000*	372	M42AN44300EAA0	\$720,000	2	103.7	200	49.5	21600
3000	372	M43AN44300EAA0	\$766,000	3	103.7	210	49.5	24500
3500	434	M43AN44350EAA0	\$776,000	3	103.7	210	49.5	25300
4000*	496	M43AN44400EAA0	\$882,000	3	103.7	210	49.5	26100
4000	496	M44AN44400EAA0	\$949,000	4	103.7	258	49.5	35800
4500	558	M44AN44450EAA0	\$964,000	4	103.7	258	49.5	35800
5000	620	M44AN44500EAA0	\$981,000	4	103.7	258	49.5	35800
5500	682	M44AN44550EAA0	\$996,000	4	103.7	258	49.5	35800
6000*	720	M44AN44600EAA0	\$1,017,000	4	103.7	258	49.5	35800

Notes:

- HP ratings above are for typical 4-pole motors.
- *Model numbers with an asterisk have a 110% OL rating. 1000 HP (Frame A4/Frame 0), 2000 HP (Frame B4/Frame 1), 3000 HP (Frame 2), 4000 HP (Frame 3), 6000 HP (Frame 4), and 8000 HP (Frame G4P).
- Dimensions do not include space required or clearance for airflow, door operation, etc.
- Bypass Starter pricing is based on fixed contactors (not rack-out type). Please select required Motor Protection relay option.
- Frame 1 drives with redundant fan option will increase in height by 7" over the standard model.
- Weights and dimensions are subject to change.
- Bypass 6000 HP (720 A) and below are contactors. For bypass with breakers (744A), please consult factory.
- are breakers; rear access needed. Breakers are SCCR rating 33 kA.
- Units with bypass start the motor across the line for "emergency maintenance bypass" use when the VFD is out of service. Toshiba standard RX5 overload relay is included with bypass at no additional cost. RTD monitoring not included.
- AAA are Standard models; -EAA include Bypass.

T300MV2® ASD

> T300MV2® - 6600 VAC Output Pricing & Dimensions



HP	FLA	Model Number	List Price	Frame	H	W	D	Shipping Weight (lbs.)
					Dimensions (in.)			
300	23	M4AAN66030AAA0	\$397,460	A6Sμ*	103.7	108	48	CF
400	31	M4AAN66040AAA0	\$405,410	A6Sμ*	103.7	108	48	CF
500	39	M4AAN66050AAA0	\$413,518	A6Sμ*	103.7	108	48	CF
600	47	M4AAN66060AAA0	\$420,000	A6Sμ*	103.7	108	48	CF
700	55	M4AAN66070AAA0	\$430,224	A6Sμ*	103.7	108	48	CF
800	63	M4AAN66080AAA0	\$438,828	A6Sμ*	103.7	108	48	CF
900	70	M4AAN66090AAA0	\$533,354	A6S	103.7	138	48	CF
1000	78	M4AAN66100AAA0	\$544,022	A6S	103.7	138	48	CF
1250	98	M4AAN66125AAA0	\$554,902	A6S	103.7	138	48	CF
1500	117	M4AAN66150AAA0	\$566,000	A6S	103.7	138	48	CF
1750	137	M4BAN66175AAA0	\$623,115	B6S*	103.7	176	48	CF
2000	156	M4BAN66200AAA0	\$635,578	B6S*	103.7	176	48	CF
2250	176	M4BAN66225AAA0	\$648,289	B6S*	103.7	176	48	CF
2500	195	M4BAN66250AAA0	\$661,255	B6S*	103.7	176	48	CF
3000	234	M4BAN66300AAA0	\$674,480	B6S*	103.7	176	48	CF
3500	273	M4CAN66350AAA0	\$708,204	C6S	103.7	234	60	CF
4000	313	M4CAN66400AAA0	\$722,368	C6S	103.7	234	60	CF
4500	352	M4DAN66450AAA0	\$942,000	D6S	103.7	265	60	CF
5000	391	M4DAN66500AAA0	\$960,000	D6S	103.7	265	60	CF
5500	430	M4FAN66550AAA0	\$1,250,771	F6S	103.7	305	60	CF
6000	469	M4FAN66600AAA0	\$1,275,786	F6S	103.7	305	60	CF
7000	547	M4FAN66700AAA0	\$1,301,302	F6S	103.7	305	60	CF
8000	625	M4FAN66800AAA0	\$1,468,701	F6S+	103.7	379	60	CF
9000	703	M4FAN66900AAA0	\$1,498,075	F6S+	103.7	379	60	CF
300	23	M4AAN66030EAA0	\$452,460	A6Sμ	103.7	CF	CF	CF
400	31	M4AAN66040EAA0	\$460,410	A6Sμ	103.7	CF	CF	CF
500	39	M4AAN66050EAA0	\$468,518	A6Sμ	103.7	CF	CF	CF
600	47	M4AAN66060EAA0	\$475,000	A6Sμ	103.7	CF	CF	CF
700	55	M4AAN66070EAA0	\$485,224	A6Sμ	103.7	CF	CF	CF
800	63	M4AAN66080EAA0	\$493,828	A6Sμ	103.7	CF	CF	CF
900	70	M4AAN66090EAA0	\$588,354	A6S	103.7	CF	CF	CF
1000	78	M4AAN66100EAA0	\$599,022	A6S	103.7	CF	CF	CF
1250	98	M4AAN66125EAA0	\$609,902	A6S	103.7	CF	CF	CF
1500	117	M4AAN66150EAA0	\$621,000	A6S	103.7	CF	CF	CF
1750	137	M4BAN66175EAA0	\$678,115	B6S	103.7	CF	CF	CF
2000	156	M4BAN66200EAA0	\$690,578	B6S	103.7	CF	CF	CF
2250	176	M4BAN66225EAA0	\$703,289	B6S	103.7	CF	CF	CF
2500	195	M4BAN66250EAA0	\$716,255	B6S	103.7	CF	CF	CF
3000	234	M4BAN66300EAA0	\$729,480	B6S	103.7	CF	CF	CF
3500	273	M4CAN66350EAA0	\$763,204	C6S	103.7	CF	CF	CF
4000	313	M4CAN66400EAA0	\$777,368	C6S	103.7	CF	CF	CF
4500	352	M4DAN66450EAA0	\$997,000	D6S	103.7	CF	CF	CF
5000	391	M4DAN66500EAA0	\$1,035,000	D6S	103.7	CF	CF	CF
5500	430	M4FAN66550EAA0	\$1,325,771	F6S	103.7	CF	CF	CF
6000	469	M4FAN66600EAA0	\$1,350,786	F6S	103.7	CF	CF	CF

T300MV2

MTX2

MTX

BMV2

Regen

MV
ControllersVacuum
Contactors

LV SSS

Vacuum
BreakersIndustrial
Automation

T300MV2® ASD

➤ T300MV2® - 6600 VAC Output
Pricing & Dimensions



HP	FLA	Model Number	List Price	Frame	H	W	D	Shipping Weight (lbs.)
					Dimensions (in.)			
7000	547	M4FAN66700EAA0	\$1,376,302	F6S	103.7	CF	CF	CF
8000	625	M4FAN66800EAA0	\$1,543,701	F6S+	103.7	CF	CF	CF
9000	703	M4FAN66900EAA0	\$1,573,075	F6S+	103.7	CF	CF	CF

Notes:

- HP ratings above are for typical 4-pole motors.
- Dimensions do not include space required for clearance for airflow, door operation, etc.
- Bypass Starter pricing is based on fixed contactors (not rack-out type). Please select required Motor Protection relay option.
- Weights and dimensions are subject to change.
- C6S/D6S/F6S/F6S+ are UL/cUL listed. For all other units, consult factory for updated UL status.
- (*) Frame size needs factory approval before quoting.
- CF = Consult Factory.
- Units with bypass start the motor across the line for emergency maintenance bypass use when VFD is out of service. Toshiba standard RX5 overload relay is include with bypass at not additional cost. RTD monitoring not included.
- AAA are Standard models; -EAA include Bypass.



Main Input Bus Drives:

\$1500/linear foot. For uninsulated bus; \$2000/linear foot for insulated bus

15" Incoming Section (1200 A) — list price: \$15,000 uninsulated, \$16,000 insulated

30" Incoming Section (2000 A) — list price: \$20,000 uninsulated, \$21,000 insulated

Available Frame A4μ/A4/B4 drives only.

When 4160 V Common AC Main uninsulated Bus is used for A4μ, A4 and B4 drives, please add 22" for sine wave filter. See Sine wave filter price for details.

Example: If two (2) Frame A4 are connected using Common AC Bus with 15" Incomer, then the price increment is:

Total length = 15" + 60" + 60" = 135"

Next price increment is = (135/12) * \$1500 = \$16,875

50 Hz (Option Code B)

Price adder is for magnetics including input isolation transformer, pre-charge reactor, output reactor and low voltage VFD for Fan power (fans are rated at 60Hz).

For 50 Hz, add 15% to the list price. Consult factory for updates on UL status.

Example 1:

60 Hz: 4160 V Input and 4160 V Output: M4AAN44050AAA0; 500 HP — list price: \$315,000.

50 Hz: 4160 V Input and 4160 V Output: M4ABN44050AAA0; 500 HP — list price: \$315,000 plus 15% = \$362,250.

BIL Transformer Rating

2400V: 20kV for both primary and secondary

3300V & 4160 V: 30 kV for both primary and secondary.

6600V: 45 kV primary and 30kV secondary

13.8kV input transformer BIL: 60kV primary and 30 kV secondary

To change to 45kV BIL @ Primary: add 3.5% to the total price of the drive.

Maximum BIL level for A4u/A4/B4 is 45 kV BIL. In case of higher BIL (60 kV), please select Frame 1.

6.9 to 13.8 kV Input

- The HV input option gives users the ability to input 6.9 to 13.8 kV primary voltages directly to the drive transformer. In this option the short circuit rating is 40 kA. This option pricing is available only as a price adder. Published standard dimensions will increase 74" or 26" on width based on the selection of HV equipment.
- 74" section includes fused input disconnect switch, input contactor, soft charge circuit, and PTs. This arrangement mimics the drive but with HV input.
- 26" section is comprised of a soft charge circuit without PTs. Input disconnects and fusing is supplied by the user. In this configuration, the customer is to provide 2 PTs in open delta configuration (120-0-120 V) for input voltage monitoring at ASD (100 VA) and also external power 120 V, single-phase, 60 Hz - rated at 1 kVA (non UL listed; short circuit is based on feeder and coordination by others).

Notes:

- No bypass is available with this feature.
- The price of the drive will increase by 10% to accommodate the transformer HV windings and HV pre-charge reactor.
- In case of HV Input; Frame A4μ and A4 ASD will be in Frame 0.
- In case of HV input Frame B4 drives will be in Frame 1.
- No HV Input option for common AC Bus
- For above mentioned frames, select ASD per following page.

T300MV2® ASD

> Option Information & Pricing



MV Frame	MV Input Frame	Price
Frame A2/B2/D2	Max Permissible 6600 V	No HV Input Option
Frame A4μ, A4 & 0	Frame 0	Use 1000HP (Frame 1) x 110% price + selected HV input price
Frame B4	Frame 1	Drive Price(Frame1) x 110% price + selected HV input price
Frame 1, 2, 3, 4, G4P & H4P	No Change	Drive price x 110% + selected HV input price
For 6600 V Drives	CF (Consult Factory)	CF (Consult Factory)

Frame Size	Description	Price
Frames 0 to 4	Up to 15 kV input — includes fused input disconnect, input breaker, soft charge circuit, and PT (add 74" to width)	\$85,700
Frames G4P & H4P	Up to 15 kV input — includes fused input disconnect, input breaker, soft charge circuit, and PTs (add 23" to width)	\$97,800
Frames 0 to 4	Up to 15 kV input without disconnect, load break switch or PTs (add 26" to width) (Non-UL)	\$26,800
Frames G4P & H4P	Up to 15 kV input without disconnect - not available	N/A

Example 1: 1250 HP, 13.8 kV input with 4160 V output. This is a Frame B4 rating but will be housed in a Frame 1 (122") enclosure. Use the Frame 1, 1250 HP price of \$385,000 and add the 74" section at \$85,700. Total list price equals \$470,700. Overall dimension will be 196" (122" + 74"). Part number will be M41ANH4125AAA0.

Example 2: 2500 HP, 12.4 kV input with 4160 V output, Input disconnect (breaker/contact) is customer-supplied. This is a Frame 2 drive at 164". The 26" section has no PT, so control power is supplied from a separate power supply. The T300MV2® price is \$574,000 plus 10%, which equals \$631,400. The 26" section is \$26,800, for a total list price of \$658,200. Part number will be M42ANF4250DAA0. The unit is UL only when Toshiba recommended fuses and contactor/breaker controller is used.

T300MV2® ASD

> Option Information & Pricing



Sync-Xfer

Sync-Xfer is an exciting technological feature of the T300MV2®. With Sync-Xfer, the T300MV2 determines the utility line characteristics and transfers the motor supply power from variable speed to utility power via contactors. Additionally, it can pick up a motor from utility power and return it to variable speed.

Sync-Xfer can have a significant impact in lowering a system’s cost in applications where multiple motors are controlled by one T300MV2 and/or used for soft-starting duty only. Consult factory for more details.

Sync transfer capability requires following options added to the ASD pricing.

	Item	Description
1	Sync Reactor	Use price book to select the sync reactor price based on frame size
2	Contactor section	Use price book to select the bypass section. One section is required per motor.
3	Motor Protection	Use price book to select the Motor protection relay. One relay is required per motor
4	PLC Section	For one motor sync transfer, PLC is not required. PLC is required for sync transfer capability of more than one motor. Use price book to select PLC option. Toshiba PLC is the default PLC.
5	Customer-Supplied MCC	Use the guidelines below.
6	Multiple Motor	Multiple motor sync transfer capability will require additional cabinets. Use price book selection. Recommended to consult with PAC.
7	Sync Transfer System with two ASDs	Consult Factory

T300MV2® ASD

> Option Information & Pricing



Option Code	Description	Price
12th Digit D	Sync reactor Frame A4μ/A4/A2/0 One per drive	\$11,550
	Contactor section Frame A4μ/A4/A2/0 Add 30" section per motor For multiple motors, select required additional section from below	\$48,000
	For multiple motors > 1200A, add 15" cable pull section	\$15,000
	Sync reactor Frame B4/1/B2 One per drive	\$13,475
	Contactor section Frame B4/1/B2 Add 30" section per motor For multiple motors, select required additional section from below	\$48,000
	For multiple motors > 1200A, add 15" cable pull section	\$15,000
	Sync reactor frame 2 (2250 to 2500 HP)/D2 (1250 to 1500 HP)	\$16,170
	Contactor section frame 2 (2250 to 2500 HP)/D2 (1250 to 1500 HP) Add 30" section per motor For multiple motors, select required additional section from below	\$48,000
	For multiple sections, total bus current up to 1200A Add 54" for power cable pull section (15") + ASD fee LBS (24") + ASD output pull section (15")	\$30,000
	For multiple sections, total bus current > 1200A up to 3000A Add 69" for power cable pull section (30") + ASD feed LBS (24") + ASD output pull section (15")	\$42,000
	Sync reactor Frame 2 (3000 HP)/3 (3000 to 3500 HP)/D2 (1750 to 2000 HP)	\$18,480
	Contactor section Frame 2 (3000 HP)/3 (3000 to 3500 HP)/ D2 (1750 to 2000 HP) Add 36" per motor For multiple motors, select required additional section from below	\$69,000
	For multiple sections, total bus current up to 1200A Add 66" for power cable pull section (15") + ASD feed LBS (36") + ASD output pull section (15")	\$40,000
	For multiple sections, total bus current > 1200A up to 3000A Add 81" for power cable pull section (30") + ASD feed LBS (36") + ASD output pull section (15")	\$52,000
	Sync reactor Frame 3 (4000 HP)/4 Maximum output current allowed is 720A	\$23,100
	Contactor section Frame 3 (4000 HP)/4 Add 36" per motor For multiple motors, select required additional section from below	\$69,000
	For multiple sections, total bus current up to 1200A Add 66" for power cable pull section (15") + ASD feed LBS (36") + ASD output pull section (15")	\$40,000

T300MV2® ASD

> Option Information & Pricing



Option Code	Description	Price
12th Digit D	For multiple sections, total bus current > 1200A up to 3000A Add 88" for power cable pull section (30") + ASD feed LBS (36") + ASD output pull section (15")	\$52,000
	Sync reactor Frame G4P Add 48" to drive footprint	\$32,500
	Bypass section for motors	CF
	Sync reactor Frame H4P Add 48" to drive footprint	\$41,000
	Bypass section for motors	CF
6600V	CF	CF

Notes:

- In Sync-Xfer application, maximum bus current capacity is 3000 A.
- Sync-Xfer lineups can be configured differently to meet site requirements; please consult factory.
- Above details are given as a primary guideline, not for construction. If the dimensions are critical, please consult factory.
- Standard bus 1200 A; When bus rating is changed to 2000 A, input section changes from 15" to 36" wide with a price adder of \$5,000 for input section. When bus rating is changed to 3000 A, line depth changes from 36" to 44" and input section changes from 15" to 36" wide with a price adder of \$5,000 for input section.
- CF = Consult Factory

Option Code	Description	Price
Sync-TPLC-2	Sync Transfer Circuitry Using Toshiba PLC for Two Motors	\$15,500
Sync-TPLC-3	Sync Transfer Circuitry Using Toshiba PLC for Three Motors	\$17,500
Sync-TPLC-4	Sync Transfer Circuitry Using Toshiba PLC for Four Motors	\$19,500

Notes:

- Application programming is included and loaded in the PLC. No PLC firmware, software, or cables are included. Please consult factory for additional details.
- In case of PLCs other than Toshiba PLC, please consult factory for price adder. May increase footprint.

Customer-Supplied MCC Guidelines:

Bypass current feedback CTs (CTAX and CTCX). CT ratio 5:0.1 A. The CTs are installed in Bypass section of MV MCC. Each motor bypass requires two CTs.

List price \$1500 for two CTs/motor as loose items for customer to install in MV MCC. Wiring between CTs and ASDs are not included.

Notes:

- Case 1: ASD with Sync Transfer capability; please add above options per ASD.
- Case 2: Two ASDs on separate input feed bus but no ASD output bus tie; treat same as case 1.
- Case 3: Two ASDs with ASD output bus connected through Main-Tie-Main configuration; customer one-line drawing needed.

T300MV2® ASD

> Option Information & Pricing



Typical Layout for Sync-Xfer

Please contact factory, as many variations are available.

Frame A4μ/A4/A2/0: Sync-Xfer Arrangement for Single Motor

BYP 1	A4μ/A4/A2/0
ASD 1	

Frame A4μ/A4/A2/0: Sync-Xfer Arrangement for Multiple Motors (max. 3000 A)

IP	BYP 1	BYP 2	BYP ..	BYP n	A4μ/A4/A2/0
	ASD 1	ASD 2	ASD ...	ASD n	

Frame B4/1/B2: Sync-Xfer Arrangement for Single Motor

BYP 1	B4/1/B2
ASD 1	

Frame B4/1/B2: Sync-Xfer Arrangement for Multiple Motors (max. 3000 A)

IP	BYP 1	BYP 2	BYP ..	BYP n	B4/1/B2
	ASD 1	ASD 2	ASD ..	ASD n	

Notes:

- Standard bus 1200 A; when bus rating is changed to 2000 A, input section changes from 15" to 36" wide with a price adder of \$5,000 for input section. When bus rating is changed to 3000 A, line depth changes from 36" to 44" and input section changes from 15" to 36" wide with a price adder of \$5,000 for input section.

T300MV2® ASD


> Option Information & Pricing




Frame 2 (2250 to 2500 HP): Sync-Xfer Arrangement for Single Motor




Frame 2: Sync-Xfer (2250 to 2500 HP) Arrangement for Multiple Motors (max. 3000 A)

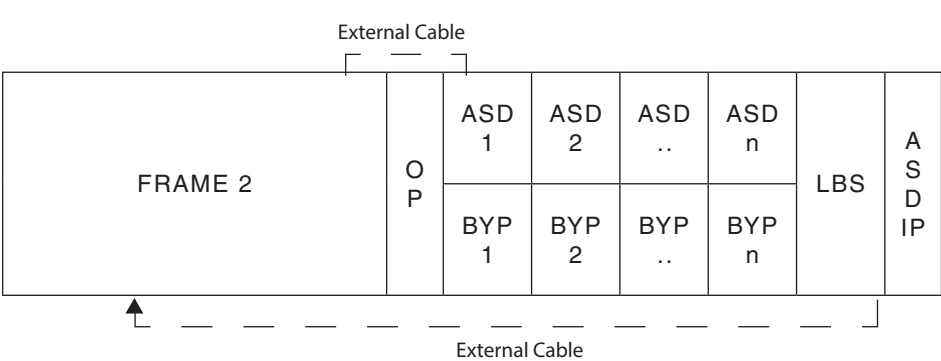

Frame 2 (3000 HP)/Frame 3: Sync-Xfer Arrangement for Single Motor

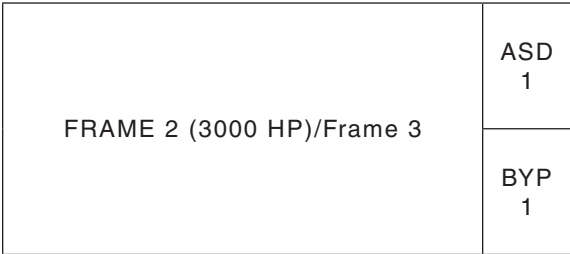

Frame 2 (3000 HP)/Frame 3: Sync-Xfer Arrangement for Multiple Motors (max. 3000 A)

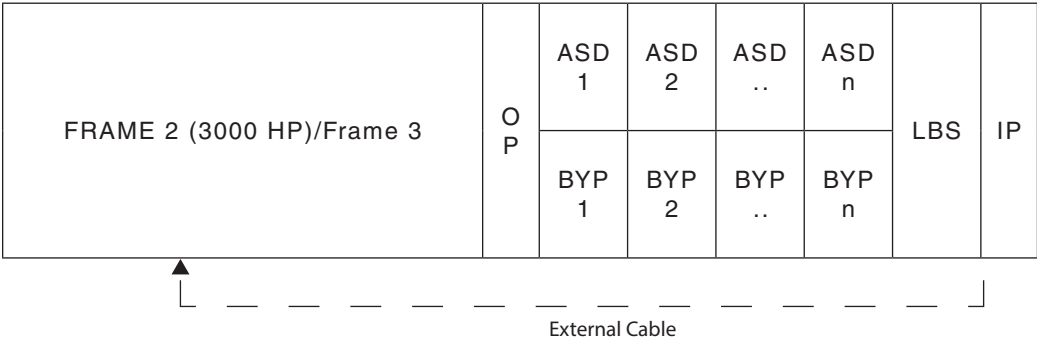

- Notes:
- Additional 15" cabinet may be needed for Frame 2; consult factory before ordering.
 - External cable by others.
 - Standard bus 1200 A; when bus rating is changed to 2000 A, input section changes from 15" to 36" wide with a price adder of \$5,000 for input section. When bus rating is changed to 3000 A, line depth changes from 36" to 44" and input section changes from 15" to 36" wide with a price adder of \$5,000 for input section.



Frame 4 (up to 720 A): Sync-Xfer Arrangements for Single Motor

FRAME 4	ASD 1
	BYP 1

Frame 4 (Bypass 720 A): Sync-Xfer Arrangement for Multiple Motors (max. 3000 A)

FRAME 4	O P	ASD 1	ASD 2	ASD ..	ASD n	LBS	IP
		BYP 1	BYP 2	BYP ..	BYP n		

external cable

Notes:

- External cable by others.
- Standard bus 1200 A; when bus rating is changed to 2000 A, input section changes from 15" to 36" wide with a price adder of \$5,000 for input section. When bus rating is changed to 3000 A, line depth changes from 36" to 44" and input section changes from 15" to 36" wide with a price adder of \$5,000 for input section.

T300MV2® ASD

> Option Information & Pricing



Solid State Starter Maintenance Bypass

The Toshiba JKSSS Plus Series digital, reduced-voltage, solid state starter is designed to be a superior method of providing soft-start control and protection for AC motors while in Bypass. Advantages include solid state construction, advanced motor protection, step-less acceleration, reduced inrush current, minimal maintenance, and high-duty cycle capability. Published dimensions will increase based on the size of additional equipment.

Rating	Description	Price
2400 V		
300 to 450 HP	SSS Maintenance Bypass — Adds 75” to Base Dimensions	\$86,900
500 to 900 HP		\$96,200
1000 to 1500 HP		\$105,800
1750 HP	SSS Bypass — Adds 123” to Base Dimensions	\$129,200
2000 to 2500 HP		\$146,800
3300 V		
500 to 700 HP	SSS Bypass —Adds 75” to Base Dimensions	\$91,000
800 to 1500 HP		\$97,500
1750 to 2250 HP		\$99,000
2500 to 3500 HP	SSS Bypass —Adds 123” to Base Dimensions	\$155,800
4000 to 4500 HP		\$163,600
4160 V		
500 to 900 HP	SSS Bypass — Adds 75” to Base Dimensions	\$91,000
1000 to 1750 HP		\$97,500
2000 to 2500 HP		\$99,000
3000 to 3500 HP	SSS Bypass — Adds 123” to Base Dimensions	\$155,800
4000 to 6000 HP		\$163,600
5000 to 6000 HP (max. 720 Amps)		\$183,300

Notes:

- In case of solid state starter bypass, consult PAC. Only solid state starter shall be ordered as a separate line item.
- Toshiba Standard RX5 simple overload relay is included in bypass at no additional cost. RTD monitoring not included.

T300MV2® ASD

> Option Information & Pricing



Reduced Voltage Auto-Transformer Bypass

The reduced voltage auto-transformer (RVAT) bypass provides the owner with a means of limiting the inrush current by reducing initial voltage supplied to the motor during starting, resulting in a mechanical soft-start. Published dimensions will increase based on the size of additional equipment.

Rating	Description	Price
300 to 800 HP, 2400 V 500 to 1750 HP, 4160 V	RVAT Bypass — Adds 72" to Base Dimensions	CF
900 to 1750 HP, 2400 V 2000 to 3000 HP, 4160 V		CF
2000 to 2500 HP, 2400 V 4000 to 5000 HP, 4160 V	RVAT Bypass — Adds 108" to Base Dimensions	CF

- Notes:
- Reduced voltage auto-transformer bypass shall be ordered as a separate line item.
 - CF = Consult Factory.
 - Toshiba Standard RX5 simple overload relay is included in bypass at no additional cost. RTD monitoring not included.

T300MV2® ASD

> Option Information & Pricing



dV/dT Output Filter

A DV/DT output filter is recommended for lead-length from 1000 ft. to 2000 ft.

Option Code	Size	Description	Price
12th Digit B	2400V		
	Frame A2	Output DV/DT Filter	\$16,550
	Frame B2		\$18,475
	Frame D2 1250 HP - 1500 HP		\$21,170
	Frame D2 1750 HP - 2000 HP		\$23,400
	Frame 4		\$28,100
	3300V		
	Frame A4μ/A4	Output DV/DT Filter	\$16,550
	Frame B4		\$18,475
	Frame 2		\$21,170
	Frame 3		\$23,400
	Frame 4		\$28,100
	4160V		
	Frame A4μ/A4/0	Output DV/DT Filter	\$16,550
	Frame B4/1		\$18,475
	Frame 2		\$21,170
	Frame 3		\$23,400
	Frame 4		\$28,100
	Frame G4P		\$37,500
	Frame H4P		\$45,000

Sinewave Output Filters

A sinewave output filter is recommended for lead-lengths above 2000 ft. up to 6 miles. Sinewave output filters are recommended in applications where a step-up transformer is used on the output of the drive.

Option Code	Size	Width	Description	Price
13th Digit E	2400V			
	Frame A2/B2/C2/D2	N/A	N/A	N/A
	Frame 4	N/A		N/A
	4160V			
	Frame A4μ	Included		\$25,000
	Frame A4μ Common AC Bus	22"	Sine Wave output filter	\$30,000
	Frame A4	Included		\$25,000
	Frame A4 Common AC Bus	22"		\$30,000
	Frame B4	22"		\$36,000
	Frame 0	Included		\$25,000
	Frame 1	Included		\$29,000
	Frame 2	40"		\$57,000
	Frame 3	40"		\$83,000
	Frame 4	40"		\$109,000
	Frame G4P	48"		\$127,000
	Frame H4P	48"		\$182,000

Notes:

- 6000 HP, G4P/H4P with sine wave filter is not UL listed.

T300MV2® ASD

> Option Information & Pricing



Redundant Fans

Redundant fan option includes two groups of fans. Main control board is used to program the redundant fan logic for cycling fan groups at set interval. Upon failure of a fan in any one group will automatically cycle the drive cooling to the second fan group without stopping the drive. A fan fault alarm will be annunciated.

Option Code	Size	Description	Price
11th Digit J through R	Frame A2, B2	Redundant Fans	\$7,675
	Frame D2		\$21,950
	Frame A4μ, A4, B4, 0, 1		\$7,675
	Frame 2, 3		\$21,950
	Frame 4		\$32,775
	Frame G4P		\$64,780
	Frame H4P		\$80,700
FRS	Frame A4μ, A4, 0	Drives with Sinewave filter	\$7,675
	Frame B4		\$15,400
	Frame 1		\$11,525
	Frame 2, 3		\$27,440
	Frame 4		\$38,265
	Frame G4P		\$70,270
	Frame H4P		\$86,190
FRS-SR	Frame G4P	Redundant Fans with sync-reactor	\$70,270
	Frame H4P		\$86,190
FRS-CB	Frame A4μ, A4, B4 Common AC Bus	Drives with Sinewave filter	\$11,515

Drive & Motor Space Heater

Option Code	HP Range	Description	Price
EDH	Frame A2	Drive space heater external 208/240 VAC power used	\$2,200
	Frame B2		\$3,200
	Frame D2		\$4,400
	Frame A4μ, A4, B4, 0 & 1		\$2,200
	Frame 2		\$3,200
	Frame 3		\$4,400
	Frame 4		\$5,400
	Frame G4P & H4P		\$8,500
EHM1	Power Provided Separately	Basic motor space heater control circuit to turn motor space heater ON (up to 10 amps) when the drive is not operating. External 120V/240V power supplied by customer. For special requirements, consult factory.	\$2,200

Note: Sinewave filter (Frame 2 - Frame H4P) or sync reactors (Frame G4P - H4P) add \$2,200

T300MV2® ASD

> Option Information & Pricing



Communication Interface

Option Code	Description	Price
C5	TOSLINE-S20LP Communication Card with FC Connector (Tosline-S20 with F07 connector included on control board)	\$2,533
CD	DeviceNet Communication Card	\$3,833
CF	Profibus Communication Card	\$4,255
CR	Modbus RTU/ModBus TCP IP/Ethernet Communication Card	\$3,200
CE	Ethernet Global Data (EGD) Communication Card	\$4,000
CN	TCNET Communication Card	\$4,000

Keyed Door Interlocks

The end-user address is required. Default key manufacturer is Superior.

Option Code	Description	Price
KK	Single Lock	\$1,400
	Transfer Blocks w/3 Locks	\$3,500
	Transfer Blocks w/4 Locks	\$4,500
	Transfer Blocks w/5 Locks	\$5,500
	Transfer Blocks w/6 Locks	\$6,500
	Transfer Blocks w/7 Locks	\$7,500

Note: KirkKey Brand: add \$1000 to pricing.

T300MV2® ASD

> Option Information & Pricing



Door-Mounted Equipment - Meters

Option Code	Description	Price
M3	Multilin 369, 12-channel RTD monitor & OL Includes CTs & Ground CT	\$22,000
M3-1	Multilin 369, 12-channel RTD monitor local (369-HI-R-M-0-E-H-0) Includes output phase CTs, one output Ground CT, & output PTs	\$26,000
M4	Multilin 469, 12-channel RTD monitor (469-P5-HI-A20-T-H) Includes CTs & Ground CT	\$22,000
M4-1	Multilin 469, 12-channel RTD monitor (469-P5-HI-A20-T-H) Includes output phase CTs, one output Ground CT, & output PTs	\$26,000
M5	Multilin 869, 12-channel RTD monitor (869 E-P5-NN-G5-H-R-R-A-N-N-G-S-S-B-B-SE-N-N-B) Includes output phase CTs & one output Ground CT	\$26,000
M5-1	Multilin 869, 12-channel RTD monitor (869 E-P5-NN-G5-H-R-R-A-N-N-G-S-S-B-B-SE-N-N-B) Includes output phase CTs, one output Ground CT, & output PTs	\$30,000
MA	Output Amp Meter Using drive analog output 4 to 20 mA	\$2000
MF	Output frequency meter Using drive analog output 4 to 20 mA	\$2000
MV	Output volt meter Using drive analog output	\$2000
ME	Elapsed time meter	\$400
MX	Miscellaneous meter Specify function	CF
MQ	Multilin input PQM (Power Quality Meter) with input phase CTs PQMII-T20 - Mod 525	\$17,800
MQ-1	Multilin input PQM (Power Quality Meter) with input phase CTs & power analysis option - PQMII-T20-A- Mod 525	\$20,000
RT	Door-mounted TIC-TE-RTD12 — IEC (RTD monitor)	\$2,800
AFR-5	Arc-flash Relay with Optical point sensors (A4μ/A4/B4/Frame 1) Little Fuse Please consult factory for UL Status	\$29,000

Pilot Lights

Option Code	Description	Price
PLI	IEC Style	\$300
PLN	NEMA Style	\$450

For motor protection relays:

1. Motor differential protection (87M) CTs are not included. These CTs are typically provided in the motor terminal box and are supplied by the motor manufacturer.
2. Multilin 369 relay does not accept differential CT input. Provide separate differential protection relay and connect the relay contact to Multilin 369.
3. Multilin 469 relay has specific terminals to connect Ground CT with 1A/5A secondary and with 0.025A secondary.
4. Multilin 869 relay part number must be properly selected for Ground CT ratios. Ground CT with 1A or 5A secondary is connected to Slot J and Differential core balance CT with 0.025 secondary is connected to Slot K.
5. The output CTs used with the motor protection relay are Class C10. For other CT Class, please consult factory.

T300MV2® ASD

> Option Information & Pricing



Push-Buttons

Option Code	Description	Price
PBI	IEC Style	\$300
PBN	NEMA style	\$450

Notes:

- Mounted on drive enclosure.

Speed Potentiometer & Switches

Option Code	Description	Price
S1	Speed Control Potentiometer	\$450
S2	Speed Control Potentiometer with Local/Remote Switch	\$650

Software

Option Code	Description	Price
CF	Navigator	\$6,070

Miscellaneous Options

Option Code	Description	Price
RX	IEC Relay Outputs 115 V, 2 A, Form-C	\$450
SP	Interposing Relay with 24 VDC Coil	\$650
X1	4 to 20 mA Isolation Transducer	\$1,440

T300MV2® ASD

> Spare Parts Kit



Toshiba recommends a separate line item on the purchase order for spare parts on the drives purchase order. Spare Parts Kits provide an easy and practical way to acquire the proper spare parts to handle most emergencies. Spare Parts Kits contain one of each circuit board, one low voltage power supply, rectifier fuses, diodes, one set of control power fuses, four potential transformer fuses, three input fuses.

Spare Parts Kits can be ordered with or without a power module. To order a Spare Parts Kits, please use the following numbering convention:

Example Part Number:	M4	A	A	N	4	4	050	A	-1
Series: M4 - MV2									
Frame Type: 0 - Frame 0 1 - Frame 1 2 - Frame 2 3 - Frame 3 4 - Frame 4	A - Frame A B - Frame B C - Frame C D - Frame D	E - Frame E F - Frame F G - Frame G H - Frame H							
Input Frequency: A - 60 Hz									
Type: N - For Non-Regen Drives R - Regen Module Drives									
Input Voltage: 2 - 2400 3 - 3300 4 - 4160 5 - 4800 6 - 6600	7 - 6900 A - 7200 B - 8320 C - 10000 D - 11000	E - 12000 F - 12470 G - 13200 H - 13800 Z - Other							
Output Voltage: 2 - 2400 3 - 3300 4 - 4160 6 - 6600									
Output Rated Capacity: 030 - 300 HP 035 - 350 HP 040 - 400 HP 045 - 450 HP 050 - 500 HP 060 - 600 HP	070 - 700 HP 080 - 800 HP 090 - 900 HP 100 - 1000 HP 125 - 1250 HP 150 - 1500 HP	175 - 1750 HP 200 - 2000 HP 225 - 2250 HP 250 - 2500 HP 300 - 3000 HP 350 - 3500 HP	400 - 4000 HP 450 - 4500 HP 500 - 5000 HP 550 - 5500 HP 600 - 6000 HP 700 - 7000 HP	800 - 8000 HP 900 - 9000 HP 10K - 10000 HP 11K - 11000 HP					
Configuration: A - Standard Fans B - Redundant Fans									
Power Module: -1 (Included)									

T300MV2® ASD

> Spare Parts Kit



Input fuses will change as HP changes. Spare Parts Kits contain:

Item	2400 V Qty.	3300V Qty	4160 V Qty.	Description	Part Number
1	1	1	1	Control Board	Job/Inverter Specific
2	1	1	1	GSD Board	Job/Inverter Specific
3	1	1	1	XIO Board	Job/Inverter Specific
4	1	1	1	EXIO Board	PC61910P205B
5	1	1	1	Interface Board	Job/Inverter Specific
6	1	1	1	External Interface Board	PC61910P206A
7	1	1	1	Keypad Interface Board	PC61910P204A
8	1	1	1	Display/Keypad	PC61910P216
9	1	1	1	Power Supply	GCI6720G282
10	1	1	1	GDI Board	PC61910P085A
11	1	1	1	PDM Board	PC61910P107A
12	2	2	2	Control Power Fuse	HP-Specific
13	3	3	3/6	Input Fuse	HP-Specific
14	4	4	4	CPT Fuse	PC16109P902*
15	4	12	12	Rectifier Fuse	HP-Specific
16	4	12	12	Diode Pack	HP-Specific
17	1	1	1/2	Power Module (One Phase)**	HP-Specific
18	1	1	1/2	Cooling Fan	HP & Application Specific

*6000hp and below only

**Only included in kits designated with -1

T300MV2

MTX2

MTX

BMV2

Regen

MV
Controllers

Vacuum
Contactors

LV SSS

Vacuum
Breakers

Industrial
Automation

T300MV2® ASD

> Spare Parts Kits



MTX2

MTX

BMV2

Regen

MV
ControllersVacuum
Contactors

LV SSS

Vacuum
BreakersIndustrial
Automation

Part Number Without PM & Std Fan	List Price	Frame	Part Number With PM & Std Fan	List Price
2400V Kits				
SPK-M4AAN22030A to SPK-M4AAN22050A	\$26,560	A2	SPK-M4AAN22030A-1 to SPK-M4AAN22050A-1	\$40,170
SPK-M4BAN22060A to SPK-M4BAN22100A	\$28,250	B2	SPK-M4BAN22060A-1 to SPK-M4BAN22100A-1	\$44,260
SPK-M4DAN22125A to SPK-M4DAN22200A	\$31,190	D2	SPK-M4DAN22125A-1 to SPK-M4DAN22200A-1	\$50,050
SPK-M44AN22225A to SPK-M44AN22300A	\$34,080	4	SPK-M44AN22225A-1 to SPK-M44AN22300A-1	\$114,225
3300V Kits				
SPK-M40BN33030A to SPK-M40BN33070A	\$26,090	0	SPK-M40BN33030A-1 to SPK-M40BN33070A-1	\$56,980
4160V Kits				
SPK-M4AAN44030A to SPK-M4AAN44060A	\$26,560	A4	SPK-M4AAN44030A-1 to SPK-M4AAN44060A-1	\$55,180
SPK-M4AAN44070A to SPK-M4AAN44100A	\$29,990	A4	SPK-M4AAN44070A-1 to SPK-M4AAN44100A-1	\$58,950
SPK-M40AN44030A to SPK-M40AN44100A	\$29,990	0	SPK-M40AN44030A-1 to SPK-M40AN44100A-1	\$58,950
SPK-M41AN44125A to SPK-M41AN44200A	\$31,370	1	SPK-M41AN44125A-1 to SPK-M41AN44200A-1	\$74,590
SPK-M4BAN44125A to SPK-M4BAN44200A	\$31,370	B4	SPK-M4BAN44125A-1 to SPK-M4BAN44200A-1	\$74,590
SPK-M42AN44225A to SPK-M42AN44300A	\$33,870	2	SPK-M42AN44225A-1 to SPK-M42AN44300A-1	\$101,125
SPK-M43AN44300A to SPK-M43AN44400A	\$35,260	3	SPK-M43AN44300A-1 to SPK-M43AN44400A-1	\$126,950
SPK-M44AN44400A to SPK-M44AN44600A	\$39,260	4	SPK-M44AN44400A-1 to SPK-M44AN44600A-1	\$158,250
SPK-M4GAN44700A to SPK-M4GAN44800A	\$34,725	G4P	SPK-M4GAN44700A-1 to SPK-M4GAN44800A-1	\$221,050
SPK-M4HAN44800A to SPK-M4HAN4411KA	\$38,350	H4P	SPK-M4HAN44800A-1 to SPK-M4HAN4411KA-1	\$274,225

Part Number Without PM & Redundant Fan	List Price	Frame	Part Number With PM & Redundant Fan	List Price
2400V Kits				
SPK-M4BAN22030J to SPK-M4BAN22050J	\$29,770	A2	SPK-M4BAN22030J-1 to SPK-M4BAN22050J-1	\$43,420
SPK-M4BAN22060J to SPK-M4BAN22100J	\$31,500	B2	SPK-M4BAN22060J-1 to SPK-M4BAN22100J-1	\$45,410
SPK-M4BAN22125J to SPK-M4BAN22200J	\$34,450	D2	SPK-M4BAN22125J-1 to SPK-M4BAN22200J-1	\$51,150
SPK-M4BAN22225J to SPK-M4BAN22300J	\$37,030	4	SPK-M4BAN22225J-1 to SPK-M4BAN22300J-1	\$117,175
3300V Kits				
SPK-M40BN33030J to SPK-M40BN33070J	\$27,190	0	SPK-M40BN33030J-1 to SPK-M40BN33070J-1	\$58,080
4160V Kits				
SPK-M4AAN44030J to SPK-M4AAN44060J	\$29,860	A4	SPK-M4AAN44030J-1 to SPK-M4AAN44060J-1	\$58,450
SPK-M4AAN44070J to SPK-M4AAN44100J	\$33,290	A4	SPK-M4AAN44070J-1 to SPK-M4AAN44100J-1	\$62,250
SPK-M40AN44030J to SPK-M40AN44100J	\$33,290	0	SPK-M40AN44030J-1 to SPK-M40AN44100J-1	\$62,250
SPK-M41AN44125J to SPK-M41AN44200J	\$34,670	1	SPK-M41AN44125J-1 to SPK-M41AN44200J-1	\$77,890
SPK-M4BAN44125J to SPK-M4BAN44200J	\$34,670	B4	SPK-M4BAN44125J-1 to SPK-M4BAN44200J-1	\$77,890
SPK-M42AN44225J to SPK-M42AN44300J	\$37,170	2	SPK-M42AN44225J-1 to SPK-M42AN44300J-1	\$104,425
SPK-M43AN44300J to SPK-M43AN44400J	\$38,560	3	SPK-M43AN44300J-1 to SPK-M43AN44400J-1	\$130,250
SPK-M44AN44400J to SPK-M44AN44600J	\$42,560	4	SPK-M44AN44400J-1 to SPK-M44AN44600J-1	\$161,550
SPK-M4GAN44700J to SPK-M4GAN44800J	\$41,375	G4P	SPK-M4GAN44700J-1 to SPK-M4GAN44800J-1	\$227,600
SPK-M4HAN44800J to SPK-M4HAN4411KJ	\$45,000	H4P	SPK-M4HAN44800J-1 to SPK-M4HAN4411KJ-1	\$280,775

*Parallel configuration contains two power modules in the kit (M3APXXX).

Notes: Prices valid when ordered along with drive.

T300MV2® ASD

> Spare Parts Kit



Item	6600 V Qty. (300 to 3000 HP)	Description	Part Number
1	1	Control Board	PC61910P200C
2	1	GSD Board	PC61910P203A
3	1	XIO Board	PC61910P201B
4	1	EXIO Board	PC61910P205B
5	1	Interface Board	HP-Specific
6	1	External Interface Board	PC61910P206A
7	1	Keypad Interface Board	PC61910P204A
8	1	Display/Keypad	PC61910P216
9	1	Power Supply	GCI6720G282
10	1	GDI Board	PC61910P085A
11	1	PDM Board	PC61910P107A
12	2	Control Power Fuse	HP-Specific
13	3	Input Fuse	HP-Specific
14	2	CPT Fuse	PC31029P002
15	10/16	Rectifier Fuse	HP-Specific
16	10/16	Diode Pack	HP-Specific
17	1	Cooling Fan	HP & Application Specific
18	1	Power Module (One Phase)**	HP-Specific

Part Number Without PM & Std Fan	Price	Frame	Part Number With PM & Std Fan	Price
6600V Kits				
SPK-M4AAN66030A to SPK-M4AAN66080A	\$30,400	A6Sm	SPK-M4AAN66030A-1 to SPK-M4AAN66080A-1	\$67,100
SPK-M4AAN66090A to SPK-M4AAN66150A	\$32,600	A6S	SPK-M4AAN66090A-1 to SPK-M4AAN66150A-1	\$82,400
SPK-M4BAN66175A to SPK-M4AAN66300A	\$36,850	B6S	SPK-M4BAN66175A-1 to SPK-M4AAN66300A-1	\$102,100
SPK-M4CAN66350A to SPK-M4CAN66400A	\$48,150	C6S	SPK-M4CAN66350A-1 to SPK-M4CAN66400A-1	\$138,000
SPK-M4DAN66450A to SPK-M4DAN66500A	\$51,500	D6S	SPK-M4DAN66450A-1 to SPK-M4DAN66500A-1	\$180,100
SPK-M4FAN66550A to SPK-M4FAN66700A	\$55,450	F6S	SPK-M4FAN66550A-1 to SPK-M4FAN66700A-1	\$214,700
SPK-M4FAN66800A to SPK-M4FAN66900A	\$58,150	F6S+	SPK-M4FAN66800A-1 to SPK-M4FAN66900A-1	\$218,500

Part Number Without PM & Redundant Fan	Price	Frame	Part Number With PM & Redundant Fan	Price
6600V Kits				
SPK-M4AAN66030J to SPK-M4AAN66080J	\$33,700	A6Sm	SPK-M4AAN66030J-1 to SPK-M4AAN66080J-1	\$70,400
SPK-M4AAN66090J to SPK-M4AAN66150J	\$35,850	A6S	SPK-M4AAN66090J-1 to SPK-M4AAN66150J-1	\$85,650
SPK-M4BAN66175J to SPK-M4AAN66300J	\$40,100	B6S	SPK-M4BAN66175J-1 to SPK-M4AAN66300J-1	\$105,400
SPK-M4CAN66350J to SPK-M4CAN66400J	\$54,800	C6S	SPK-M4CAN66350J-1 to SPK-M4CAN66400J-1	\$144,650
SPK-M4DAN66450J to SPK-M4DAN66500J	\$58,200	D6S	SPK-M4DAN66450J-1 to SPK-M4DAN66500J-1	\$186,750
SPK-M4FAN66550J to SPK-M4FAN66700J	\$62,100	F6S	SPK-M4FAN66550J-1 to SPK-M4FAN66700J-1	\$221,350
SPK-M4FAN66800J to SPK-M4FAN66900J	\$64,800	F6S+	SPK-M4FAN66800J-1 to SPK-M4FAN66900J-1	\$225,150

Notes:

- Power module pricing includes one 2400 V and one 4160 V module.

T300MV2® ASD

➤ Heat Loss Data
(Standard Duty Drive)



Voltage	Motor HP	Motor kW	Output kVA	Losses	
				kW	BTU/hr
2400	300	233	268	8.1	27,551
	350	272	313	9.4	31,919
	400	311	357	10.7	36,623
	450	350	402	12.1	41,327
	500	389	447	13.4	45,695
	600	466	536	16.1	54,767
	700	544	625	18.7	63,838
	800	622	715	21.5	73,246
	900	699	804	24.1	82,318
	1000	777	893	26.8	91,390
	1250	971	1116	33.5	114,237
	1500	1166	1340	40.2	137,085
	1750	1360	1563	46.9	159,932
	2000	1554	1786	53.6	182,780
	2250	1748	2010	60.3	205,627
	2500	1943	2233	67.0	228,475
	3000	2331	2680	80.4	274,169

T300MV2® ASD

> Heat Loss Data
(Standard Duty Drive)



Voltage	Motor HP	Motor kW	Output kVA	Losses	
				kW	BTU/hr
4160	300	233	268	8.2	27,849
	350	272	313	9.5	32,511
	400	311	357	10.9	37,172
	450	350	402	12.3	41,834
	500	389	447	13.6	46,495
	600	466	536	16.3	55,699
	700	544	625	19.0	65,022
	800	622	715	21.8	74,345
	900	699	804	24.5	83,548
	1000	777	893	27.2	92,871
	1250	971	1116	34.0	116,059
	1500	1166	1340	40.8	139,366
	1750	1360	1563	47.6	162,554
	2000	1554	1786	54.4	185,742
	2250	1748	2010	61.2	208,930
	2500	1943	2233	68.0	232,237
	3000	2331	2680	81.6	278,613
	3500	2720	3126	95.2	325,108
	4000	3108	3573	108.8	371,484
	4500	3497	4019	122.4	417,979
	5000	3885	4466	136.0	464,355
	5500	4274	4913	149.6	510,850
	6000	4662	5359	163.2	557,226
	7000	5439	6252	190.4	650,096
	8000	6216	7145	217.6	742,967
	9000	6993	8038	244.8	835,838
	10000	7770	8931	272.0	928,709
	11000	8590	9828	299.6	1,021,160

T300MV2

MTX2

MTX

BMV2

Regen

MV
Controllers

Vacuum
Contactors

LV SSS

Vacuum
Breakers

Industrial
Automation

T300MV2® ASD

➤ Heat Loss Data
(Standard Duty Drive)



Voltage	Motor HP	Motor kW	Output kVA	Losses	
				kW	BTU/hr
6600	300	234	267	11.9	40,606
	350	273	312	13.4	45,665
	400	312	357	14.7	50,140
	450	351	401	15.5	52,752
	500	390	446	16.8	57,354
	600	468	535	19.8	67,403
	700	546	624	21.9	74,872
	800	623	713	24.4	83,293
	900	701	802	27.1	92,548
	1000	779	892	29.0	98,846
	1250	974	1115	35.8	122,045
	1500	1169	1337	41.6	141,870
	1750	1364	1560	48.7	166,121
	2000	1559	1783	54.6	186,322
	2250	1753	2006	61.4	209,391
	2500	1948	2229	67.4	229,846
	3000	2338	2675	80.3	274,097
	3500	2728	3121	94.3	321,785
	4000	3117	3567	107.4	366,635
	4500	3507	4012	120.8	412,317
	5000	3896	4458	134.2	458,000
	5500	4286	4904	147.6	503,683
	6000	4676	5350	160.0	545,924
	7000	5455	6242	184.8	630,698
	8000	6234	7133	216.6	738,982
	9000	7014	8025	245.1	836,373

MTX2™ NEMA 3R ASD

Specifications

The MTX2 NEMA 3R outdoor medium voltage adjustable speed drive is one of the most innovative adjustable speed drive offerings to date. A smaller footprint and improved MTTR are the result of an advanced enclosure design and power section topology. The MTX2 is specifically designed for outdoor mounting in remote locations from the jungle to the desert.

Product Scope

4160 V at 500 to 1500 HP

Highlights

- Outdoor Design UL-Rated Rainproof (NEMA 3R) Enclosure
- Distribution-Quality Lightning Arrestors as Standard
- 36-Pulse Harmonic Cancellation Complies with IEEE-519 2014
- Higher True Factor (>0.96) than Running Motors Across-the-Line
- Provides Easy Monitoring & Maintenance through Advanced User Interface Design
- Removable Power Modules
- Totally Enclosed Cooling System
- Allows for Standard Motors to be Used in Conjunction with Drive Without Special Motor Insulation

Standard Features

- 100% Continuous Overload Rating, 115% for 60 Seconds
- NEMA 3R Enclosure
- Ten Discrete Digital Input Terminals with Programmable Functions
- Ten Available Digital Programmable Outputs
- Three Analog Inputs; Isolation Transducer Required
- Eight Analog Outputs; Isolation Transducer Required
- Medium Voltage IGBT Technology
- EOI: Plain-English LCD Display
- Ambient Temperature: -49° to 122°F (-45° to 50°C)
- Humidity: 95% Non-Condensing
- Externally Powered Space Heaters
- Standards & Compliances: NEC, NEMA, UL
- Listed in US & Canada, ANSI, & American Recovery & Reinvestment Act (ARRA) Compliant



MTX2™ NEMA 3R ASD

> Part Numbering Convention



The MTX2 can be configured with commonly-used options for an easy-to-install, turn-key package. See the chart below for available configurations. Custom packages are available upon request. Drawings supplied by Toshiba's MV Drives Department.

The example below, MX45AN44050AAA0, shows a standard duty MTX2, 500 HP, 4160 V input, 4160 V output with input disconnect and cooling fan power.

Example Part	MX4	5	A	N	4	4	050	A	A	A	xxx
Number:											
Series: MX4 -- MTX2 Outdoor											
Frame type: 0 -- MTX-15 (Convection w fixed modules) 2 -- MTX-30 (Convection w fixed modules) 3 -- MTX2-30 (Sealed w DO modules) 4 -- MTX2-60 (Sealed w DO modules) 5 -- MTX2-15 (Sealed w DO modules) 6 -- MTX2-15 (Low profile)											
Input Frequency: A -- 60 Hz B -- 50 Hz											
Type: N -- For non regen drives R -- Regen Module Drives											
Input Voltage: 4 -- 4160											
Output Voltage: 4 -- 4160											
Output Rated Capacity 050 -- 500 HP 100 -- 1000 HP 125 -- 1250 HP 150 -- 1500 HP											
Configuration: A -- B -- C -- D -- E -- F -- G -- H --		ID: Yes Yes No No Yes Yes No No	CP: Yes No Yes No Yes No Yes No	BYP: No No No No Yes Yes Yes Yes	ID -- Input Disconnect CP -- Internal Cooling Fan Power BYP -- Bypass						
Output Options: A -- Standard reactor B -- dV/dt filter C -- dV/dt filter and transfer D -- Transfer E -- Sinewave filter F -- Sinewave filter and transfer											
Enclosure Options: A -- Standard painted B -- Stainless steel											
Additional Options: Additional numbers or letters that may be used to designate other options or identify individual units in multiple unit orders											

T300MV2

MTX2

MTX

BMV2

Regen

MV
Controllers

Vacuum
Contactors

LV SSS

Vacuum
Breakers

Industrial
Automation

MTX2™ NEMA 3R ASD

> 4160 VAC Output
Pricing & Dimensions



VAC	HP	FLA	Model Number	Frame	List Price	H	W	D	Shipping Weight (lbs.)
						Dimensions (in.)			
4160V	500	62	MX45AN44050AA	MTX2-15	\$584,000	107	110	72	CF
4160V	1000	124	MX45AN44100AA	MTX2-15	\$620,000	107	110	72	CF
4160V	1250	155	MX45AN44125AA	MTX2-15	\$669,000	107	110	72	CF
4160V	1500	186	MX45AN44150AA	MTX2-15	\$713,000	107	110	72	CF

- Notes:
- HP rating is based on a typical 4-pole motor.
 - Always use motor FLA rating to size drives.
 - CF = Consult Factory.

MTX2™ NEMA 3R ASD

> Option Information & Pricing



Sinewave Output Filters

A sinewave output filter is recommended for lead-lengths of 2000 ft. to 6 miles. Sinewave output filters are recommended in applications where a step-up transformer is used on the output of the drive.

Option Code	Size	Description	Price
12 th Digit E	500 HP	Sinewave output filter	\$21,035
	1000 HP		\$24,165
	1250 HP, 1500 HP		\$29,000

Push Buttons

Option Code	Description	Price
PBI	IEC Style	\$300
PBN	NEMA Style	\$450

Communication Interface

Option Code	Description	Price
C5	TOSLINE-S20LP Communication Card with FC Connector (Tosline-S20 with F07 connector included on control board)	\$2,533
CD	DeviceNet Communication Card	\$3,833
CF	Profibus Communication Card	\$4,255
CR	Modbus RTU/ModBus TCP IP/Ethernet Communication Card	\$3,200
CE	Ethernet Global Data (EGD) Communication Card	\$4,000
CN	TCNET Communication Card	\$4,000

Pilot Lights

Option Code	Description	Price
PLI	IEC Style	\$300
PLN	NEMA Style	\$450

Power Module Lifting Attachment

Description	Part Number	Price
Power Module Overhead Lift Attachment	GCI6825G055	\$14,000

MTX2™ NEMA 3R ASD

> Spare Parts



Item	Quantity	Description	Part Number
1	1	Control Board	PC61910P200C
2	1	GSD Board	PC61910P203A
3	1	XIO Board	PC61910P201B
4	1	EXIO Board	PC61910P205B
5	1	Interface Board	HP - Specific
6	1	External Interface Board	PC61910P206A
7	1	Keypad Interface Board	PC61910P204A
8	1	Display/Keypad	PC61910P216
9	1	Power Supply	GCI6720G282
10	1	GDI Board	PC61910P085A
11	1	PDM Board	PC61910P107A
9	1	Fan	HP - Specific
11	4	CPT Fuse - 2E 4.8kV	PC16109P902
12	3	Input Fuse	HP - Specific
13	6	Rectifier Fuse	HP - Specific
14	1	Control Power Fuse	PC26163P050
15	1	Space Heater Fuse	PC26143P625
16	1	Space Heater Fuse	PC26130P029
17	1	Power Module (One Phase)**	HP - Specific

**Only included in kits designated with -1

Part Number	Price w/o PM	Frame	Part Number	Price w/PM
SPK-MX45AN44050 to SPK-MX45AN44150	\$26,100	MTX2-15	SPK-MX45AN44050-1 to SPK-MX45AN44150-1	\$98,500
SPK-MX44AN44350 to SPK-MX45AN44600	\$80,100	MTX2-60	SPK-MX44AN44350-1 to SPK-MX45AN44600-1	\$209,450

MTX® NEMA 3R ASD

Specifications

The MTX® NEMA 3R outdoor medium voltage adjustable speed drive is one of the most innovative adjustable speed drive offerings to date. Featuring an advanced enclosure design and power section topology, the MTX® is the world's first and only drive specifically designed for outdoor mounting in remote applications or applications where a building does not exist. From the jungle to the desert, the MTX® can be installed virtually anywhere, eliminating the need to find suitable indoor floor space.

Product Scope

4160 V at 500 to 3000 HP

Highlights

- Outdoor Enclosure Design
- Three Cables In, Three Cables Out
- Distribution-Quality Lightning Arrestors as Standard
- 36-Pulse Harmonic Cancellation Complies with IEEE-519 2014
- Higher True Factor (>0.96) than Running Motors Across-the-Line
- Provides Easy Monitoring & Maintenance through Advanced User Interface Design
- UL-Rated Rainproof (NEMA 3R) Enclosure
- Lowers Cost of Ownership from Rated Full-Load Operation at -20° to 50°C
- Allows for Standard Motors to be Used in Conjunction with Drive Without Special Motor Insulation

Standard Features

- 100% Continuous Overload Rating, 115% for 60 Seconds
- NEMA 3R Enclosure
- Seven Discrete Digital Input Terminals with Programmable Functions
- Five Available Digital Programmable Outputs
- Two Analog Inputs; Isolation Transducer Required
- Eight Analog Outputs; Isolation Transducer Required
- Medium Voltage IGBT Technology
- EOI: Plain-English LCD Display
- Ambient Temperature: -4° to 122°F (-20° to 50°C)
- Altitude: Up to 1000 Meters without Derate (4500 Meter Option Available)
- Humidity: 95% Non-Condensing
- Standards & Compliances: NEC, NEMA, UL Listed in US & Canada, ANSI, & American Recovery & Reinvestment Act (ARRA) Compliant



MTX® NEMA 3R ASD
➤ Part Numbering Convention



The MTX® can be configured with commonly-used options for an easy-to-install, turn-key package. See the chart below for available configurations. Custom packages are available upon request. Drawings supplied by Toshiba's MV Drives Department.

The example below, MTX44050SAA-CR, shows a standard duty MTX®, 500 HP, 4160 V input, 4160 V output with input disconnect, cooling fan power, and Modbus RTU/Modbus TCP IP/Ethernet communication card.

Example Part	MX4	5	A	N	4	4	050	A	A	A	xxx
Number:											
Series: MX4 -- MTX2 Outdoor											
Frame type: 0 -- MTX-15 (Convection w fixed modules) 2 -- MTX-30 (Convection w fixed modules) 3 -- MTX2-30 (Sealed w DO modules) 4 -- MTX2-60 (Sealed w DO modules) 5 -- MTX2-15 (Sealed w DO modules) 6 -- MTX2-15 (Low profile)											
Input Frequency: A -- 60 Hz B -- 50 Hz											
Type: N -- For non regen drives R -- Regen Module Drives											
Input Voltage: 4 -- 4160											
Output Voltage: 4 -- 4160											
Output Rated Capacity 050 -- 500 HP 100 -- 1000 HP 125 -- 1250 HP 150 -- 1500 HP											
Configuration: A -- B -- C -- D -- E -- F -- G -- H --											
ID: Yes No No Yes Yes No No											
CP: Yes No Yes No Yes No Yes No											
BYP: No No No Yes Yes Yes Yes Yes											
ID -- Input Disconnect CP -- Internal Cooling Fan Power BYP -- Bypass											
Output Options: A -- Standard reactor B -- dV/dt filter C -- dV/dt filter and transfer D -- Transfer E -- Sinewave filter F -- Sinewave filter and transfer											
Enclosure Options: A -- Standard painted B -- Stainless steel											
Additional Options: Additional numbers or letters that may be used to designate other options or identify individual units in multiple unit orders											

MTX® NEMA 3R ASD

> 4160 VAC Output


Pricing & Dimensions



HP	FLA	Model Number	List Price	Frame	H	W	D	Shipping Weight (lbs.)
500	62	MX40AN44050AAA	\$466,000		107	168	63	15000
1000	124	MX40AN44100AAA	\$495,000		107	168	63	15000
1500	186	MX40AN44150AAA	\$574,000		107	168	63	15000
2000	248	MX42AN44200AAA	\$986,000		111	238	70	24500
2500	310	MX42AN44250AAA	\$1,020,000		111	238	70	24500
3000	372	MX42AN44300AAA	\$1,060,000		111	238	70	24500
500	62	MX40AN44050EAA	\$524,000		107	225	63	21000
1000	124	MX40AN44100EAA	\$553,000		107	225	63	21000
1500	186	MX40AN44150EAA	\$632,000		107	225	63	21000
2000	248	MX42AN44200EAA	CF		CF	CF	CF	CF
2500	310	MX42AN44250EAA	CF		CF	CF	CF	CF
3000	372	MX42AN44300EAA	CF		CF	CF	CF	CF

Notes:

- External cable not included for bypass.
- HP rating is based on a typical 4-pole motor.
- Always use motor FLA rating to size drives.
- Bypass Starter pricing is based on fixed contactors (not rack-out type).
- CF = Consult Factory.

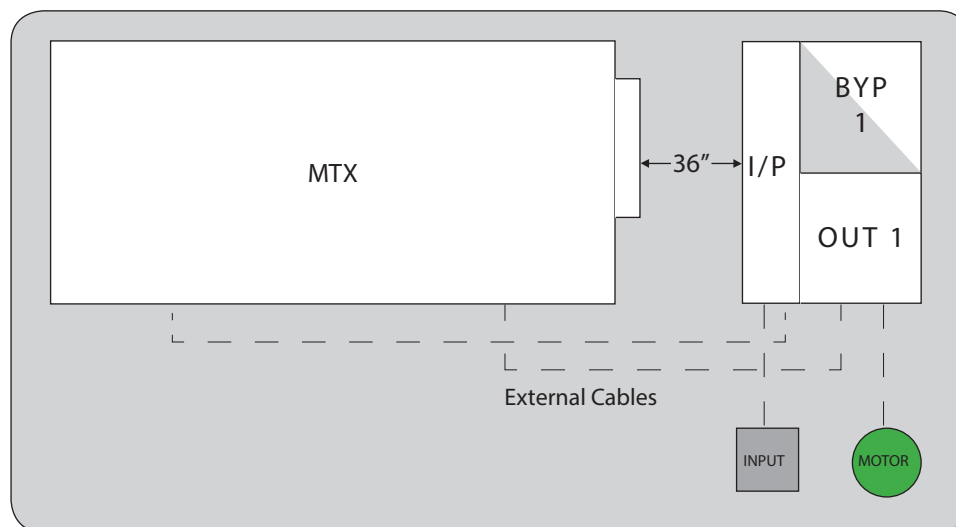

Notes:

- Clearance is needed to the right for side-mounted heat exchanger.
- No clearance is needed when mounted on the left hand side.
- External cables interconnecting two sections are not included and need to be provided by others.

MTX® NEMA 3R ASD

> Option Information & Pricing



Sync-Xfer

Sync-Xfer is an exciting technological feature of the MTX®. With Sync-Xfer, the MTX determines the utility line characteristics and transfers the motor supply power from variable speed to utility power via contactors. Additionally, it can pick up a motor from utility power and return it to variable speed.

Sync-Xfer can have a significant impact in lowering a system’s cost in applications where multiple motors are controlled with MV ASDs, or where the ASD is used for soft-starting duty only. Contact Toshiba’s MV Drive Department or your local distributor for more details.

Sync-Xfer capability requires following options added to the ASD pricing:

	Item	Description
1	Sync Reactor	Use price book to select the sync reactor price based on frame size.
2	Contactor section	Use price book to select the contactor section for each motor/additional motors per guidelines.
3	Motor Protection Section	Use price book to select the Motor protection relay for each motor/additional motors.
4	PLC Section	Use the guidelines below. All sync transfer options will require a PLC in the ASD. Toshiba PLC.
5	Customer-Supplied MCC	Use the guidelines below.

Option Code	Description	Price
SX	Output reactor frame (500 to 1500 HP) One per drive	\$13,475
	Must add first section (84") for input, LBS, output sections	\$58,000
	Contactor section (500 to 1500 HP) Add 36" per section, one section per motor	\$57,865
	Output reactor frame (2000 to 3000 HP) One per drive	\$18,480
	Must add first section (84") for input, LBS, output sections	\$65,000
	Contactor section (2000 to 3000 HP) Add 42" per section, one section per motor	CF

- Notes:
- Field interconnecting cable not included for bypass.
 - CF = Consult Factory.

MTX® NEMA 3R ASD**> Option Information & Pricing****Sync - PLC guidelines**

Option Code	Description	Price
Sync-TPLC-1	Sync Transfer Circuitry Using Toshiba PLC for One Motor	\$13,500
Sync-TPLC-2	Sync Transfer Circuitry Using Toshiba PLC for Two Motors	\$15,500
Sync-TPLC-3	Sync Transfer Circuitry Using Toshiba PLC for Three Motors	\$17,500
Sync-TPLC-4	Sync Transfer Circuitry Using Toshiba PLC for Four Motors	\$19,500

Notes:

- Application programming is included and loaded in the PLC. PLC firmware, software, and cables are not included. Please consult factory for additional details.
- In case of PLCs other than the Toshiba PLC, please consult factory for price adder. May increase footprint.

Customer-Supplied MCC Guidelines:

Bypass current feedback CTs (CTAX and CTCX). CT ratio 5:0.1 amp. The CTs are installed in the Bypass section of the MV MCC. Each motor bypass requires two CTs.

List Price: \$1500 for two CTs as loose items for customer to install in MV MCC. Wiring between CTs and ASDs are not included.

Notes:


- Case 1: ASD with Sync Transfer capability; please add above options per ASD.
- Case 2: Two ASDs on separate input feed bus but no ASD output bus tie; treat same as Case 1.
- Case 3: Two ASDs with ASD output bus connected through Main-Tie-Main configuration; customer one-line drawing needed. Please consult factory.

MTX® NEMA 3R ASD

> Option Information & Pricing



Typical Layout For Sync-Xfer

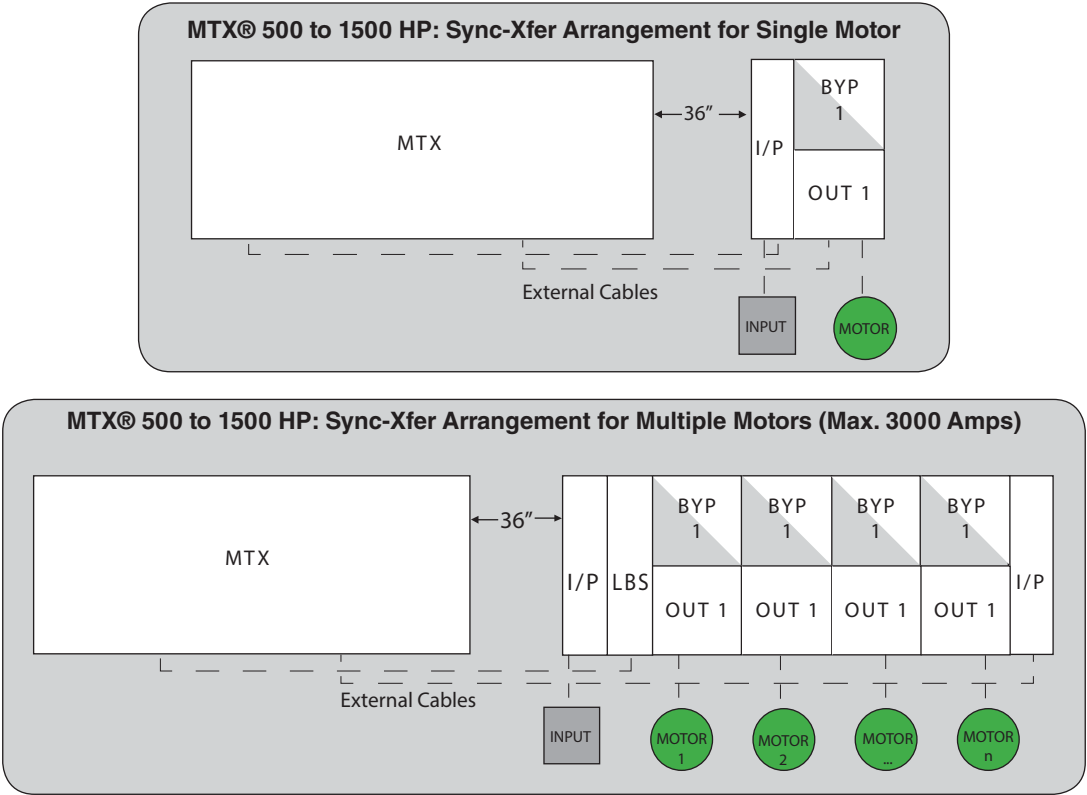

Notes:

- Consult factory for lineup details on MTX 3000 frame.

6.9 To 13.8 kV Input

The HV Input option gives users the ability to input 6.9 to 13.8 kV primary voltages directly to the drive transformer. This option pricing is available only as a price adder to the standard unit. Published standard dimensions will increase 74" on width based on the selection of HV equipment.

- 74" section includes fused input disconnect switch, input contactor, soft charge circuit, and PTs. This arrangement mimics the standard -AA drive but with HV input.
- Option price = drive price x 110% + \$97,800.
- Add 74" to the drive dimension.

Notes:

- UL/cUL in progress.
- No bypass is available with this feature.
- The price of the drive will increase by 10% to accommodate the HV windings.

HP	Description	Price
500 to 3000	Up to 15 kV input Includes: Fused input disconnect, input breaker, soft charge circuit, PTs (add 74" to width)	\$97,800

Example 1: 500 HP, 13.8 kV input with 4160 V output. Use the 500 HP price of \$466,000 plus 10% = \$512,600 and add the 74" section at \$97,800. Total list price equals \$610,400. Overall dimension will be 242" (168" + 74"). Part number will be MX40ANH4050AAA0.

MTX® NEMA 3R ASD**> Option Information & Pricing****dV/dT Output Filter**

A DV/DT output filter is recommended for lead-length between 1000 ft. to 2000 ft.

Option Code	Rating	Description	Price
13th Digit B thru C	500	Output dV/dT Filter	\$11,500
	1000		\$11,500
	1500		\$11,500
	2000		\$14,000
	2500		\$14,000
	3000		\$14,000

Sinewave Output Filters

A sinewave output filter is recommended for lead-lengths of 2000 ft. to 6 miles. Sinewave output filters are recommended in applications where a step-up transformer is used on the output of the drive.

Option Code	Size	Description	Price
12th Digit E	500 HP	Sinewave output filter	\$21,035
	1000 HP		\$24,165
	1500 HP		\$29,000

Drive Motor Space Heater

Option Code	HP Range	Description	Price
EDH	MTX15	Drive space heater external 240V power used - internally powered drive space heater available; extreme weather space heater for transformer cabinet is always externally powered	\$2,200
	MTX30		\$3,200
EMH1	Power provided seperately	Basic space heater control circuit to turn one space heater ON (up to 10 amps) when the drive is not operating. External 120V or 240V supplied by customer. For special requirements, consult factory	\$2,200

CF = Consult Factory.

MTX® NEMA 3R ASD

> Option Information & Pricing



Pilot Light

Option Code	Description	Price
PLI	IEC Style	\$300
PLN	NEMA Style	\$450

Push-Buttons

Option Code	Description	Price
PBI	IEC Style	\$300
PBN	NEMA style	\$450

Communication Interface

Option Code	Description	Price
C5	TOSLINE-S20LP Communication Card with FC Connector (Tosline-S20 with F07 connector included on control board)	\$2,533
CD	DeviceNet Communication Card	\$3,833
CF	Profibus Communication Card	\$4,255
CR	Modbus RTU/ModBus TCP IP/Ethernet Communication Card	\$3,200
CE	Ethernet Global Data (EGD) Communication Card	\$4,000
CN	TCNET Communication Card	\$4,000

T300MV2

MTX2

MTX

BMV2

Regen

MV
Controllers

Vacuum
Contactors

LV SSS

Vacuum
Breakers

Industrial
Automation

MTX® NEMA 3R ASD

> Spare Part Kits



Toshiba recommends a separate line item on the purchase order for spare parts on the drives purchase order. Spare parts are handled by the spare parts group. Spare Parts Kits provide an easy and practical way to acquire the proper spare parts to handle most emergencies. Spare Parts Kits contain one of each circuit board, one low voltage power supply, rectifier fuses, diodes, and one set of control power fuses.

To order a Spare Parts Kits, please use the following numbering convention:

Example Part Number:	MTX	A	4	4	050
Series: MTX®					
Input Frequency: A — 60 Hz B — 50 Hz					
Input Voltage: 2 — 2400 3 — 3300 4 — 4160					
Output Voltage: 3 — 3300 4 — 4160					
4160V Output: 050 — 500 HP 100 — 1000 HP 150 — 1500 HP 200 — 2000 HP 250 — 2500 HP 300 — 3000 HP					

MTX® NEMA 3R ASD

> Spare Part Kits



Item	Quantity (500-1500hp)	Quantity (2000-3000hp)	Description	Part Number
1	1	1	Control Board	PC61910P200C
2	1	1	GSD Board	PC61910P203A
3	1	1	XIO Board	PC61910P201B
4	1	1	EXIO Board	PC61910P205B
5	1	1	Interface Board	HP - Specific
6	1	1	External Interface Board	PC61910P206A
7	1	1	Keypad Interface Board	PC61910P204A
8	1	1	Display/Keypad	PC61910P216
9	1	1	Power Supply	GCI6720G282
10	1	1	GDI Board	PC61910P085A
11	1	1	PDM Board	PC61910P107A
9	1	1	Fan	HP - Specific
10	1	N/A	Fan Starting Cap	PC42000P412
11	4	4	CPT Fuse - 2E 4.8kV	PC16109P902
12	3	3	Input Fuse	HP - Specific
13	6	6	Rectifier Fuse	HP - Specific
14	1	N/A	Control Power Fuse	PC26163P150
15	1	1	Control Power Fuse	PC26163P050
16	1	1	Space Heater Fuse	HP - Specific
17	2	4	Diode Pack	PC40333P402
18	6	N/A	Rectifier	PC40365P200
19	N/A	6	Rectifier	PC40365P400
20	8	16	PM IGBT	PC40233P406
21	2	4	PM Fuse	PC16109P901
22	1	2	PM PWR Supply Board	PC43000P011-CC
23	1	2	PM OLB Board	PC61910P073C
24	1	2	PM VDET Board	PC61910P074B5
25	4	8	PM RGM Board	PC61910P106A
26	1	2	PM CHG DET Board	PC61910P110A
27	2	4	PM Gate Driver Board	PC61910P077G
28	2	4	PM Gate Driver Board	PC61910P077H

Part Number	Frame	Price
SPK-MX40AN44050-1 to SPK-MX40AN44150-1	MTX-15	\$74,780
SPK-MX42AN44200-1 to SPK-MX42AN44300-1	MTX-30	\$121,500

BMV2 ASD

Specifications

The BMV2 indoor medium voltage adjustable speed drive is a cost effective solution with the latest MV2 control platform. Aluminum magnetics are paired with an advanced enclosure design and power section topology. The BMV2 is the perfect cost effective solution for many industrial and commercial applications.

Product Scope

4160 V at 700 to 2000 HP

Highlights

- Aluminum Transformer and Magnetics
- Distribution-Quality Lightning Arrestors as Standard
- 24-Pulse Harmonic Cancellation Complies with IEEE-519 2014
- Higher True Factor (>0.96) than Running Motors Across-the-Line
- Provides Easy Monitoring & Maintenance through Advanced User Interface Design
- Removable Power Modules
- Allows for Standard Motors to be Used in Conjunction with Drive Without Special Motor Insulation

Standard Features

- Overload Rating, 115% for 60 Seconds (Some Ratings Excluded)
- NEMA 1 Ventilated Gasket & Filter Enclosure with IP20 Degree of Protection
- Four Programmable Digital Inputs
- Four Programmable Digital Outputs
- One Analog Input
- One Analog Output
- Medium Voltage IGBT Technology
- EOI: Plain-English LCD/LED Display
- Ambient Temperature: 32° to 104°F (0° to 40°C)
- Altitude: Up to 1000 Meters
- Humidity: 95% Non-Condensing
- Motor Cable Length 1000 ft. Without Output Filter
- Standards & Compliances: NEC, NEMA, Listed in US & Canada, ANSI, & American Recovery & Reinvestment Act (ARRA) Compliant



BMV2 ASD

> Part Numbering Convention



The BMV2 can be configured with commonly-used options for an easy-to-install, turn-key package. See the chart below for available configurations. Custom packages are available upon request. Drawings supplied by Toshiba's MV Drives Department.

Example Part Number:	BM4	A	A	N	4	4	070	A	A	A	0	xx
Series: BM4 - BMV2												
Frame Type: A - Frame A B - Frame B												
Input Frequency: A - 60 Hz												
Type: N - For Non-Regen Drives												
Input Voltage: 4 - 4160												
Output Voltage: 4 - 4160												
Output Rated Capacity: 070 - 700 HP 125 - 1250 HP 080 - 800 HP 150 - 1500 HP 090 - 900 HP 175 - 1750 HP 100 - 1000 HP 200 - 2000 HP												
Configuration: A -- C --	ID: Yes No	CP: Yes Yes	CP - Internal Cooling Fan Power									
Output Options: A - Standard Reactor B - dV/dt Filter												
Cooling Options: A - Standard												
Main Input Bus: 0 - None												
<i>Additional Options: Additional numbers or letters that may be used to designate other options or identify individual units in multiple unit orders</i>												

BMV2 ASD

> BMV2 - 4160 VAC Output Pricing & Dimensions



VAC	HP	FLA	Model Number	List Price	Frame	H	W	D	Shipping Weight (lbs.)
						Dimensions (in.)			
4160V	700	87	MB4AAN44070CAA0	\$282,720	A4	103.7	60	49.5	CF
4160V	800	99	MB4AAN44080CAA0	\$287,280	A4	103.7	60	49.5	CF
4160V	900	112	MB4AAN44090CAA0	\$294,576	A4	103.7	60	49.5	CF
4160V	1000*	124	MB4AAN44100CAA0	\$299,136	A4	103.7	60	49.5	CF
4160V	1250	155	MB4BAN44125CAA0	\$351,120	B4	103.7	90	49.5	CF
4160V	1500	186	MB4BAN44150CAA0	\$374,832	B4	103.7	90	49.5	CF
4160V	1750	217	MB4BAN44175CAA0	\$377,568	B4	103.7	90	49.5	CF
4160V	2000*	248	MB4BAN44200CAA0	\$385,776	B4	103.7	90	49.5	CF
4160V	700	87	MB4AAN44070AAA0	\$294,500	A4	103.7	60	49.5	CF
4160V	800	99	MB4AAN44080AAA0	\$299,250	A4	103.7	60	49.5	CF
4160V	900	112	MB4AAN44090AAA0	\$306,850	A4	103.7	60	49.5	CF
4160V	1000*	124	MB4AAN44100AAA0	\$311,600	A4	103.7	60	49.5	CF
4160V	1250	155	MB4BAN44125AAA0	\$365,750	B4	103.7	90	49.5	CF
4160V	1500	186	MB4BAN44150AAA0	\$390,450	B4	103.7	90	49.5	CF
4160V	1750	217	MB4BAN44175AAA0	\$393,300	B4	103.7	90	49.5	CF
4160V	2000*	248	MB4BAN44200AAA0	\$401,850	B4	103.7	90	49.5	CF

- Notes:
- HP rating is based on a typical 4-pole motor.
- Always use motor FLA rating to size drives.
- CF = Consult Factory.
- (*) Model numbers with asterisk have 110% OL rating.

BMV2 ASD**> Option Information & Pricing****dV/dT Output Filters**

A dV/dT output filter is recommended for lead-lengths of 1000 ft. to 2000 ft.

Option Code	Size	Description	Price
13th Digit B	4160V		
	Frame A	Output DV/DT Filter	\$16,550
	Frame B		\$18,475

Drive & Motor Space Heater

Option Code	HP Range	Description	Price
EDH	Frame A	Drive space heater external 208/240 VAC power used	\$2,200
	Frame AS	Drive space heater external 208/240 VAC power used	\$3,200
	Frame B	Drive space heater external 208/240 VAC power used	\$4,000
	Frame BS	Drive space heater external 208/240 VAC power used	\$3,200
EHM1	Power Provided Separately	Basic motor space heater control circuit to turn space heater ON (up to 10 amps) when drive is not operating. External 120V/240V power supplied by customer. For special requirements, consult factory.	\$2,200

Push-Buttons

Option Code	Description	Price
PBI	IEC Style	\$300
PBN	NEMA Style	\$450

Pilot Light

Option Code	Description	Price
PLI	IEC Style	\$300
PLN	NEMA Style	\$450

BMV2 ASD

> Option Information & Pricing



Communication Interface

Option Code	Description	Price
C5	TOSLINE-S20LP Communication Card with FC Connector (Tosline-S20 with F07 connector included on control board)	\$2,533
CD	DeviceNet Communication Card	\$3,833
CF	Profibus Communication Card	\$4,255
CR	Modbus RTU/ModBus TCP IP/Ethernet Communication Card	\$3,200
CE	Ethernet Global Data (EGD) Communication Card	\$4,000
CN	TCNET Communication Card	\$4,000

Door-Mounted Equipment - Meters

Option Code	Description	Price
M3	Multilin 369, 12-channel RTD monitor & OL Includes CTs & Ground CT	\$22,000
M3-1	Multilin 369, 12-channel RTD monitor local (369-HI-R-M-0-E-H-0) Includes output phase CTs, one output Ground CT, & output PTs	\$26,000
M4	Multilin 469, 12-channel RTD monitor (469-P5-HI-A20-T-H) Includes CTs & Ground CT	\$22,000
M4-1	Multilin 469, 12-channel RTD monitor (469-P5-HI-A20-T-H) Includes output phase CTs, one output Ground CT, & output PTs	\$26,000
M5	Multilin 869, 12-channel RTD monitor (869 E-P5-NN-G5-H-R-R-A-N-N-G-S-S-B-B-SE- N-N-B) Includes output phase CTs & one output Ground CT	\$26,000
M5-1	Multilin 869, 12-channel RTD monitor (869 E-P5-NN-G5-H-R-R-A-N-N-G-S-S-B-B-SE- N-N-B) Includes output phase CTs, one output Ground CT, & output PTs	\$30,000
MA	Output Amp Meter Using drive analog output 4 to 20 mA	\$2,000
MF	Output frequency meter Using drive analog output 4 to 20 mA	\$2,000
MV	Output volt meter Using drive analog output	\$2,000
ME	Elapsed time meter	\$400
MX	Miscellaneous meter Specify function	CF
MQ	Multilin input PQM (Power Quality Meter) with input phase CTs PQMII-T20 - Mod 525	\$17,800
MQ-1	Multilin input PQM (Power Quality Meter) with input phase CTs & power analysis option PQMII-T20-A- Mod 525	\$20,000
RT	Door-mounted TIC-TE-RTD12 — IEC (RTD monitor)	\$2,800

T300MV2

MTX2

MTX

BMV2

Regen

MV
Controllers

Vacuum
Contactors

LV SSS

Vacuum
Breakers

Industrial
Automation

BMV2 ASD**> Spare Parts & Pricing****Spare Parts**

Item	4160 V Qty.	Description	Part Number
1	1	Control Board	PC61910P200C
2	1	GSD Board	PC61910P203A
3	1	XIO Board	PC61910P201B
4	1	EXIO Board	PC61910P205B
5	1	Interface Board	HP-Specific
6	1	External Interface Board	PC61910P206A
7	1	Keypad Interface Board	PC61910P204A
8	1	Display/Keypad	PC61910P216
9	1	Power Supply	GCI6720G282
10	1	GDI Board	PC61910P085A
11	1	PDM Board	PC61910P107A
12	2	Control Power Fuse	HP-Specific
13	3	Input Fuse	HP-Specific
14	4	CPT Fuse	PC16109P902
15	4	Rectifier Fuse	HP-Specific
16	4	Diode Pack	HP-Specific
17	1	Power Module (One Phase)*	HP-Specific
18	1	Cooling Fan	HP-Specific

*Only included in kits designated with -1

Part Number Without PM	List Price	Frame
SPK-MB4AAN44030A to SPK-MB4AAN44060A	\$26,560	A4
SPK-MB4AAN44070A to SPK-MB4AAN44100A	\$29,990	A4
SPK-MB4BAN44125A to SPK-MB4BAN44200A	\$31,370	B4

Regen ASD

Specifications

The Regen medium voltage adjustable speed drive is a 100% regenerative drive that can be configured with commonly-used options for an easy-to-install, turn-key package. The standard T300MVi® adjustable speed drive is only capable of two quadrant operation. When the T300MVi® is configured with the Regen module, it is equipped with an active front end. Consult the factory for technical details.

Please note: Existing T300MVi® drives cannot be retrofitted to add the regenerative capability.

Product Scope

3300, 4160, or 6600 V at 300 to 6000 HP

Highlights

- 100% Regeneration
- Three Cables In, Three Cables Out
- Isolation Transformer
- Multi-Level PWM Output
- Five-Cycle Ride Through
- Auto-Restart
- Higher True Factor (0.99)
- Small Footprint Through Compact Power Modules, Standard Copper-Wound Isolation Transformer, & Air-Cooling System
- Advanced Electronics to Reduce Component Count

Standard Features

- 100% Continuous Overload Rating, 115%* for 60 Seconds
- NEMA 1 Ventilated & IP20 Gasket & Filter Enclosure
- Seven Digital Input Terminals with Programmable Functions. Interposing Relay may be Required.
- Five Digital Outputs: Interposing Relay may be Required
- Two Analog Inputs : Isolation Transducer Required
- Eight Analog Outputs: Isolation Transducer Required
- EOI: Plain-English LCD Display
- Standards & Compliances: American Recovery & Reinvestment Act (ARRA), IEC, NEMA, & ANSI

Notes:

*Some drives are 110% OL rating



Regen ASD

> Part Numbering Convention



The Regen can be configured with commonly-used options for an easy-to-install, turn-key package. See the chart below for available configurations. Custom packages are available upon request. The Regen includes a ground lug and customer terminal block. Drawings supplied by Toshiba's MV Drive Department. The example, M3AR44050SAA-CR, shows a standard duty Regen, 500 HP, 4160 V input, 4160 V output with Input disconnect, cooling fan power, and Modbus RTU/Modbus TCP IP/Ethernet communication card.

Example Part Number:	M32	A	X	4	4	050	S	AA/AE	HS
Series: M32 — Regeneration									
Input Frequency: A — 60 Hz B — 50 Hz									
Type: R — for Regen module drives									
Input Voltage: 2 - 2400 3 - 3300 4 - 4160 A - 4800									
		6 - 6600 C - 6900 D - 8320 E - 12000	F - 12470 G - 13200 H - 13800 Z - OTHER						
Output Voltage: 4 — 4160									
Output Rated Capacity		10E - 1000 HP	300 - 3000 HP						
030 - 300 HP		125 - 1250 HP	350 - 3500 HP						
040 - 400 HP		150 - 1500 HP	400 - 4000 HP						
050 - 500 HP		175 - 1750 HP	450 - 4500 HP						
060 - 600 HP		200 - 2000 HP	500 - 5000 HP						
070 - 700 HP		225 - 2250 HP	550 - 5500 HP						
080 - 800 HP		250 - 2500 HP	600 - 6000 HP						
090 - 900 HP									
Duty Rating: S — Standard (115% OL rating)									
Configuration:	ID:	CP:	BYP:	ID — Input disconnect CP — Cooling fan power BYP — Isolated across-the-line starter					
AA -	X	X							
AB -	X								
AC -		X							
AD -									
AE -		X	X						
AF -	X		X						
AG -	X	X	X						
AH -			X						
Additional Function: - Options should be entered in alphabetical order. - If the smart part number is longer than two options, replace all options with a “-1.” - List all options with descriptions for ease of understanding.									

Notes:

- 1000, 2000, and 6000 HP has 110% OL rating.

Regen ASD

> 4160 VAC Output

Pricing & Dimensions



HP	FLA	Model Number	List Price	Frame	H	W	D	Shipping Weight (lbs.)
					Dimensions (in.)			
300	37	M32AR44030AA	\$383,000.00	A4R	104	96	48	11500
400	50	M32AR44040AA	\$413,000.00	A4R	104	96	48	11500
500	62	M32AR44050AA	\$420,000.00	A4R	104	96	48	11500
600	74	M32AR44060AA	\$420,000.00	A4R	104	96	48	11500
700	87	M32AR44070AA	\$424,000.00	A4R	104	96	48	11500
800	99	M32AR44080AA	\$425,000.00	A4R	104	96	48	11500
900	112	M32AR44090AA	\$452,000.00	A4R	104	96	48	11500
1000*	124	M32AR4410EAA	\$459,000.00	A4R	104	96	48	11500
1250	155	M32AR44125AA	\$506,000.00	B4R	104	176	CF	17000
1500	186	M32AR44150AA	\$576,000.00	B4R	104	176	CF	17000
1750	217	M32AR44175AA	\$579,000.00	B4R	104	176	CF	17000
2000*	248	M32AR44200AA	\$592,000.00	B4R	104	176	CF	17000
2250	279	M32AR44225AA	\$792,000.00	C4R	104	234	CF	24000
2500	310	M32AR44250AA	\$803,000.00	C4R	104	234	CF	24000
3000	372	M32AR44300AA	\$989,000.00	C4R	104	265	CF	30000
4000	496	M32AR44400AA	\$1,240,000.00	F4R	104	305	CF	44000
4500	558	M32AR44450AA	\$1,260,000.00	F4R	104	305	CF	44000
5000	620	M32AR44500AA	\$1,280,000.00	F4R	104	305	CF	44000
5500	682	M32AR44550AA	\$1,300,000.00	F4R	104	305	CF	44000
6000*	720	M32AR44600AA	\$1,330,000.00	F4R	104	305	CF	44000
6000	744	M32AR44600AA	\$1,300,000.00	F4R	104	305	CF	44000
300	37	M32AR44030AE	\$431,000.00	A4R	104	126	48	12600
400	50	M32AR44040AE	\$461,000.00	A4R	104	126	48	12600
500	62	M32AR44050AE	\$468,000.00	A4R	104	126	48	12600
600	74	M32AR44060AE	\$468,000.00	A4R	104	126	48	12600
700	87	M32AR44070AE	\$472,000.00	A4R	104	126	48	12600
800	99	M32AR44080AE	\$473,000.00	A4R	104	126	48	12600
900	112	M32AR44090AE	\$500,000.00	A4R	104	126	48	12600
1000*	124	M32AR4410EAE	\$507,000.00	A4R	104	126	48	12600
1250	155	M32AR44125AE	\$554,000.00	B4R	104	CF	CF	CF
1500	186	M32AR44150AE	\$624,000.00	B4R	104	CF	CF	CF
1750	217	M32AR44175AE	\$627,000.00	B4R	104	CF	CF	CF
2000*	248	M32AR44200AE	\$640,000.00	B4R	104	CF	CF	CF
2250	279	M32AR44225AE	\$840,000.00	C4R	104	CF	CF	CF
2500	310	M32AR44250AE	\$851,000.00	C4R	104	CF	CF	CF
3000	372	M32AR44300AE	\$1,058,000.00	C4R	104	CF	CF	CF
4000	496	M32AR44400AE	\$1,309,000.00	F4R	104	CF	CF	CF
4500	558	M32AR44450AE	\$1,329,000.00	F4R	104	CF	CF	CF
5000	620	M32AR44500AE	\$1,349,000.00	F4R	104	CF	CF	CF

Regen ASD

> 4160 VAC Output

Pricing & Dimensions



HP	FLA	Model Number	List Price	Frame	H	W	D	Shipping Weight (lbs.)
					Dimensions (in.)			
5500	682	M32AR44550AE	\$1,369,000.00	F4R	104	CF	CF	CF
6000*	720	M32AR44600AE	\$1,399,000.00	F4R	104	CF	CF	CF

- Notes:
- Consult factory for update on UL status.
 - HP rating is based on typical 4-pole motor. Always use motor FLA rating to size drives. Consult factory for pricing.
 - Bypass Starter pricing is based on fixed contactors (not rack-out type).
 - Dimensions are estimates only, please consult factory.
 - (*) Model numbers with asterisk have 110% OL rating.
 - CF = Consult Factory.

Appendices

Appendix A Pricing & Delivery

Pricing Information

- *List pricing is subject to change at any time.*
- *All dimensions and weights are approximate and subject to change without notice.*
- *Contact the appropriate department for “CF” (consult factory) items.*
- *Contact the appropriate TIC representative for multipliers, pricing on special features, or options not listed in this guide.*
- *All options may not work in conjunction with one another. Contact the appropriate department for compatibility.*
- *Unless otherwise specified, all offered ASDs are three-phase input, three-phase output, single-phase input, three-phase output are available as option.*
- *See each device’s Part Numbering Convention section for the required ordering information.*
- *Please see Toshiba’s Terms and Conditions at*
https://www.toshiba.com/tic/cms_files/TCofSale.pdf

Delivery

We offer engineered product options that can be ordered in a variety of configurations. The combination compatibility between different options can further impact delivery lead times.

Included in this price book are delivery guidelines that can be used to assist in determining the typical delivery of a standard or engineered product. Any item in stock is subject to prior sale. Please check with customer service for availability delivery schedules.

Appendix B

Warranty Information

Extended Warranty — Motor/Drive Packages

Extended warranties are available on motor-drive packages. When a purchase order is submitted for a motor-drive package to Toshiba, the drive warranty will be extended to match the motor warranty for up to three years on parts labor with the Motor-Drive Package Extended Warranty Request Form. For motor-drive packages shipped from distributor stock, the distributor must submit this request form to the ASD/Motor department. Please request extended storage procedure beyond 24 months.

Extended Warranty — Motor/Starter (PAC) Packages

Extended warranties are also available on Toshiba motor-starter packages. When a purchase order is submitted for a motor-starter package to Toshiba, the Solid State Starter warranty will be extended to match the motor warranty for up to three years on parts labor when the Motor-Starter Package Extended Warranty Request Form is included. This extended warranty includes the following PAC products: TE, TD, TX. For motor-starter packages shipped from distributor stock, the distributor must submit this request form to the Motor Control Marketing department.

Extended Warranty — Adders

Extended warranties are also available from Toshiba as adders. The extended warranty must be on the same purchase order with the covered equipment. The adders are listed below:

Two-Year Warranty		Three-Year Warranty		Four-Year Warranty		Five-Year Warranty	
Parts Only	1.5%	Parts Only	4.0%	Parts Only	7.5%	Parts Only	15.0%
Parts & Labor	3.0%	Parts & Labor	8.0%	Parts & Labor	15.0%	Parts & Labor	20.0%

Example: If total equipment cost is \$30,000 and a four-year parts labor warranty is required, multiply \$30,000 by 0.15, which equals \$4,500. Added to the original amount, the total order would equal \$34,500.

For Toshiba’s Standard Terms and Conditions of Sale, please refer to our website at https://www.toshiba.com/tic/cms_files/TCofSale.pdf for more details.

Appendix C

Drawing Requests

Drawing Requests

Approval Drawings

Please include a part number of DWG-APR to request approval drawings on any purchase order to Toshiba. For non-standard parts, a set of drawings will be provided for your approval four to six weeks after acceptance of the purchase order. Standard product drawings will be available immediately for approval. Not all products in this price book are standard.

Equipment manufacturing starts only after a written request of the approval drawings with:

- 1. Release for manufacture as submitted, or provided there is no impact on technical/commercial conditions.*
- 2. Revise and release as noted.*

Reference Drawings

Please include a part number of DWG-REF to request reference drawings on any purchase order to Toshiba. For non-standard parts, a set of drawings will be provided for your reference four to six weeks after receipt of the purchase order. Standard product drawings will be available immediately for reference. Not all products in this price book are standard.

Any changes made to reference drawings are considered a change request which are subject to change fees and may also affect product lead times.

Appendix D

Medium Voltage Drives Related Services

- Startup

Toshiba recommends a separate line item on the purchase order for services along with the drives purchase order. Startup is handled by Toshiba's Field Service Department. The typical medium voltage drive requires four days of startup service by a factory-qualified/approved startup engineer/technician. Startup requires a three-week notice and an Onsite Service Request form (available online at <https://www.toshiba.com/tic/service-warranty/service-request-forms>) to be submitted. Please consult the factory to determine the readiness requirements onsite for the service. If the service is extended beyond the pre-arranged time frame due to reasons out of Toshiba's control, additional charges may apply. For additional information, contact Field Service at 1-855-803-7092.

The following table lists the net price for the continental U.S. and Canada. All startup services performed outside these countries will be billed per the standard field service rate schedule.

Part Number	Description	List Price
MVSTARTUP1	• Single day adder for Monday through Saturday - Excludes Sundays and holidays - 7 AM to 5 PM - Living expenses included • Must be in conjunction with MVSTARTUP4 • Multiple drives, same site, same size, same application = two additional days per drive • Multiple drives, same site, different sizes, different applications = four additional days per drive	\$1,795/day
MVSTARTUP2	• Single day adder for Sundays and holidays - 7 AM to 5 PM - Living expenses included • Must be in conjunction with MVSTARTUP4	\$3,250/day
MVSTARTUP3	• Stand-by day/holidays and Sundays	\$950/\$1900
MVSTARTUP4	• Standard package up to four days onsite - Travel on Sunday and/or holidays not included - Includes travel expenses Monday through Saturday - 7 AM to 5 PM - Based on 10 hours per day • Package for one drive only	\$12,000
MVTRAINING3	• Standard training package up to three days onsite - Includes technical operational overview - Monday through Friday - 7 AM to 5 PM	Contact Service Training at: TIC-ASD-Training@toshiba.com for quote.

Notes:

- Prices are subject to change.
- Services and packages are only available in the continental U.S. and Canada.
- For Sync-Xfer, please add one additional day for each additional motor line-up.

Special Testing

Control Logic Witness Testing

- Testing conducted under shop ambient conditions.
- *Test has a minimum one week impact on shipping lead times.*

Standard Witness Testing for Low Voltage Drives

All Horsepowers	List Price
Standard Witness Testing	\$14,000

Standard Witness Testing for Medium Voltage Drives

Synch Transfer	Frames 0 & 1	Frames ≥ 2
YES	\$45,000 List	\$50,000 List
NO	\$35,000 List	\$45,000 List

Burn-In Testing (Unwitnessed)

- Burn-in Testing is performed in Toshiba's Control Plant with a reactor load. A shorted reactor at reduced voltage is used to demonstrate the current carrying capacity (Amps) of the ASD.
- Testing conducted under shop ambient conditions.
- Burn-in test capacity ≤ 900 Amps. max.

	8 Hr. Burn-In	16 Hr. Burn-In	24 Hr. Burn-In	40 Hr. Burn-In
MV-ASD Burn-In	\$7,000 List	\$10,000 List	\$13,000 List	\$22,000 List
LV-ASD Burn-In	\$3,000 List	\$5,000 List	\$7,000 List	\$13,000 List

Dynamometer Testing Prices (Witnessed or Unwitnessed)

- Testing conducted under shop ambient conditions.
- Test has a minimum one week impact on shipping lead times. Actual impact dependent upon scope of testing and shop loading at time of testing.
- Test motor will be provided by Toshiba where available. In some cases, a test motor cannot be supplied by Toshiba. In this case, customer will be expected to supply a motor to Toshiba for load.
- Motor-drive string testing is subject to additional motor testing charges.
- Maximum load capability based upon using both 950 kW and 375 kW together.

Dynamometer Test Capacities (ASD Ratings)

6,600 V @ 150 Amps. max.	690 V @ 900 Amps. max.	230 V @ 1,000 Amps. max.
4,000 V @ 250 Amps. max.	600 V @ 1,250 Amps. max.	
2,300 V @ 400 Amps. max.	480 V @ 1,750 Amps. max.	

Dynamometer Testing for Low Voltage Drives

(Motor Test Lab - Dynamometer Testing NOT TO EXCEED 8 hrs.)

Small	Medium	Large
≤ 100 HP	125 to 450 HP	≥ 500 HP
\$13,200 List	\$22,000 List	\$27,000 List

Dynamometer Testing for Medium Voltage Drives

(Motor Test Lab - Dynamometer Testing NOT TO EXCEED 8 hrs.)

Synch Transfer	Frames 0 & 1	Frames ≥ 2
YES	\$45,000 List	\$50,000 List
NO	\$35,000 List	\$45,000 List

Medium Voltage Drives

Related Services

> Statement of Conformance

STATEMENT OF CONFORMANCE IEEE-519, 2014

Toshiba guarantees that the T300MVi/2® and MTX/2® medium voltage adjustable speed drive product lines will meet or exceed IEEE-519 per table 1 and 2 standards as advertised at the input to the drive to reduce harmonic distortion associated with AC adjustable frequency drives and other nonlinear loads that employ the use of three-phase, six-pulse diode bridge rectifiers. During testing, the technologically advanced designs of the T300MVi/2® and MTX/2 have been proven to:

- Reduce voltage harmonic distortion, as measured at the input terminals, to less than 5% at full load operation per table 1. The daily and weekly percentiles (95th & 99th percentiles) in table 1 are met.
- Reduce current harmonic distortion, as measured at the input terminals, to less than 5% at full load operation per table 2 and table 5. The daily and weekly percentiles (95th & 99th percentiles) in table 2 are met.
- Not become overloaded by upstream harmonic sources.
- Not resonate with other power system components due to its specially designed input topology.
- Present no compatibility problems with engine generator sets.

Medium Voltage Drives

Related Services

➤ Medium Voltage Worksheet

MEDIUM VOLTAGE WORKSHEET

Specification for Procurement 2400/3300/4160/6600 VAC Adjustable Speed Drive

PROJECT REFERENCE:		R.F.Q. REFERENCE	
SPEC. REFERENCE		DATE	

MOTOR DATA

HP/kW	
New/Existing	
Voltage (Volts)	
FLA (Amps)	
Speed (RPM)	
Motor Lead Length (Ft)	
Service Factor	
Space Heater (Volts/Watts)	
RTD (Make/Qty)	
Inverter-Duty	☐ Yes ☐ No
Encoder	
Cable Distance From Motor to ASD	

LOAD TYPE

Variable Torque	☐
Constant Torque	☐
Regeneration	☐
Fan/Pump	
Other	
Speed Range	Hz to Hz

BREAKAWAY TORQUE

0 to 100%	☐
101 to 150%	☐

Medium Voltage Drives

Related Services

> Medium Voltage Worksheet

ENVIRONMENT

Control Room Max Ambient	°C	
Control Room Min Ambient	°C	
Elevation	Meters ASL	
Humidity Non-condensing	%	
Drive Cabinet Space Heater	☐ Yes	☐ No
Space Heater Test Circuit	☐ Yes	☐ No
Motor Space Heater Circuit (Externally Powered)	☐ Yes	☐ No

DESIGN STANDARDS

ENCLOSURE

UL	☐		NEMA 1	
cUL	☐		NEMA 3R	
IEEE 519	☐		Electrical House	☐
Other				

SPEED REGULATION

0.5%, Without Tachometer	☐
0.1% With Tachometer	☐
Other	
Motoring	☐
Volts/Hz Speed Control	☐
Closed Loop Vector Control	☐
Master Follower	
Speed Regulation without Encoder/ Resolver	
Speed Regulation with Encoder/Resolver	

SUPPLY SYSTEM VOLTAGE (± 10%)

2400 V			
3300 V			
4160 V	☐		
6600 V	☐		
Other_____V	☐		
Line Frequency	☐ 60 Hz	☐ 50 Hz	

Medium Voltage Drives

Related Services

➤ Medium Voltage Worksheet

CABLE

Power Cable Entry	☐ TOP	☐ BOTTOM
Power Cable Exit	☐ TOP	☐ BOTTOM
Control Cable Entry	☐ TOP	☐ BOTTOM
Control Cable Exit	☐ TOP	☐ BOTTOM

OPTIONS

Kirk Key Interlocks	☐		
Relay Outputs 115 V, 2 A, Form-C	☐		
24 VDC Power Supply	☐		
4 to 20 mA Isolated Analog Outputs	☐ Speed	☐ Current	☐ Voltage
	☐ Load	☐ Other	
Control Power Backup 1 KVA, 120 V, TIC UPS	☐		
Auxiliary Pilot Lights	☐		
Auxiliary Pilot Lights Type	☐		
Auxiliary Push Buttons	☐		
Auxiliary Push Buttons Type	☐		
Redundant Fan (3,460 V)	☐		
Additional Controls (please attach control schematic)	☐		
	☐		

AUXILIARY EQUIPMENT

Bypass Starter	
Across The Line	☐
RVAT	☐
Solid State Starter	☐
Synchronous Transfer	
Number of Motors	
Indoor Rated Sync.Transfer (GEAR)	
Outdoor Rated Sync.Transfer (GEAR)	
Gear Supplied by Others	

COMMUNICATION OPTIONS

TOSLINE S20	☐
DeviceNET	☐
ProfiBus	☐
Ethernet	☐
ModBus RTU/PLUS	☐
Other	

MOTOR PROTECTION

TE-RTD12	☐

Medium Voltage Drives

Related Services

> Medium Voltage Worksheet

MULTILIN 369	☐
MULTILIN 469	☐
MULTILIN 869	
RTD TYPE	

SERVICES

Startup <i>(Included in Price of Unit)</i>	☐
Onsite Factory Training Testing	☐
Factory Training Houston	☐

SPARES

Spare Parts Kit	☐ Yes	☐ No
Spare Power Module	☐ Yes	☐ No

SOFTWARE

PC Interface Software	☐ Yes	☐ No

TESTING

Witness Test – QC Runback	☐
Witness Test – Dynamometer <i>(Upto 1250 HP)</i>	☐
Drive/Motor Combined Test at Motor Vendor's Facility	☐

ADDITIONAL REQUIREMENTS

Cable Distance From Drive to Motor	

Power Apparatus & Components

Medium Voltage Controllers

JK Series Starters

Toshiba's medium voltage JK Series motor controller is manufactured under ISO 9001 standards in the same Houston, Texas facility as motors and drives. The components of this series are arranged to produce a streamlined space-saving unit, using no internal power cables in the full-voltage type starters for ease of maintenance and enhanced safety features. These state-of-the-art medium voltage controllers are available in full-voltage or reduced-voltage models for the control of induction, wound rotor or synchronous motors, transformers, and capacitors.

Highlights

- JK400 & JK700 Series
- Reduced Footprint
- Rigid 11-Gauge Steel Frame
- Visible, Bolted Pressure, Isolation Switch
 - Less Resistance
 - Less Wear
 - No Insertion Pressure
 - Mechanical Interlocking System
- Reduced Voltage Auto-Transformer (RVAT) Controllers
 - Three Vacuum Contactors
 - Three Winding Copper-Wound Auto-Transformer with 50, 65, & 80% Voltage Taps
 - Adjustable Solid State Transition Timer & Incomplete Sequence Timer

Standard Features

- UL-Listed in US & Canada
- Meet NEMA Class E2 Requirements
- Front-Accessible Main Bus
- Current Transformers
- Mechanical & Electrical Interlocks
- Single-Phase Ammeter
- Power-Control Transformer with Primary/Secondary Fuses
- Solid State Protection Relay (Overload & Single Phase)
- Start/Stop Push Buttons
- Run/Off Pilot Lights



Medium Voltage Controllers

> JK400 Series Starters

Product Scope

2300 to 6600 V
360 A Maximum
Up to 5000 HP

Standard Features

- 30 Inch Wide Footprint*
- Two-High Design Option
- Available Configurations:
 - Full-Voltage
 - Non-Reversing
 - Reversing

* Dimensions are based on NEMA Type 1, 12 enclosure ratings. For NEMA Type 3R, add 6" to width.



JK400 Series Starters Current Rating

Enclosure Type	Maximum Continuous Amps 46" & 60" One-High Controller		Maximum Continuous Amps 90" One-High Controller or Lower Controller in a Two-High Stacked Arrangement		Maximum Continuous Amps Upper Controller in a Two-High Stacked Arrangement
	Fixed Type	Drawout Type	Fixed Type	Drawout Type	Fixed & Drawout Type
Type 1 Ventilated	360 A	360 A	360 A	360 A	320 A
Type 1 Non-Ventilated	320 A	320 A	320 A	360 A	280 A
Type 12 & 3R	310 A	310 A	310 A	310 A	280 A

Notes:

- Actual limits based on your specific application parameters. All specifications subject to change without notice.

JK400 Series Short Circuit Withstand Capability

Interrupting Capacity (Symmetrical Amps)	Interrupting Capacity (Symmetrical MVA)	Short Time Capability 30 Seconds (Amps)	Short Time Capability 1 Second (Amps)	Dielectric Withst 1 Minute (KVAC)	Impulse Voltage Withst (KV)
50,000 @ 2.3 to 6.6 KV	200 @ 2.3 KV 350 @ 4.0 KV 400 @ 4.6 KV 570 @ 6.6 KV	2400 A	6000 A	18.2	60 KV

JK400 Series Application Table

Enclosed Max. Continuous Current (Amps)	Maximum Horsepower at Utilization Voltage								
	2300 V			4200 V			6600 V		
	Synchronous Motors		Induction Motors	Synchronous Motors		Induction Motors	Synchronous Motors		Induction Motors
	0.8 PF	1.0 PF		0.8 PF	1.0 PF		0.8 PF	1.0 PF	
360	1500	1750	1500	2500	3000	2500	4000	5000	4000
320	1250	1500	1250	2250	2500	2250	3500	4500	3500
310	1250	1500	1250	2000	2500	2000	3500	4000	3500
280	1000	1250	1000	1750	2250	1750	3000	3500	3000

Notes:

- For transformer and capacitor load-switching applications, consult factory.
- Maximum rating depends on enclosure rating.

Medium Voltage Controllers

> JK700 Series Starters

Product Scope

2300 to 6600 V
720 A Maximum
Up to 6000 HP

Standard Features

- 36 Inch Wide Footprint*
- One-High Enclosure Design
- Available Configuration:
 - Full-Voltage
 - Non-Reversing
 - Reversing

* Dimensions are based on NEMA Type 1, 12 enclosure ratings. For NEMA Type 3R, add 6" to width.

JK700 Series Starters Current Rating

Enclosure Type	Max. Continuous Amps
Type 1 Ventilated	720 A
Type 1 Non-Ventilated	650 A
Type 12 & 3R	600 A

Notes:

- Actual limits are based on your specific application parameters. All specifications subject to change without notice.

JK700 Series Short Circuit Withstand Capability

Interrupting Capacity (Symmetrical Amps)	Interrupting Capacity (Symmetrical MVA)	Short Time Capability 30 Seconds (Amps)	Short Time Capability 1 Second (Amps)	Dielectric Withst 1 Minute (KVAC)	Impulse Voltage Withst (KV)
50,000 @ 2.3 to 6.6 KV	200 @ 2.3 KV 350 @ 4.0 KV 400 @ 4.6 KV 570 @ 4.6 KV	4320 A	8000 A	AC 13.25 DC 19	60 KV

JK700 Series Application Table

Enclosed Max. Continuous Current (Amps)	Maximum Horsepower at Utilization Voltage					
	2300 V			4200 V		
	Synchronous Motors		Induction Motors	Synchronous Motors		Induction Motors
	0.8 PF	1.0 PF		0.8 PF	1.0 PF	
720	3000	3500	3000	5500	6000	5500
650	2750	3000	2750	5000	5500	5000
600	2500	2750	2500	4500	5000	4500

Notes:

- Maximum rating depends on enclosure rating.
- Consult factory for 6600 V ratings.



T300MV2

MTX2

MTX

BMV2

Regen

MV
Controllers

Vacuum
Contactors

LV SSS

Vacuum
Breakers

Industrial
Automation

Medium Voltage Controllers

> JK400 JK700 Series Pricing



JK Full Voltage Non-Reversing (NEMA 1) Controller Pricing

Nominal System Voltage	HP	Contactor Type	Model Number	H	W	D	List Price
				Dimensions (in.)			
2300	75 to 800	400 A Fixed	FK400B2_	46	30	36	\$33,000
	900 to 1500	400 A Fixed	FK400B2_	46	30	36	\$33,000
	75 to 800	400 A Drawout	JK400B2_	46	30	36	\$36,000
	900 to 1500	400 A Drawout	JK400B2_	46	30	36	\$36,000
	1750 to 2250	720 A Fixed	JK700B2_	90	36	36	\$48,000
	2500	720 A Fixed	JK700B2_	90	36	36	\$53,000
4160	200 to 1500	400 A Fixed	FK400B4_	46	30	36	\$33,000
	1750 to 3000	400 A Fixed	FK400B4_	46	30	36	\$33,000
	200 to 1500	400 A Drawout	JK400B4_	46	30	36	\$36,000
	1750 to 3000	400 A Drawout	JK400B4_	46	30	36	\$36,000
	3000 to 4000	720 A Fixed	JK700B4_	90	36	36	\$48,000
	4500 to 5000	720 A Fixed	JK700B4_	90	36	36	\$53,000
6600	200 to 700	400 A Fixed	FK400BB_	46	30	36	\$36,000
	750 to 2250	400 A Fixed	FK400BB_	46	30	36	\$36,000
	2500 to 4500	400 A Fixed	FK400BB_	46	30	36	\$38,000
	200 to 700	400 A Drawout	JK400BB_	46	30	36	\$39,000
	75 to 2250	400 A Drawout	JK400BB_	46	30	36	\$42,000
	2500 to 4500	400 A Drawout	JK400BB_	46	30	36	\$47,000
	5000 to 9000	720 A Fixed	JK700BB_	90	36	36	CF

- Notes:
- For other system voltages (i.e. 3300 V), consult factory.
 - HP rating is based on a typical 4-pole motor. Always use motor FLA rating. Refer to application tables (i.e. ampere rating in the appropriate enclosure rating) to size starters.
 - 46-inch tall one-high units can be supplied as a 60" tall enclosure with a larger low voltage compartment. Consult factory for price adder.

Medium Voltage Controllers

> JK400 JK700 Series Pricing



JK Reduced Voltage Autotransformer Type (NEMA 1) Controller Pricing

Nominal System Voltage	HP	Contactor Type	Model Number	H	W	D	List Price
				Dimensions (in.)			
2300	100 to 350	400 A Drawout	JK420B2_	90	36	36	\$50,000
	400	400 A Drawout	JK420B2040	90	36	36	\$50,000
	500	400 A Drawout	JK420B2050	90	36	36	\$52,000
	600	400 A Drawout	JK420B2060	90	36	36	\$52,000
	700	400 A Drawout	JK420B2070	90	36	36	\$60,000
	800	400 A Drawout	JK420B2080	90	36	36	\$60,000
	900	400 A Drawout	JK420B2090	90	36	36	\$66,000
	1000	400 A Drawout	JK420B2100	90	36	36	\$66,000
	1250	400 A Drawout	JK420B2125	90	36	36	\$72,000
	1500	400 A Drawout	JK420B2150	90	42	36	\$72,000
	1750 to 2250	720 A Fixed	JK720B2_	90	72	36	\$150,000
	2500	720 A Fixed	JK720B250	90	84	36	\$180,100
4160	200	400 A Drawout	JK420B4020	90	36	36	\$50,000
	300 to 400	400 A Drawout	JK420B4_	90	36	36	\$50,000
	500	400 A Drawout	JK420B4050	90	36	36	\$50,000
	600 to 700	400 A Drawout	JK420B4_	90	36	36	\$56,000
	800 to 900	400 A Drawout	JK420B4_	90	36	36	\$56,000
	1000	400 A Drawout	JK420B4100	90	36	36	\$60,000
	1250	400 A Drawout	JK420B4125	90	36	36	\$60,000
	1500	400 A Drawout	JK420B4150	90	42	36	\$66,000
	2000	400 A Drawout	JK420B4200	90	42	36	\$66,000
	2250	400 A Drawout	JK420B4225	90	42	36	\$72,000
	2500	400 A Drawout	JK420B4250	90	42	36	\$72,000
	3000*	400 A Drawout	JK420B4300	90	42	36	\$72,000
	3500 to 4000	720 A Fixed	JK720BB_	90	72	36	\$150,000
	4500	720 A Fixed	JK720BB450	90	72	36	\$155,400
	5000 to 5500	720 A Fixed	JK720BB_	90	84	36	\$180,100

Notes:

- For other system voltages (i.e. 3300 V), consult factory.
- * HP rating is based on a typical 4-pole motor. Always use motor FLA rating. Refer to application tables (i.e. ampere rating in the appropriate enclosure rating) to size starters.

Medium Voltage Controllers

JK Solid State Starters Series

Toshiba's JKSSS medium voltage motor starter series is designed to softly start and stop AC motors in any fixed speed application regardless of power condition, load condition, and the extremity of its environment. Rated at 500% for 60 seconds, the JKSSS motor starter series is one of the highest rated power devices in current-carrying capacity. The JKSSS line provides maximum protection with "true thermal modeling," while allowing smooth, stepless control of acceleration and deceleration.

Highlights

- JKSSS4 & JKSSS7 Series
- Soft Start
- Reduced Footprint
- Rigid 11-Gauge Steel Frame
- Programmable Via Keypad or Computer
- Fiber Optically Isolated Low Voltage Compartment
- Built-In 120 V Control Power Transformer; Voltage & Current Metering
- Fully-Rated Bypass Contactor for Increased Thermal Capacity & Optional Across-the-Line Start
- Line Isolation Vacuum Contactor
- Heavy Duty SCR Stack Assemblies with Ring Transformer Isolation
- Visible Grounding Bar
- Coordinated Motor Fuses with Blown Fuse Indicators
- Ground Fault Protection

Standard Features

- JKSSS4 UL-Listed in US & Canada
- NEMA Type 1 Enclosure
- Meet NEMA Class E2 Requirements
- Front-Accessible Main Bus
- Top or Bottom Entry & Exit
- Removable Entry Plates for Easy Connection
- RTD Input for Precision Thermal Management
- OLED Display with Programmable Key Pad
- Built-In Real-Time Clock
- Current Transformers
- Non-Load-Break Disconnect Switch with Door Safety Interlocking
- Single- & Three-Phase Overload Protection
- LED Trip Indicator
- Manual or Remote Reset (Auto-Reset Optional)



Medium Voltage Controllers

> JKSSS4 Solid State Starters

Product Scope

2300 to 6600 V
360 A Maximum
Up to 5000 HP



JKSSS4 Series Current Ratings

Enclosure Type	Max. Continuous Amps 90" One-High Controller
Type 1 Ventilated	360 A
Type 12 & 3R	300 A

Notes:

- Actual limits based on your specific application. All specifications subject to change without notice.

JKSSS4 Series Short Circuit Withstand Capability

Interrupting Capacity (Symmetrical Amps)	Interrupting Capacity (Symmetrical MVA)	Short Time Capability 30 Seconds (Amps)	Short Time Capability 1 Second (Amps)	Dielectric Withst 1 Minute (KVAC)	Impulse Voltage Withst (KV)
50,000 @ 2.3 to 6.6 KV	200 @ 2.3 KV 350 @ 4.0 KV 570 @ 6.6 KV	2400 A	6000 A	18.2	60 KV

JKSSS4 Series Application Table

Enclosed Max. Continuous Current (Amps)	Maximum Horsepower at Utilization Voltage								
	2300 V			4200 V			6600 V		
	Synchronous Motors		Induction Motors	Synchronous Motors		Induction Motors	Synchronous Motors		Induction Motors
	0.8 PF	1.0 PF		0.8 PF	1.0 PF		0.8 PF	1.0 PF	
360	1500	1750	1500	2500	3000	2500	4000	5000	4000
300	1000	1250	1000	1750	2250	1750	3500	4000	3500

Notes:

- Line reactors and MOVs are not required with Toshiba solid state starters.
- The starter is not affected by line capacitance, power source rating (MVA), multiple starters on the supply bus, or cable length.
- Maximum rating depends on enclosure rating and motor FLA.

Medium Voltage Controllers

> JKSSS7 Solid State Starters

Product Scope

2300 to 4200 V
720 A Maximum
Up to 6000 HP



JKSSS7 Series Current Ratings

Enclosure Type	Max. Continuous Amps 90" One-High Controller
Type 1 Ventilated	720 A
Type 1 Non-Ventilated	650 A
Type 12 & 3R	600 A

Notes:

- All specifications subject to change without notice.
- Actual limits based on your specific application.

JKSSS7 Series Short Circuit Withstand Capability

Interrupting Capacity (Symmetrical Amps)	Interrupting Capacity (Symmetrical MVA)	Short Time Capability 30 Seconds (Amps)	Short Time Capability 1 Second (Amps)	Dielectric Withst 1 Minute (KV)	Impulse Voltage Withst (KV)
50,000 @ 2.3 to 4.2 KV	200 @ 2.3 KV 350 @ 4.0 KV	4320 A	8000 A	AC 13.25 DC 19	60 KV

JKSSS7 Series Application Table

Enclosed Max. Continuous Current (Amps)	Maximum Horsepower at Utilization Voltage					
	2300 V			4200 V		
	Synchronous Motors		Induction Motors	Synchronous Motors		Induction Motors
	0.8 PF	1.0 PF		0.8 PF	1.0 PF	
720	3000	3500	3000	5500	6000	5500
650	2750	3000	2750	5000	5500	5000
600	2500	2750	2500	4500	5000	4500

Notes:

- Line reactors and MOVs are not required with Toshiba solid state starters.
- The starter is not affected by line capacitance, power source rating (MVA), multiple starters on the supply bus, or motor cable length.
- Maximum rating depends on enclosure rating.

Medium Voltage Controllers

> JK Solid State Starter Series Pricing



JK Reduced Voltage Solid State Starter (NEMA 1) Pricing

Nominal System Voltage	HP	Contactor Type	Model Number	H	W	D	List Price
				Dimensions (in.)			
2300	100 to 250	400 A Fixed	JKSSS4-B2_	90	30	36	\$63,600
	300 to 350	400 A Fixed	JKSSS4-B2_	90	30	36	\$63,600
	400 to 500	400 A Fixed	JKSSS4-B2_	90	30	36	\$63,600
	600 to 800	400 A Fixed	JKSSS4-B2_	90	30	36	\$63,600
	900	400 A Fixed	JKSSS4-B2090	90	30	36	\$66,600
	1000	400 A Fixed	JKSSS4-B2100	90	30	36	\$66,600
	1250	400 A Fixed	JKSSS4-B2125	90	30	36	\$66,900
	1500	400 A Fixed	JKSSS4-B2150	90	30	36	\$73,900
	1750	720 A Fixed	JKSSS7-B2175	90	72	36	\$99,700
	2000 to 2250	720 A Fixed	JKSSS7-B2_	90	72	36	\$117,700
4160	200 to 400	400 A Fixed	JKSSS4-B4_	90	30	36	\$63,600
	500 to 700	400 A Fixed	JKSSS4-B4_	90	30	36	\$63,600
	800 to 1000	400 A Fixed	JKSSS4-B4_	90	30	36	\$63,600
	1250	400 A Fixed	JKSSS4-B4125	90	30	36	\$63,600
	1500	400 A Fixed	JKSSS4-B4150	90	30	36	\$63,600
	1750 to 2000	400 A Fixed	JKSSS4-B4_	90	30	36	\$66,400
	2250 to 2500	400 A Fixed	JKSSS4-B4_	90	30	36	\$66,400
	3000	400 A Fixed	JKSSS4-B4300	90	30	36	\$70,500
	3500	720 A Fixed	JKSSS7-B4350	90	72	36	\$128,000
	4000 to 4500	720 A Fixed	JKSSS7-B4_	90	72	36	\$136,600
	5000 to 5500	720 A Fixed	JKSSS7-B4_	90	72	36	\$158,200
	6000	720 A Fixed	JKSSS7-B4600	90	72	36	\$161,600

Notes:

- For other system voltages (i.e. 3300 V), contact the factory.
- HP rating is based on a typical 4-pole motor. Always use motor FLA rating. Refer to application tables (i.e. ampere rating in the appropriate enclosure rating) to size starters.
- For Type 1 enclosure only. If Type 12 or 3R, use 3500 HP price (720 A). Confirm motor FLA with factory.
- For 6600 V starters, consult factory.

Medium Voltage Controllers

> JK Series Part Numbering Convention



The JK series combines a fixed isolation switch with either a drawout or fixed contactor/main fuse assembly.

Available Options

- **JK** – Withdrawable 400 A or Fixed 720 A Contactor/ Main Power Fuse Assembly
- **FK** – Fixed Type 400 A Contactor Power Fuses
- **JKSSS** – Reduced Voltage Solid-State Type with Fixed 400 A or 720 A Isolation Contactor
- **JKSSD** – Reduced Voltage Solid-State Type with Drawout 400 A Isolation Contactor

Available Controller Types

- **FVNR** – Full Voltage Non-Reversing Type
- **FDR** – Transformer Feeder (As Standard Uses Latched-Type Contactor)
- **FVR** – Full-Voltage Reversing Type
- **RVAT** – Reduced-Voltage Autotransformer Type
- **SSS** – Reduced-Voltage Solid-State Type

Consult factory for other controller types that are available (i.e. reversing SSS, synchronous RVAT).

Ordering Information: Use the following part numbering convention to configure the JK Starter when placing your order. For transformer feeder application, select “ZZZ” under Motor Rating; specify transformer KVA separately.

Example Part Number:	JK/FK/JKSSS	4	00	B	4	025	SH
Series							
Contactor Rating: 4 — 400 A 7 — 720 A							
Controller Type: 00 — FVNR 01 — FDR 10 — FVR 20 — RVAT N/A — SSS							
Enclosure Rating: B — 1 (indoor) K — 12 (indoor) E — 3R (outdoor) A — 1 Gasketed (indoor) Z — OTHER							
Line Voltage: 2 — 2400 3 — 3300 4 — 4160	A — 4800 B — 6600 Z — OTHER						
Motor Rating: 010 — 100 HP 012 — 125 HP 015 — 150 HP 020 — 200 HP 025 — 250 HP 030 — 300 HP 035 — 350 HP 040 — 400 HP	045 — 450 HP 050 — 500 HP 060 — 600 HP 070 — 700 HP 080 — 800 HP 090 — 900 HP 100 — 1000 HP 125 — 1250 HP	150 — 1500 HP 175 — 1750 HP 200 — 2000 HP 225 — 2250 HP 250 — 2500 HP 300 — 3000 HP 350 — 3500 HP 400 — 4000 HP	450 — 4500 HP 500 — 5000 HP 550 — 5500 HP 600 — 6000 HP ZZZ — OTHER				
Additional Functions: • See options section. • Options should be entered in alphabetical order. • If the smart part number is longer than two options, replace all options with a “-1.” • List all options with descriptions for all equipment.							

Medium Voltage Controllers

> JK Series Factory-Installed Modifications



Medium Voltage Starter Options

Pilot Devices

Part Number	Description	Price
B1	Push-buttons: Start/Stop standard on FVNR and RVAT, opt. on JKSSS	\$400
BE	Push-button: Emergency Stop, mushroom head (red)	\$250
BR	Push-button: "Reset" overload relay	\$200
BX	Push-button: Specify function	CF
PB	Pilot light: Bypass Mode indication (white) for JKSSS	\$300
PF	Pilot light: Fault indication (amber); protection relay trip indication	\$300
PG	Pilot light: Stop indication (green); standard on FVNR and RVAT	\$300
PP	Pilot light: Power On indication (white)	\$300
PR	Pilot light: Run indication (red); standard on FVNR and RVAT	\$300
PX	Pilot light: Miscellaneous; specify function	CF
SO	Selector switch: Off/On	\$300
SH	Selector switch: Hand/Off/Auto	\$300
SL	Selector switch: Local/Remote	\$300
SX2	Selector switch: Two-position/specify function	CF
SX3	Selector switch: Three-position/specify function	CF

Notes:

- When selecting push-button or pilot light, add color code.
- Full-voltage and RVAT-type controllers come with standard pilot lights (see individual controller description). These options are for additional lights on these controllers.

Protective Relays

Part Number	Description	Price
-	Solid-state protection relay (overload/phase failure) - Standard with drawout contactor IEEE device no. 46/51. For JKSSS, see "Emergency Full Voltage Starting" option	STD
MG	Solid state protection relay option: zero-sequence ground fault IEEE device no. 50G	\$1,000
M3	Multilin 369, 12-channel RTD monitor & OL, includes CTs & Ground CT	\$22,000
M4	Multilin 869, 12-channel RTD monitor & OL, Includes CTs & Ground CT	\$24,000
MX	Multi-function motor protection relay	CF
MZ	Ground Fault: zero-sequence ground fault, for JKSSS only IEEE device no. 50G	\$2,100
RT	RTD monitor/relay, door-mounted, 12 RTD Inputs, Pt100, Ni100, Ni120, Cu10, IEEE device no. 49. JKSSS Includes 12 RTD Inputs standard	\$2,800
V1	Undervoltage relay (standard on JKSSS) IEEE device no. 27	\$400
V2	Overvoltage relay (standard on JKSSS) IEEE device no. 59	\$400
V3	Under, overvoltage relay (standard on JKSSS) IEEE device no. 27/59	\$800
-	Incomplete sequence protection standard on applicable controllers IEEE device no. 48	STD

Medium Voltage Controllers

> JK Series Factory-Installed Modifications



Control Relays

Part Number	Description	Price
R22	4-pole: contact arrangement 2NO, 2NC	\$360
R40	4-pole: contact arrangement 4NO	\$360
R44	8-pole: contact arrangement 4NO, 4NC	\$600
R62	8-pole: contact arrangement 6NO, 2NC	\$600
R80	8-pole: contact arrangement 8NO	\$600
TX	Timing relay, solid state (specify time-range and function)	\$500

Miscellaneous

Part Number	Description	Price
HS	Cubicle space heater (standard on type 3R enclosures)	\$400
HT	Thermostat (for cubicle space heater)	\$400
D8	Lighting arrester - three-phase, station class (15" inc. sec. may be required)	\$3,600
D9	Surge capacitor (three-phase)	CF
T4	Add 2nd PT/CPT, 100/300 to 500 VA (standard on SSS)	\$1,000
T8	Additional CPT capacity (VA)	CF
-	Device markers	STD
KK	Key interlock	\$1,400
L1	Latched contactor (specify close trip voltages) includes AC/DC rectifier	\$1,500
L2	Capacitor trip device (for use on latched-type contactors)	\$850
L3	Blown-fuse trip mechanism (UL not available if required) 400 series only	\$1,200

Notes:

- Option T4 is not used if option MY (below) is selected.

Metering

Part Number	Description	Price
MA	Ammeter, AC, single-phase monitoring (standard on full voltage and RVAT)	\$400
MT	Ammeter switch (three-phase monitoring)	\$500
MV	Voltmeter (AC single-phase monitoring)	\$1,000
MY	Voltmeter (AC Single three-phase monitoring, includes: meter, three-phase switch, additional PT)	\$2,400
ME	Elapsed time meter	\$400
W3	Current transducer (4-20mA output)	\$2,000

Notes:

- JKSSS includes many metering features. See JKSSS section for further details.

Medium Voltage Controllers

> JK Series Factory-Installed Modifications



Enclosure

Part Number	Description	Price
-	Type-1 general purpose (indoor)	STD
K	Type-12 dust-tight (indoor), one-high (46"-60" H) controller	\$600
	Type-12 dust-tight (indoor), all 90" H cubicles (two-high controller, RVAT, SSS)	\$1,200
KD	Drip shield (for Type 1 or 12 enclosure)	\$600
E	Type-3R rainproof, sleet-resistant (outdoor), one-high (46"-60" H) controller	\$5,800
	Type-3R rainproof, sleet-resistant (outdoor), all 90" H cubicles (two-high controller, RVAT, SSS)	\$8,000
-	Incoming section	CF

Special Options For Solid State Starters

Part Number	Description	Price
F3	Emergency Full Voltage Starting Includes: SSS/Bypass Selector Switch Current Transformers Solid State Overload	\$1,700
MZ	Ground Fault: zero sequence, includes GF board sensor (ZCT), IEEE device no. 50G	\$2,100
D4	Input Isolation contactor/power fuses change from fixed to drawout	\$3,300
-	Contactor for power correction capacitor switching	CF

Communications Option Code	Modification Description	List Price
XVS1	Provides Modbus RTU over Ethernet (Modbus TCP) & Internet (TCP/IP) over Ethernet	\$2,500
XVS2	Provides Modbus RTU over Ethernet (Modbus TCP)	\$2,200
CO	Provides CANopen Communications	\$4,500
DN	Provides DeviceNet™ Communications	\$4,500
EI	Provides EtherNet/IP Communications	\$5,300
PB	Provides PROFIBUS Communications	\$2,500
PN	Provides PROFINET Communications	\$4,500

Notes:

- Option E includes cubicle space heater. If thermostat is required, add Option HT.

Medium Voltage Controllers

> JK Series Accessories



Push-button/Pilot Light Color Codes

Color Pb Caps	Color PI Lens	Color Code
Green	Green	G
Black	-	Bw
Red	Red	R
White	White	W
Yellow	Yellow	Y
Blue	Blue	B

JK Series Accessories

Catalog Number	Item	Description	List Price
LCV5010H20G01	JK Yoke	Carriage lifting attachment	\$300
SSS TOOL	Software	For JKSSS series	\$650

Notes:

- JK lifting yoke is recommended for two-high FVNR & RVAT-type controllers with 400A Withdrawable Contactors.
- Software for programming, commissioning and monitoring includes CD and USB to RS485 converter.

T300MV2

MTX2

MTX

BMV2

Regen

MV
Controllers

Vacuum
Contactors

LV SSS

Vacuum
Breakers

Industrial
Automation

Vacuum Contactors

Medium Voltage JK OEM Power Cells

Toshiba's JK OEM power cells are UL listed. This compact, front-accessible design can be used in either motor or distribution applications (2300 to 6600 V, 7200 V maximum).

OEM power cells are designed to replace existing air contactors or old vacuum contactor applications when used for motors or small distribution feeders. This kit provides you with state-of-the-art Toshiba vacuum technology, a patented bolt-pressure isolation switch.

Customers can use their existing standard cubicles, wiring methods, and components with these power cells, allowing for valuable real-estate and labor dollars to be saved.

Standard Features

- Toshiba Medium Voltage Vacuum Contactor, 400 A
- Draw-out or Fixed-Type
- Patented, Bolted Pressure-Isolation Switch
- Less than 24" Wide, 29.3" High, Less than 33" Deep
- Available with or without Main Power Fuse-Clips (Single or Double-Barrel)
- Front-Accessible
- Electrically Held or Latched-Type Versions

Visible, Bolted Pressure, Isolation Switch Features

- Less Resistance
- No Insertion Pressure
- Less Wear
- Mechanical Interlocking System

JK OEM Cell Application Table

System Voltage	0.8 PF Ind./Syn. Motor	1 PF Syn. Motor	Three-Phase Transformer	Three-Phase Capacitor
2.2 to 2.5 KV	1750 HP	2000 HP	1500 KVA	1500 KVAR
3 to 3.3 KV	2250 HP	2500 HP	2000 KVA	2000 KVAR
4 to 5 KV	3000 HP	3500 HP	3000 KVA	2000 KVAR
6 to 6.6 KV	4500 HP	5000 HP	4000 KVA	2000 KVAR

Notes:

- The above table is based on general-load data standard application.
- Lower limitations may apply on specific applications (i.e. applications above 1000 masl).



Vacuum Contactors

> JK OEM Power Cell Pricing



Model Number	Description	Application	List Price
GCV5084L03G00	Fixed-type without fuse clips (with bus)	Used when upstream protection is provided	\$9,000
GCV5084L03G01	Fixed-type with single-barrel fuse clips	Motor HP rating up to 1500 HP	\$8,640
GCV5084L03G02	Fixed-type with double-barrel fuse clips	Motor HP rating up to 3000 HP	\$9,000
GCV5084L03G03	Fixed-type for CPT/PT/CB	Includes bolted pressure - isolation switch for disconnecting CPT/PTs, provision to fix-mount 1 or 2 CPT/PTs with mounting provision for secondary low voltage circuit breaker	\$6,240
GCV5084L03G04	Fixed-type for CPT/PT/LS	Includes bolted-pressure isolation switch for disconnecting CPT/PTs, provision to fix-mount 1 or 2 CPT/PTs with limit switch	\$6,240
GCV5084L04G00	Drawout-type without fuse clips	Used when upstream protection is provided	\$11,880
GCV5084L04G01	Drawout-type with single-barrel fuse clips	Motor HP rating up to 1500 HP	\$11,520
GCV5084L04G02	Drawout-type with double-barrel fuse clips	Motor HP rating up to 3000 HP	\$11,880
GCV5084L05G00	Fixed-latched-type without fuse clips	Used when upstream protection is provided	\$10,200
GCV5084L05G01	Fixed-latched-type with single-barrel fuse clips	For distribution loads (400 A maximum), transformer, or capacitor switching	\$9,840
GCV5084L05G02	Fixed-latched-type with double-barrel fuse clips	For distribution loads (400 A maximum), transformer, or capacitor switching	\$10,200
GCV5084L06G00	Drawout-latched-type without fuse clips	Used when upstream protection is provided	\$13,080
GCV5084L06G01	Drawout-latched-type with single-barrel fuse clips	For distribution loads (400 A Maximum), transformer, or capacitor switching	\$12,720
GCV5084L06G02	Drawout-latched-type with double-barrel fuse clips	For distribution loads (400 A maximum), transformer, or capacitor switching	\$13,080

Factory Modifications

Option	Modification Description	List Price
K1	Provision for addition of key interlock switch (to lock disconnect in closed position)	\$300
K2	Provision for addition of key interlock switch (to lock disconnect in open position)	\$300

Notes:

- Add modification option code to end of OEM kit part number (e.g. GCV5084L03G00K1).
- Key switch is not included. Use Superior catalog no. S105821Y (Type B-4003-1).

Vacuum Contactors

Low & Medium Voltage Vacuum Contactors

Toshiba is a leading manufacturer of vacuum contactors with over 40 years experience developing the latest technologies available in the market. Our vacuum contactors use an electronics-controlled circuit with a compact design to ensure reliability, ease-of-use, and safety. They are suitable for motor starters, transformer feeders, and capacitor-switching.

Standard Features

- **Environment-Resistant:** Ideal for Use in High Dust Areas; Switching Arc is Contained within Vacuum Bottle, Shielding Main Contacts
- **Reduced Maintenance:** Vacuum Bottle Contacts Have Long Life with Virtually No Maintenance
- **No External Surge Protection:** Special Main Contact Materials Minimize Chopping Current; No Surge Suppressor/Arrester Required Except for Special Applications
- **Designed for Safety:** High & Low Voltage Parts are totally Separated by Insulated Barrier (Non-Flammable Molded Frame)
- **Conformity Industrial Standards:** Conforms to Latest International Standards Such as UL, CSA, AS, BS, NEMA, IEC60470 (2000); Consult Factory On Each Series
- **Electronic-Control Drive Unit:** All Contactors Include Electronic Control of Operating Coil Which Offers Wide Control Voltage of 100 to 240 VAC & 100 to 250 VDC, Anti-Chopping Feature Reduce Power Consumption
- Electrically Held or Latched-Type Versions (Medium Voltage Models)

CV-10H (13.8/15 KV) Contactor



CV-10HA (15 KV, 400 A)

- **New CV-10H (13.8/15 KV) Contactor:** Contactor is now rated 400 Inductive & 450 Thermal Amps, available in Latched-Type Version; CV-10HA model is for Inductive Load-Switching (i.e. Motors & Transformer Loads), CV-10HB Model has Specially Designed Interrupters for Capacitor Switching
- **Higher Interrupting-Performance:** Afford a Wide Margin of Protective Coordination with Any Type of Power Fuse Resulting in Increased Electrical Safety & Reliability

Vertical Magnetic Arc Dispersion System

- **Designed for Longer Wear:** Unique Vertical Magnetic Arc Dispersion System, USA patent (HCV-1KAU, HCV-6KAU, HCV-6KALU)



Axial Magnetic Field Interrupter - Arc Dispersion



Vacuum Contactors

> Low Voltage

Vacuum Contactor Specifications



Low Voltage Technical Data

Model	HCV-1JBU	HCV-1KAU
Voltage	208 to 1500 V	
Operational Current	600 A	720 A
Rated Thermal Current	600 A	720 A
Interrupting Current	42,000 A	
Peak Withstand Current	-	85 KA
Short-Circuit Making/Breaking Current IEC 60470 (2000)	6000 A (100 Times)	7200 A (100 Times)
	6000 A (25 Times)	7200 A (25 Times)
	3600 A for 30 Seconds	4320 A for 30 Seconds
	6000 A for 2 Seconds	7200 A for 2 Seconds
	9000 A for 1 Second	10,800 A for 1 Second
	30,000 A for 0.05 Seconds	36,000 A for 0.05 Seconds
Withstand Overload Current		
Coordination with Current-Limiting Fuses	50 KA	45 KA
Switching Frequency	1200/Hour	
Mechanical Life	2.5 Million	
Electrical Life	500,000	
Impulse Withstand	15 KV	
Dielectric Strength	5.5 KV for 1 minute	
Pick-up Voltage	85% Hot to 70% Cold AC or DC	
Drop-out Voltage	20% or More of Rated Control Voltage (Cold)	

Notes:

- Maximum required test; actual life under normal conditions is greater.

Vacuum Contactors

> Low Voltage
Vacuum Contactor Specifications



Low Voltage Technical Data

Model		HCV-1JBU	HCV-1KAU
Control Voltage	Standard	100 to 240 VAC/DC	
Control Circuit Burden	Closing	1080 VA	
	Holding	50 VA	
Auxiliary Contact Ratings	Arrangement	3NO-3NC	
	Current	10 A (A600)	
	Voltage	600 V Maximum, 48 V Minimum	
	VAC	720 VA (P.F. 0.35)	
	VDC	60 W (L/R 150 ms)	
Application Conditions	Altitude without Derating	Lower than 3300 ft. (1000m)	
	Ambient	-5 to 40°C	
	Relative Humidity	45 to 85%	
	Vibration	Maximum 20 Hz to 1 G	
	Shock	Maximum 30 G	
Weight in lbs. (kg)		59.5 (27)	61.7 (28)

T300MV2

MTX2

MTX

BMV2

Regen

MV
Controllers

Vacuum
Contactors

LV SSS

Vacuum
Breakers

Industrial
Automation

Vacuum Contactors

> Low Voltage

Vacuum Contactor Specifications



Low Voltage Application Table

Model	System Voltage	Induction Motor	Three-Phase Transformer	Three-Phase Capacitor
	208 V	200 HP	100 KVA	-
	230 V	250 HP	200 KVA	200 KVAR
	380 V	300 HP	350 KVA	-
	460 V	500 HP	400 KVA	400 KVAR
	575/600 V	600 HP	560 KVA	500 KVAR
	762/796 V	800 HP	720 KVA	-
	1500 V	1600 HP	1400 KVA	1400 KVAR
	230 V	300 HP	240 KVA	250 KVAR
	380 V	450 HP	400 KVA	-
	460 V	600 HP	480 KVA	500 KVAR
	575/600 V	700 HP	600 KVA	600 KVAR
	762/796 V	900 HP	800 KVA	-
	1500 V	2000 HP	1500 KVA	1500 KVAR

Notes:

- The above table is based on general load data and standard application.
- Lower limitations may apply on specific application (i.e. applications above 3000 meter elevations).

Accessories

- **Capacitor Trip Device:** Used for Latched Contactor when DC Power is Not Available; Charges from AC Power, Supplies DC Power to Trip Coil
- **Control Power Rectifier:** Converts AC to DC Control Power for Trip Coil on Latched-Type Contactors
- **Surge Suppressor:** Three-Phase-Type NV60K304T1 for 3.6 to 7.2 KV, NVK95K304T1 for 12 to 15 KV; Surge Suppressor Composed of Capacitor and Series Resistor for an Excellent Protection Device; Features Suppression, Decreased Surge Generation; Suitable for Protecting Motors and Transformers Requiring Frequent Operations
- **Mechanical Interlock:** Used in a Reversing Starter to Mechanically Prevent Forward/Reverse Contactors from Closing Simultaneously (Not Available for CV-10 Series)



Reversing Contactor Assembly

- Low Voltage Vacuum Contactors, HCV-1JBU (600 A, 208 to 1500 V) and HCV-1KAU (720 A, 208 to 1500 V) Available in Assembly for Reversing Motor Applications; Assembly Consists of Two Contactors on Common Base-plate with Mechanical Interlock; Line-Side Bus Jumpers with Incoming Mechanical Lugs, Load-Side Cable Jumpers, Output Mechanical Lugs also Included.

Vacuum Contactors

> Medium Voltage

Vacuum Contactor Specifications



Medium Voltage Technical Data

Model	HCV-5HA	HCV-5HAL	HCV-6KAU	HCV-6KALU	CV-10HA(L)	CV-10HB(L)
Voltage	2.4 to 6.6 KV (7.2 KV maximum)				12 to 15 KV	12 to 13.8 KV
Operational Current	400 A		720 A		400 A	
Rated Thermal Current	450 A		800 A		450 A	
Interrupting Current	7000 A (4.5 KA @ 7.2 KV)		7200 A		5 KA/4 KA	5 KA
Peak Withstand Current	15.8 KA		20 KA		12.5 KA	
Short-Circuit Making/Breaking Current IEC 60470 (2000)	6.3 KA		8.0 KA		5 KA/4 KA	5 KA
	Open for 3 Minutes, Closed/Open for 3 Minutes, Closed/Open					
Class E1 MVA	25/50 (36/60)		30/60/85		120	
Class E2 MVA	200/400/570		200/400/600		1200	
Withstand Overload Current	2400 A for 30 Seconds		4320 A for 30 Seconds		1920 A for 30 Seconds	
	4000 A for 12 Seconds		-		-	
	6300 A for 2 Seconds		10,800 A for 1 Second		8000 A for 1 Second	
Overcurrent Strength w/Current Limiting Fuses (Peak Value)	85 KA (Peak)				See Coordination Below	
Coordination W/Current Limiting Fuses	-		-		Prospective Short-circuit Current 50 KA, Cut-off Current 36 KA Peak	
Switching Frequency	1200/Hr	300/Hr	600/Hr	300/Hr	300/Hr	120/Hr
Mechanical Life	2.5 Million	250 Thousand	1 Million	200 Thousand	250 Thousand	
Electrical Life	250 Thousand		200 Thousand		100 Thousand	
Impulse Withstand	60 KV				75 KV	
Dielectric Strength	22 KV, 1 Minute				28 KV, 1 Minute (42 KV)	
Pick-up Voltage	85% Hot to 70% Cold AC or DC					
Drop-out Voltage	70% Hot to 60% Cold AC or DC					
Tripping Voltage	60% or Less of Coil Rating DC (Cold)					

Notes:

- Special withstand voltage (42 KV for 1 minute) available by request.
- Maximum required test. Actual life under normal conditions is greater.

Vacuum Contactors

> Medium Voltage

Vacuum Contactor Specifications



Model		HCV-5HA	HCV-5HAL	HCV-6KAU	HCV-6KALU	CV-10HA(L)	CV-10HB(L)
Control Voltage	Standard	120 VAC, 50/60 Hz		115 to 240 VAC/ 125 to 250 VDC		100 to 240 VAC/ 125 to 250 VDC	
	Optional	240 VAC/125 VDC/250 VDC		-		-	
	Tripping	-	24, 32, 48, 125, 250 VDC	-	24, 32, 48, 125, 250 VDC	-	125 VDC
Control Circuit Burden	Closing	5.4 A Peak @ 120 VAC 670 VA (AC), 700 W (DC)		6 to 7.0 A @ 120 VAC 840 VA (AC), 875 W (DC)		7.2 A Peak @ 120 VAC 864 VA (AC), 900 W (DC)	
	Holding	0.12 A Avg. @ 120 VAC 85 VA (AC), 85 W (DC)		0.8 to 1 A @ 120 VAC 48 VA		0.16 A Avg. @ 120 VAC 80 VA (AC), 90 W (DC)	
	Tripping *	4.8 A peak @125 VDC					
Auxiliary Contact Ratings	Arrangement	3NO-3NC	2NO-2NC	3NO-3NC	2NO-2NC	4NO-2NC	2NO-1NC
	Current	10 A (A600)					
	Voltage	600 V Maximum, 48 V Minimum					
	AC	720 VA (P.F. 0.35)					
	DC	60 W (L/R 150 ms)					
Application Conditions	Altitude w/o Derating	Lower than 3300 ft (1000 m)					
	Ambient	-5° to 40°C					
	Relative Humidity	45 to 85%					
	Vibration	Maximum 20 Hz to 1 G					
	Shock	Maximum 30 G					
Weight in lbs. (kg)		43 (19.5)	44 (20.0)	60 (27)	62 (28)	88 (40)	91 (41)

Notes:

* Trip circuit burden applies to all latched type contactors only

Vacuum Contactors

> Medium Voltage Vacuum Contactor Specifications



T300MV2

MTX2

MTX

BMV2

Regen

MV
Controllers

Vacuum
Contactors

LV SSS

Vacuum
Breakers

Industrial
Automation

Medium Voltage Application Table

Model	System Voltage	0.8 PF Ind./ Syn. Motor	1.0 PF Syn. Motor	Three-Phase Transformer	Three-Phase Capacitor
HCV-5HA(L) (400 A)	2.2 to 2.5 KV	1750 HP	2000 HP	1500 KVA	1500 KVAR
	3 to 3.3 KV	2250 HP	2500 HP	2000 KVA	2000 KVAR
	4 to 5 KV	3000 HP	3500 HP	3000 KVA	2000 KVAR
	6 to 6.6 KV	4500 HP	5000 HP	4000 KVA	2000 KVAR
HCV-6KA(L)U (720 A)	2.2 to 2.5 KV	2500 HP	3000 HP	2500 KVA	2000 KVAR
	3 to 3.3 KV	3000 HP	3500 HP	3500 KVA	2000 KVAR
	4 to 5 KV	4500 HP	5000 HP	4500 KVA	2000 KVAR
	6 to 6.6 KV	6000 HP	7000 HP	7000 KVA	2000 KVAR
CV-10HA(L) (400 A)	6.9 to 7.2 KV	3500 HP	4000 HP	3000 KVA	N/A
	10 to 12 KV	5500 HP	6000 HP	5500 KVA	
	13.8 KV	7000 HP	7500 HP	6500 KVA	
CV-10HB(L) (400 A Continuous, 230 A Breaking)	2.2 to 2.5 KV	N/A	N/A	N/A	1500 KVAR
	3 to 3.3 KV				2000 KVAR
	4 to 5 KV				2000 KVAR
	6 to 6.6 KV				3000 KVAR
	6.9 to 7.2 KV				3000 KVAR
	10 to 13.8 KV				5000 KVAR

- Notes:
- The above table is based on general load data and standard application.
 - Lower limitations may apply on specific applications (i.e applications above 3000 meter elevations).

Vacuum Contactors

> Low & Medium Voltage

Vacuum Contactor Pricing

Model	Description	Application	List Price
HCV-5HA	400 A, 2.3 to 7.2 KV Non-Latched Type	Motors, Distribution Loads, Transformer/Capacitor Switching	\$4,000
HCV-5HAL-xx*	400 A, 2.3 to 7.2 KV Latched Type	Motors, Distribution Loads, Transformer/Capacitor Switching	\$4,800
HCV-6KAU	720 A, 2.3 to 7.2 KV Non-Latched Type	Motors, Distribution Loads, Transformer/Capacitor Switching	\$12,000
HCV-6KALU-xx*	720 A, 2.3 to 7.2 KV Latched Type	Motors, Distribution Loads, Transformer/Capacitor Switching	\$12,900
CV-10HA	400 A, 10 to 15 KV Non-Latched Type	Motors, Distribution Loads, Transformer	\$11,700
CV-10HAL	400 A, 10 to 15 KV Latched Type	Distribution Loads, Transformer Switching	\$13,000
CV-10HB	400 A, 10 to 13.8 KV Non-Latched Type	Capacitor Switching	\$11,700
CV-10HBL	400 A, 10 to 13.8 KV Latched Type	Capacitor Switching	\$13,000
HCV-1JBU	600 A, 208 to 1500 V Non-Latched Type	Motors, Distribution Loads, Transformer/Capacitor Switching	\$6,500
HCV-1KAU	720 A, 208 to 1500 V Non-Latched Type	Motors, Distribution Loads, Transformer/Capacitor Switching	\$9,900
HCVR-1JBU	Reversing Contactor Assembly, 600 A, 208 to 1500 V Non-Latched Type	Reversing Motors	\$19,430
HCVR-1KAU	Reversing Contactor Assembly, 720 A, 208 to 1500 V Non-Latched Type	Reversing Motors	\$27,700

Notes:

* For HCV-5HAL and HCV-6KALU, replace “xx” in model number with close and trip voltage codes.
First “x” is closing voltage, and second “x” is trip-coil voltage.

Latched Contactor Voltage Codes

Close Voltage	Code	Trip-Coil Voltage	Code
1	120 VAC	1	125 VDC
2	240 VAC	2	250 VDC
3	125 VDC	3*	24 VDC
4	250 VDC	4*	32 VDC
		5*	48 VDC

Notes:

* For 24 VDC, 32 VDC, and 48 VDC trip, add **\$800** to list price shown in table. Adder includes auxiliary contact arc killer.

Vacuum Contactors

> Low & Medium Voltage Vacuum Contactor Accessories

Model Number	Description	List Price
CIT-10QA	Capacitor trip device used for latched-type vacuum contactor or vacuum circuit breaker when DC power is not available. Charges from AC power and supplies DC power to trip coil 	\$1,600
4Z9G0334G001	AC/DC control power rectifier converts 120/240 VAC input to 125/520 VDC to power trip coil on latched-type vacuum contactor or control power for a vacuum circuit breaker 	\$400
NV60K304T1	Surge suppressor: three-phase CR surge suppressor for 3.3 to 7.2 KV system 	\$2,500
NV95K304T1	Surge suppressor: three-phase CR surge suppressor for 10 to 15 KV system	\$5,900
2C9G0059G002	Mechanical interlock for HCV-5HA(L)	\$640
2C9G0068G001	Mechanical interlock for HCV-6KA(L)U	\$1,000
3Z9G0119G001	Latched-contactor modification kit for HCV-5HA & HCV-6KAU; 125 VDC trip-coil	\$700
3Z9G0119G002	Latched-contactor modification kit for HCV-5HA & HCV-6KAU; 250 VDC trip-coil	\$700
3Z9G0119G003	Latched-contactor modification kit for HCV-5HA & HCV-6KAU; 24 VDC trip-coil	\$1,150
3Z9G0119G004	Latched-contactor modification kit for HCV-5HA & HCV-6KAU; 30/32 VDC trip-coil	\$1,150
3Z9G0119G005	Latched-contactor modification kit for HCV-5HA & HCV-6KAU; 48 VDC trip-coil	\$1,150
PC18330P671	Latched-contactor auxiliary contact arc killer for HCV-5HAL & HCV-6KAUL; Used with 24/32/48 VDC trip-coil models	\$280
5P9A2593P001	B9 lubricating grease (30 g tube)	CF

Low Voltage Solid State Starters

TE Series

Toshiba's low voltage TE Series is a high-end, digitally programmable, reduced voltage solid state starter. This heavy-duty starter provides stepless soft starting of three-phase AC induction motors, which protects mechanical components from excessive torque stress as well as electrical systems from the effects of high motor inrush currents. Toshiba's TE Series solid state starter sets a new standard in control and protection for critical motors and loads.

Product Scope

18 to 1250 A
200 to 600 V

Highlights

- Advanced Motor Protection
- Narrow Width for Motor Control Center (MCC) Mounting
- Remote Keypad Mounting
- Pull-Apart Control Terminals for Easy Assembly & Wiring
- Smooth, Stepless Soft Start
 - Voltage Ramp Start: 1 to 120 Seconds
 - Initial Voltage: 0 to 100%
- Soft Stop
 - Stop Voltage: 0 to 100%
- Deceleration/Pump Control
- Current Limit: 200 to 600%
- Overload Capacity: 500% for 60 Seconds
- Undercurrent
- Overcurrent
- Jog Mode
- Three Programmable Output Relays
- Two-Wire or Three-Wire Control Standard
- 120 Vac Control Voltage

STANDARD FEATURES

- UL Listed in US & Canada
- Four-Digit EOI Display
- Start & Run Protection
- Residual Ground Fault
- Retentive Thermal Memory
- Overload Reset: Manual or Automatic
- Phase Loss (Single-Phase)/Imbalance (5 to 30%)
- Electronic Overload
- Shorted SCR
- Shorted Load
- Over-Temperature



Low Voltage Solid State Starters

> TE Series Pricing



TE Solid State Starter Pricing — Open Chassis Type

Model Number	Max. Amps	Nominal Motor Rating 50/60 Hz								List Price
		208 V/HP		230 V/HP		460 V/HP		575 V/HP		
		Shunt Bypass	Start Bypass	Shunt Bypass	Start Bypass	Shunt Bypass	Start Bypass	Shunt Bypass	Start Bypass	
TE-18-BP	18	5	3	5	5	10	10	15	10	\$1,570
TE-28-BP	28	7.5	7.5	7.5	7.5	20	15	25	20	\$1,600
TE-39-BP	39	10	10	10	10	25	25	30	30	\$1,650
TE-48-BP	48	15	10	15	15	30	30	40	30	\$1,700
TE-62-BP	62	20	15	20	20	40	40	60	50	\$1,720
TE-78-BP	78	25	20	25	25	60	50	75	60	\$1,750
TE-92-BP	92	30	25	30	30	60	60	75	75	\$2,100
TE-112-BP	112	30	30	40	30	75	75	100	75	\$2,500
TE-150-BP	150	40	40	50	50	100	100	125	-	\$3,200
TE-160-BP	160	50	40	60	50	125	100	150	-	\$3,600
TE-210-BP	210	60	60	75	60	150	150	200	150	\$4,600
TE-275-BP	275	75	60	100	75	200	150	200	150	\$5,500
TE-361-BP	361	125	75	125	125	300	250	350	300	\$5,900
TE-450-BP	450	150	125	150	150	350	300	450	300	\$6,620
TE-550-BP	550	150	150	200	200	450	400	500	500	\$8,350
TE-600-BP	600	200	200	200	200	500	500	600	600	\$8,500
TE-862-BP	862	250	250	300	300	600	500	700	600	\$12,250
TE-900-BP	900	300	250	350	300	700	600	900	600	\$14,250
TE-1006-BP	1006	350	300	400	400	800	800	1000	900	\$24,000
TE-1250-BP	1250	450	350	500	450	1000	900	1200	1000	\$29,500

- Notes:
- Data is based on NEC Table 430-150, full-load current three-phase motors.
 - Size soft starter based on actual motor nameplate FLA.
 - Chassis dimensions are on page 441.
 - Accessories are on page 441.

Low Voltage Solid State Starters

TE-H Series

There is no need to compromise on performance or features. The TE-H Series incorporates Toshiba's TE Series SSS into a heavy-duty enclosure that is ready to work right out-of-the-box. Expect the full benefits of reliable soft starting, unsurpassed motor/load protection, and control flexibility -- all in one complete package that is readily stocked in many ratings.

Product Scope

21 to 1080 A
200 to 600 V

Highlights

- Type 12/4 Enclosure (Model 21 to 690 & 800)
- Type 12 Enclosure (Model 960 to 1080)
- Circuit Breaker with Door Operator (Models 45 to 1080 A)
- Fusible Disconnect Switch with Fuses (Models 21 to 40 A)
 - New 65 kAIC Rating Standard
- For new 65kAIC rating (Models 45 to 600), consult factory
- Lightning Arrestor
- Built-In Full Rated Bypass Contactor
- Communications: RS458 Modbus RTU

Standard Features

- Includes TE Series SSS
- UL Listed in US & Canada
- Four-Digit EOI Display
- 120 V Control Voltage (CPT Included)
- Smart Door
 - Door Mounted Keypad
 - Emergency Stop Button
 - Local/Off/Remote Switch
 - Start/Stop Button

Options *See page 441*

- Soft Start or Across-the-Line Switch
- Communications: Ethernet, DeviceNet, Profibus, DP, Profinet
- Enclosure Space Heater & Thermostat
- RTD Monitor/Relay (12 RTD Inputs)
- Type 4X Stainless Steel Enclosure (Consult Factory)



TE-H Smart Door



Low Voltage Solid State Starters

> TE-H Series Pricing



TE-H Heavy Duty Combination Type

Model Number	Nominal Motor HP Rating				Maximum KW Rating			List Price	Enclosure Frame Size
	200 V/HP	230 V/HP	460 V/HP	575 V/HP	220 V/KW	380 V/KW	415 V/KW		
TE-H-21-CB-*	7.5	7.5	10 to 15	15 to 20	5.5	11	11	\$4,200	1
TE-H-27-CB-*	10	10	20 to 25	25 to 30	7.5	15	15	\$4,300	1
TE-H-40-CB-*	10	15	30	30	11	18.5	18.5	\$4,400	1
TE-H-45-CB-*	15	20	40	40 to 50	15	30	30	\$4,500	1
TE-H-55-CB-*	20	25	50	60	18.5	37	30	\$4,700	1
TE-H-68-CB-*	25	30	60	-	22	45	37	\$4,800	1
TE-H-96-CB-*	30	30	75	75	30	55	60	\$5,400	1
TE-H-125-CB-*	40	40 to 50	100	-	45	75	75	\$6,000	1
TE-H-156-CB-*	50 to 60	60	125 to 150	100 to 150	55	90	90	\$7,200	2
TE-H-220-CB-*	60	75	150	150	55	110	132	\$8,200	2
TE-H-248-CB-*	75 to 100	100 to 125	200 to 250	200 to 300	75	132	132	\$10,000	2
TE-H-312-CB-*	125	150	300	300	110	160	160	\$11,100	2
TE-H-400-CB-*	125	150	300	300	-	200	250	\$12,000	2
TE-H-480-CB-*	150	200	400	350 to 500	-	-	-	\$15,500	2
TE-H-600-CB-#	150	250	500	600	-	-	-	\$21,400	2
TE-H-690-CB-*	250	250	500	600	-	355	400	\$21,500	2.5
TE-H-800-CB-*	250	300	600	600	-	450	500	\$21,700	2.5
TE-H-960-CB-*	300	350 to 400	700 to 800	700 to 900	-	475	500	\$34,000	3
TE-H-1080-CB-*	350	450	900	1000	-	565	600	\$39,000	3

Notes:

- TE-H-600 is 1.0 S.F. rated. Use 690 model if 1.15 S.F. is required.

* - Replace with Line and Control Voltage code listed below:

1 = 208 V, 120 V Ctrl, 50/60 Hz

2 = 230 V, 120 V Ctrl, 50/60 Hz

3 = 380 V, 120 V Ctrl, 50/60 Hz

4 = 460 V, 120 V Ctrl, 50/60 Hz

5 = 575 V, 120 V Ctrl, 50/60 Hz

6 = 415 V, 120 V Ctrl, 50/60 Hz

7 = 220 V, 220 V Ctrl, 50/60 Hz

Low Voltage Solid State Starters

> TE & TE-H Series Dimensions/Weights/Factory Modifications

TE Series — Open Chassis Type

Model	Open-Chassis Type			
	Dimensions Inches (mm)			Approx. Weight lbs. (kg)
	H	W	D	
TE-18-BP to TE-48-BP	8.75 (216)	8.00 (203)	6.66 (169)	13 (5.9)
TE-62-BP to TE-112-BP	14.00 (355.6)	8.00 (203)	6.68 (170)	23 (10.4)
TE-150-BP to TE-160-BP	19.21 (487.9)	8.00 (203)	6.68 (170)	33 (15)
TE-210-BP	28.50 (712.4)	12.50 (317.5)	9.04 (223)	130 (59)
TE-275-BP				140 (63.5)
TE-361-BP to TE-450-BP				145 (65.8)
TE-550-BP to TE-600-BP	31.50 (800)	12.50 (317.5)	9.04 (223)	165 (74.8)
TE-862-BP to TE-900-BP	44.13 (1120)	25.5 (647.7)	11.86 (301)	315 (143)
TE-1006-BP	46.56 (1182)	28.2 (716)	13.00 (330)	550 (250)
TE-1250-BP	46.56 (1182)	28.2 (716)	13.00 (330)	750 (340)

TE-H Series — Combination Type

Frame Size	Enclosure	H	W	D	Rating
		Dimensions (in.)			
1	Wall Mount	37	15	17	N4/12
2	Wall Mount	48	33	16	N4/12
2.5	Floor Standing	87	31.5	24	N4/12
3	Floor Standing	92	36	30	N12 only

TE-H Series Factory Installed Modifications

Option Code	Modification Description	List Price
RX	Emergency Bypass - Door-Mounted SS/ATL Switch with Solid State Overload Relay	\$1,000
H	Heater with Thermostat	\$1,200
RTD	TE-RTD12 RTD Monitor/Relay - Includes Door-Mounted Keypad/Display	\$4,400
65K	For 65 kAIC Rating	CF
TD	Load Transducer & CT (4-20mA Output)	\$700

Communications Option Code	Modification Description	List Price
XVS1	Provides Modbus RTU over Ethernet (Modbus TCP) & Internet (TCP/IP) over Ethernet	\$2,500
XVS2	Provides Modbus RTU over Ethernet (Modbus TCP)	\$2,200
CO	Provides CANopen Communications	\$4,500
DN	Provides DeviceNet™ Communications	\$4,500
EI	Provides EtherNet/IP Communications	\$5,300
PB	Provides PROFIBUS Communications	\$2,500
PN	Provides PROFINET Communications	\$4,500

T300MV2

MTX2

MTX

BMV2

Regen

MV
Controllers

Vacuum
Contactors

LV SSS

Vacuum
Breakers

Industrial
Automation

Low Voltage Solid State Starters

> TE Series Accessories



TE Series Accessories

Part Number	Description	Model	List Price
TE-KP12-KIT2-1	Remote display kit - Type 1, 12, & 4X with 1-meter cable	TE-18 to TE-48	\$220
TE-KP12-KIT2-2	Remote display kit - Type 1, 12, & 4X with 2-meter cable		\$250
TE-KP12-KIT2-3	Remote display kit - Type 1, 12, & 4X with 3-meter cable		\$270
TE-KP12-KIT-1	Remote display kit - Type 1, 12, & 4X with 1-meter cable	TE-62 & above	\$320
TE-KP12-KIT-2	Remote display kit - Type 1, 12, & 4X with 2-meter cable		\$340
TE-KP12-KIT-3	Remote display kit - Type 1, 12, & 4X with 3-meter cable		\$350
SSS TOOL	Software for programming, commissioning, monitoring includes CD & USB to RS485 converter	All	\$650
66-0103B	Floor Stand Kit for Enclosure Frame Size 2 (adds 18" to height)	TE-H-156 to 600	\$900

- Notes:
- Remote display cable assembly includes connectors on each end.
 - TE open chassis units do not come with lugs. Soft starters up to 60A rating are provided with terminal bus tabs as standard.

Lug Kits Part Number	Wire Size	Wire Size	List Price
71-0228	#14-#4 (1/ph, line & load)	TE-18 to TE-48	\$60
71-0229	#14-1/0 (1/ph, line & load)	TE-62 to TE-112	\$100
71-0230	#14-3/0 (1/ph, line & load)	TE-150 to TE-160	\$200
71-0231	#6-250MCM (2/ph, line & load)	TE-210 to TE-361	\$300
71-0232	#6-500MCM (2/ph, line & load)	TE-450 to TE-600	\$350
71-0251	#6-600MCM (3/ph, line & load)	TE-862 to TE-900	\$1,100
71-0252	#6-600MCM (4/ph, line & load)	TE-1006 to TE-1250	\$1,200

Low Voltage Solid State Starters

TD Series

Toshiba's low voltage TD Series is a high-end, digitally programmable, reduced voltage solid state starter. This heavy-duty, microprocessor-controlled solid state starter offers a new standard of motor and load protection for critical motor loads. Digital microprocessor control makes sophisticated programmable protective features possible, yet keeps the complex algorithms transparent to the user. Programmable protection, flexible response, system protection, and historical recordings make the TD Series an ideal choice for your applications.

Product Scope

48 to 1250 A
200 to 600 V

Highlights

- Smooth, Stepless Soft Start
 - Voltage Ramp Start: 1 to 120 Seconds
 - Initial Voltage: 0 to 100%
- Soft Stop
 - Stop Voltage: 0 to 100%
- Deceleration/Pump Control
- Current Limit: 200 to 600%
- Overload Capacity: 500% for 60 Seconds; 600% for 30 Seconds
- Undercurrent
- Overcurrent
- Three Programmable Output Relays
- Two-Wire/Three-Wire
- Modbus RTU RS485 (Adapter Kit Required)
- 120 V Control Voltage

STANDARD FEATURES

- UL Listed in US & Canada
- Built-In Real-Time Clock
- Four-Digit Display
- Phase Reversal
- Phase Currents (A, B, C)
- Remaining Thermal Capacity of Motor
- Elapsed Time (ETM)
- Run Cycle Counter
- Past Trip Monitoring: Stores Last Three Faults
- Lockout Time Remaining
- Overload Reset: Manual or Automatic
- Phase Loss (Single-Phase)/Imbalance (5 to 30%)
- Electronic Overload
- Shorted SCR
- Shorted Load



TD Display



Low Voltage Solid State Starters

> TD Series Pricing



TD Series—Non-Combination Type

Model Number	Chassis Max. Amps	Maximum HP				List Price			
		208V	230 V	460 V	575 V	Open Chassis	Enclosure Type		
							1	12/3R	4
TD005	48	10	15	30	40	\$1,800	-	\$2,800	\$2,970
TD006	78	15	20	40	50	\$1,900	-	\$2,900	\$3,070
TD006	78	20	25	50	60	\$1,900	-	\$2,900	\$3,070
TD007	120	25	30	60	75	\$2,300	-	\$4,100	\$4,750
TD007	120	30	40	75	100	\$2,300	-	\$5,080	\$5,700
TD008	180	40	50	100	125	\$3,000	\$5,080	\$6,350	\$6,800
TD008	180	50	60	125	150	\$3,000	\$5,080	\$6,900	\$7,300
TD009	220	60	75	150	200	\$3,600	\$5,800	\$8,200	\$8,670
TD010	288	75	100	200	250	\$4,000	\$6,560	\$8,670	\$9,500
TD011	414	100	125	250	300	\$4,600	\$7,400	\$10,150	\$11,100
TD011	414	125	150	300	350	\$4,600	\$7,400	\$10,900	\$11,950
TD012	476	-	-	350	400	\$5,500	\$9,200	\$12,900	\$14,380
TD013	550	150	200	400	500	\$5,800	\$9,610	\$13,500	\$14,700
TD014	718	200	250	500	600	\$7,500	\$12,900	\$19,900	\$21,700
TD015	1006	250	300	600	700	\$9,000	\$15,700	\$21,200	\$23,950
TD015	1006	300	350	700	800	\$9,000	\$15,700	\$21,200	\$23,950
TD016	1150	350	400	800	900	\$15,000	\$23,800	\$44,600	\$48,000
TD017	1250	400	450	900	1000	\$19,000	\$31,800	\$52,900	CF
TD017	1250	450	500	1000	1250	\$19,000	CF		

Notes:

- For TD007 to TD017, the NEMA 12, 3R, and 4 price includes automatic bypass (air) contactor, full HP rated.
- Minimum motor FLA (chassis) setting is programmable down to 18A.
- TD005 through TD007 open chassis units have an integrated NEMA 1 chassis, but can also be used as a panel mount.
- All units require 120 VAC control power. See option for control power transformer if desired.
- Options and accessories may affect overall dimensions. Consult factory for exact dimensions.
- CF: Consult Factory.

Low Voltage Solid State Starters

> TD Series Pricing



TD Series— Combination Circuit Breaker Type

Model Number	Chassis Max. Amps	Maximum HP				List Price		
						Enclosure Type		
		208 V	230 V	460 V	575 V	1	12/3R	4
TD105	48	10	15	30	40	\$4,100	\$4,530	\$5,070
TD106	78	15	20	40	50	\$4,230	\$4,700	\$5,180
TD106	78	20	25	50	60	\$4,230	\$4,700	\$5,180
TD107	120	25	30	60	75	\$5,180	\$5,980	\$6,560
TD107	120	30	40	75	100	\$6,090	\$6,870	\$7,500
TD108	180	40	50	100	125	\$7,400	\$7,950	\$8,780
TD108	180	50	60	125	150	\$7,840	\$8,460	\$9,300
TD109	220	60	75	150	200	\$8,350	\$9,600	\$10,500
TD110	288	75	100	200	250	\$10,270	\$12,500	\$13,800
TD111	414	100	125	250	300	\$11,300	\$19,200	\$21,120
TD111	414	125	150	300	350	\$12,960	\$19,500	\$21,500
TD112	476	-	-	350	400	\$14,900	\$21,700	\$23,900
TD113	550	150	200	400	500	\$15,700	\$22,000	\$24,200
TD114	718	200	250	500	600	\$18,300	\$28,000	\$30,800
TD115	1006	250	300	600	700	\$22,900	\$29,900	\$32,800
TD115	1006	300	350	700	800	\$25,800	\$33,800	\$35,800
TD116	1150	350	400	800	900	\$36,200	\$48,800	\$51,500
TD117	1250	400	450	900	1000	\$42,200	\$65,000	CF
TD117	1250	450	500	1000	1250	\$54,300	\$65,600	

- Notes:
- For TD107 to TD117, the NEMA 12, 3R, and 4 price includes automatic bypass (air) contactor, full HP rated.
 - Minimum motor FLA (chassis) setting is programmable down to 18 A.
 - All units require 120 VAC control power. See option for control power transformer if desired.
 - Options and accessories may affect overall dimensions. Consult factory for exact dimensions.
 - Circuit breakers come standard with shunt-trip coil (120 VAC).
 - CF: Consult Factory.

T300MV2

MTX2

MTX

BMV2

Regen

MV Controllers

Vacuum Contactors

LV SSS

Vacuum Breakers

Industrial Automation

Low Voltage Solid State Starters

TX Series

Toshiba's low voltage TX Series is a high-end, digitally programmable, reduced voltage solid state starter. This heavy-duty, microprocessor-controlled solid state starter offers a new standard of motor and load protection for critical motor loads. Digital microprocessor control makes sophisticated programmable protective features possible, yet keeps the complex algorithms transparent to the user. Programmable protection, flexible response, system protection, and historical recordings make the TX Series an ideal choice for your applications.

Product Scope

48 to 1250 A
200 to 600 V

Highlights

- Smooth, Stepless Soft Start
 - Voltage Ramp Start: 1 to 120 Seconds
 - Initial Voltage: 0 to 100%
- Soft Stop
 - Stop Voltage: 0 to 100%
- Deceleration/Pump Control
- Current Limit: 200 to 600%
- Overload Capacity: 500% for 60 Seconds; 600% for 30 Seconds
- Undercurrent
- Overcurrent
- Four Programmable Output Relays
- Two-Wire/Three-Wire
- 120 V Control Voltage

STANDARD FEATURES

- UL-Listed in US & Canada
- Built-In Real-Time Clock
- Residual Ground Fault
- Phase Reversal
- Motor Thermal Model
- Retentive Thermal Memory
- Dynamic Reset Response
- Overload Reset: Manual or Automatic
- Phase Loss (Single-Phase)/Imbalance (5 to 30%)
- Electronic Overload
- Shorted SCR
- Shorted Load
- Over-Temperature



TX Display



Low Voltage Solid State Starters

> TX Series Pricing



TX Series—Non-Combination Type

Model Number	Chassis Max. Amps	Maximum HP				List Price			
		208 V	230 V	460 V	575 V	Open Chassis	Enclosure Type		
							1	12/3R	4
TX005	48	10	15	30	40	\$3,400	-	\$3,990	\$4,230
TX006	78	15	20	40	50	\$3,600	-	\$4,700	\$4,970
TX006	78	20	25	50	60	\$3,600	-	\$4,700	\$4,970
TX007	120	25	30	60	75	\$3,900	-	\$5,980	\$6,450
TX007	120	30	40	75	100	\$3,900	-	\$6,950	\$7,500
TX008	180	40	50	100	125	\$4,600	\$6,880	\$8,250	\$8,700
TX008	180	50	60	125	150	\$4,600	\$6,900	\$8,700	\$9,300
TX009	220	60	75	150	200	\$5,200	\$7,600	\$10,200	\$10,500
TX010	288	75	100	200	250	\$5,600	\$8,400	\$10,600	\$11,300
TX011	414	100	125	250	300	\$6,200	\$9,300	\$11,900	\$12,800
TX011	414	125	150	300	350	\$6,200	\$9,300	\$12,800	\$13,900
TX012	476	-	-	350	400	\$7,100	\$10,900	\$14,740	\$14,200
TX013	550	150	200	400	500	\$7,400	\$11,300	\$15,300	\$16,500
TX014	718	200	250	500	600	\$9,100	\$14,800	\$21,600	\$23,600
TX015	1006	250	300	600	700	\$10,600	\$17,500	\$22,900	\$25,000
TX015	1006	300	350	700	800	\$10,600	\$17,500	\$22,900	\$25,000
TX016	1150	350	400	800	900	\$16,600	\$25,700	\$47,400	\$49,800
TX017	1250	400	450	900	1000	\$20,600	\$33,700	\$54,600	CF
TX017	1250	450	500	1000	1250	\$20,600	CF		

Notes:

- For TX007 to TX017, the NEMA 12, 3R, and 4 price includes automatic bypass (air) contactor, full HP rated.
- Minimum motor FLA (chassis) setting is programmable down to 18 A.
- Unit has an integrated NEMA 1 chassis, but can also be used as a panel mount.
- All units require 120 VAC control power. See option for control power transformer, if desired
- Options and accessories may affect overall dimensions. Consult factory for exact dimensions.
- CF: Consult Factory.

Low Voltage Solid State Starters

> TX Series Pricing



TX Series—Combination Circuit Breaker Type

Model Number	Chassis Max. Amps	Maximum HP				List Price		
						Enclosure Type		
		208 V	230 V	460 V	575 V	1	12/3R	4
TX105	48	10	15	30	40	\$5,700	\$6,100	\$6,900
TX106	78	15	20	40	50	\$6,090	\$6,560	\$7,100
TX106	78	20	25	50	60	\$6,090	\$6,560	\$7,100
TX107	120	25	30	60	75	\$7,100	\$7,920	\$8,500
TX107	120	30	40	75	100	\$7,980	\$8,700	\$9,500
TX108	180	40	50	100	125	\$9,240	\$9,840	\$10,680
TX108	180	50	60	125	150	\$9,720	\$11,300	\$12,400
TX109	220	60	75	150	200	\$10,250	\$11,800	\$12,800
TX110	288	75	100	200	250	\$12,060	\$14,300	\$15,700
TX111	414	100	125	250	300	\$13,200	\$15,200	\$16,500
TX111	414	125	150	300	350	\$13,980	\$15,840	\$17,300
TX112	476	-	-	350	400	\$16,900	\$21,900	\$24,000
TX113	550	150	200	400	500	\$17,900	\$22,500	\$24,700
TX114	718	200	250	500	600	\$20,300	\$31,300	\$34,700
TX115	1006	250	300	600	700	\$25,000	\$31,800	\$35,800
TX115	1006	300	350	700	800	\$27,000	\$35,800	\$37,700
TX116	1150	350	400	800	900	\$38,400	\$50,900	\$53,200
TX117	1250	400	450	900	1000	\$43,900	\$67,700	CF
TX117	1250	450	500	1000	1250	\$56,900	\$68,300	

Notes:

- For TX107 to TX117, the NEMA 12, 3R, and 4 price includes automatic bypass (air) contactor, full HP rated.
- Minimum motor FLA (chassis) setting is programmable down to 18 A.
- All units require 120 VAC control power. See option for control power transformer, if desired.
- Options and accessories may affect overall dimension. Consult factory for exact dimensions.
- Circuit breakers come standard with shunt-trip coil (120 VAC).
- CF: Consult Factory.

Low Voltage Solid State Starters

> TD & TX Series Dimensions

Max HP At 460 V	Model	Combination Type (Circuit Breaker) N-1 (With CPT, No Bypass)			Combination Type (Circuit Breaker) N-12/3R (With CPT, Air Bypass)		
		Dimensions (in.)			Dimensions (in.)		
		H	W	D	H	W	D
30	TD/TX105	30	24	13	30	24	16
50	TD/TX106	30	24	13	30	24	16
60	TD/TX107	30	24	13	30	24	16
75	TD/TX107	30	24	13	30	24	16
100	TD/TX108	42	30	13	48	36	16
125	TD/TX108	42	30	13	48	36	16
150	TD/TX109	42	30	13	60	36	16
200	TD/TX110	48	36	16	60	36	16
250	TD/TX111	48	36	16	60	36	16
300	TD/TX111	48	36	16	60	36	16
350	TD/TX112	48	36	16	60	36	16
400	TD/TX113	48	36	16	72	48	16
500	TD/TX114	72	60	20	90	48	24
600	TD/TX115	72	60	20	90	48	24
800	TD/TX116	90	72	24	90	72	24
1000	TD/TX117	Consult Factory			90	72	24

- Notes:
- TD/TX005 and TD/TX006 as standard do not come with or need an automatic bypass contactor.
 - Includes floor-stand kit as standard. Add 12"for total height (i.e. 84"tall).

Max HP At 460 V	Model	Combination Type (Circuit Breaker) N-12/3R (With CPT, Vacuum Bypass)		
		Dimensions (in.)		
		H	W	D
100	TD/TX108	48	36	16
125	TD/TX108	48	36	16
150	TD/TX109	60	36	16
200	TD/TX110	60	36	16
250	TD/TX111	60	36	16
300	TD/TX111	72	48	16
350	TD/TX112	72	48	16
400	TD/TX113	72	48	16
500	TD/TX114	90	48	24
600	TD/TX115	90	48	24
800	TD/TX116	Not Available		
1000	TD/TX117			

- Notes:
- Includes floor-stand kit as standard. Add 12"for total height (i.e 84"tall).

Low Voltage Solid State Starters

> TD & TX Series Dimensions & Weights

Max HP At 460 V	Model	Open-Chassis Type				Non-Combination Type N-1 (With CPT, No Bypass)		
		Dimensions (in.)			Weight (lbs.)	Dimensions (in.)		
		H	W	D		H	W	D
30	TD/TX005	16	10	10	31.4	30	24	13
50	TD/TX006	16	10	10	34.8	30	24	13
60	TD/TX007	16	10	10	35	30	24	13
75	TD/TX007	16	10	10	35	30	24	13
100	TD/TX008	20	20.12	12	85	30	24	13
125	TD/TX008	20	20.12	12	85	30	24	13
150	TD/TX009	27	20.12	11.2	85	42	30	13
200	TD/TX010	27	20.12	11.2	97	42	30	13
250	TD/TX011	29.5	20.12	11.5	120	42	30	13
300	TD/TX011	29.5	20.12	11.5	120	42	30	13
350	TD/TX012	29.5	20.12	11.5	120	42	30	13
400	TD/TX013	29.5	20.12	11.5	120	42	30	13
500	TD/TX014	45	33	12.75	410	48	36	16
600	TD/TX015	45	33	12.75	410	48	36	16
800	TD/TX016	33	33	15.2	893	90	48	24
1000	TD/TX017	33	33	15.2	893	90	48	24

Max HP At 460 V	Model	Non-Combination Type N-1/12/3R (With CPT, Air Bypass)			Non-Combination Type N-1/12/3R (With CPT, VAC Bypass)		
		Dimensions (in.)			Dimensions (in.)		
		H	W	D	H	W	D
30	TD/TX005	30	24	16	-	-	-
50	TD/TX006	30	24	16	-	-	-
60	TD/TX007	30	24	16	-	-	-
75	TD/TX007	30	24	16	-	-	-
100	TD/TX008	48	36	16	48	36	16
125	TD/TX008	48	36	16	48	36	16
150	TD/TX009	60	36	16	60	36	16
200	TD/TX010	60	36	16	60	36	16
250	TD/TX011	60	36	16	60	36	16
300	TD/TX011	60	36	16	72	48	16
350	TD/TX012	60	36	16	72	48	16
400	TD/TX013	60	36	16	72	48	16
500	TD/TX014	90	48	24	90	48	24
600	TD/TX015	90	48	24	90	48	24
800	TD/TX016	90	48	24	Not Available		
1000	TD/TX017	90	48	24			

Notes:

- TD/TX005, TD/TX006 as standard do not come with or need an automatic bypass contactor.
- Includes floor-stand kit as standard. Add 12" for total height (i.e. 84" tall).

Low Voltage Solid State Starters

> TD & TX Series

Part Numbering Convention

Ordering Information: Use the following part numbering convention to configure the solid state starter when placing your order. For additional factory installed options, add the appropriate option code on the end as in the example below. Example is a TD unit with a circuit breaker, 100 HP, 460 V, in a NEMA 12 enclosure.

Example Part Number:	TD/TX	1	08	K	C	W	1
Series							
Non-Comb. or w/CB: 0 — Non-comb.	1 — Circuit Breaker						
Chassis Rating: 05 — 48 A 06 — 78 A 07 — 120 A 08 — 180 A 09 — 220 A 10 — 288 A	11 — 414 A 12 — 475 A 13 — 550 A 14 — 718 A 15 — 1006 A 16 — 1150 A 17 — 1250 A						
Enclosure Rating: A — None (Open) B — 1 C — 1A K — 12	E — 3R G — 4 W — 4X						
Line Voltage @ 60 Hz B — 230 to 240 C — 460 to 480 D — 575 to 600 F — 208 H — 400	Line Voltage @ 50 Hz N — 200 to 220 P — 400 to 440 R — 380	Line Voltage w/Open Chassis No Factory Mod. N — 200 to 220 C — 208 to 480 D — 575 to 600					
Motor Rating: K — 7.5 HP L — 10 HP M — 15 HP N — 20 HP P — 25 HP Q — 30 HP R — 40 HP	S — 50 HP T — 60 HP V — 75 HP W — 100 HP Y — 125 HP Z — 150 HP A — 200 HP	B — 250 HP C — 300 HP D — 350 HP E — 400 HP F — 450 HP G — 500 HP H — 600 HP	J — 700 HP K — 800 HP L — 900 HP M — 1000 HP N — 1250 HP X — OTHER				
Bypass/Input ISO: 0 — NONE 1 — Auto Byp - Air Ctt 2 — Man Byp - VAC Ctt/Solid State OL 3 — Man Byp - Air Ctt/Solid State OL		4 — Auto Byp - VAC Ctt 5 — ISO - Air Ctt 6 — ISO - VAC Ctt 7 — Man Byp - Air Ctt/Bi-metal OL					

Notes:

- Enclosure Ratings:
 - 1 — Type 1, Indoor, General Purpose
 - 1A — Indoor, Gasketed, Dust-Protected with Fans & Filters
 - 12 — Type 12, Indoor, Dust-Tight, Drip-Tight
 - 3R — Type 3R, Outdoor, Rain-Tight, Sleet-Resistant
 - 4 — Type 4, Indoor/Outdoor, Water-Tight, Dust-Tight
 - 4X — Type 4X, Indoor/Outdoor, Water-Tight, Dust-Tight, Corrosion-Resistant
- For no modifications or bypass, 120 VAC separate control, use open chassis enclosure code "A" in the part number, line voltage code "C" or "D" for TD, "D" for TX, no other codes.

Low Voltage Solid State Starters

> Factory Installed Modifications

Modification Ordering Information: Use the following part numbering convention to configure the solid state starters when placing your order.

For additional factory installed options, add the appropriate option code to the end of the part number as shown in the example.

For a TD rated 100 HP, 460 V, type 12 enclosure, which comes standard with an automatic bypass contactor, include a control power transformer (460 V:120 V), H/Off/Auto selector switch, Run/Off pilot lights.

TD108KCY1	D		0		K		6			
Starter Base Part No.	Control Circuit		Pilot Device PB		Pilot Device SS		Pilot Device PL		Protective Device/ Relay/Etc.	
	Code	Type	Code	Type	Code	Type	Code	Type	Code	Type
TD for a 100 HP, 460 V motor, with circuit breaker in N-12 enclosure	D	Std. capacity CPT	0	No push-button	K	H/O/A Switch	6	Run/Off pilot lights	Blank	No additional options

Low Voltage Solid State Starters

> TD & TX Factory Installed Modifications

Modification Description			Model	Code	List Price
No bypass or input isolation contactor			All	0	-
Bypass option (bypass contactor is full-HP rated for across-the-line starting)	Manual bypass Allows emergency full voltage starting without SSS No pilot devices supplied as standard If door or internally-mounted device is required, add appropriate option (i.e. selector switch mod. code “E” or “M”; \$300 adder)	Bypass - air contactor & bimetallic overload	TD/TX_05	7	\$450
			TD/TX_06		\$600
			TD/TX_07		For N-1 enclosure, use N-12 price code, add \$250 On N-12/3R/4/4X, add \$250
			TD/TX_08		
			TD/TX_09		
			TD/TX_10		
			TD/TX_11		
			TD/TX_12		
			TD/TX_13		
			TD/TX_14		
			TD/TX_15		
			TD/TX_16		Consult Factory
			TD/TX_17		
		Bypass - vacuum contactor & solid state overload for Type 1 enclosure, use Type 12 list price enclosure code, add modification list price For Type 12, 3R, 4, and 4X, use appropriate enclosure code, add modification list price shown	TD/TX_13	2	\$5,000
			TD/TX_14		\$5,400
			TD/TX_15 (720A max. FLA)		\$5,400
		Bypass option (bypass contactor is full-HP rated for across-the-line starting)	Manual bypass Allows emergency full voltage starting without SSS No pilot devices supplied as standard If door or internally-mounted device is required, add appropriate option (i.e. selector switch mod. code “E” or “M”, \$100 adder)	Bypass - air contactor & solid state overload	TD/TX_05
TD/TX_06	\$1,100				
TD/TX_07	For N-1 enclosure, use N-12 price code, add \$720 On N-12/3R/4/4X, add \$720				
TD/TX_08					
TD/TX_09					
TD/TX_10					
TD/TX_11					
TD/TX_12					
TD/TX_13					
TD/TX_14					
TD/TX_15					
TD/TX_16	Consult Factory				
TD/TX_17					

Low Voltage Solid State Starters

> TD & TX Factory Installed Modifications

Modification Description			Model	Code	List Price
Bypass option (bypass contactor is full-HP rated for across-the-line starting)	Automatic bypass (uses SSS chassis internal solid state overload)	Bypass - air contactor	TD/TX_05	0	Not Required
			TD/TX_06		
			TD/TX_07	1	For N-1 enclosure, use N-12 price code Standard on N-12/3R/4/4X
			TD/TX_08		
			TD/TX_09		
			TD/TX_10		
			TD/TX_11		
			TD/TX_12		
			TD/TX_13		
			TD/TX_14		
			TD/TX_15		
			TD/TX_16		
Bypass option (bypass contactor is full-HP rated for across-the-line starting)	Automatic bypass (uses SSS chassis internal solid state overload)	Bypass - vacuum contactor For NEMA 1 enclosure, use NEMA 12 list price enclosure code, add modification list price For NEMA 12, 3R, 4, 4X, use appropriate enclosure code, add modification list price shown	TD/TX_12	4	\$3,250
			TD/TX_13		\$4,400
			TD/TX_14		\$4,700
			TD/TX_15 (720A max. FLA)		\$4,700
Input isolation-contactor	Input air-contactor		TD/TX_05	5	\$350
			TD/TX_06		\$400
			TD/TX_07		\$500
			TD/TX_08		\$700
			TD/TX_09		\$900
			TD/TX_10		\$1,000
			TD/TX_11		\$1,900
			TD/TX_12		\$2,000
			TD/TX_13		\$3,300
			TD/TX_14		\$5,800
			TD/TX_15		\$5,800
			TD/TX_16		\$6,900
			TD/TX_17		CF
	Input vacuum-contactor		TD/TX_11	6	\$5,400
			TD/TX_12		\$5,400
			TD/TX_13		\$5,400
			TD/TX_14		\$5,400
			TD/TX_15 (720A Max. FLA)		CF

Notes:

- Standard starter dimensions may be changed due to these modifications.

Low Voltage Solid State Starters

➤ TD & TX Factory Installed Modifications

Modification Description			Code	List Price
Control circuit	Separate control	120 VAC	A	NC
		230 VAC	B	
Control power transformer (120 VAC secondary with one secondary and two primary fuses)	Standard capacity		D	\$250
	With 100 VA extra capacity		F	\$350
	With 200 VA extra capacity		H	\$450
	With 300 VA extra capacity		J	\$600
	With 400 VA extra capacity		L	\$650
	With 500 VA extra capacity		M	\$750
	With 1000 VA extra capacity		V	\$1,000

- Notes:
- Standard starter dimensions may be changed due to these modifications.
 - If other control voltage is required, consult factory.
 - NC: No Charge.

Modification Descriptions				Code	List Price
	Quantity	Color	Legend		
Pilot devices - PB (Push-button)	1	Black	Start	A	\$200
			Stop	B	
			On	C	
			Off	D	
			Open	E	
			Close	F	
			Reset	G	
			Jog	H	
			Bypass	I	
	Red	Stop	K		
		Off	M		
	2	Black/red	Start/Stop	T	\$400
			On/Off	U	
	3	Black/black/red	For/Rev/Stop	X	\$600
				Y	
None				0	

- Notes:
- Legend plates are standard black with white lettering.

Low Voltage Solid State Starters

> TD & TX Factory Installed Modifications

Modification Description				Code	List Price
	Position	Color	Legend		
Pilot devices - SS (selector switch)	2	Black	Local/Remote	A	\$300
			Hand/Auto	B	
			For/Rev	C	
			Slow/Fast	D	
			SSS/Bypass	E	
			Man/Auto	F	
			Start/Stop	G	
			Off/On	H	
	3	Black	For/Off/Rev	I	
			Hi/Off/Lo	J	
			H/Off/Auto	K	
			SSS/Off/Bypass	M	
None			0		

Modification Description				Code	List Price
	Quantity	Color	Legend		
Pilot devices - PL (pilot light)	1	Red	Run	A	\$300
			On	B	
			Off	C	
			Stop	D	
			Trip	E	
			Open	F	
			Close	G	
			Jog	H	
			Power On	J	
			SSS	K	
			Bypass	L	
			Fault	M	
	None			0	

Notes:

- Legend plates are standard black with white lettering.

Low Voltage Solid State Starters

➤ TD & TX Factory Installed Modifications

Modification Description				Code	List Price
	Quantity	Color	Legend		
Pilot devices - PL (pilot light)	1	Green	Run	N	\$300
			On	P	
			Off	Q	
			Stop	R	
			Open	T	
			Close	U	
			Jog	V	
		Amber	Fault	X	
			Reset	Y	
			Power On	Z	
			Trip	1	
		White	Reset	3	
			Power On	4	
	2	Red/green	Run/Off	6	\$600
			On/Off	7	
		Green/red	Run/Off	8	
			On/Off	9	
		Red/red	For/Rev	#	
			Slow/Fast	%	
			SSS/Bypass	\$	
	3	Red/red/green	For/Rev/Off	@	\$900
			Hi/Lo/Off	&	
	None				0

Notes:

- Legend plates are standard black with white lettering.

Low Voltage Solid State Starters

> TD & TX Factory Installed Modifications

Modification Description			Code	Enclosure Type	List Price
Protective devices Control timing relays Enclosure modifications	For multi-motor control or manual bypass:				
	Thermal bimetallic OLR - add OLR		A	ALL	\$160
	Solid state overload relay. For manual bypass, see bypass option		C	ALL	\$720
	Door-mount keypad/display panel	TD & TX	M	1	\$480
				12, 3R, 4	\$600
	RTD monitor/relay -12 RTD inputs, door-mount display	For TD or man. byp.	R	1, 12	\$4,400
	RTD monitor/relay - maximum 12 RTD inputs	TX only	N	ALL	\$2,000
	Undervoltage relay	Std. on TX	S	ALL	\$400
	Overvoltage relay	Std. on TX	T	ALL	\$400
	Under/overvoltage relay	Std. on TX	U	ALL	\$800
	Control relay, 4-pole, specify function	NO NC			
	Contact configuration	2	2	Y	ALL \$360
		3	1	Z	
		4	0	1	
	Control relay, 8-pole, Specify function	NO NC			
	Contact configuration	4	4	2	ALL \$600
		6	2	3	
		8	0	4	
	Timing relay; Specify time range function		5	ALL	\$500
	Programmable 24-hour, 7 day clock		9	ALL	\$600
	Lighting arrestor, Three-phase		#	ALL	\$300
	Surge capacitor		%	ALL	\$240
	Floor-mount stand where applicable		\$	ALL	\$400
	Cubicle space heater		@	ALL	\$400
	Cubicle space heater with thermostat		&	ALL	\$600
	None				

Low Voltage Solid State Starters

> TD Series Accessories



TD Series Accessories

Part Number	Description	List Price
TD-KPN1-1	Remote display kit - Type 1 with 1-meter cable	\$160
TD-KPN1-2	Remote display kit - Type 1 with 2-meter cable	\$180
TD-KPN1-3	Remote display kit - Type 1 with 3-meter cable	\$200
TD-KP12-1	Remote display kit - Type 12/4 with 1-meter cable	\$280
TD-KP12-2	Remote display kit - Type 12/4 with 2-meter cable	\$300
TD-KP12-3	Remote display kit - Type 12/4 with 3-meter cable	\$320
TD-RS485-KIT-1	RS485 communication kit for TD series only. Kit includes 12-inch long cable	\$400

Low Voltage Solid State Starters

> TD & TX Series Spare Parts

Part Number	Chassis Model	Description	List Price (ea.)
101232	TD005-17 (120 VAC Control)	Main power/CPU circuit board kit includes both main power board & CPU board assembled together	\$1,750
101285	TX005-17	Main power/CPU circuit board kit includes both main power board & CPU boards assembled together	\$4,400
101183	TD or TX005	Thyristor (SCR) for 48 A unit, three required per starter	\$260
101184	TD or TX006	Thyristor (SCR) for 78 A unit, three required per starter	\$370
101185	TD or TX007	Thyristor (SCR) for 120 A unit, three required per starter	\$375
101186	TD or TX008	Thyristor (SCR) for 180 A unit, six required per starter	\$380
101187	TD or TX009-10	Thyristor (SCR) for 220 to 288 A units, six required per starter	\$385
101188	TD or TX011-15	Thyristor (SCR) for 414 to 718 A units, six required per starter	\$930
101190	TD or TX016-17	Thyristor (SCR) for 1150 to 1250 A units, six required per starter	\$1,720
101235	TD005-17	Keypad/display panel	\$240
101262	TX005-17	Keypad communications board, Circuit board only	\$2,100

Notes:

- Does not include keypad membrane. For membrane, consult factory.
- Use spare parts discount.

T300MV2

MTX2

MTX

BMV2

Regen

MV
Controllers

Vacuum
Contactors

LV SSS

Vacuum
Breakers

Industrial
Automation

Vacuum Circuit Breakers

VK/HVK Series

The VK and HVK Series circuit breakers combine Toshiba's quality and state-of-the-art vacuum technology to provide full range of voltages and interrupting ratings with the highest reliability and service for worldwide applications.

Product Scope

5 to 15 KV
1200, 2000, & 3000 A
250 to 1000 MVA

Highlights

- VK & HVK Series
- Compact & Lightweight
- Available In:
 - Fixed Style
 - Drawout Style
 - Manual Operated
 - Motor Operated
- Designed for Safety with Electrical & Mechanical Interlocks
- Excellent Breaking Performance
- Minimized Maintenance & Inspection
- Front-Mounted with Circuit Control Components on Printed Circuit Board

Standard Features

- Meets or Exceeds ANSI Standard
- NEMA Enclosure
- Rugged & Simple Primary Disconnects
- Heavy Duty Auxiliary Contacts
- High-Tech Control Circuit Board
- Rugged Steel Frame
- Heavy Duty & Glass Polyester High-Performance Insulation Barrier



Vacuum Circuit Breakers

> VK/HVK Series Specifications



Rating & Specifications with Voltage Range Factor K=1.0

(Symmetrical Current Rating Basis, ANSI C37.06-1997)

Identification				Insulation Level		Current		
Model Number	Nominal RMS Voltage Class (KV)	Max. RMS Volts	Nominal Three-Phase Class MVA	Rated Low Freq. Withstand (KV, RMS)	Rated Impulse Withstand Voltage (KV, CREST)	Cont. Current Rating (A, RMS)	RMS Short Circuit Current (KA, RMS)	Close & Latch Capability (KA, PEAK)
HVK-6M32A	4.16	4.76	250	19	60	1200	29	58
HVK-6P32A	4.16	4.76	250	19	60	2000	29	58
HVK-6M40A	4.16	4.76	350	19	60	1200	41	66
HVK-6P40A	4.16	4.76	350	19	60	2000	41	66
VK-6M50	4.16	4.76	350	19	60	1200	41	78
VK-6P50	4.16	4.76	350	19	60	2000	41	78
VK-6Q50	4.16	4.76	350	19	60	3000	41	78
HVK-8M40A	7.2	8.25	500	36	95	1200	33	66
HVK-8P40A	7.2	8.25	500	36	95	2000	33	66
VK-8Q40	7.2	8.25	500	36	95	3000	33	66
HVK-10M25A2	13.8	15	500	36	95	1200	18	37
HVK-10P25A2	13.8	15	500	36	95	2000	18	37
HVK-10M40A	13.8	15	750	36	95	1200	28	58
HVK-10P40A	13.8	15	750	36	95	2000	28	58
VK-10Q40	13.8	15	750	36	95	3000	28	58
HVK-10M40A	13.8	15	1000	36	95	1200	37	59
HVK-10P40A	13.8	15	1000	36	95	2000	37	59
VK-10Q40	13.8	15	1000	36	95	3000	37	59
VK-10M50	13.8	15	1000	36	95	1200	37	77
VK-10P50	13.8	15	1000	36	95	2000	37	77
VK-10Q50	13.8	15	1000	36	95	3000	37	77

Notes:

- Maximum voltage for which the breaker is designed and the upper limit of operation are based on ANSI C84.1.
- Rated interrupting time: three cycles (all above breakers).
- Rated permissible tripping delay time: two seconds (all above breakers).

Vacuum Circuit Breakers

> VK/HVK Series Part Numbering Convention



Ordering Information: Use the following part numbering convention to configure the breaker when placing your order. For additional factory installed options, add the appropriate option code on the end as in the example below.

Example is a HVK series breaker rated 4.16 KV, 1200 A, 29 KA, Fixed-Type, with 125 VDC Close/Charge/Trip and 120 VAC undervoltage release.

Example Part Number:	HVK-	6	M	32	F	V	V	-UV
Series								
Voltage Class: 6 — 4.2 KV 8 — 7.2 KV 10 — 15 KV								
Continuous Amps: M — 1200 A P — 2000 A Q — 3000 A								
Interrupting Capability: 25 — 18 KA 32 — 29 KA 40 — 28 to 41 KA 50 — 37 to 41 KA								
Breaker Configuration: - — Drawout F — Fixed								
Closing/Charging Voltage: V — 125 VDC								
Tripping Voltage: V — 125 VDC								
Factory Modification: N/A — None UV — Undervoltage								

Vacuum Circuit Breakers

> VK/HVK Series Breaker Pricing & Factory Modifications



Model Number	Nominal RMS Voltage Class (KV)	Cont. Current Rating (A, RMS)	Three-Phase Class MVA	RMS Short Circuit Current (KA, RMS)	Drawout-Type Breaker List Price	Fixed-Type Breaker List Price
HVK-6M32A	4.16	1200	250	29	\$32,400	\$33,900
HVK-6P32A	4.16	2000	250	29	\$40,100	\$41,600
HVK-6M40A	4.16	1200	350	41	\$32,400	\$33,900
HVK-6P40A	4.16	2000	350	41	\$40,100	\$41,600
VK-6M50	4.16	1200	350	41	CF	CF
VK-6P50	4.16	2000	350	41	CF	CF
VK-6Q50	4.16	3000	350	41	CF	CF
HVK-8M40A	7.2	1200	500	33	\$32,400	\$33,900
HVK-8P40A	7.2	2000	500	33	\$40,100	\$41,600
VK-8Q40	7.2	3000	500	33	CF	CF
HVK-10M25A2	13.8	1200	500	18	\$32,400	\$33,900
HVK-10P25A2	13.8	2000	500	18	\$40,100	\$41,600
HVK-10M40A	13.8	1200	750/1000	28	\$32,400	\$33,900
HVK-10P40A	13.8	2000	750/1000	28	\$40,100	\$41,600
VK-10Q40	13.8	3000	750/1000	28	CF	CF
VK-10M50	13.8	1200	1000	37	CF	CF
VK-10P50	13.8	2000	1000	37	CF	CF
VK-10Q50	13.8	3000	1000	37	CF	CF

- Notes:
- Breakers sold without cells are not for use in applications involving breaker retrofits.
 - Racking and charging handles are not included with breaker or cell and must be ordered separately. See breaker accessories.
 - CF: Consult Factory.

VK/HVK Series Breaker Factory Modifications

Modification	Breaker Series	Code	List Price
Under Voltage Release (120 VAC)	VK & HVK	UV	\$1,400

Vacuum Circuit Breakers

HV6 Series

Toshiba's HV6 series circuit breakers are designed specifically for medium voltage, low-capacity power receiving and transforming facilities. The HV6 series low-surge features and compact size make it ideal for a wide variety of applications, including mobile power centers and portable substations.

Product Scope

600 A
2300 to 7200 V
12.5 kA

Highlights

- Compact & Lightweight
- Available In:
 - Fixed Style
 - Drawout Style
 - Manual Operated
 - Motor Operated
- Designed for Safety with Electrical & Mechanical Interlocks
- Excellent Breaking Performance
- Minimized Maintenance & Inspection
- Made in Houston, Texas

Standard Features

- Front-Mounted Operation Counter
- Conforms to JIS C 4603 & JEC-2300
- Low Surge Interrupters
- Low Chopping-Current
- Multiple Main Terminal Configurations
- Power Terminals Available in Two Directions
 - U-Vertical
 - L-Horizontal



Vacuum Circuit Breakers

> HV6 Series
Part Numbering Convention



Ordering Information: Use the following part numbering convention to configure the breaker when placing your order. For additional factory installed options, add the appropriate option code on the end as in the example below.

Example is an HV6, fixed-type, motor-operated, with power stabs horizontal, with 125 VDC close/charge/trip.

HV6CS-	ML		-V		V			
Model	Type		Closing-Coil Volts		Trip-Coil Volts		Factory Modification	
Version	Code	Configuration/ Operation	Code	Volts	Code	Volts	Code	Mod.
HV6CS	U	Fixed/Manual Operation	A	None (manually operated)	S	24/32 VDC	-R	Replaces V16 series fixed-mount version (same faceplate dimensions)
	L	Fixed/Manual Operation			V	125 VDC		
HV6CS	MU	Fixed/Motor Operation	V	125 VDC	S	24/32 VDC	-R	Replaces V16 Series fixed-mount version (same faceplate dimensions)
	ML	Fixed/Motor Operation						
	MLD	Drawout/Motor Operation			V	125 VDC	Not applicable on drawout version	

- Notes:
- Factory modification “-R” includes a special mounting faceplate on the HV6 so it can replace a V16 without enclosure modification. The front-facing of the HV6 is smaller than the V16. This modification is applicable for the fixed-type models only, if the faceplate was used for mounting or if the face was protruding though the enclosure. This is a no-cost adder.

Vacuum Circuit Breakers

> HV6 Series

Specifications & Pricing



Model Number		HV6CS-U	HV6CS-L	HV6CS-MU	HV6CS-ML	HV6CS-MLD
Maximum Continuous Current Rating		600 A				
Rated Voltage		2.4 to 7.2 KV				
Interrupting Current (0.15 P.F.)		12.5 KA (Sym.)				
Rated Frequency		50/60 Hz				
Transient Recovery Voltage		0.32 KV/Microsecond at 4.2 KV & Above, Below 0.16 KV/Microsecond				
Making Current		31.5 KA (Peak)				
Short-time Current		12.5 KA for 2 Seconds				
Interrupting Time		Less than 3 Cycles				
Insulation Level (Basic Impulse Level)		60 KV				
AC Withstand Voltage		22 KV for 1 Minute				
Operation Duty		Open 1 Minute; Closed/Open 3 Minutes; Closed/Open				
Mechanical Life		10,000 Operations				
Load-Switching Life		10,000 Operations				
Auxiliary Contacts	Form	2NO-2NC				
	Cont. Current	10 A				
	Voltage	300 V Maximum; 48 V Minimum				
	Interrupting	AC: 700 VA at PF 0.35/DC: 60 W at L/R 150 ms				
Altitude (Above Derate by ANSI C37.04)		3300 ft (1000 m)				
Ambient Temperature		-5° to 40 C°				
Installation		Fixed				Drawout
Operation		Manual Closing		Motor Spring Closing		
Opening Time		30 ms (Typical)				
No-Load Closing Time		-		30 ms		
Charging	Voltage/Current	-		125 VDC/2.5 A Peak (0.9 A Average)		
Closing	Voltage/Current	-		125 VDC/1.1 A		
Tripping	Voltage/Current	125 VDC/3.0 A		125 VDC/4.6 A		
Under Voltage Release		0.4 A at 120 VAC (Trip Voltage 24 to 72 VAC)				
Weight in lbs. (kg)		66 (30)		73 (33)		99 (45)
List Price*		\$6,100	\$7,800	\$8,800	\$8,800	\$9,900

*Add \$900 to list price for 24 to 32 VDC trip.

Vacuum Circuit Breakers

> OEM Cell Pricing

OEM Cell Model Number	Used for Breaker	Cell Weight	List Price
HKA-10MS-K-X (Provision for kirk-key interlock & shutter padlock)	HVK-6M32A HVK-6M40A HVK-8M40A HVK-10M25A2 HVK-10M40A	130 kg. 190 lb.	\$12,300
HKA-10PS-K-X (Provision for kirk-key interlock & shutter padlock)	HVK-6P32A HVK-6P40A HVK-8P40A HVK-10P25A2 HVK-10P40A	150 kg. 330 lb.	\$16,500
HKA-10MS1	VK-6M50 VK-10M50	150 kg. 330 lb.	\$13,200
HKA-10PS1	VK-6P50 VK-10P50	170 kg. 380 lb	\$16,500
HKA-6QS	VK-6Q50 VK-8Q40 VK-10Q40 VK-10Q50	290 kg. 640 lb	\$24,300
H6A-HLS	HV6CS-MLD	20 kg. 44 lb	\$4,100

Notes:

- For adding a kirk-key interlock, the key interlock kit (in breaker accessories) is required. The actual kirk-key is not included with the cell or the interlock kit and must be purchased separately.

Vacuum Circuit Breakers

> Accessories

Model Number	Description	List Price
CIT-10QA	Capacitor-trip device used for latched-type vacuum contactor or vacuum circuit breaker when DC power not available. Device charges from AC power & supplies DC power to trip-coil 	\$1,600
4Z9G0334G001	AC/DC Control Power Rectifier converts 120/240 VAC input to 125/250 VDC to power trip-coil on latched-type vacuum contactor or control power for vacuum circuit breaker 	\$400
NV60K304T1	Surge suppressor; three-phase CR surge suppressor for 3.3 to 7.2 KV system 	\$2,500
NV95K304T1	Surge suppressor; three-phase CR surge suppressor for 10 to 15 KV system	\$5,900
4D9A2365G001	Charging handle for VK & HVK series	\$750
4D9A2177G002	Racking handle for VK & HVK series	\$730
4D9A2283G002	Key interlock kit without key for HKA-10MS/PS cells	\$820
4D9A2283G003	Key Interlock Kit without key for HKA-10MS1/PS1 cells	\$820
4D9A2177G008	Mechanism operating contacts (MOC 6a-6b) kit for VK & HVK breakers	\$1,800
4D9A2177G012	Truck operating contacts (TOC 6a-6b) kit for HKA cells (VK & HVK breakers)	\$1,250
L-21CBS	Portable lifter for standard VK & HVK series breakers	\$5,000
5P1B0404P013	Portable lifter for VK 50 Series & 3000 A Breakers	\$9,700
5P9A2593P001	B9 lubricating grease (30 g tube)	CF

Industrial Automation

Operator Interface Stations

OIS PLUS Series Pricing



Operator Interface Stations


Part Number	Description	Price
OIS24	3.5" TFT Color Touchscreen 480x320 HVGA 24 Vdc PS Requires OIL-DS setup software	\$180
OIS42U PLUS	3" Tri-Color Touch Screen PLC Ladder Editor I/O - 8 DI, 6 RO, 2 PNP transistor DO, 2 AI (incl's Thermo & RTD), 1 AO 24 Vdc PS Requires OIL-DS setup software	\$410
OIS45E PLUS	4.3" TFT Color Touchscreen Ethernet Port Accepts 3 Clip-On I/O Modules PLC Ladder Editor 24 VDC PS Requires OIL-DS Setup Software Built-in Web Server	\$460
OIS70E PLUS	7" TFT 800 x 480 Color Touchscreen Ethernet Port PLC Ladder Editor Accepts 5 Clip-On I/O Modules 24 VDC PS Requires OIL-DS Setup Software Built-in Web Server	\$700
OIS120A	12" TFT Color Touchscreen Ethernet Port No I/O, 24 VDC PS Requires OIL-DS Setup Software Built-in Web Server	\$2,000

Notes:

- For availability of other displays, please contact TIC-PLC@toshiba.com

Industrial Automation

> OIS PLUS Series Pricing



Clip-On I/O — Digital


Part Number	Description	Price
TRPDIX1600	16 Inputs 24 VDC (Sink/Source)	\$80
TRPDIO0808P	8 Inputs 24 VDC (Sink/Source) 8 Outputs, Transistor, 24 VDC, PNP	\$105
TRPDIO0808N	8 Inputs 24 VDC (Sink/Source) 8 Outputs, Transistor, 24 VDC, NPN	\$100
TRPHIO0808P	8 Inputs (4 HS) 24 VDC (Sink/Source) 8 Outputs (2 PWM), Transistor, 24 VDC, PNP	\$120
TRPHIO0808N	8 Inputs (4 HS) 24 VDC (Sink/Source) 8 Outputs (2 PWM), Transistor, 24 VDC, NPN	\$120
TRPDOX0016N	16 Outputs, Transistor, 24 VDC, 0.5 A/each, NPN	\$130
TRPDOX0016P	16 Outputs, Transistor, 24 VDC, 0.5 A/each, PNP	\$130
TRPROX0012	12 Output Relays 24 VDC - 240 VAC 2 A Each, 5 A/Common	\$110

Clip-On I/O — Analog

Part Number	Description	Price
TRPADT0400	4 Inputs 4 to 20 mA, 0 to 10 V, 12 Bits	\$170
TRPRTX0402	4 Inputs, 0 to 10 V, 4 to 20 mA, RTD, TC 2 Outputs, 0 to 10 V, 4 to 20 mA, 16 Bits Each	\$280
TRPAIO0202L	2 Inputs, 0 to 10 V, 4 to 20 mA 2 Outputs, 0 to 10 V, 4 to 20 mA, 12 Bits Each	\$205

Notes:

- For availability of other displays, please contact TIC-PLC@toshiba.com



Clip-On I/O — Digital

Part Number	Description	Price
TRPDIX1600	16 Inputs 24 VDC (Sink/Source)	\$80
TRPDIO0808P	8 Inputs 24 VDC (Sink/Source) 8 Outputs, Transistor, 24 VDC, PNP	\$105
TRPDIO0808N	8 Inputs 24 VDC (Sink/Source) 8 Outputs, Transistor, 24 VDC, NPN	\$100
TRPHIO0808P	8 Inputs (4 HS) 24 VDC (Sink/Source) 8 Outputs (2 PWM), Transistor, 24 VDC, PNP	\$120
TRPHIO0808N	8 Inputs (4 HS) 24 VDC (Sink/Source) 8 Outputs (2 PWM), Transistor, 24 VDC, NPN	\$120
TRPDOX0016N	16 Outputs, Transistor, 24 VDC, 0.5 A/each, NPN	\$130
TRPDOX0016P	16 Outputs, Transistor, 24 VDC, 0.5 A/each, PNP	\$130
TRPROX0012	12 Output Relays 24 VDC - 240 VAC 2 A Each, 5 A/Common	\$110

Clip-On I/O — Analog

Part Number	Description	Price
TRPADT0400	4 Inputs 4 to 20 mA, 0 to 10 V, 12 Bits	\$170
TRPRTX0402	4 Inputs, 0 to 10 V, 4 to 20 mA, RTD, TC 2 Outputs, 0 to 10 V, 4 to 20 mA, 16 Bits Each	\$280
TRPAIO0202L	2 Inputs, 0 to 10 V, 4 to 20 mA 2 Outputs, 0 to 10 V, 4 to 20 mA, 12 Bits Each	\$205

Notes:

- For availability of other displays, please contact TIC-PLC@toshiba.com

Industrial Automation

> OIS PLUS Series Pricing



Cables

Part Number	Description	Price
EC-P-046A-00	Connects OIS40R/OIS PLUS/GWY to T1/T2E/T3/S2E/S2T RS485 Port, Pigtail on PLC End, 2 m	\$20
EC-P-108A-00	Connects OIS PLUS to G9/P9/AS1 ASDs, RS485, 4W	\$25
EC-P-108C-00	Connects OIS PLUS to VF-nC3/FS1 ASDs, RS485, 2W	\$25
RC-P-009H-00	Connects OIS PLUS/GWY to V200 Series PLC, RS232, 2 m	\$25
RC-P-108A-00	Connects V200 PLC to Toshiba G9/AS1 ASDs, RS485, 4W, 2 m	\$25
IBM-0909-1-00	Programming Cable For Download from Computer to All OIS/OIS PLUS Use with OISep32 & OIL-DS Setup Software	\$25

Industrial Automation

Programmable Logic Controllers

V200 Series PLC Pricing



CPU Modules

Part Number	Description	Price
GPU288*3S	V200 CPU 8 Inputs, 24 VDC 2 Outputs, 24 VDC Transistor, 6 Output Relays Requires 24 VDC PS Supports 8 I/O Expansion Modules	\$220
GPU230*3S	V200 CPU RS232/485, Ethernet & USB Ports Remote Programming, Monitoring, & Embedded Webpage Capability Requires 24 VDC PS Supports 16 I/O Expansion Modules	\$400

Digital I/O Modules

Part Number	Description	Price
GDI216**S	16 Inputs 24 VDC, 8p/com Sink/Source	\$95
GDR288**S	8 Inputs 24 VDC, 4p/com 8 Output Relays, 4p/com	\$125
GDD288P*S	8 Inputs 24 VDC, 4p/com 8 Outputs PNP, 4p/com	\$125
GDD288N*S	8 Inputs 24 VDC, 4p/com 8 Outputs NPN, 4p/com	\$125
GRO216**S	16 Output Relays, 8p/com	\$150
GDO216P*S	16 Outputs 24 VDC Transistor, 8p/com PNP	\$150
GDO216*S	16 Outputs 24 VDC Transistor, 8p/com NPN	\$150

Notes:

- For availability of other modules, please contact TIC-PLC@toshiba.com

Industrial Automation

> V200 Series PLC Pricing



Analog I/O Modules

Part Number	Description	Price
GAD208**S	8 Analog Inputs 4 to 20 mA, 0 to 10 VDC (12 Bits)	\$260
GAA242**S	4 Analog Selectable Inputs, 4 to 20 mA, 0 to 10 VDC 0-50/100 mV, RTD, TC 2 Analog Outputs, 4 to 20 mA, 0 to 10 VDC	\$240
GDA204**S	4 Analog Outputs 4 to 20 mA, 0 to 10 VDC	\$270

Cables

Part Number	Description	Price
RC-P-009I-00	Connects OIS PLUS/GWY to V200 Series PLC, RS485, 2 m	\$25
RC-P-009H-00	Connects OIS PLUS/GWY to V200 Series PLC, RS232, 2 m	\$25
RC-P-108C-00	Connects V200 PLC to Toshiba VF-nC3/FS1 ASDs, RS485, 2W, 2 m	\$25
RC-P-108A-00	Connects V200 PLC to Toshiba G9/AS1 ASDs, RS485, 4W, 2 m	\$25



V2000-Series Controller Modules

Part Number	Description	Price
HPUM11**S	Sequence Control Module, Standard CPU User Program Capacity 32 kSteps Ports: USB, Ethernet, & SD Card Slot Uses V-Tool Programming Software	\$2,100
HPUM12**S	Sequence Control Module, High Performance CPU User Program Capacity 64 kSteps Ports: USB, Ethernet, & SD Card Slot TC-Net I/O Loop, Optical Network Uses V-Tool Programming Software	\$4,200
HPUM14**S	Sequence Control Module, Redundant CPU User Program Capacity 128 kSteps Ports: USB, Ethernet, & Tracking Cables TC-Net I/O Loop, Optical Network Uses V-Tool Programming Software	\$7,400

Main/Expansion Racks

Part Number	Description	Price
GBU643D**S	Base Rack for S2T/S2 Four Station Bus Slots, No I/O Slots Not for S2E	\$395
GBU648E**S	Base Rack for S2T/S2 Four Slots (Up to 5 Station Bus Slots) Not for S2E	\$425
GBU664**S	Base Rack for S2E Three I/O Slots Expansion Rack for S2T/S2, Four I/O Slots	\$195
GBU666**S	Base Rack for S2E Five I/O Slots Expansion Rack for S2T/S2, Six I/O Slots	\$200
GBU668**S	Base Rack for S2E Seven I/O Slots Expansion Rack for S2T/S2, Eight I/O Slots	\$210
GIF661**S	Interface Module for Connecting Expansion Racks	\$130

Notes:

- For availability of other modules, please contact TIC-PLC@toshiba.com

Industrial Automation

> V2000 Series PLC Pricing



Power Supplies

Part Number	Description	Price
GPS632**S	24 VDC Power Supply For Main/Expansion Racks	\$130
GPS652**S	100 to 110 VDC Power Supply For Main/Expansion Racks	\$600
GPS693**S	120/240 VAC Power Supply For Main/Expansion Racks 24 VDC Service PS	\$240
GPS691**S	120/240 VAC Power Supply For Main Rack with UPS Interface Connections	\$480

Direct I/O Modules — Discrete

Part Number	Description	Price
GIN663**S	AC Input Module 16 Points 200 to 240 VAC	\$225
GIN653**S	AC Input Module 16 Points 100 to 120 VAC	\$225
GDI632D*S	DC Input Module 8 Points 12 to 24 VDC Isolated Between Points	\$255
GDI633**S	DC Input Module 16 Points 12 to 24 VDC	\$140
GDI634**S	DC Input Module 32 Points 24 VDC	\$330
GDI635**S	DC Input Module 64 Points 24 VDC	\$475
GDI635H*S	DC Input Module High Speed 64 Points 24 VDC	\$520
GDI653**S	DC Input Module 16 Points 100 to 110 VDC 0.1A/Point, Sink	\$330
GCD633**S	DC Input Module Change Detect 16 Points 12 to 24 VDC	\$580



Direct I/O Modules — Discrete

Part Number	Description	Price
GDO633*S	DC Output Module 16 Points 5 to 24 VDC 1A/Point Sink (Source Load)	\$160
GDO633P*S	DC Output Module 16 Points, 5 to 24 VDC, 1A/Point, Source	\$185
GDO634**S	DC Output Module 32 Points 5 to 24 VDC 0.1A/Point Sink	\$390
GDO635**S	DC Output Module 64 Points 5 to 24 VDC 0.1A/Point Sink	\$540
GAC663A*S	AC Output Module 12 Points 100 to 240 VAC 1A/Point	\$285
GRO662S*S	Relay Output Module Eight Points (Isolated) 240 VAC/24 VDC (max) 2A/Point	\$190
GRO663**S	Relay Output Module 16 Points, 240 VAC/24 VDC (max), 2A/Point	\$215

Direct I/O Modules — Analog

Part Number	Description	Price
GAD634L*S	Analog Input Module Four Channels 0 to 10 V Input 8-Bit	\$320
GAD668**S	Analog Input Module Eight Channels 0 to 5 V 0 to 20 mA ±10 V 16-Bit	\$880
GAD674**S	Analog Input Module Four Channels ±10 V Input 12-Bit	\$530
GAD624**S	Analog Input Module Four Channels 1 to 5 VDC/4 to 20 mA 12-Bit	\$530
GAD638S*S	Analog Input Module Eight Channels (Isolated) ±10 V Input 12-Bit	\$1,590

Industrial Automation

> V2000 Series PLC Pricing



Part Number	Description	Price
GAD624L*S	Analog Input Module Four Channels 1 to 5 VDC/4 to 20 mA 8-Bit	\$320
GAD628S*S	Analog Input Module Eight Channels (Isolated) 0 to 5 V/0 to 20 mA 12-Bit	\$1,590
GRT614**S	RTD Input Module Four Channels Pt100 Input 12-Bit	\$1,145
GTC618**S	Thermocouple Input Module Eight Channels E, J, K 16-Bit	\$900
GDA672**S	Analog Output Module Two Channels ±10 V Output 12-Bit	\$650
GDA624S*S	Analog Output Module Four Channels (Isolated) 0 to 20 mA 16-Bit Output Hold Option	\$1,820
GDA622L*S	Analog Output Module Two Channels 1 to 5 VDC/4 to 20 mA 8-Bit	\$350
GDA622**S	Analog Output Module Two Channels 1 to 5 V/4 to 20 mA 8-Bit	\$650
GDA664**S	Analog Output Module Four Channels 0 to 5 V/0 to 20 mA ±10 V 16-Bit	\$840



Cables

Part Number	Description	Price
GCS6R3*CS	Expansion Cable 0.3 m Long	\$90
GCS6R5*CS	Expansion Cable 0.5 m Long	\$100
GC6R7*CS	Expansion Cable 0.7 m Long	\$105
GCS6*1*CS	Expansion Cable 1.2 m Long	\$120
TKIO20	Cable for Hi-Density PLC I/O Modules 24 VDC One End I/O Connector & Other End Pigtail 1/32 pt Module 2/64 Module 2 m Long	\$160

Intelligent I/O Modules

Part Number	Description	Price
GPI632**S	Pulse Input Module Two Channels Up to 50 kpps 5/12/24 V Input 24-Bit Counter	\$785
GPI672**S	Pulse Input Module Two Channels Up to 50 kpps RS422 Input 24-Bit Counter	\$850

Industrial Automation

> V2000 Series PLC Pricing



Network Modules

Part Number	Description	Price
GDN611A*S	DeviceNet Scanner Module	\$1,160
GPF611**S	Profibus DP Master Module	\$5,450
GPF612**S	Profibus DP Slave Module	\$4,700
GEN651A*S	Ethernet Module Single Bus 100 Base-TX	\$1,690

Industrial Automation
> V2000 Series PLC Pricing



Network Peripherals

Part Number	Description	Price
HGA922**S	TC-Net I/O Adapter Connects V2000 Racks to TC-Net I/O Loop Allows Use of All V2000 I/O Modules	\$2,400

Programming

Part Number	Description	Price
HET81E4SS	V-Series Computer Programming Software; MS Windows® XP or Later Programs All V2000 Series (Except S2E & S2T) & nV Controllers IEC61131-3 Compliant Single Station Stand Alone Version	\$2,100
T-DNW	T-Series DeviceNet Wizard Software; MS Windows® 95/98/NT Requires DeviceNet Interface (AB 1770-KFC RS232 Module or SST DeviceNet PCMCIA Card)	\$2,300

T300MV2

MTX2

MTX

BMV2

Regen

MV
Controllers

Vacuum
Contactors

LV SSS

Vacuum
Breakers

Industrial
Automation

Industrial Automation

> V2000 Series PLC Pricing



Parts & Peripherals

Part Number	Description	Price
GPT9R2*AS	Spare Thermistor for TTC218/GTC618 Thermocouple Input Card	\$15
GSP691**S	Module Blank with Cover for Custom I/O Card	\$60
GSP600*AS	Module Blank	\$40
GBT611*AS	Battery Spare for S2/L2 CPU Modules	\$80

- Notes:
- For availability and pricing of other equipment, please contact TIC-PLC@toshiba.com
 - For further information, documentation etc. please visit <https://www.toshiba.com/tic/plcs>

Agency Approvals

ISO9001:2008

Emblem: **ISO 9001:2008**
Agency: International Standards Organization
Requirements: ISO 9001

NVLAP

Emblem: 
NVLAP LAB CODE 200088-0
Agency: National Voluntary Laboratory Accreditation Program (NVLAP), administered by the National Institute of Standards and Technology (NIST)
Requirements: Efficiency testing per ISO/IEC 17025

UL Listed

Emblem: 
Agency: Underwriters Laboratories (UL)
Requirements: a) Construction in accordance with UL 1004 and 674; covers safe application of XP electric motors for use in classified locations
b) Compliance with UL requirements is documented in Toshiba's UL File - E53559
c) Maintain traceability of product using UL controlled serial numbers on listing labels"

UL Component Recognition

Emblem: 
Agency: Underwriters Laboratories (UL)
Requirements: UL 1004 Safety Standard for Electric Motors
Toshiba File: E133052

CSA Safety & Energy Efficiency

Emblem: 
Agency: Canadian Standards Association (CSA)
Requirements: CSA Std. C22.2 No. 0, 77, 100, and 145 & 390

NEMA

Emblem: 
Agency: National Electrical Manufacturers Association (NEMA)
Requirements: Meets or exceeds efficiency values of NEMA MG-1 (most recent version), Tables 12-12 (LV 60 Hz), 12-13 (MV 60 Hz), and 12-14 (LV 50 Hz) NEMA Premium marking is primarily intended for 60 Hz applications

IEC European Conformity

Emblem: 
Agency: European Commission
Requirements: Complies with the relevant EU directives (applicability will vary by product line). A combination of the following directives may be applied (some are optional).
a) EMC Directive
b) Low Voltage Directive
c) Machinery Directive
d) Ecodesign Directive
e) ROHS Directive
Demonstration of compliance is typically performed with reference to applicable IEC/EN standards.

U.S. DOE

Emblem: 
Agency: U.S. Department of Energy (DOE)
Requirements: Motors whose efficiency levels meet or exceed the values shown in the Code of Federal Regulations - particularly those shown in 10 CFR Part 431 (location of this legislation may change and is subject to the evolving decisions made by the U.S. Department of Energy)
Toshiba File: CC027B, CC020A, CC129B

CSA Safety

Emblem: 
Agency: Canadian Standards Association (CSA)
Requirements: CSA Std. C22.2 No. 0, 77, 100, and 145

CSA Energy Efficiency

Emblem: 
Agency: Canadian Standards Association (CSA)
Requirements: CSA Std. C390 Toshiba File: MC 153942 - EEV 79018

1-800-231-1412
www.toshiba.com/tic

CONTACT US	
CUSTOMER SERVICE	
Low Voltage Motors	<i>Tel: (855) 803-7091</i> <i>Fax: (713) 896-5242</i> TIC-MDCustomerService@toshiba.com
Medium Voltage Motors	
Adjustable Speed Drives	
Custom Adjustable Speed Drives	<i>Tel: (855) 803-7090</i> TIC-CASD_PO@toshiba.com
Power Apparatus & Controls	<i>Tel: (800) 231-1412 x2993</i> TIC-Controls@toshiba.com
PLCs	<i>Tel: (800) 231-1412 x26724</i> TIC-PLC@toshiba.com
Instrumentation	<i>Tel: (800) 231-1412 x26723</i> TIC-Instrument@toshiba.com

APPLICATIONS & PRODUCT SUPPORT	
Low Voltage Motors	<i>Tel: (855) 803-7091</i> TIC-LVM@toshiba.com
Medium Voltage Motors	<i>Tel: (855) 803-7091</i> TIC-MVM@toshiba.com
Adjustable Speed Drives	<i>Tel: (855) 803-7089</i> <i>Fax: (713) 896-5242</i> TIC-ASD@toshiba.com
Custom Adjustable Speed Drives	<i>Tel: (855) 803-7090</i> TIC-CASD@toshiba.com TIC-CASD_quotes@toshiba.com
Power Apparatus & Controls	<i>Tel: (800) 231-1412 x2993</i> TIC-Controls@toshiba.com
PLCs	<i>Tel: (800) 231-1412 x26724</i> TIC-PLC@toshiba.com
Instrumentation	<i>Tel: (800) 231-1412 x26723</i> TIC-Instrument@toshiba.com

FIELD SERVICE	
Low Voltage Motors	<i>Tel: (855) 803-7092</i> <i>Fax: (713) 896-5224</i>
Medium Voltage Motors	Rapid Response: TIC-ASD-RA@toshiba.com
Adjustable Speed Drives	Repair Authorization: TIC-ASD-RA@toshiba.com
Custom Adjustable Speed Drives	On Site Service Request: TIC-ASD-SVC@toshiba.com
	Service Training: TIC-ASD-Training@toshiba.com
	Motor Warranty TIC-motorwarranty@toshiba.com
Motor Spare Parts 1-855-803-7092 Option 1	

Motor Notes:

1	Motors are not NAFTA Qualified
2	Motors Provided with Drive End Roller Bearing as Standard
3	Motors are 1.0SF
4	Motors are Uni-directional CCW Rotation When Facing Non Drive End
5	Motors are Uni-directional CW Rotation When Facing Non Drive End
6	Motors are Nema Design A
7	Totally Enclosed Non-Ventilated (TENV)
8	Ball Bearing Long Shaft as Standard
9	Motors Nameplated Dual Frequency 50/60hz.
10	Insulated Sleeve Bearings
11	Insulated Bearing Housing
12	Copper Bar Rotor
13	May Not Meet 841 Sound Level Requirements
14	Class F Rise by Resistance at 1.0SF
15	Suitable for Vertical Mounting
16	Motor has Non-NEMA "BA" Dimensions
17	Available Until Stock Depleted
*	Normal Stock



TOSHIBA INTERNATIONAL CORPORATION

13131 W. Little York Road • Houston, TX 77041
Tel: 713-466-0277 Fax: 713-466-8773
US: 800-231-1412 Canada: 800-872-2792 Mexico: 800-527-1204

www.toshiba.com/tic